


Acoustech

A **B•I•C** *America*™ Company

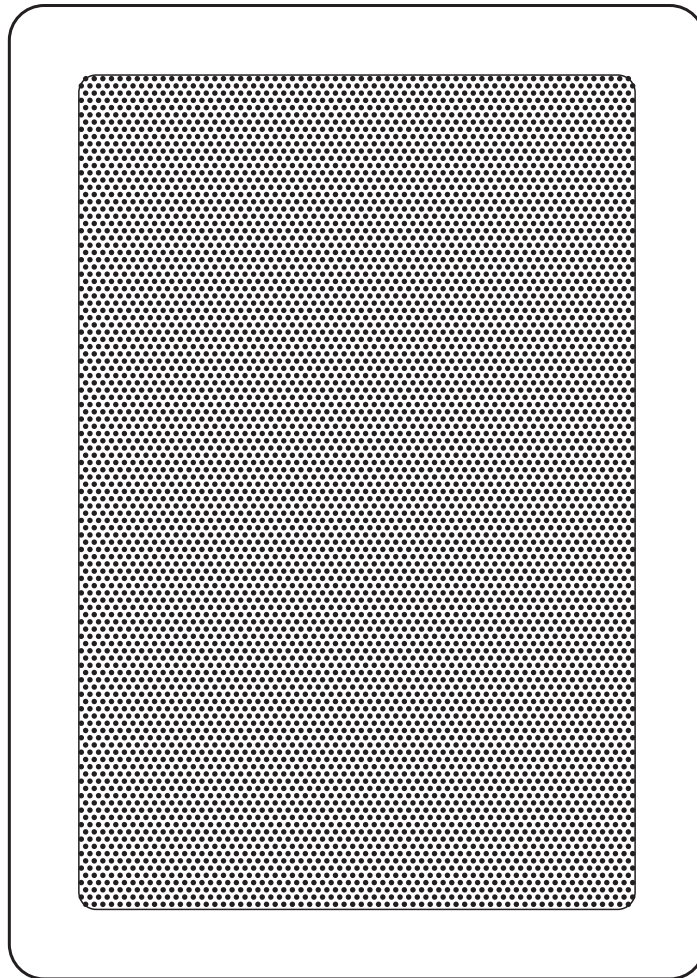

Acoustech HT-8W In-Wall Speaker System

Installation and Owner's Manual

TABLE OF CONTENTS


A	What you need to do the job	
	Speaker system parts inventory.....	2
	Tools for installation.....	2
	Speaker wire.....	3
	Amplifier considerations.....	3
B	Where to put your speakers	
	Various uses.....	3
	Stereo imaging.....	3
	Other acoustic considerations.....	3
	Wall & ceiling surfaces.....	4
	Speaker wire paths.....	5
C	Painting your speakers.....	5
D	Cutting holes for the speakers.....	5
E	Running connecting wires.....	6
F	Hooking up your speakers	
	At the speaker end.....	9
	At the amplifier end.....	9
G	Final assembly.....	10
H	A short “test drive”.....	10
	A quick troubleshooting guide.....	11
	Further reading	
	Taking care of your new in-wall speakers.....	11
	More on amplifiers and impedances.....	11
	Installing Acoustech speakers during new construction.....	12
	Outside help.....	12
	Limited Warranty.....	12
	Acoustech HT-8W description and specifications.....	12

CONGRATULATIONS

— on selecting this Acoustech Ceiling Speaker. Like all Acoustech speakers, they combine advanced acoustic technology with durability and will provide years of musical enjoyment.

This manual is designed to make your ceiling speaker as easy to install as it is to listen to. If you’ve had any home “do-it-yourself” experience, you should find installation of your new speaker a simple job.

However, we suggest you read through this manual before starting out. If you then decide that installing your Acoustech Ceiling Speaker is a bit beyond your skills, we’ve included suggestions for locating sources of affordable outside help.

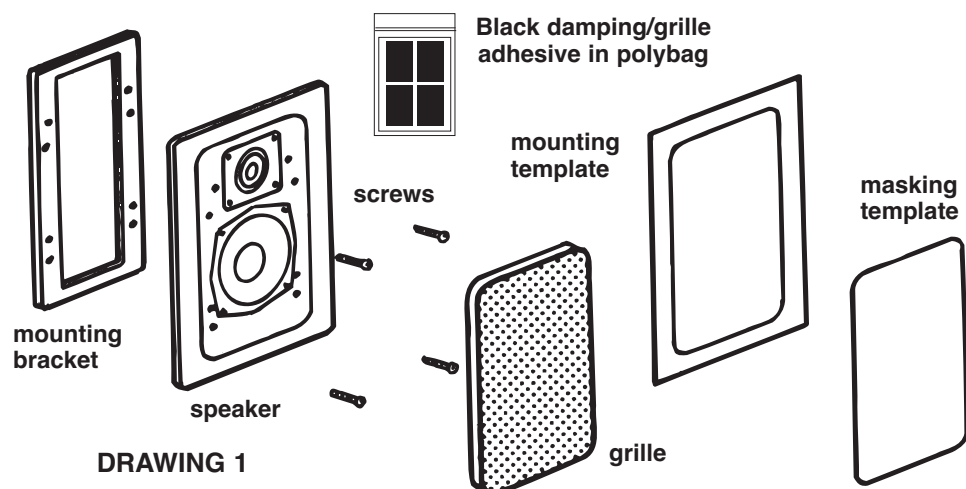

A

WHAT YOU NEED TO DO THE JOB

SPEAKER PARTS INVENTORY

Before you get involved in the actual installation process, it’s a good idea to check for possible shipping damage and identify parts and hardware.

You should have the parts shown in Drawing 1:

- Two (2) Acoustech In-wall loudspeaker systems with attached grilles
- Two (2) metal brackets
- Twelve (12) black metal screws (in their own little zip-top bag)
- Black grille adhesive (in another poly bag)
- Two (2) white cardboard mounting templates
- Two (2) white cardboard masking templates for painting (Note: These are the punch-outs from the above mounting templates).

If anything is missing after a thorough search of the box and packing materials, contact the dealer where you bought your speaker.

Although the Acoustech Speaker Systems are extremely well packed to withstand the rigors of shipping, you should still inspect them closely, especially if there is any damage to the outside carton. If you find anything wrong, contact your dealer or the shipper who delivered the speaker.

TOOLS FOR INSTALLATION IN EXISTING WALLS

It doesn’t take a whole workshop to install your new speaker, just a few simple tools:

- A pencil
- A drill with a 1-inch flat bit
- A retractable utility knife or keyhole saw
- A length of stiff wire about 3 feet long (a straightened wire coat hanger works fine)
- A Phillips-head screw driver which will fit the black screws included with your speakers
- A pair of diagonal pliers or wire strippers

Some of the following may also be needed, depending on the application.

- A stud finder
- Drill bit just slightly larger than the diameter of one speaker wire
- Plumb bob or small weight on a string
- Insulated staples for securing speaker wire
- Masking tape or foam “double-stick” tape
- Paint and applicator for changing grille and outer frame finish
- A bubble level

SPEAKER WIRE

The amount of wire you're going to need will of course vary with speaker placement (which we cover next). But we're covering the subject of wire now because it's something you may have to go out and obtain along with whatever tools you don't already have.

What kind to use

We recommend using inexpensive, multi-stranded "zip-cord" for amplifier-to-speaker connections. Also called lamp cord, it's sold in pre-packed rolls and in bulk displays at hardware, lighting and home improvement stores. Zip-cord's outside covering (insulation) can be transparent, black, brown, white, etc. Color doesn't matter. Wire-thickness does. For in-wall and in-ceiling, a good quality wire should be used so the outside plastic covering won't crack and break down over time.

Selecting the proper gauge

Wire is measured in "gauges." For no particularly good reason, the bigger the number, the smaller the wire. For example, 18-gauge is thinner than 14-gauge.

The gauge of wire you need is determined by the distance between your amplifier/receiver and the speakers. Use the following chart as a guide:

Length	Minimum Gauge
Less than 10 ft.	18
10 to 50 ft.	16
Over 50 ft.	14

If in doubt, be safe and get a smaller gauge (i.e. thicker wire). Using too thin a gauge over a long distance can compromise sound quality. And besides, there isn't a vast cost difference between gauges, anyway.

How much to buy

Basically, more than you think you need. As we noted earlier, a discussion of lengths is sort of premature until you've decided on exact placement, so you may want to skip to Section B on "Where to Put Your Speakers." But if you have a rough idea of the distance from your amplifier to the speakers, here are a few tips:

- Because of the complicated paths which are often required to route wires, you'll definitely need more than the amount derived from simple measurements.
- Even if one speaker is a lot closer to the amp than the other speaker, you should use the same length of wire for both paths. This insures that both speakers will play at equal volume.
- Professional installers often use the following rule of thumb: "As the crow flies" amp to speaker distance TIMES FIVE. That allows enough for both speaker paths plus a very healthy margin for unplanned detours. Remember the electrician's favorite adage: *"You can always cut off extra wire, but they don't stretch worth a darn."*

AMPLIFIER CONSIDERATIONS

Virtually any receiver, power amplifier or integrated amplifier can be used with your Acoustech Stereo In-Wall Speaker. Although Acoustech speakers are rated for high power, it's OK to use a more powerful amplifier if you take some simple precautions, which we cover on page 11 ("Taking Care of Your New Acoustech Speakers").

A more serious consideration is whether or not you intend to power more than one set of speakers with the same amplifier or receiver. If you intend to hook speakers to both "A" and "B" receiver outputs and then play both sets of speakers at the same time, you should read the section starting on page 11 of this manual ("More on Amplifiers and Impedance"), to avoid potential problems.



WHERE TO PUT YOUR SPEAKERS

Placement can make all the difference in how your Acoustech speaker systems sound – and how easy they are to install. There are at least three "WHERE'S" and a "HOW" to factor into your layout:

- HOW you intend to use your speakers
- WHERE they'll sound best (stereo imaging and acoustic considerations)
- WHERE it's possible to install them (wall and ceiling surfaces)
- WHERE they can be installed that makes it easy to get wire to them without remodeling your entire house.


VARIOUS USES

Acoustech In-Wall Speakers can be used for background music, as a primary listening system or as built-in rear surround speakers in an audio/video home theater.

Background music

If you just want low-volume background music to float through a room, placement for best acoustics is not particularly critical. You can pretty well ignore all our diagrams and tips on imaging and other acoustical matters. Just put your speaker where it's convenient and non-intrusive to room decor. You can even place the speaker in an adjoining room, such as a living room that flows into a formal dining room, or in a kitchen and breakfast nook.

If you're going to place the speakers high up on a wall, flip the speaker upside down when mounting it so that the tweeter is on the

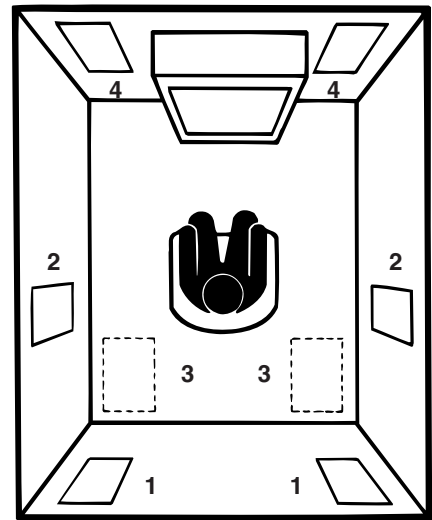

DRAWING 2

B-I-C in-wall speakers may be used for rear surround sound channels by placing them (1) behind, (2) on each side of the viewing position or (3) in the ceiling just behind the viewers. B-I-C In-wall speakers also make excellent, unobtrusive front channel home video theater speakers (4).

bottom. This will insure better treble dispersion (see Drawing 4).

Surround sound

Acoustech In-Wall Speakers make excellent surround sound speakers. They can be mounted in any of the positions shown in Drawing 2 including from the ceiling.

STEREO IMAGING

If your B-I-C In-Wall Speakers are going to be your primary listening source in a room, you need to consider some other factors to insure proper imaging. The term "stereo imaging" refers to a speaker system's ability to project music so that it sounds like the performers are in a 3-dimensional space between the speakers. It's the whole point of having a stereo instead of monophonic system.

Drawing 3 shows some possible placements as well as some situations to avoid.

OTHER ACOUSTIC CONSIDERATIONS

For best fidelity, there are several other factors to keep in mind before you start actual installation.

Vertical placement

Treble frequencies are quite directional. While the dome tweeters in Acoustech HT-8W speakers are designed to disperse high frequencies over a wide area, they will give you the best sound when positioned so that they are at least at ear level, as shown in Drawing 4.

The tweeter can be swivelled to direct the high frequencies toward the listening position. (See Drawing 4A.)

Of course, if the speakers are being installed in an area where listeners usually stand up (such as a kitchen or hallway), “ear level” will be higher on the wall than for rooms where listeners are often seated.

Corners and reflections

When an in-wall speaker is placed close to the corner of a room, bass frequencies are emphasized. This can be OK if both speakers are mounted near corners (while maintaining stereo imaging). But try to avoid placing just one speaker in a corner and another on a long flat wall.


Treble is emphasized when it reflects back from reflective surfaces such as large windows. Conversely, highs tend to be muffled by soft surfaces such as drapes, rugs, upholstered furniture, carpeted steps and even textured fabric wall paper.

In general, the best acoustic performance will result if both speakers face a similar type of surface and are placed in similar positions on the same type of wall.

WALL AND CEILING SURFACES

Now that we’ve covered where you should put your speakers, let’s consider where you CAN put them. The HT-8W requires $3\frac{3}{4}$ " of wall depth (measured from the outside surface of the wall).

This means that they can be installed in any wall-board-and-2x4 stud wall. In fact, the dense, rigid nature of plasterboard (or lath and plaster in older homes) acts as a superb speaker baffle.

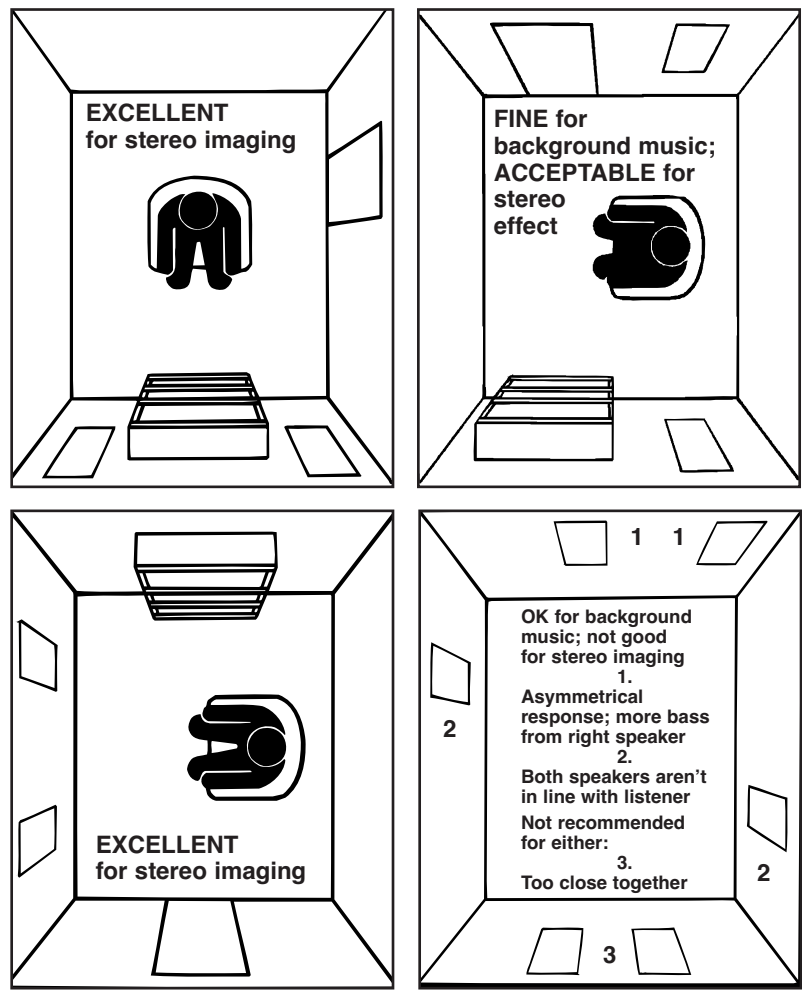


DRAWING 3

You can also install Acoustech In-wall speakers in stud walls covered with thick wood paneling or in wallboard/plaster ceilings. However, avoid:

- Stud walls covered only with thin veneer paneling – the surface isn’t rigid enough and can cause annoying vibrations and buzzing.
- T-bar “drop ceilings with very thin fiberboard panels which can buzz and vibrate. If you suspect this will happen, reinforce the drop-in panel with wood or particle board.
- Any wall which can’t provide proper depth (clearance) for the back of the HT-8W speaker to protrude. This includes brick or concrete walls where the wallboard or paneling is attached to thin furring strips.
- Walls where you know that there are pipes, heating ducts and ESPECIALLY AC wiring in the general vicinity. For example, if there is an outlet along the baseboard, there is often a live wire running partly up the wall at that point.




DRAWING 4

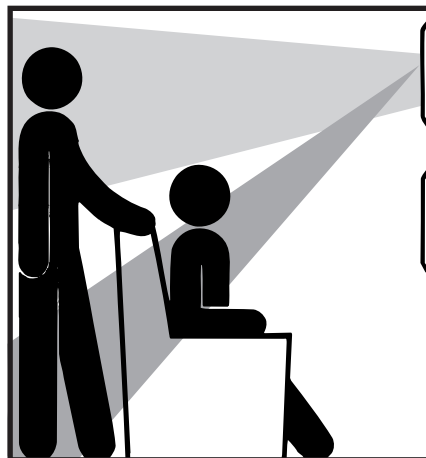

DRAWING 4A

Tweeter rotated down

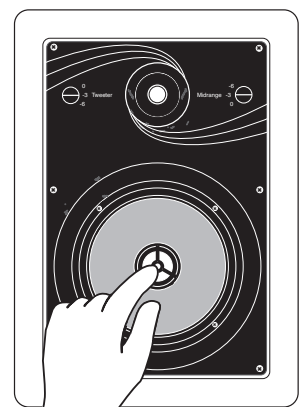

HT-8W
Push on rim of
tweeter to rotate

SPEAKER WIRE PATHS

The last consideration is the obstacle course that lies between the speakers' hoped-for mounting positions and your stereo system.

Wires can be run through crawl spaces that lie above your ceiling or below the floor, through basements or second stories, or simply along the perimeter of your listening room. We cover each of these options in detail in the **"Running Connecting Wires"** section of this manual.

In general, you should pay particular attention to the following areas:

- Avoid running speaker wires close to house electrical wiring for any distance. If you have to run them parallel, make sure to space the speaker wires at least two feet from the AC line. It is, however, OK for speaker wires to cross paths with AC line or go through the same hole together with house wiring if they separate before and after.
- Make sure that the entire path between speakers and amplifier is clear and not obstructed by a major floor or ceiling joist or masonry wall which you won't be able to drill through.
- Remember that the other end of the wires has to come out somewhere to connect with the amplifier. Confirm ahead of time that you can drill an outlet hole easily and in an unobtrusive spot.



PAINTING SPEAKERS

If you like the designer white finish which has been applied to your Acoustech speakers, you can skip to Step D. But if you want your speakers to completely blend in with a colored wall or accent the surface, now is the time to paint their outer frames and perforated grilles.

The speakers' outer surfaces are primed to accept ordinary latex wall paint or aerosol spray paint. Because the surface behind the perforated grille should remain unpainted, you will need to mask this area off before you begin painting.

1. First the speaker's grille must be removed.

From the back of the speaker, insert a mounting screw from the rear and push on the inside of the grille to loosen it so you can pull it off.

2. If you are going to use standard, canned, wall paint so your speakers will match the wall color, you will need to thin the paint to nearly the consistency of water. This is critical since paint with any thickness will plug the holes in the grille which will impede the sound from getting to the room. Once you thin the paint it may take several coats to get good consistent color coverage without plugging the holes in the grille. One trick to use is to blow air through the grille holes as you are in the painting process to keep the holes open. Paint the outer speaker frame and grille separately. A medium nap roller or fine brush will work OK

if you take your time and are careful. If you're using spray paint, make sure that you achieve the same coverage on both grille and frame. Take care to use very light coats on the grille to avoid plugging the holes (perforations). Also, be sure to spray at different angles to achieve good even coverage of the perforations and edges. You must take extreme precautions when painting the grille not to get paint in the holes of the grille. There's no need to replace the grille at this time since you will need access to the inner speaker surface during installation.




CUTTING HOLES FOR THE SPEAKERS

Wallboard is an easy surface in which to make a relatively neat hole. Actually, the hole doesn't even have to be that neat, since the speaker's outer frame will cover it. Just make sure you don't make it any bigger than the template. In the following steps, you're going to locate a section of wall between two studs, mark the outer boundaries of the hole, drill a small hole in the center to confirm your location and then cut the main hole.

1. First you must determine the location of your wall studs so that the speaker can be approximately centered between them. There are several ways to go about this:

- Tap on the surface and listen to the resulting "THUMP". When it's deeper, you're between studs. When it's sharper and more flat-sounding, you're close to a stud.
- Use a stud-finder, a simple little magnetic device which works by locating the lines of nails hammered into the stud.
- Identify wall studs by the position of electrical outlets or switches. There will be a stud either directly to the left or right of an electrical fixture. This gives you a point of measurement, since studs are either 18 or 16 inches apart in newer houses, 12 inches apart on pre-WW2 homes.

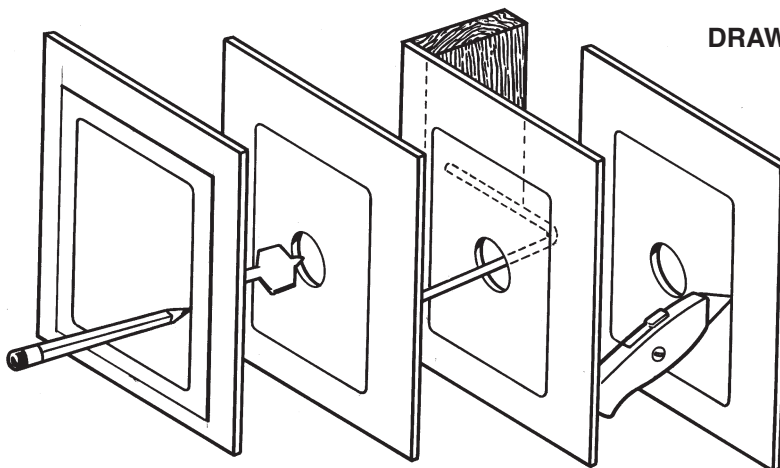

A. Trace template outline

B. Drill 1 inch pilot hole

C. Probe with wire for stud clearance

D. Cut speaker hole along outline

2. When you're reasonably sure of where the wall stud 2 x 4's are (and are TOTALLY sure that there isn't an electrical cable, water pipe or heating duct in that vicinity of your proposed cutout) position one of the cardboard mounting templates and draw around the inside outline with a pencil. If you don't trust your eye, use a level to make sure the hole will be straight. Repeat for the other speaker position.

3. Drill a 1-inch hole in the center of the pencil outline which you have just drawn.

4. Obtain a length of stiff wire such as an unwound, totally un-bent coat hanger. Bend it so that the last 12 inches is at a right angle to the rest.

5. Insert the angled part into the 1-inch hole you just drilled and probe to left and right to confirm that a stud is not close on either side.

- If there is a close stud on one side, just reposition the cardboard template a few inches in the opposite direction and re-draw your pencil outline, keeping the 1-inch hole within the pencil outline's inner boundaries.

6. If there are no obstructions, cut the hole along the pencil outline. If the surface is wallboard, simply cut it increasingly deeper with utility knife until it gives way and then pull it out by grasping the cut-out through the 1-inch hole.

- If you're dealing with lath and plaster or thick paneling, you need to use a different technique. Drill 1-inch holes at the corners of the pencil outline. Then use a keyhole saw or even a hacksaw blade with VERY slow strokes to saw through and remove the inner surface.

7. Temporarily place the Acoustech speaker into the cut-out to insure that it fits properly. It's OK if the hole is slightly large, since it will be covered by the speaker's outer frame. Actual installation will happen later, after you've routed the speaker wires.

8. Repeat steps 1 through 7 for the other speaker.

9. Now it's time to drill the hole on the OTHER end — at the point where the wires from the speakers will exit to the amplifier/receiver.

- Use the same 1-inch drill bit as before.

- If you want a totally finished job, install an outlet box against a stud and cover it with a TV cable or single outlet plate which has one hole in the middle for the wires to exit from.

E

RUNNING CONNECTING WIRES

Now you know where the wires have to run. It's time to actually route them. As mentioned before, there are several possibilities.

1. DOWN, ACROSS & BACK UP. If you have a crawl space under your house or a relatively unfinished basement, your job is broken into three parts:

1) Down from the amplifier to the crawl space;
2) Across the crawl space to the wall(s) with the speakers; 3) Up the wall to the speaker.

2. UP & OVER. If you have an attic or overhead crawl space, your three steps are:

1) Up from the amplifier to the crawl space;
2) Across the crawl space to the wall(s) with the speakers; 3) Down the wall to the speaker.

3. OVERLAND. If the speakers and amplifier are in the same room and it is carpeted, you can route the wires along the baseboard. This method results in just two VERY short lengths of wire being possibly visible.

Use whichever method (or combination) is most applicable, but read each over before undertaking it.

DOWN, ACROSS AND BACK UP (BASEMENT OR LOWER CRAWL SPACE)

If you have an unfinished basement or crawl space under your home, you can avoid having to run wires in the room. Working from underneath is sometimes trickier since there are often more pipes, ducts, electrical and cable lines already in place.

○1. Make sure you have the following:

- Tape measure
- Cordless drill (or regular model with long extension cord) with a 1-INCH BIT
- A VERY long roll of speaker wire
- Wire cutters – either diagonal pliers or wire strippers which include a cutting surface
- Length of stiff wire such as coat hanger at least 3 feet long
- Plumb bob or string with a small weight (such as a metal nut) on the end
- Tape – any kind will do
- It's also convenient to have another person upstairs helping you. The person's job will be to grab the cables as you push them up from below.

○2. Enter the basement or crawl space and proceed to a spot directly below where where one of the in-wall speakers will be.

○3. After carefully measuring to make sure you're in the right place, drill a hole up through the horizontal 2x4 directly below the speaker.


○4A. If you haven't encountered in-wall insulation (sometimes present on outside walls), have your assistant drop a plumb bob or weight string down until you can reach it. Tape the cable to it and let them pull it up.

○4B. If you have run into insulation, there is another approach: Get out your long roll of speaker cable and tape the end to the stiff wire or bent coat hanger. Push the stiff wire with speaker cable attached up through one of the holes far enough that your assistant can grasp it through the speaker cut-out above. Have him or her pull out at least 8 feet of cable (as measured from your position downstairs).

○5. Making sure that the end doesn't get pulled back down through the hole, reel out wire while moving across the basement/crawl space until you reach a location below the amplifier.

○6. Extend at least 10 (TEN) extra feet of cable and cut the end off the roll.

○7. Grab your coil/roll of cable and move over to the hole that's been drilled below the other speaker. Again, have your assistant drop a plumb bob or weight and string down until you can reach it. Tape the cable to it and let him or her pull it up, extending at least 8 feet of wire up through this hole. Or use the stiff wire method if the wall has insulation or obstructions in it.

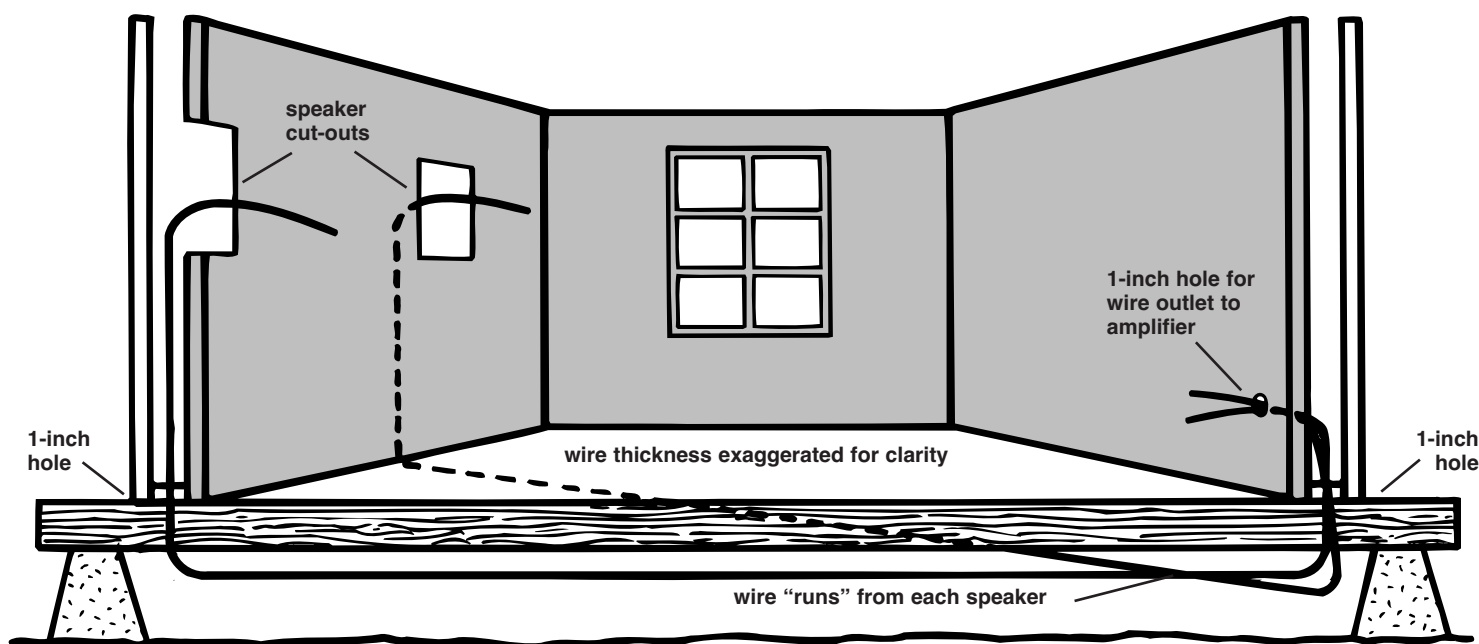


DRAWING 6 - DOWN, ACROSS AND BACK UP

- 8. Making sure the end doesn't get pulled back down through the hole, reel out cable until you reach the space under the amplifier.
- 9. Extend at least 10 (TEN) extra feet of cable and cut the end off the roll. You've now run wires from both speakers to a point directly below where the amplifier will be.
- 10. Drill a 1-inch hole through the horizontal 2x4 directly below the amplifier wall outlet hole.
- 11. Because of the small diameter of the hole, the plumb bob/string method may not work on the amplifier end. If so, tape the two cable ends (which come from the speakers) to a stiff wire and push them up through the hole. Since there's only a 1-inch hole upstairs, you'll probably need to wiggle the wire around until your helper can locate it and snag the wires taped to the end. They, too may need to use a length of stiff wire with a hook in it to grab the cables through the small hole.
- 12. Have your helper pull the cable up until most of the slack has been taken up down in the crawl space or basement. If you want, you can secure the cable runs to the floor joists or beams using insulated staples.

You've done it! Skip to the next section titled **"Hooking Up Your Speakers."**

UP AND OVER (ATTIC CRAWL SPACE)

- 1. You're about to ascend into your attic. Grab the following:
 - Tape measure
 - Cordless drill (or regular model with long extension cord) with a 1-INCH BIT
 - A VERY long roll of speaker wire
 - Wire cutters – either diagonal pliers or wire strippers which include a cutting surface
 - Plumb bob or string with a small weight (such as a metal nut) on the end
 - Tape – any kind will do
- 2. Crawl up into the attic with all the aforementioned stuff and proceed to a spot that's directly over one of the speaker cut-out holes.
- 3. After carefully measuring to make sure you're in the right place, drill a hole through the horizontal 2x4 directly ABOVE the SPEAKER. Then drill a hole for the other speaker.
- 4. Time to use that roll of cable. Push the cable end through one of the holes you just drilled until it extends at least 8 feet. If you encounter insulation, such as an outside wall, tape the speaker cable to a stiff wire and poke it down until it can be located at the speaker cut-out.
- 5. Making sure the end doesn't get pulled back up through the hole, reel out cable while moving across the attic/crawl space until you reach the location above your amplifier.
- 6. Extend at least 10 (TEN) more feet of cable for the roll and cut it.
- 7. Grab your coil/roll of wire and move over to the hole that's been drilled above the other speaker. Extend at least 8 feet of wire down through this hole.
- 8. Again, making sure that the end doesn't get pulled back up through the hole, reel out cable until you reach the space above the amplifier.
- 9. Extend at least 10 (TEN) more feet of cable and cut it. You now have cables running from both speakers. Time to get them down the wall to where the amplifier will be.
- 10. Drill a 1-inch hole through the horizontal 2x4 directly above the amplifier wall outlet.
- 11. Now you're going to guide cables down to where they'll emerge from the wall. Since this hole isn't very big, just stuffing them down and grabbing them won't work. Instead, it's time for the plumb bob or string-with-weight (or wire if there is insulation to contend with). Tape the two cable ends (which come from the speakers) to the plumb bob string just above the weight and lower the whole thing down through the 1-inch hole above the amplifier. You'll probably have to "feed out" the attached cable to get the weight to descend.

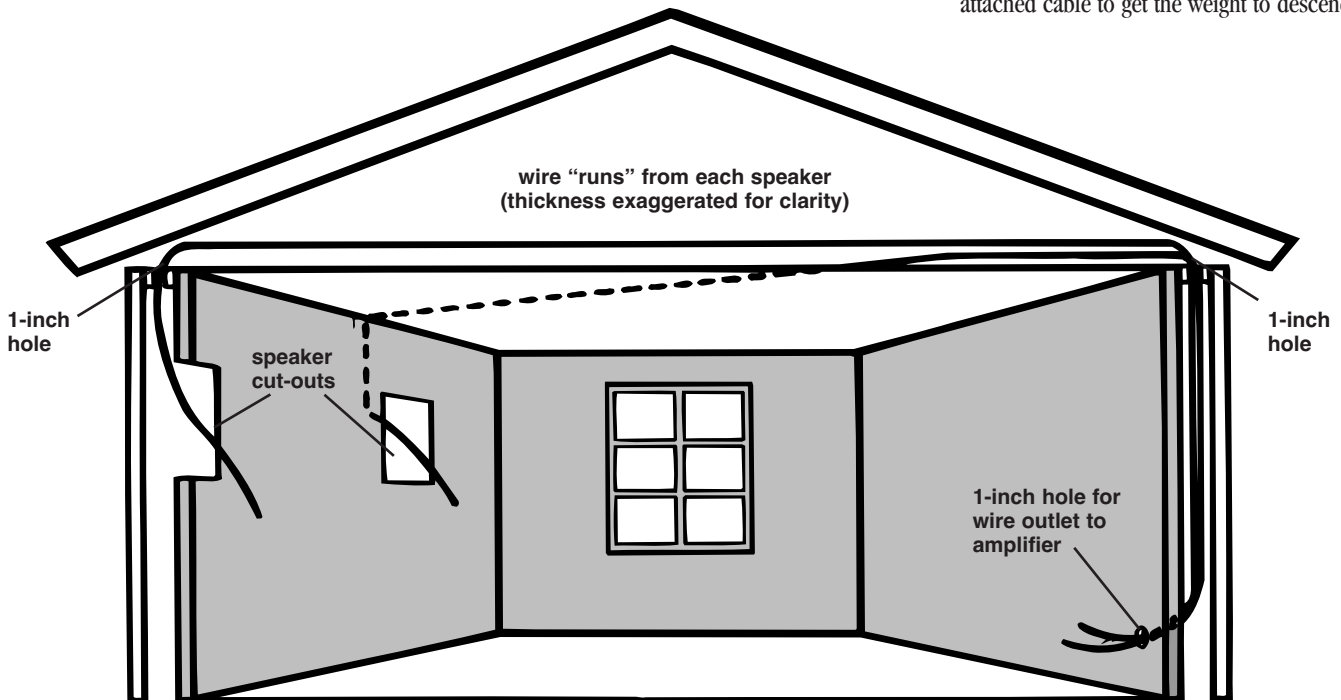

DRAWING 7 - UP AND OVER

- 12. Continue “paying out” both cables until they and the weight hit bottom. Tie the free end of the plumb bob string to something so that it doesn’t fall down the hole.
- 13. Exit the attic crawl space and stretch for a moment.
- 14. Go over to the 1-inch amplifier wire hole and look for the extended string/plumb bob and attached cables. If they’re not visible, fish around for them with your stiff wire/unbent coat hanger and pull them through the hole. Then rescue the plumb bob from the attic.
- 15. At the speaker holes, things are much easier. You can just reach through and grab the cables. Pull their whole free length out the cut speaker hole.



You’ve done it! Skip to the next section, titled “Hooking Up Your Speakers.”

OVERLAND

If, for a variety of reasons, it’s impossible to route cables above or below, you can still achieve a relatively invisible job, assuming your amplifier can be located in the same room. The only visible cable will be a 1”-2” segment on the baseboard below each speaker.

- 1. On the wallboard directly below each speaker cut-out hole, measure up 2 inches from the floor and mark the spot with a pencil dot.
- 2. Drill a small hole just large enough to admit a speaker cable.
- 3. Insert one end of your speaker wire through the small drilled hole and use a stiff hooked wire to fish out the speaker cable from above. Repeat for both speakers.
- 4. When a room is carpeted, the baseboard moldings are elevated slightly to clear the carpet and pad. This creates a hollow space between the bottom of the molding and the floor which can be used to conceal your speaker cable along the perimeter of the room. Use a screwdriver to stuff the cable under until you reach the spot where your amplifier will be.
- 5. To secure the cable so that it doesn’t get pulled out during vacuuming, add insulated staples at the points where the cable enters and exits the baseboard.

Note: If your baseboards are taller than normal, you can drill the hole behind the baseboard and avoid the short length of visible cable. You may have to chisel a shallow channel in the back of the baseboard for clearance.

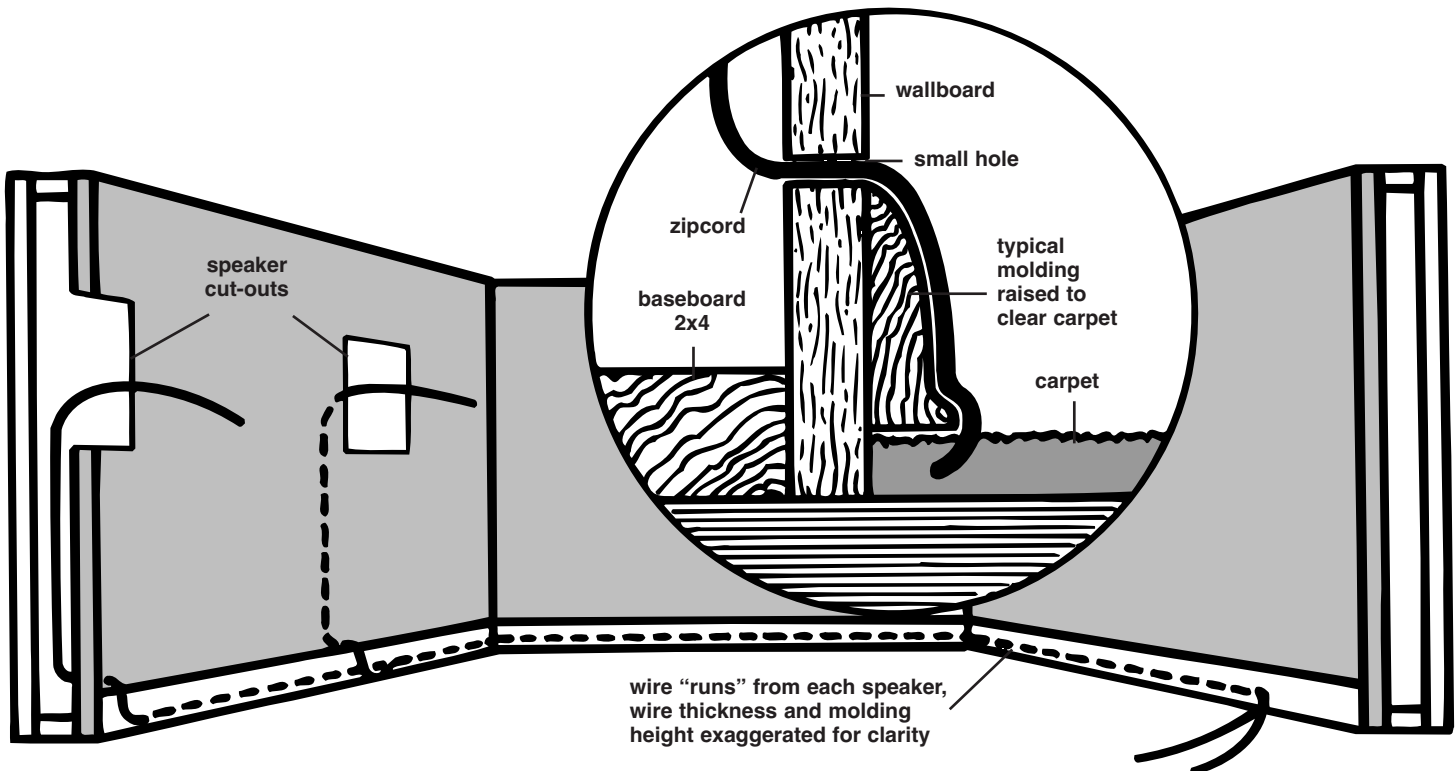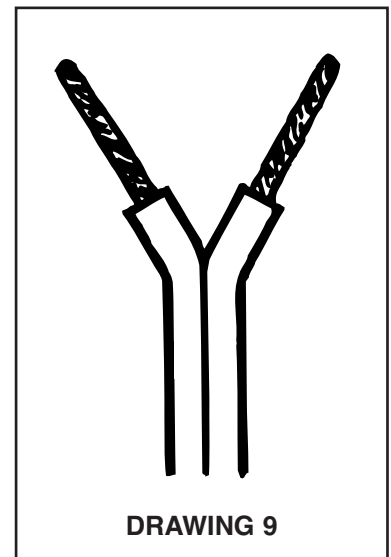

DRAWING 8 - OVERLAND

F

HOOKING UP YOUR SPEAKERS

The main thing to remember when hooking up speakers is that the two conductors in the speaker wire are not interchangeable. One will be used as a POSITIVE (+) conductor and the other as a NEGATIVE (-) conductor. These correspond to the RED (+) and BLACK (-) connectors on your Acoustech In-Wall Speakers and also to the speaker terminals on your amplifier or receiver.

IDENTIFYING “+” and “-”

You need to be able to discriminate between the two conductors in the zip cord.

If your wire has transparent insulation, this is easy: One conductor will be copper-colored and the other silver-colored. Generally, professionals denote the copper one as POSITIVE (+) and the silver one as NEGATIVE (-).

If you’ve used wire which has an opaque insulation, there are still differentiating markings. Examine the wire closely and look for:

- A series of ribs or grooves on one conductor
- A painted stripe
- A single strand of yarn intertwined with the multi-stranded wire in one conductor.

Denote any of these as the POSITIVE (+) conductor for similar connections on both ends.


AT THE SPEAKER END

- 1. Cut off excess wire, leaving about two feet extending through the speaker cut-out hole.
- 2. Pull the conductors apart so they’re separated for the first two inches from their ends.
- 3. Using wire strippers, diagonal pliers or a knife, remove 1/2 inch of insulation from each conductor.
- 4. Twist the tiny strands in each conductor into tight spirals, as shown in Drawing 9.
- 5. IMPORTANT: Route the speaker wire THROUGH the HT-8W speaker frame as shown in Drawing 10.
- 6. Attach the speaker wires to the red and black speaker terminals. Press down on the protruding levers while inserting the wire into the hole.
 - Connect the POSITIVE (+) conductor to the RED terminal and the NEGATIVE (-) conductor to the BLACK speaker terminal.
 - Make sure that no stray strands of wire have gotten detached and are touching the other main wire.
- 7. Repeat Steps 1 through 6 for the other Acoustech In-Wall Speaker.

AT THE AMPLIFIER END

- 1. Cut off excess wire, leaving enough to comfortably reach from the hole in the wall to your stereo system. If there’s a possibility that you’re going to move the amplifier to another part of the room, consider leaving some excess wire coiled up. If you’ve used sufficiently thick wire, this extra length will not affect speaker performance and could make things easier if the room is rearranged later.
- 2. Pull the conductors on both speaker wires apart so they’re separated for the first two inches.
- 3. Using wire strippers, diagonal pliers or a knife, remove 1/2 inch of insulation from each conductor.
- 4. Twist the tiny strands in each conductor into tight spirals.
- 5. Attach the speaker wires to the red and black speaker terminals on the amplifier or receiver.
 - Connect the POSITIVE (+) conductor to the RED terminal and the NEGATIVE (-) conductor to the BLACK speaker terminal.
 - Make sure that no stray strands of wire have gotten detached and are touching the other main wire.

9

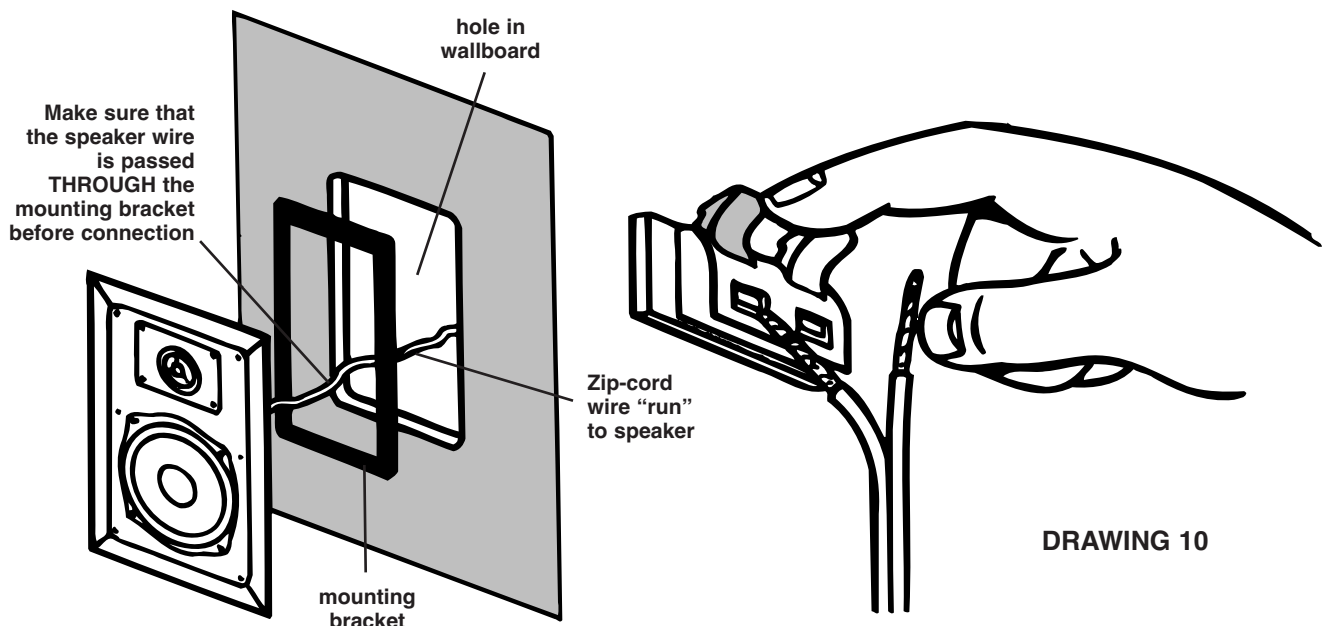


G

FINAL ASSEMBLY

- 1. If you haven't done so already during painting, remove the perforated grilles from both Acoustech In-Wall Speakers. Use one of the black mounting screws to push the grille out from the back side.
- 2. Attach the black mounting bracket to the speaker using the black screws provided, as shown in Drawing 11. Tighten the screws just a few turns each – only enough to loosely hold the mounting bracket in place.
- 3. Slide the bottom of the bracket inside the speaker cut-out hole, followed by the top so that the wallboard is between the bracket and the speaker.

- 4. Center the speaker in the cut-out hole and tighten the screws until the mounting bracket is drawn up snugly from behind, clamping the speaker in place. Try to tighten each screw equally.
- 5. Replace the HT-8W speaker grille by gently pressing it into place.
- 6. Repeat the above steps for the other speaker.

In most situations, the grilles will fit tightly without vibration. If any audible vibration does occur – or if your Acoustech Speakers are ceiling-mounted, use the supplied black damping/adhesive material. Remove the perforated grille, unwrap four of the damping strips and affix them to the four outer corners of the inner speaker surface. Then replace the grille.

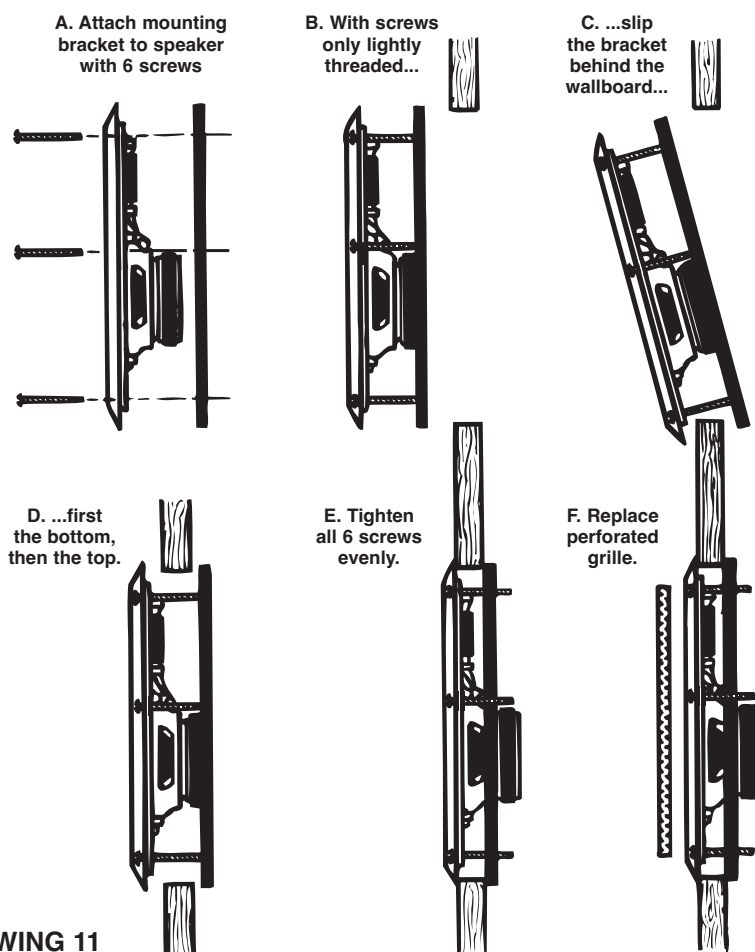

DRAWING 11

H

A SHORT TEST DRIVE

It's a good idea to test everything out at this point. Also, although we've paid close attention to speaker polarity, we haven't concerned ourselves with which wires went to left and right speakers.

- 1. Turn on your stereo system. Make sure that the VOLUME control is turned down and that the BALANCE control is set to center.
- 2. Activate a musical source such as FM, a tape or CD player.
- 3. Gently turn up the volume. You should hear music coming out of your new Acoustech In-Wall Speakers! (If you don't, refer to the troubleshooting guide on the next page.)
- 4. Now rotate the stereo's BALANCE control all the way to the LEFT. Sound should only come out of your left speaker. If it comes out of the RIGHT speaker, skip to Step 6B.
- 5. Rotate the BALANCE control all the way to the RIGHT. Sound should only come out of the right speaker.
- 6. If this is the case, your installation is a success. We suggest you read the section on the next page titled "**Taking Care of Your New Acoustech Speakers**" (for further operating tips).
- 6B. If sound comes from the right speaker when the stereo's balance control is turned to the LEFT, you'll need to change the connections on the back of the amp or receiver.
 - FIRST TURN OFF THE AMPLIFIER!
 - Then swap the wires attached to the left and right speaker terminals.

A QUICK TROUBLESHOOTING GUIDE

Before returning your Acoustech In-Wall Speaker for service, it's a good idea to check out these simple remedies first.

No sound from either speaker.

1. Incorrect source selected on receiver or preamplifier.
2. Mute button pressed on receiver.
3. Wrong speaker output selected – many receivers have an “A” and “B” speaker switch. Make sure it's in the right position.

No sound from one speaker.

1. Un-secure connection at either the speaker or amplifier – double check them.
2. Balance control turned all the way left or right – return it to center.
3. Bad connecting cable between sound source and amplifier – try a new cable.
4. Defective speaker – contact your Acoustech dealer or call 1-877-558-4242.

Intermittent sound from one speaker or speakers play initially but then shut off.

1. Short circuit at either the amplifier or speaker connectors is activating the amp's protection circuits – double check connections, making sure no stray strands of wire from one conductor are touching the other.

Both speakers play but sound is mixed with hum.

1. It could be a faulty patch cord. If so, there will be hum from your main speaker system as well as from your Acoustech Speakers.
2. Assuming you didn't have hum in your system before, one or both of the speaker wires has been run too close to internal AC house wiring. Re-route it so that it stays at least 2 feet away from AC power wiring when running parallel.

Both speakers play but sound is muffled and “strained.” Amplifier may shut off if volume is raised too far.

1. Too thin a gauge of wire has been run too far a distance between amp and speakers. Make sure that you have followed our suggestions as to wire gauge versus overall distance.

When volume is turned up to a high level, the treble cuts in and out.

1. The HT-8W features a special protection circuit which electronically disconnects the tweeter if it starts getting too hot. Turn down your amplifier and make sure to read the section of this manual titled “Taking care of your new Acoustech speakers” which starts on this page.

FURTHER READING

TAKING CARE OF YOUR NEW ACOUSTECH SPEAKERS

Acoustech Speakers are designed to last the life of your home if you follow a few simple rules. The main “killers” of any loudspeaker system are: 1) too little power at high volumes, 2) too much power at high volume, 3) transient thumps.

Not enough power

It's a surprising fact, but far more speakers are damaged by too little power than by too much! When an amplifier runs out of power while trying to re-create musical peaks, it causes a form of high frequency distortion called clipping. In moderate amounts, clipping simply makes the music sound terrible. In greater quantities over a period of time, it can damage or destroy the tweeters (high frequency reproduction speakers) in any speaker system. If you like your music LOUD, consider getting an amplifier with at least 60 watts per channel.

Too much power

There's nothing wrong with driving your HT-8W Speakers with a high power amp – the extra power helps them achieve quick musical transients found in digital recordings. However, you should restrain yourself and not get too heavy-handed with the volume control (or remote buttons). If the music begins to sound distorted or you hear a “clacking” sound during bass notes, back off! And naturally, if the internal protection circuits are intermittently shutting off the tweeter, you're exceeding its safe power input level.

Transients

Loud, deep THUMPs, caused when you turn your stereo on or off, can seriously damage any loudspeaker including your Acoustech ceiling models. It's always a good practice to turn the volume down (or press the MUTE button if your receiver has one) when changing sources (such as changing from tuner to CD player input). Also remember to turn your system off before disconnecting any hook-up cables. When they're pulled out, a huge burst of low frequency hum often occurs if the system is still on.

Cleaning

Acoustech HT-8W Speakers are covered with a durable finish which can be cleaned with soap and water or spray cleaners. Avoid the use

of ammonia-based cleaning products, however. If you've painted the grilles and frames, follow the paint manufacturer's cleaning instructions.

MORE ON AMPLIFIERS AND IMPEDANCE

Not all amplifiers or receivers can safely operate two sets of speakers at once. If you intend to use your Acoustech In-Wall Speakers at the same time as your main speakers – or if you intend to hook up two pairs of Acoustech Speakers and use both at the same time, it's important to consider both the impedance of the speakers and the capabilities of the amplifier you're using.

First consult the owner's manual that came with the amp or receiver. It should tell you the minimum speaker impedances during simultaneous operation. On some models, the manual will recommend that only two pairs of 8 ohm speakers be used at the same time. Others might allow one set of 8-ohm speakers and one set of 4-ohm impedance speakers. A few extremely robust receivers and power amplifiers may even allow two sets of 4-ohm speakers.

If you can't readily determine this information, consult the dealer where you purchased the amplifier, or call the manufacturer.

Next, determine the impedance of your other speakers. It's often printed on the back of the enclosure down near the connection terminals, or you can consult the speaker's owner's manual.

Acoustech In-Wall Speakers are rated at 8 ohms impedance. In general, this means that most amplifiers will allow you to simultaneously operate one set of Acoustech In-Wall Speakers and one other set of 8-ohm loudspeakers – or two sets of Acoustech In-Wall Speakers.

If your other speakers are rated at 4 ohms, some amplifiers may experience difficulty driving both sets at once and shut off intermittently when the volume control is turned up. In this case, you should operate only one set of speakers at a time or keep the volume extremely low.

Parallel operation

Two sets of 8-ohm speakers connected in parallel create a 4-ohm load. This means that some amplifiers can be used to drive as many as four sets of Acoustech In-Wall speakers at the same time (or three sets and one pair of main listening room speakers).

The chart below may be used as a guide:

Amplifier Simultaneous Output Rating	Speaker Output A		Speaker Output B
Two sets of 8 spkrs.	1 pr. Acoustech In-Wall speakers	AND	1 set 8 speakers
	1 pr. Acoustech In-Wall speakers	OR	1 pr. Acoustech In-Wall speakers
One 8 set, one 4 set	1 pr. Acoustech In-Wall speakers	AND	1 set 4 speakers
	1 pr. Acoustech In-Wall speakers	OR	2 prs. of Acoustech In-Wall speakers
Two sets of 4 spkrs.	2 prs. of Acoustech In-Wall speakers	AND	1 set 4 speakers
	2 prs. Acoustech In-Wall speakers	OR	2 prs. of Acoustech In-Wall speakers

INSTALLING ACOUSTECH SPEAKERS DURING NEW CONSTRUCTION

Needless to say, installing speakers when a house is being built is far easier than doing it later.

- If possible run speaker wires after AC wiring is in place to avoid induced hum caused by close parallel proximity.
- Secure speaker wires in place along the run with insulated staples only and be careful not to pierce the insulation. Allow a bit of slack for expansion of building materials.
- Needless to say, the actual speakers should not be installed until the wall board is in place. In the meantime, leave several feet of wire coiled up and secured to the back side of the speaker opening.
- When it comes time to put up the drywall, make sure the speaker cut out hole doesn't extend farther than the sides of the mounting frame.
- After the wallboard is put up, install the speakers as detailed on page 5 of this manual.

OUTSIDE HELP

If you don't feel that you're up to undertaking installation – or if you start it and for some reason can't finish, we recommend you contact a custom installation expert for assistance.

Acoustech Speakers Seven-Year Limited Warranty

If the Acoustech speaker system proves to be defective in materials or workmanship within seven years from the date of the original customer's purchase, we will at our option, repair or replace the defective product.

Limitation of Implied Warranties

Any implied warranties, including warranties of merchantability and fitness for a particular purpose, are limited in duration to the length of this warranty.

Disclaimer

THE WARRANTY STATED HEREIN IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING MERCHANTABILITY AND FITNESS FOR PARTICULAR PURPOSE AND ALL OTHER LIABILITIES AND OBLIGATIONS OF B-I-C AMERICA, ALL OF WHICH ARE EXPRESSLY DISCLAIMED, B-I-C AMERICA HAS NOT MADE AND DOES NOT HEREBY MAKE ANY OTHER REPRESENTATION, WARRANTY OR COVENANT WITH RESPECT TO THE CONDITION, QUALITY, DURABILITY, DESIGN, OPERATION, CAPACITY, FITNESS FOR USE OR SUITABILITY OF THE B-I-C ELECTRONIC PRODUCT.

Exclusion of Certain Damages

Acoustech Systems' liability for any defective product is limited to repair or replacement of the product at our option. Acoustech Systems shall not be liable for incidental or consequential damages of any kind or character because of product defects.

Some states do not allow limitation of how long an implied warranty lasts and/or do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation and exclusions may not apply.

This Warranty Does Not Cover

Damage caused by abuse, accident, misuse, negligence, or improper operation (installation).

Products that have been altered or modified.

Any product whose serial number has been altered, defaced or removed.

Normal wear and maintenance.

Damages caused by shipping (All claims for shipping damages must be made with the carrier.)

Warranty Service

Warranty service must be performed by an authorized service center, usually an Acoustech speaker system dealer or its authorized agent. You may obtain a list of authorized service centers by calling 1-877-558-4242.

All warranty repairs must be accompanied by the original bill of sale. No other document is acceptable or required.

ACOUSTECH HT-8W DESCRIPTIONS AND SPECIFICATIONS

The Acoustech HT-8W in-ceiling speaker system has been ruggedly constructed to withstand not only the extreme dynamic range found in today's digital sound sources, but also the rigors of temperature variation, dust and moisture encountered in permanent installation. Above all, they have been designed to give you the finest possible music reproduction possible in modest-sized speakers.

The HT-8W features an 8" polycarbon woofer with rubber surround for outstanding base reproduction. It employs a 2.5" poly cone midrange for accurate mid-range reproduction. At the heart of the HT-8W is a concentric mounted 1" soft dome swivel tweeter for precise imaging and aiming of the critical high-frequency range.

Specifications

HT-8W

Frequency response 35Hz - 25,000Hz
Power Handling. . . 10 - 175 watts per channel
Sensitivity 90dB
Woofer 8" Poly/graphite
Midrange 2 1/2" Poly
Tweeter 1" soft dome swivel
Crossover . . 600Hz, 3kHz (12dB per octave)
Impedance 8 ohms
Dimensions 14" H x 10 1/8" W x 3 3/4" D
Required cut-out 12 3/4" H x 8 3/4" W

Due to our continual efforts to improve product quality as new technology and techniques become available, B-I-C America reserves the right to revise speaker systems specifications without notice.



B-I-C America
925 N. Shepard Street
Anaheim, CA 92806
www.bicamerica.com

Tech Support: 1-877-558-4242 (4BIC)

© B-I-C America. All rights reserved.
Acoustech is a registered trademark of B-I-C America. Dolby is a registered trademark of Dolby Licensing Corporation.