


# Product Environmental Profile

## Easy Switched Rack Power Distribution Units (PDUs)

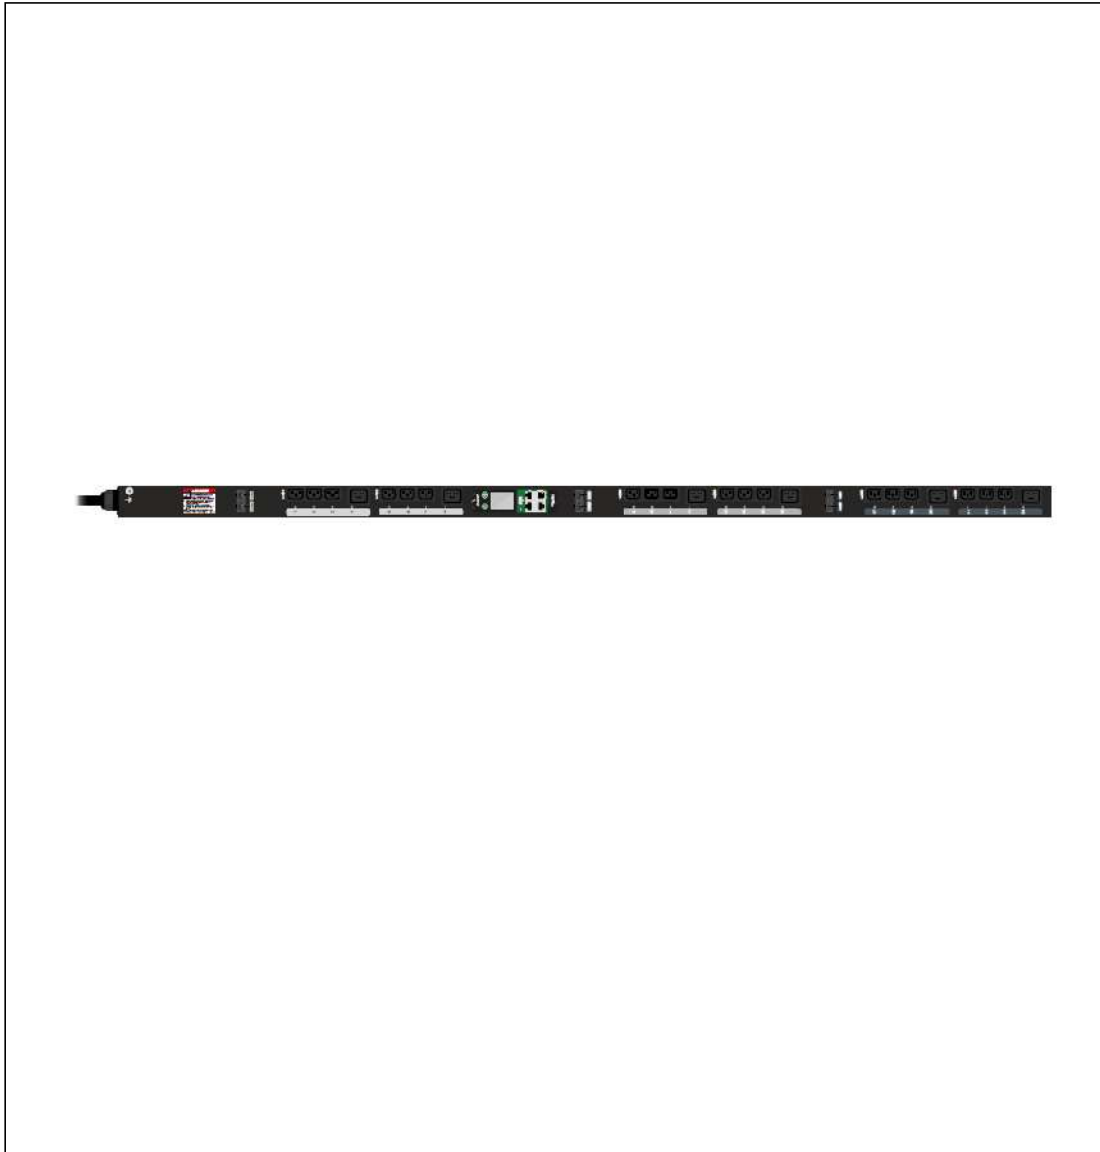


## General information

|                            |                                                                                                                                                                                                                                                                    |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Reference product          | Easy Switched Rack Power Distribution Units (PDUs) - EPDU2232SMBO                                                                                                                                                                                                  |
| Description of the product | EasyPDU provides reliable rack power distribution units that offer more than a power strip for server rack and network rack solutions.                                                                                                                             |
| Functional unit            | To provide rack power distribution via a IEC60309 3P+N+PE inlet with 18 C13 and 6 C19 outlets and distributes power up to 3-phase 32A. To provide active metering of individual outlets and on/off outlet switching to enable energy optimization during 10 years. |

## Constituent materials

|                        |                                                                                     |
|------------------------|-------------------------------------------------------------------------------------|
| Reference product mass | 9850 g including the product, its packaging and additional elements and accessories |
|------------------------|-------------------------------------------------------------------------------------|

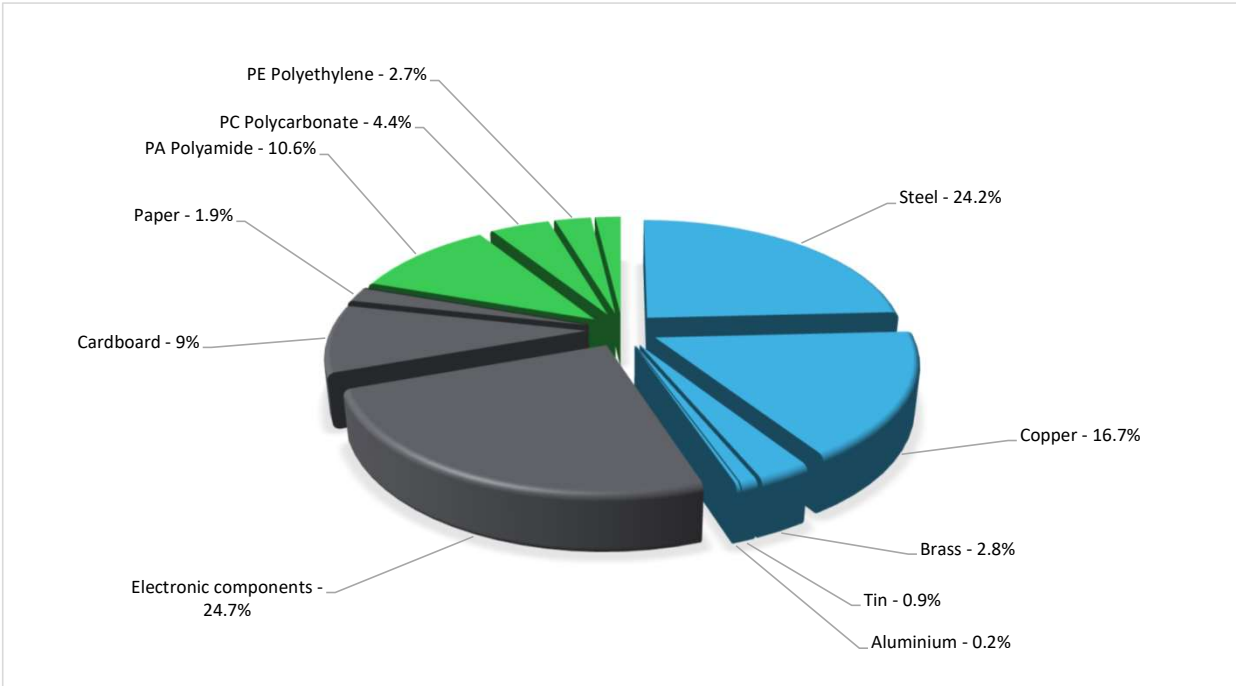

|          |        |
|----------|--------|
| Plastics | 19.60% |
| Metals   | 44.80% |
| Others   | 35.60% |

## Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website <https://www.se.com/ww/en/work/support/green-premium/>

## Additional environmental information

|             |                          |     |                                                                                                                                                                                                                                                                                                              |
|-------------|--------------------------|-----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| End Of Life | Recyclability potential: | 50% | Recyclability rate has been calculated based on REEECYLAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the "ECO'DEEE recyclability and recoverability calculation method" was taken. If no data was found a conservative assumption was used (0% recyclability). |
|-------------|--------------------------|-----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|


**Environmental impacts**

|                                  |                                                                                                                                                                                                                                                                     |                                                     |                                                     |                                                     |
|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------|
| Reference service life time      | 10 years                                                                                                                                                                                                                                                            |                                                     |                                                     |                                                     |
| Product category                 | Combination of functions                                                                                                                                                                                                                                            |                                                     |                                                     |                                                     |
| Installation elements            | No special components needed                                                                                                                                                                                                                                        |                                                     |                                                     |                                                     |
| Use scenario                     | The product is in active mode 80% of the time with a power use of 19.955W and in sleep mode 20% of the time with a power use of 19.428W, for 10 years.                                                                                                              |                                                     |                                                     |                                                     |
| Technological representativeness | The Modules of Technologies such as material production, manufacturing process and transport technology used in this PEP analysis (LCA EIME in this case) are Similar and representative of the actual type of technologies used to make the product in production. |                                                     |                                                     |                                                     |
| Geographical representativeness  | Europe                                                                                                                                                                                                                                                              |                                                     |                                                     |                                                     |
| Energy model used                | [A1 - A3]                                                                                                                                                                                                                                                           | [A5]                                                | [B6]                                                | [C1 - C4]                                           |
|                                  | Electricity Mix; Production mix; Low voltage; CN                                                                                                                                                                                                                    | Electricity Mix; Production mix; Low voltage; UE-27 | Electricity Mix; Production mix; Low voltage; UE-27 | Electricity Mix; Production mix; Low voltage; UE-27 |

Detailed results, including all the optional indicators mentioned in PCRRed4, and the split of the Use Phase (B1 to B7), are available in the LCA report and on demand in a digital format - Country Customer Care Center - <http://www.schneider-electric.com/contact>

| Mandatory Indicators                                         |                           |          | Easy Switched Rack Power Distribution Units (PDUs) - EPDU2232SMBO |              |              |           |             |                    |
|--------------------------------------------------------------|---------------------------|----------|-------------------------------------------------------------------|--------------|--------------|-----------|-------------|--------------------|
| Impact indicators                                            | Unit                      | Total    | Manufacturing                                                     | Distribution | Installation | Use       | End of Life | Loads and Benefits |
|                                                              |                           |          | [A1 - A3]                                                         | [A4]         | [A5]         | [B1 - B7] | [C1 - C4]   | [D]                |
| Contribution to climate change                               | kg CO2 eq                 | 8.38E+02 | 1.06E+02                                                          | 1.29E+00     | 1.98E+00     | 7.13E+02  | 1.59E+01    | -1.72E+01          |
| Contribution to climate change-fossil                        | kg CO2 eq                 | 8.36E+02 | 1.05E+02                                                          | 1.29E+00     | 1.89E+00     | 7.12E+02  | 1.56E+01    | -1.67E+01          |
| Contribution to climate change-biogenic                      | kg CO2 eq                 | 2.31E+00 | 9.45E-01                                                          | 0*           | 8.70E-02     | 9.51E-01  | 3.30E-01    | -4.46E-01          |
| Contribution to climate change-land use and land use change  | kg CO2 eq                 | 7.50E-06 | 5.11E-07                                                          | 0*           | 1.48E-06     | 0*        | 5.51E-06    | 0.00E+00           |
| Contribution to ozone depletion                              | kg CFC-11 eq              | 1.68E-05 | 1.34E-05                                                          | 1.97E-09     | 1.38E-07     | 3.05E-06  | 2.39E-07    | -2.98E-06          |
| Contribution to acidification                                | mol H+ eq                 | 5.50E+00 | 1.35E+00                                                          | 8.28E-03     | 7.94E-03     | 4.07E+00  | 7.14E-02    | -3.42E-01          |
| Contribution to eutrophication, freshwater                   | kg (PO4) <sup>3-</sup> eq | 1.44E-02 | 6.46E-04                                                          | 0*           | 2.08E-05     | 1.95E-03  | 1.17E-02    | -6.45E-05          |
| Contribution to eutrophication marine                        | kg N eq                   | 6.31E-01 | 1.52E-01                                                          | 3.89E-03     | 2.11E-03     | 4.62E-01  | 1.17E-02    | -1.32E-02          |
| Contribution to eutrophication, terrestrial                  | mol N eq                  | 8.76E+00 | 1.62E+00                                                          | 4.27E-02     | 1.63E-02     | 6.94E+00  | 1.40E-01    | -1.44E-01          |
| Contribution to photochemical ozone formation - human health | kg COVNM eq               | 2.05E+00 | 5.11E-01                                                          | 1.08E-02     | 4.38E-03     | 1.48E+00  | 3.93E-02    | -6.32E-02          |
| Contribution to resource use, minerals and metals            | kg Sb eq                  | 3.13E-02 | 3.09E-02                                                          | 0*           | 0*           | 5.16E-05  | 3.31E-04    | -5.12E-03          |
| Contribution to resource use, fossils                        | MJ                        | 2.10E+04 | 2.24E+03                                                          | 1.79E+01     | 2.01E+01     | 1.82E+04  | 5.98E+02    | -3.27E+02          |
| Contribution to water use                                    | m3 eq                     | 1.04E+02 | 6.59E+01                                                          | 0*           | 1.21E+00     | 2.52E+01  | 1.19E+01    | -1.91E+01          |

Additional indicators for the French regulation are available as well

| Inventory flows Indicators                                                                              |      |          | Easy Switched Rack Power Distribution Units (PDUs) - EPDU2232SMBO |              |              |           |             |                    |
|---------------------------------------------------------------------------------------------------------|------|----------|-------------------------------------------------------------------|--------------|--------------|-----------|-------------|--------------------|
| Inventory flows                                                                                         | Unit | Total    | Manufact.                                                         | Distribution | Installation | Use       | End of Life | Loads and Benefits |
|                                                                                                         |      |          | [A1 - A3]                                                         | [A4]         | [A5]         | [B1 - B7] | [C1 - C4]   | [D]                |
| Contribution to use of renewable primary energy excluding renewable primary energy used as raw material | MJ   | 3.52E+03 | 2.68E+01                                                          | 0*           | 1.74E+00     | 3.49E+03  | 7.97E+00    | 2.56E+00           |
| Contribution to use of renewable primary energy resources used as raw material                          | MJ   | 2.05E+01 | 2.05E+01                                                          | 0*           | 0*           | 0*        | 0*          | -1.89E+01          |

|                                                                                                                 |         |          |          |          |          |          |          |           |
|-----------------------------------------------------------------------------------------------------------------|---------|----------|----------|----------|----------|----------|----------|-----------|
| Contribution to total use of renewable primary energy resources                                                 | MJ      | 3.54E+03 | 4.73E+01 | 0*       | 1.74E+00 | 3.49E+03 | 7.97E+00 | -1.64E+01 |
| Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material | MJ      | 2.09E+04 | 2.15E+03 | 1.79E+01 | 2.01E+01 | 1.82E+04 | 5.98E+02 | -3.15E+02 |
| Contribution to use of non renewable primary energy resources used as raw material                              | MJ      | 8.86E+01 | 8.86E+01 | 0*       | 0*       | 0*       | 0*       | -1.26E+01 |
| Contribution to total use of non-renewable primary energy resources                                             | MJ      | 2.10E+04 | 2.24E+03 | 1.79E+01 | 2.01E+01 | 1.82E+04 | 5.98E+02 | -3.27E+02 |
| Contribution to use of secondary material                                                                       | kg      | 8.28E-03 | 8.28E-03 | 0*       | 0*       | 0*       | 0*       | 0.00E+00  |
| Contribution to use of renewable secondary fuels                                                                | MJ      | 0.00E+00 | 0*       | 0*       | 0*       | 0*       | 0*       | 0.00E+00  |
| Contribution to use of non renewable secondary fuels                                                            | MJ      | 0.00E+00 | 0*       | 0*       | 0*       | 0*       | 0*       | 0.00E+00  |
| Contribution to net use of freshwater                                                                           | m³      | 2.43E+00 | 1.54E+00 | 0*       | 2.82E-02 | 5.87E-01 | 2.78E-01 | -4.44E-01 |
| Contribution to hazardous waste disposed                                                                        | kg      | 4.72E+02 | 4.51E+02 | 0*       | 0*       | 1.33E+01 | 6.74E+00 | -4.30E+02 |
| Contribution to non hazardous waste disposed                                                                    | kg      | 1.65E+02 | 5.39E+01 | 4.52E-02 | 6.28E+00 | 1.03E+02 | 2.14E+00 | -3.58E+01 |
| Contribution to radioactive waste disposed                                                                      | kg      | 5.85E-02 | 3.60E-02 | 3.22E-05 | 8.56E-04 | 2.15E-02 | 2.14E-04 | -5.48E-03 |
| Contribution to components for reuse                                                                            | kg      | 0.00E+00 | 0*       | 0*       | 0*       | 0*       | 0*       | 0.00E+00  |
| Contribution to materials for recycling                                                                         | kg      | 5.58E+00 | 1.07E-02 | 0*       | 1.32E+00 | 0*       | 4.25E+00 | 0.00E+00  |
| Contribution to materials for energy recovery                                                                   | kg      | 2.70E-07 | 2.70E-07 | 0*       | 0*       | 0*       | 0*       | 0.00E+00  |
| Contribution to exported energy                                                                                 | MJ      | 0.00E+00 | 0*       | 0*       | 0*       | 0*       | 0*       | 0.00E+00  |
| Contribution to biogenic carbon content of the product                                                          | kg de C | 0.00E+00 | 0*       | 0*       | 0*       | 0*       | 0*       | 0.00E+00  |
| Contribution to biogenic carbon content of the associated packaging                                             | kg de C | 0.00E+00 | 0*       | 0*       | 0*       | 0*       | 0*       | 0.00E+00  |

\* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version v5.9.4, database version 2022-01 in compliance with ISO14044.

Detailed results, including all the optional indicators mentioned in PCR<sub>ed4</sub>, and the split of the Use Phase (B1 to B7), are available in the LCA report and on demand in a digital format - Country Customer Care Center - <http://www.schneider-electric.com/contact>

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

|                                                                                                                            |                  |                                     |                                                                      |
|----------------------------------------------------------------------------------------------------------------------------|------------------|-------------------------------------|----------------------------------------------------------------------|
| Registration number :                                                                                                      | ENVPEP2309051_V1 | Drafting rules                      | PEP-PCR-ed4-2021 09 06                                               |
| Verifier accreditation N°                                                                                                  |                  | Supplemented by                     | PSR-0005-ed2-2016 03 29                                              |
| Date of issue                                                                                                              | 2023/11/13       | Information and reference documents | <a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a> |
|                                                                                                                            |                  | Validity period                     | 5 years                                                              |
| Independent verification of the declaration and data, in compliance with ISO 14021 : 2016                                  |                  |                                     |                                                                      |
| Internal                                                                                                                   | X                | External                            |                                                                      |
| The PCR review was conducted by a panel of experts chaired by Julie ORGELET (DDemain)                                      |                  |                                     |                                                                      |
| PEP are compliant with XP C08-100-1 :2016 or EN 50693:2019                                                                 |                  |                                     |                                                                      |
| The elements of the present PEP cannot be compared with elements from another program.                                     |                  |                                     |                                                                      |
| Document in compliance with ISO 14021 : 2016 « Environmental labels and declarations. Type II environmental declarations » |                  |                                     |                                                                      |

Schneider Electric Industries SAS  
 Country Customer Care Center  
<http://www.se.com/contact>  
 35, rue Joseph Monier  
 CS 30323  
 F- 92500 Rueil Malmaison Cedex  
 RCS Nanterre 954 503 439  
 Capital social 928 298 512 €

[www.se.com](http://www.se.com)

Published by Schneider Electric  
 ©2023 - Schneider Electric – All rights reserved

2023/11/13