

DS-510 User's Guide

Contents

DS-510 User's Guide	7
Scanner Basics.....	8
Scanner Parts Locations	8
Scanner Parts.....	8
Scanner Buttons and Lights.....	10
Page Separation Lever	11
User Replaceable Epson Scanner Parts	12
Changing the Power Off Timer Setting.....	13
Placing Originals on the Scanner	14
Loading Originals in the Input Tray.....	14
Original Document Loading Capacity	17
Loading Cards in the Input Tray	19
Card Loading Capacity	22
Loading Special Documents.....	23
Large or Thick Original Loading Capacity.....	28
Using the Network Interface Unit	29
Network Interface Unit Buttons.....	29
Connecting the Network Interface Unit.....	30
Setting Up Network Scanning	30
Scanning to Network Computers from the Network Interface Unit - Windows	32
Scanning	33
Starting a Scan from a Scanner Button	33
Assigning Scan Button Settings or Scan Jobs	33
Scanning with Document Capture Pro and Document Capture.....	34
Scanning in Epson Scan	37
Available Image Adjustments	39
Scanning Special Projects.....	40
Scanning Two Originals onto One Sheet (Stitching Images)	40
Scanning Multi-Page Originals as Separate Files - Windows	42
Scanning to a SharePoint Server or Cloud Service	44

Cleaning and Transporting Your Scanner	46
Cleaning Your Scanner	46
Cleaning Inside Your Scanner.....	46
Replacing the Scanner Rollers.....	49
Resetting the Scanner Roller Counter	55
Transporting Your Scanner	56
Solving Problems	57
Scanner Light Status	57
Solving Scanning Problems	58
Scanner Does Not Turn On or Turns Off Unexpectedly.....	59
Scanner Button Does Not Work as Expected	59
Scanning Software Does Not Operate Correctly	59
Cannot Start Epson Scan	60
Original Feeds Incorrectly in Scanner.....	60
Original Jams in Scanner.....	61
Scanning is Slow	63
Solving Network Interface Unit Problems	64
Solving Scanned Image Quality Problems	64
Back of Original Image Appears in Scanned Image	65
Scanned Characters are Blurry	65
Characters are not Recognized During Conversion to Editable Text (OCR)	65
Ripple Patterns Appear in an Image	66
Spots or Lines Appear in All Scanned Images.....	66
Scanned Image Edges are Cropped	68
When to Uninstall Your Scanner Software	68
Uninstalling Scanner Software - Windows.....	69
Uninstalling Scanner Software - Mac OS X	69
Where to Get Help.....	70
Technical Specifications	72
Windows System Requirements	72
Mac System Requirements	72
General Specifications	73
Dimension Specifications	74

Electrical Specifications	74
Environmental Specifications	75
USB Interface Specifications	75
Safety and Approvals Specifications	75
Notices	77
Important Safety Instructions.....	77
Restrictions on Copying	79
Default Delay Times for Power Management for Epson Products.....	79
Trademarks	79
Copyright Notice.....	80
libTIFF Software Acknowledgment.....	80
libjpeg-turbo.....	81
A Note Concerning Responsible Use of Copyrighted Materials.....	82
Copyright Attribution	82

DS-510 User's Guide

Welcome to the DS-510 *User's Guide*.

For a printable PDF copy of this guide, [click here](#).

Scanner Basics

See these sections to learn about the basic features of your scanner.

[Scanner Parts Locations](#)

[User Replaceable Epson Scanner Parts](#)

[Changing the Power Off Timer Setting](#)

Scanner Parts Locations

See these sections to identify the parts on your scanner.


[Scanner Parts](#)

[Scanner Buttons and Lights](#)


[Page Separation Lever](#)

Parent topic: [Scanner Basics](#)


Scanner Parts

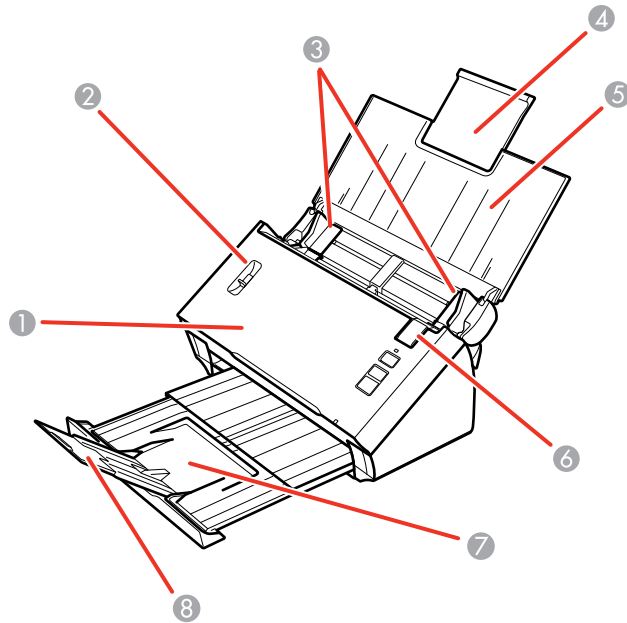

- 1 Scanner cover
- 2 Page separation lever
- 3 Edge guides
- 4 Input tray extension
- 5 Input tray
- 6 Cover open lever
- 7 Output tray
- 8 Output tray extension

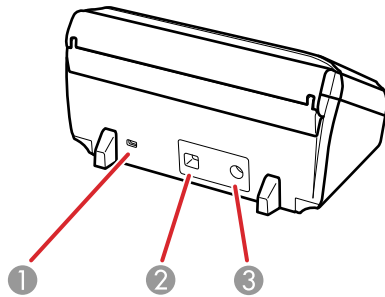

- 1 Kensington security slot
- 2 USB port
- 3 Power inlet

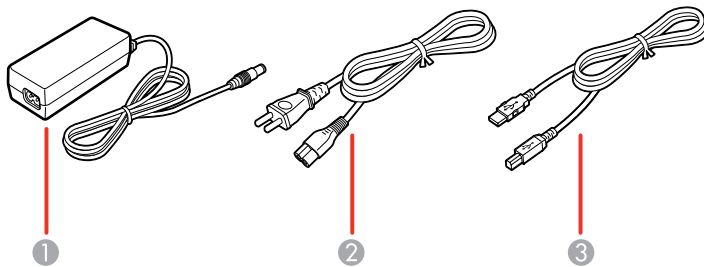





- 1 AC adapter
- 2 Power cord
- 3 USB cable

Parent topic: [Scanner Parts Locations](#)


Scanner Buttons and Lights

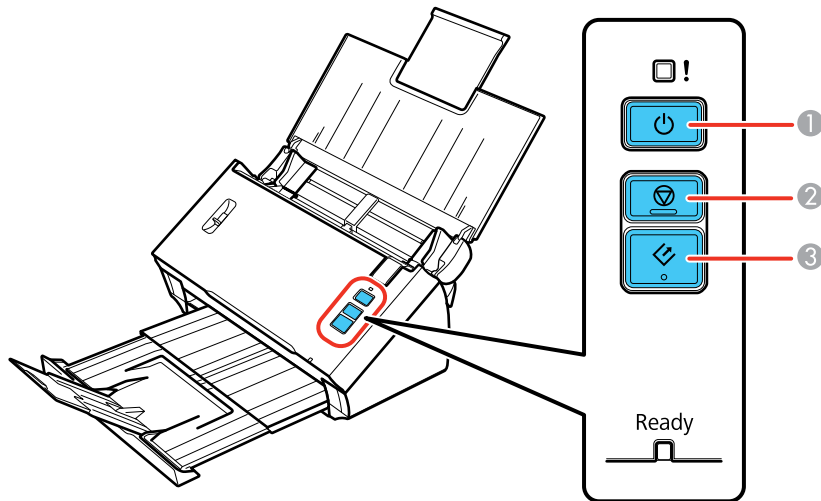Buttons



- 1  power
- 2  stop
- 3  start

Lights

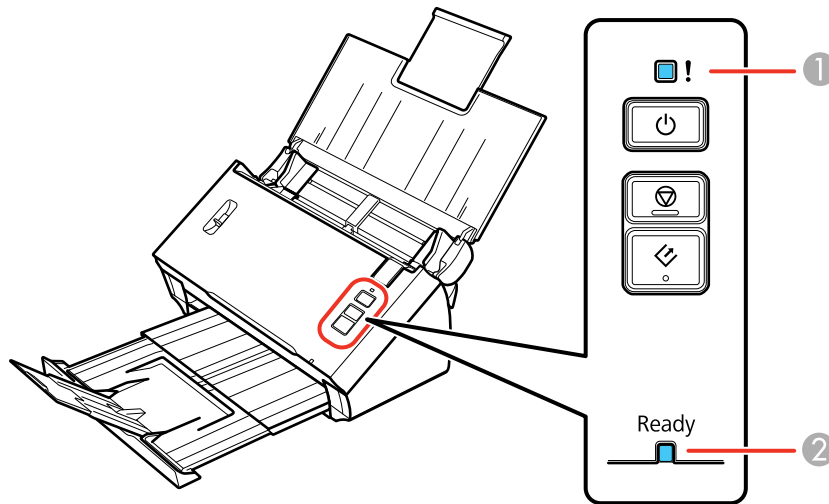




- 1 ! error
- 2 **Ready**

Parent topic: [Scanner Parts Locations](#)

Page Separation Lever

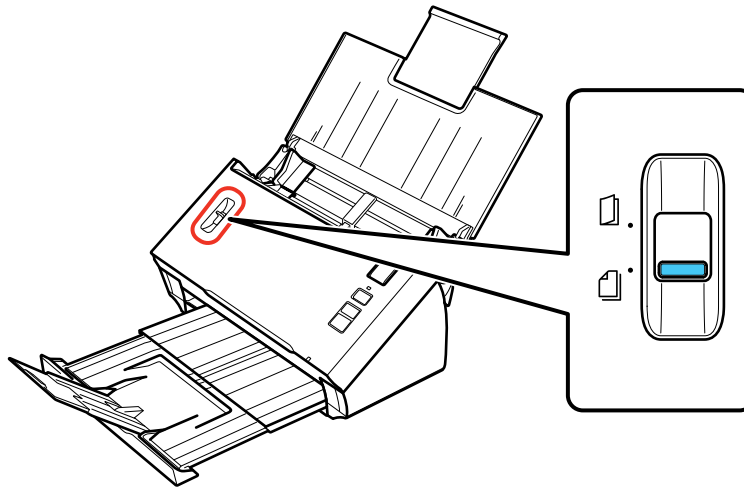You can scan plastic cards, folded documents, envelopes, or any document that requires an optional carrier sheet by adjusting the position of the page separation lever.



- 1  Move the separation lever to this position only when scanning plastic cards, folded documents, envelopes, or any document that requires an optional carrier sheet.
- 2  Leave the separation lever in this position when scanning standard single- or multiple-page documents to prevent paper jams.

Parent topic: [Scanner Parts Locations](#)

Related tasks

[Loading Originals in the Input Tray](#)

[Loading Cards in the Input Tray](#)

[Loading Special Documents](#)

User Replaceable Epson Scanner Parts

You can purchase genuine Epson accessories at epson.com (U.S. sales) or epson.ca (Canadian sales). You can also purchase accessories from an Epson authorized reseller. To find the nearest one, call 800-GO-EPSON (800-463-7766).


Part	Part number
Network interface unit	B12B808441


Part	Part number
Carrier sheet	B12B813431
Roller assembly kit	B12B813561

Parent topic: [Scanner Basics](#)

Changing the Power Off Timer Setting

You can use the Epson Scan Settings software to change the time period before the scanner enters sleep mode and turns off automatically.

- Do one of the following to access the Epson Scan Settings program:
 - Windows 8:** Navigate to the **Start** screen, right-click the screen, and select **All apps**. Click **EPSON Scan Settings**.
 - Windows (other versions):** Click  or **Start**, and select **All Programs** or **Programs**. Select **Epson**, then **EPSON Scan**, then click **EPSON Scan Settings**.
 - Mac OS X:** Open the **Applications** folder, then open the **Epson Software** folder and double-click the **EPSON Scan Settings** icon.
- Click **Energy Saving**.

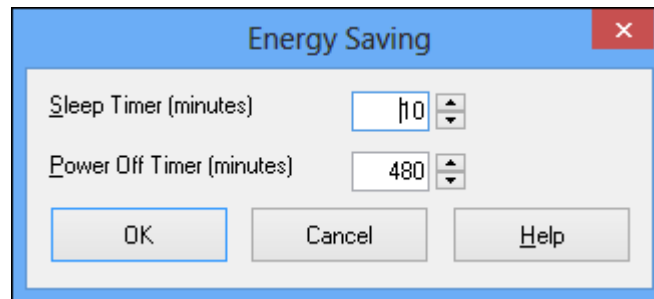

- Enter the time period you want before the scanner goes to sleep as the **Sleep Timer** setting.
- Enter the time period you want before the scanner turns off automatically as the **Power Off Timer** setting.
- Click **OK**.

Parent topic: [Scanner Basics](#)

Placing Originals on the Scanner

Follow the instructions here to place your originals on the scanner.

Caution: Do not place anything on top of your scanner or use its cover as a writing surface to avoid damaging it.

[Loading Originals in the Input Tray](#)

[Loading Cards in the Input Tray](#)


[Loading Special Documents](#)

Loading Originals in the Input Tray


You can load originals that meet the document specifications in the input tray.

Caution: Do not load photos, or valuable original documents or artwork, directly into the input tray. This may wrinkle or damage the original. Load these originals using an optional carrier sheet.


1. Open the input tray and pull up its extension.
2. Pull out the output tray and open its extension.

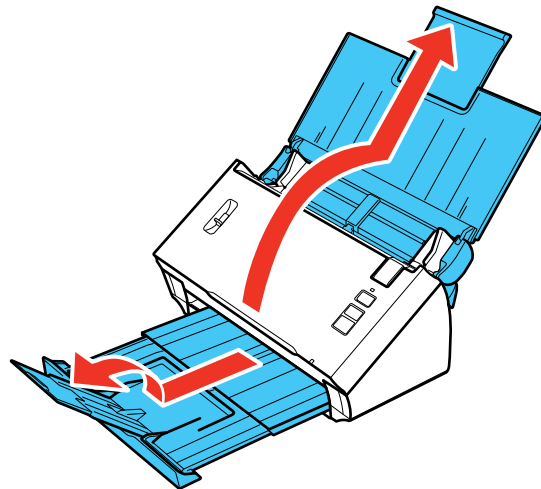

3. Slide the input tray edge guides all the way outward.

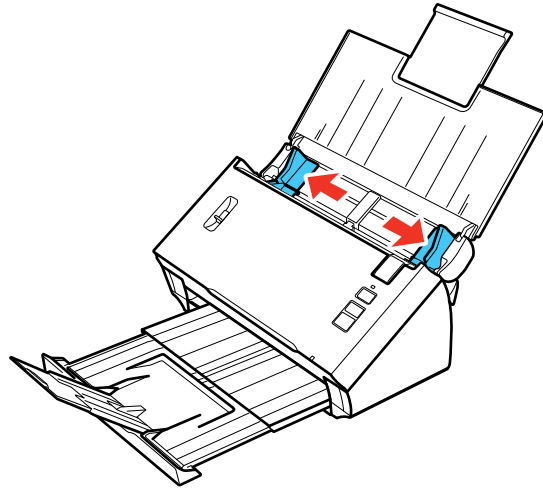


4. Check to make sure that the page separation lever is in the position shown here.

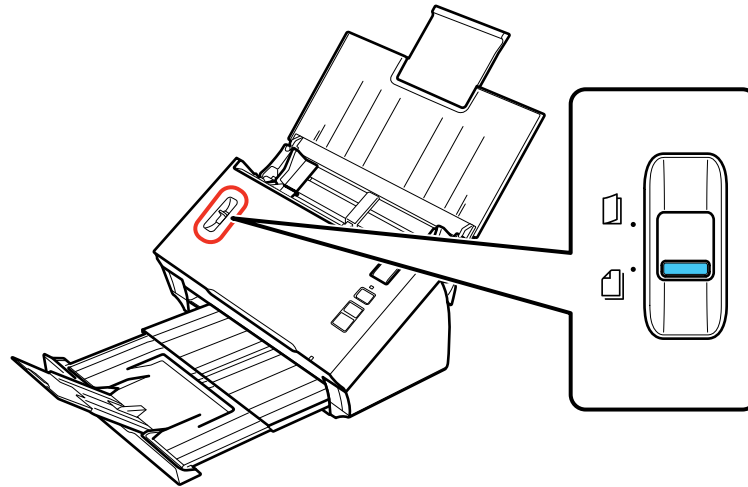


Note: To prevent paper jams, keep the lever in this position for most types of documents.

5. If you are loading a multi-page document, fan your stack of originals and tap them gently on a flat surface to even the edges.

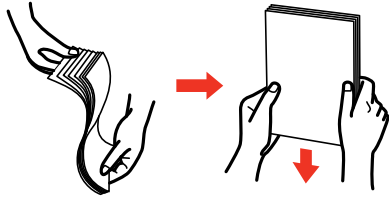


6. Slide your originals into the input tray as shown until they meet resistance. Make sure the printed side is facedown with the top facing into the scanner.

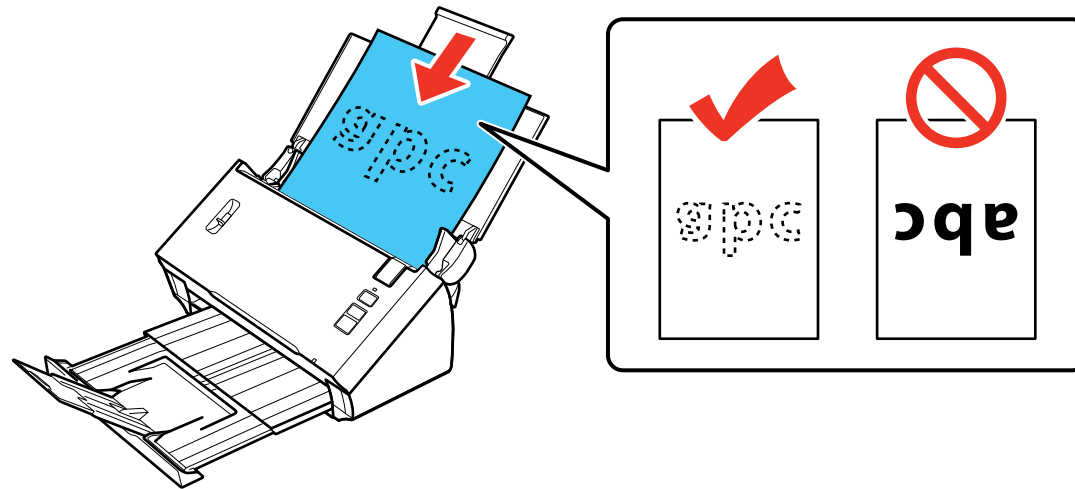

Note: If you are loading a paper business card, load it horizontally.

7. Slide the edge guides against the edges of the original.

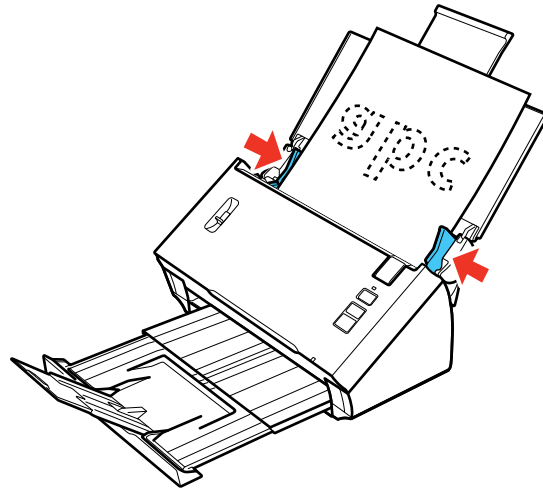

[Original Document Loading Capacity](#)

Parent topic: [Placing Originals on the Scanner](#)

Related references

[Page Separation Lever](#)

Related topics

[Scanning](#)

Original Document Loading Capacity

You can load original documents that meet these specifications in your scanner.

Paper size	Paper weight	Paper type	Loading capacity
Letter (8.5 × 11 inches [216 × 279 mm])	13 to 35 lb (50 to 130 g/m ²)	Plain paper Fine paper Recycled paper	13 lb (50 g/m ²): 70 sheets 21 lb (80 g/m ²): 50 sheets 35 lb (130 g/m ²): 30 sheets Loading capacity may vary depending on the paper type.
A4 (8.3 × 11.7 inches [210 × 297 mm])			
Legal (8.5 × 14 inches [216 × 357 mm])			
A5 (5.8 × 8.2 inches [148 × 210 mm])			
A6 (4.1 × 5.8 inches [105 × 148 mm])			
B5 (182 × 257 mm)			
Business cards	Up to 56 lb (210 g/m ²)	Paper business cards	15 cards loaded horizontally

Note: You can load original documents of different sizes, up to this size: Letter (8.5 × 11 inches [216 × 279 mm]). However, do not load different-sized large or thick originals, or valuable original documents or artwork.

Caution: Do not load the following types of originals in the scanner, or they may be damaged or may damage the scanner:

- Thermal paper
- Coated paper
- Originals with uneven surfaces, such as embossed documents
- Photos
- Originals with wet ink
- Ripped, curled, or wrinkled originals
- Originals containing staples or paper clips
- Originals with holes, other than standard hole-punched originals
- Originals that are bound
- Originals with carbon paper backing


- Transparencies
- Glossy originals

Parent topic: [Loading Originals in the Input Tray](#)


Loading Cards in the Input Tray

You can load plastic cards that meet the card specifications in the input tray.


1. Open the input tray and pull up its extension.
2. Pull out the output tray and open its extension.

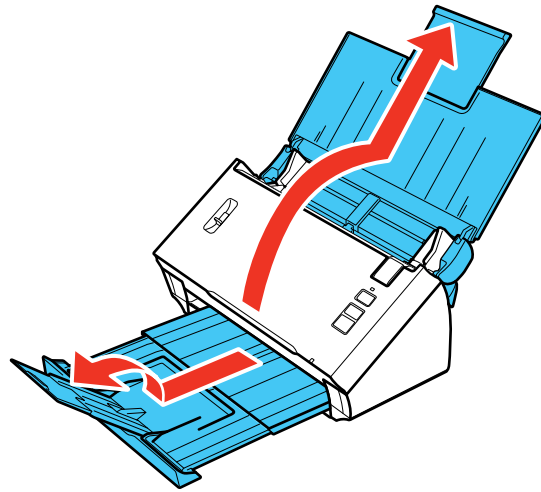


3. Slide the input tray edge guides all the way outward.

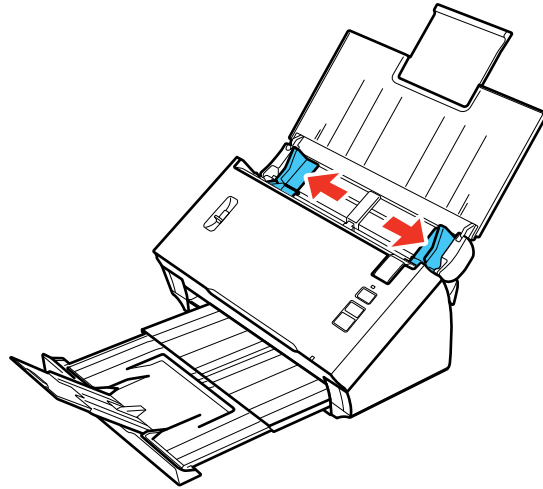


4. Load one card horizontally in the input tray as shown, sliding it in until it meets resistance. Make sure the printed side is facedown with the top facing into the scanner.

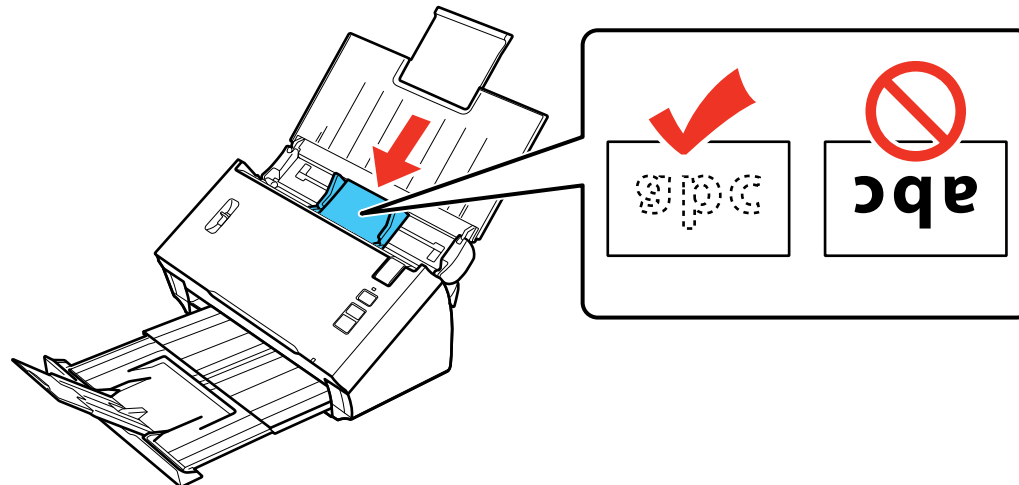


Note: Do not load a plastic card vertically.

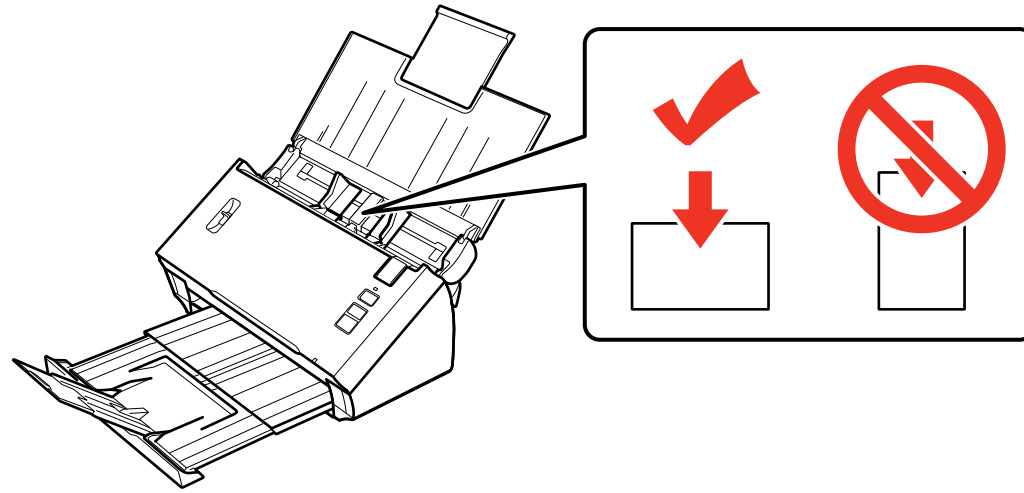

5. Slide the edge guides against the edges of the card.

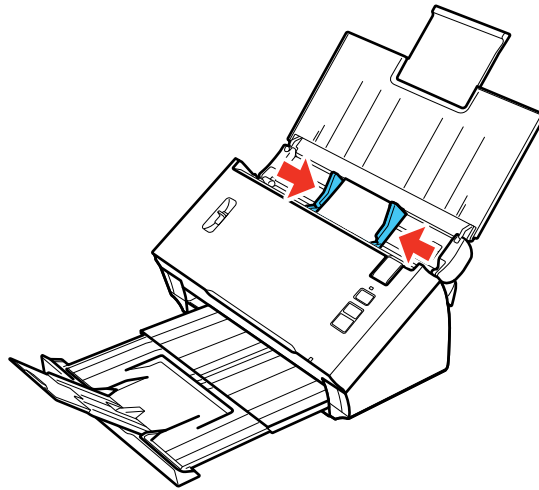

6. Set the page separation lever to the position shown here.

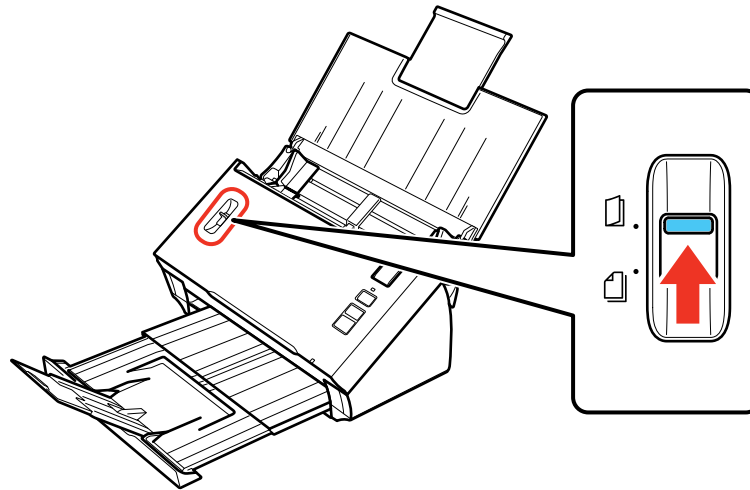

Note: To prevent paper jams, make sure to set the separation lever back to its original position when scanning standard single- or multi- page documents.

[Card Loading Capacity](#)

Parent topic: [Placing Originals on the Scanner](#)

Related references

[Page Separation Lever](#)

Related topics

[Scanning](#)

Card Loading Capacity

You can load original cards that meet these specifications in your scanner.

Type	Plastic cards, including embossed cards (ISO7810 compliant)
Size	2.1 × 3.3 inches (56 × 85.6 mm)
Thickness	Up to 0.05 inch (1.24 mm) thick, including any embossing
Loading capacity	1 card at a time

Loading direction

Horizontal


Note: Plastic cards with glossy surfaces may not scan properly.

Parent topic: [Loading Cards in the Input Tray](#)


Loading Special Documents

You can load large, thick, or folded originals in the input tray. Make sure the original meets the specifications for special originals before loading it.

1. Open the input tray and pull up its extension.
2. Pull out the output tray and open its extension.

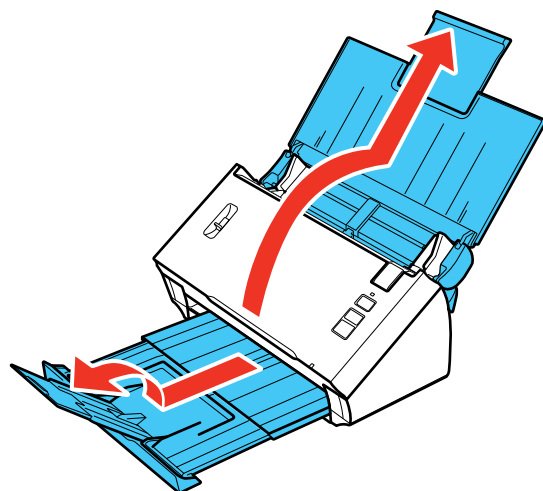


3. Slide the input tray edge guides all the way outward.

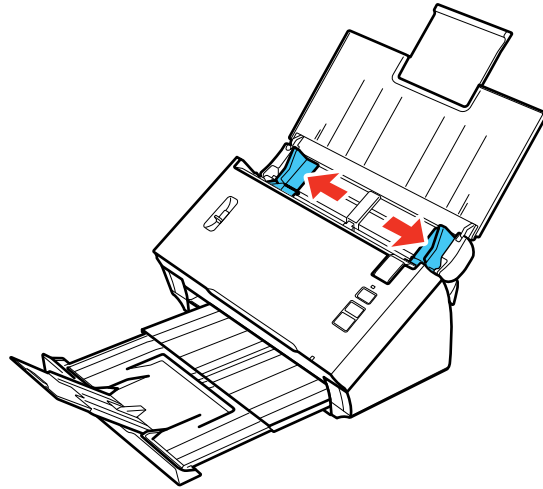


4. Do one of the following to load your original:


- Load a large or thick original or an envelope in the input tray as shown. Make sure the printed side is facedown with the top facing into the scanner.

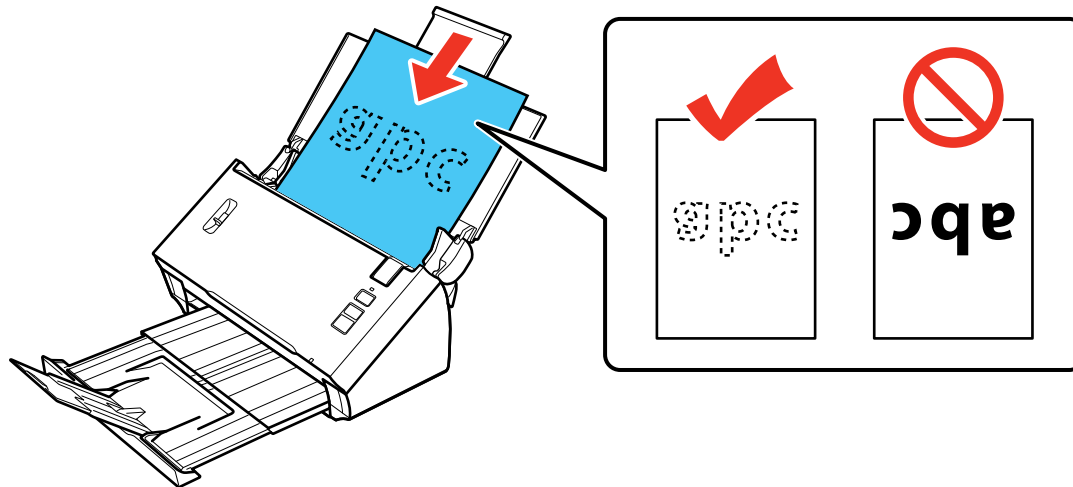


- For a folded original, fold and load the original as shown.

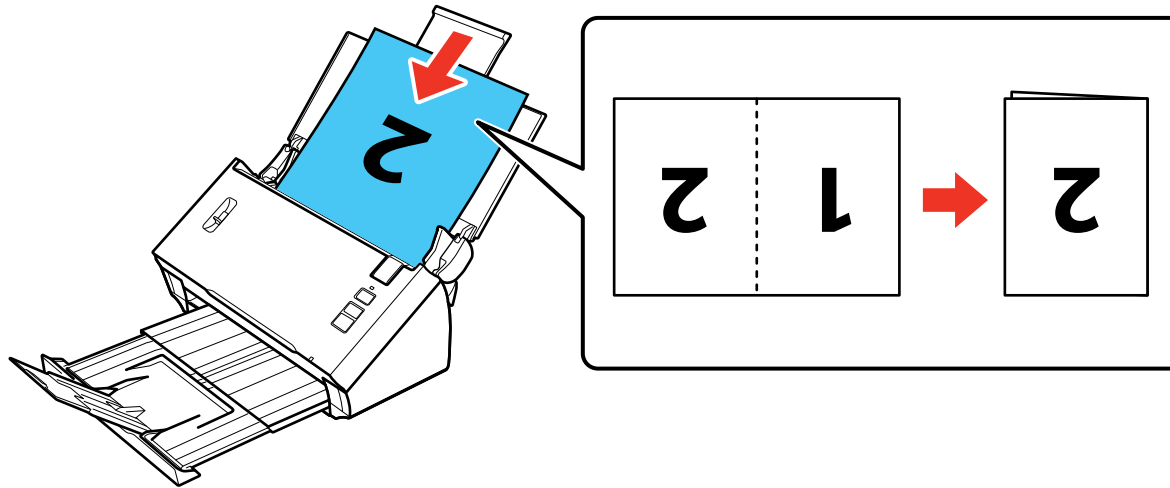


Note: Do not load the document with the open side facing down.



- For a photo or an irregularly-shaped original, use an optional carrier sheet to load the document. Do the following to load the document into the carrier sheet:
 - If the original is smaller than the carrier sheet, insert it in the center of the sheet with the printed side facedown and the top facing the arrow on the sheet.

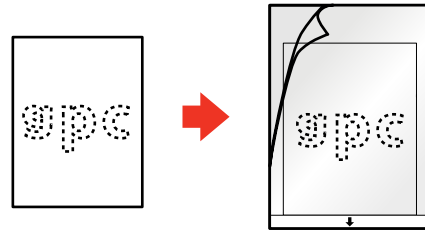


- If the original is larger than the carrier sheet, fold it in half with the sides to be scanned facing out. Position the right side of the original at the front of the sheet with the top facing the arrow on the sheet.

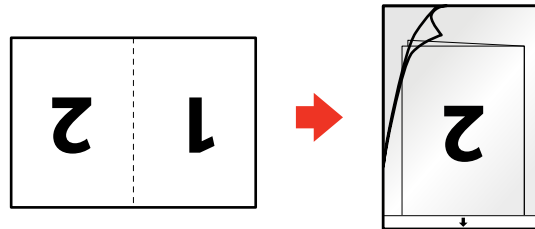


5. Slide the original into the scanner until it meets resistance.

- Slide in the edge guides to the edges of the sheet.

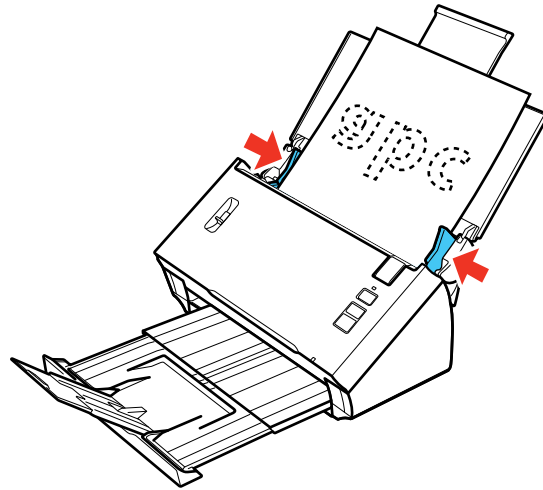

- Set the page separation lever to the position shown here.

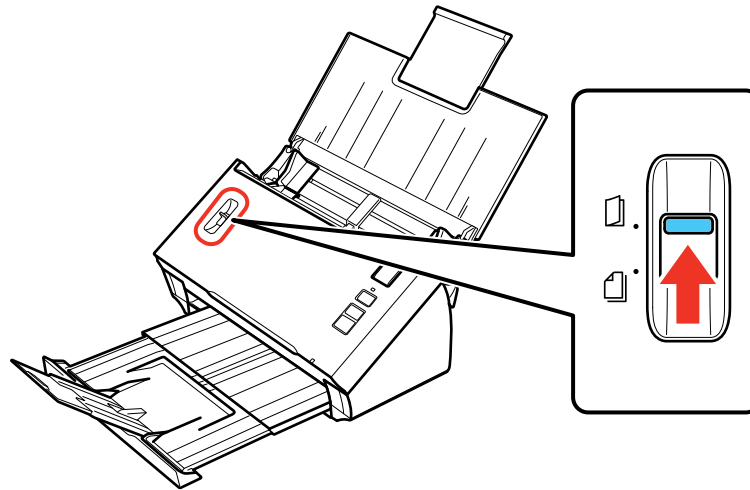

Note: To prevent paper jams, make sure to set the separation lever back to its original position when scanning standard single- or multi- page documents.

[Large or Thick Original Loading Capacity](#)

Parent topic: [Placing Originals on the Scanner](#)

Related references

[Page Separation Lever](#)

Related topics

[Scanning](#)

Large or Thick Original Loading Capacity

You can load large, thick, or folded originals, or envelopes, that meet these specifications in your scanner.

Note: You can load only one large, thick, or folded original, or envelope at a time.

Paper type	Paper size	Paper weight
Plain paper, fine paper, or recycled paper	Width: 2.05 to 8.5 inches (52 to 215.9 mm) Length: 2 to 36 inches (50.8 to 914.4 mm)	13 to 35 lb (50 to 130 g/m ²)
Folded plain paper, fine paper, or recycled paper	Unfolded minimum size: A6 (4.1 × 5.8 inches [105 × 148 mm]) Unfolded maximum size: Legal (8.5 × 14 inches [216 × 357 mm])	13 to 35 lb (50 to 130 g/m ²)
Envelopes	Up to 0.015 inch (0.38 mm) thick	—
Irregularly shaped originals (load only in a carrier sheet)	Up to this size: A4 (8.3 × 11.7 inches [210 × 297 mm])	13 to 35 lb (50 to 130 g/m ²)

Parent topic: [Loading Special Documents](#)

Using the Network Interface Unit

See these sections to use the optional Epson Network Interface Unit to scan over a network.

[Network Interface Unit Buttons](#)

[Connecting the Network Interface Unit](#)


[Setting Up Network Scanning](#)

[Scanning to Network Computers from the Network Interface Unit - Windows](#)

Related references

[User Replaceable Epson Scanner Parts](#)

Network Interface Unit Buttons

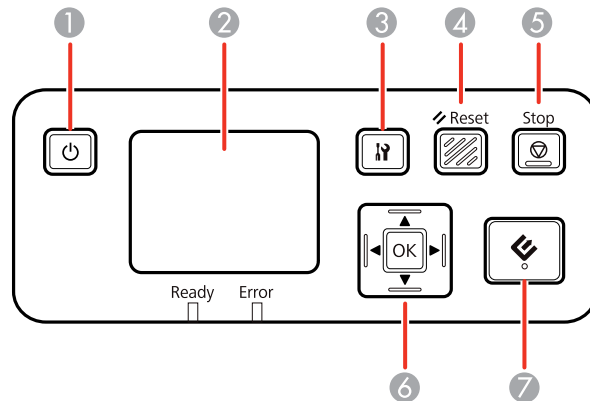

Buttons

- 1 Power (turns the unit on and off)
- 2 LCD screen (displays status, operations, and error messages)
- 3 settings (selects product settings, network settings, and maintenance options)
- 4 **Reset** (returns the LCD to the default screen)
- 5 **Stop** (cancels scanning)
- 6 **OK** and arrows (use the arrows to highlight an option and **OK** to select it)
- 7 **start** (starts scanning when networking is enabled)

Parent topic: [Using the Network Interface Unit](#)

Connecting the Network Interface Unit


See the documentation that came with the optional Epson Network Interface Unit for instructions on connecting it to your scanner.

Parent topic: [Using the Network Interface Unit](#)

Setting Up Network Scanning

You can setup network scanning to your scanner through the optional Epson Network Interface Unit. First connect the unit to your scanner and verifying that they are working properly. Then follow the instructions here to set up computers for network scanning using the Epson Scan Settings utility.

Note: Make a note of the IP address or host name of the Network Interface Unit so you can enter it in these steps.

1. Do one of the following to start Epson Scan Settings:
 - **Windows 8:** Navigate to the **Start** screen, right-click the screen, and select **All apps**. Select **EPSON Scan Settings**.
 - **Windows (other versions):** Click  or **Start > All Programs** or **Programs > EPSON > EPSON Scan > EPSON Scan Settings**.
 - **Mac OS X:** Open the **Applications** folder, click **Epson Software**, and click **Epson Scan Settings**.
2. Select your scanner from the **Select Scanner** list.
3. Select the **Network** setting and click the **Add** button.

You see this screen:

The image shows a dialog box titled "Add" with a close button in the top right corner. The dialog contains the following elements:

- A text field labeled "Scanner Name" containing the text "Scanner1".
- A horizontal separator line.
- A radio button labeled "Search for addresses" which is selected.
- A large empty rectangular box below the radio button.
- Two buttons labeled "Retry" and "Break" positioned below the empty box.
- A text box containing the message "Searching. Please wait." below the buttons.
- A radio button labeled "Enter address" which is unselected.
- A note in small text: "(Use this option when addresses do not appear above.)" below the "Enter address" radio button.
- An empty text field below the note.
- Three buttons at the bottom: "OK", "Cancel", and "Help".

4. Do one of the following:
 - Under **Search for addresses**, select the IP address of your Network Interface Unit, and click **OK**.
 - Select the **Enter address** setting and type in the IP address of your Network Interface Unit. Then click **OK**.
5. Click the **Test** button to check the connection.
You see a confirmation message.
6. Click **OK** to save your settings and close Epson Scan Settings.


Parent topic: [Using the Network Interface Unit](#)

Scanning to Network Computers from the Network Interface Unit - Windows

You can scan to a network computer directly from the Network Interface Unit (Windows only). You first set up a scan job in Document Capture Pro and then select the computer you want to send the scanned file to.

1. Start a scan job using Document Capture Pro.
2. Press the **OK** button on the Network Interface Unit.
3. On the LCD screen of the Network Interface Unit, select the computer you want to send the scanned file to and press the **OK** button.

Note: If you are using a Window computer and your scanner is part of a workgroup, make sure the computer is part of the same workgroup or it will not show up on the LCD screen.

4. If you set up a password in Document Capture Pro, enter the password at the prompt.
5. Select a scan job and press the **OK** button.
6. Press the  start button on the scanner.

Your original is scanned and the file is sent to the network computer you selected.

Parent topic: [Using the Network Interface Unit](#)

Related tasks

[Starting a Scan from a Scanner Button](#)

[Assigning Scan Button Settings or Scan Jobs](#)

Scanning

You can scan original documents or photos and save them as digital files.

[Starting a Scan from a Scanner Button](#)

[Scanning with Document Capture Pro and Document Capture](#)


[Scanning in Epson Scan](#)

[Scanning Special Projects](#)


Starting a Scan from a Scanner Button

You can scan using a button on your scanner. This automatically starts the scanning program you have assigned to the button.

Your product automatically selects suitable default scan settings, but you can view or change them as necessary.

1. Make sure you installed the scanner software and connected the scanner to your computer or network.
2. Place an original in your scanner.
3. Press the  start button.

The image is scanned and saved to the folder you have specified.

Note: If your product is connected via USB, you can use Document Capture Pro (Windows) or Document Capture (Mac OS X) to change the default scan settings when you scan using the  start button.

[Assigning Scan Button Settings or Scan Jobs](#)

Parent topic: [Scanning](#)


Related tasks


[Loading Originals in the Input Tray](#)

[Loading Cards in the Input Tray](#)



[Loading Special Documents](#)

Assigning Scan Button Settings or Scan Jobs

You can view or change the default scan settings when you scan using the  start button. You do this using the Document Capture Pro (Windows) or Document Capture (Mac OS X) program.

1. Start Document Capture Pro or Document Capture on a computer connected to the scanner.
2. Click the  **Manage Job** icon from the toolbar at the top of the window.
3. On the Job Management window, click **Add** or the **+** icon.
4. Enter a name for the new job, then select the settings you want to view or change and change the settings as necessary, and click **OK**.


Note: See the Help information in Document Capture Pro or Document Capture for details.

5. Do one of the following:
 - **Windows:** On the Job Management window, click **Event Settings**.
 - **Mac OS X:** Click the  icon at the bottom of the window, then click **Event Settings**.
6. Select the job that you want to assign to the  start button from the pull-down menu.
7. Click **OK**.


Parent topic: [Starting a Scan from a Scanner Button](#)


Scanning with Document Capture Pro and Document Capture


When you scan with Document Capture Pro (Windows) or Document Capture (Mac OS X), the program automatically saves your scanned file on your computer in the folder you specify. You can select settings, preview, and change the scanned file settings as necessary.


1. Do one of the following to start Document Capture Pro (Windows) or Document Capture (Mac OS X):
 - **Windows 8:** Navigate to the **Start** screen, right-click the screen, and select **All apps**. Select **Document Capture Pro**.
 - **Windows (other versions):** Click  or **Start**, and select **All Programs** or **Programs**. Select **EPSON Software**, then select **Document Capture Pro**.
 - **Mac OS X:** Open the **Applications** folder, select the **Epson Software** folder, and select **Document Capture**.

You see a window like this:

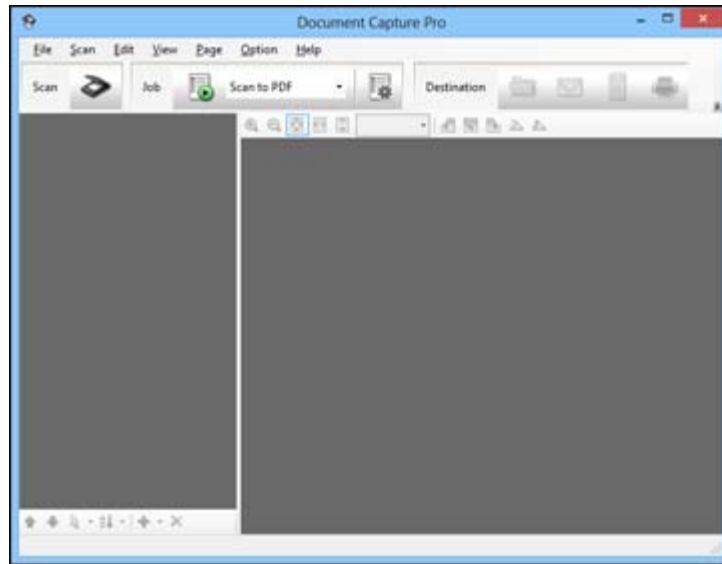

2. Click the  **Scan** icon.
You see a window like this:

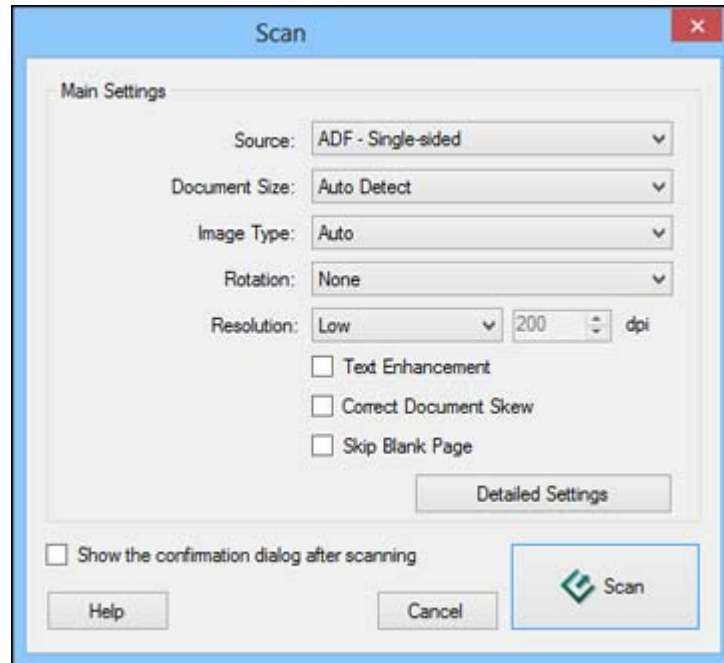

3. Select any displayed scan settings you want to use.
4. If you want to select detailed scan settings, do one of the following:
 - **Windows:** Click **Detailed Settings**. Select any displayed scan settings you want to use and click **OK**.
 - **Mac OS X:** Open the **Scan** menu at the top of the screen and select **Displays the EPSON Scan Setup Screen**. Select any displayed scan settings you want to use and click **OK**. Click the  Scan icon.
5. Click **Scan**.

You see a preview of your scan in the Document Capture Pro (Windows) or Document Capture (Mac OS X) window.
6. Check the scanned images and edit them as necessary.

7. Click one of the destination icons to choose where to save your scanned file.



Note: In the Save As window, select **Apply job separation** to sort the documents into separate files by detecting blank pages or barcodes in your scanned images.

8. Click **OK**, **Send**, or **Print** to save the scanned file.

Parent topic: [Scanning](#)

Related tasks

[Loading Originals in the Input Tray](#)

[Loading Cards in the Input Tray](#)


[Loading Special Documents](#)

Scanning in Epson Scan

Epson Scan automatically saves your scanned file on your computer in the format and folder you specify. You can select settings, preview, and change the scanned file settings as necessary.

1. Do one of the following to start Epson Scan:
 - **Windows:** Double-click the **EPSON Scan** icon on your computer desktop.
 - **Mac OS X:** Open the **Applications** folder, open the **Epson Software** folder, and double-click the **EPSON Scan** icon.

You see a window like this:

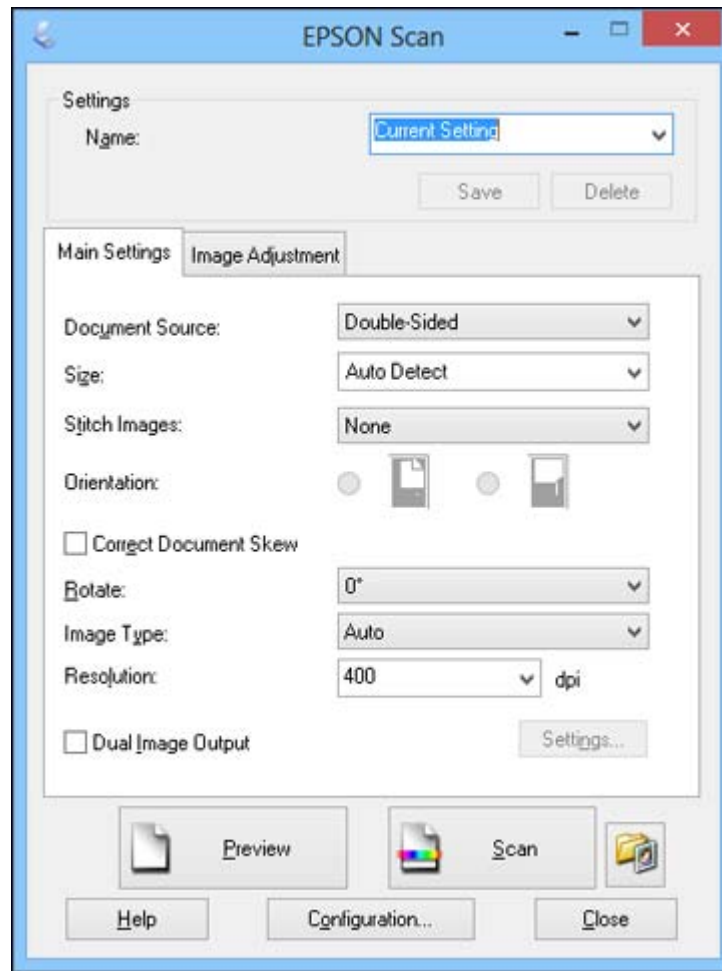

2. Select options for each of the scan settings on the screen.
3. If necessary, click the **Preview** button.

Epson Scan previews your original, and displays the result in a separate Preview window. The scanner also ejects the page.
4. Reload the page in the input tray.
5. Click the **Image Adjustment** tab and select any of the image adjustment settings you want to use. Before making adjustments, click the image or scan area in the Preview window.

6. Click **Scan**.

You see the File Save Settings window.

7. Change any of the necessary file save settings and click **OK**.

Epson Scan scans your original, and saves the file in the selected folder or opens it in your scanning program. If the file was saved directly to your computer, you see the file in the Windows Explorer or Mac OS X Finder, where you can view and print the image, if desired.

[Available Image Adjustments](#)

Parent topic: [Scanning](#)

Related tasks

[Loading Originals in the Input Tray](#)

[Loading Cards in the Input Tray](#)

[Loading Special Documents](#)

Available Image Adjustments

You can select these options in the Image Adjustments tab in Epson Scan.

Note: Not all adjustment settings may be available, depending on the Image Type setting.

Select the **Image Option** checkbox to access additional settings.

Unsharp Mask

Makes the edges of certain image areas clearer. Turn off this option to leave softer edges.

Descreening

Removes the ripple pattern that might appear in subtly shaded image areas, such as skin tones. This option improves results when scanning magazines or newspapers. (The results of descreening do not appear in the preview image, only in your scanned image.)

Text Enhancement

Sharpens the appearance of letters in text documents.

Auto Area Segmentation

Makes grayscale images clearer and text recognition more accurate by separating the text from the graphics.

Dropout

The scan will not pick up the color you select. This setting is only available if you select an **Image Type** of **Grayscale** or **Black & White**.

Color Enhance

Enhances the red, green, or blue shades in the scanned image.

Brightness

Adjusts the overall lightness and darkness of the scanned image.

Contrast

Adjusts the difference between the light and dark areas of the overall scanned image.

Parent topic: [Scanning in Epson Scan](#)

Scanning Special Projects

Your product's scanning software offers various options to help you quickly complete special scan projects.

[Scanning Two Originals onto One Sheet \(Stitching Images\)](#)



[Scanning Multi-Page Originals as Separate Files - Windows](#)

[Scanning to a SharePoint Server or Cloud Service](#)


Parent topic: [Scanning](#)

Scanning Two Originals onto One Sheet (Stitching Images)

You can scan both sides of a double-sided or folded original and using Epson Scan's Stitch Images settings.

1. Place your original on the scanner.
2. Start Document Capture Pro (Windows) or Document Capture (Mac OS X).
3. Do one of the following to access the Epson Scan settings:
 - **Windows:** Click the  **Scan** icon, then click **Detailed Settings**.
 - **Mac OS X:** Open the **Scan** menu and select **Displays the EPSON Scan Setup Screen**. Click the  **Scan** icon.

You see an Epson Scan window like this:

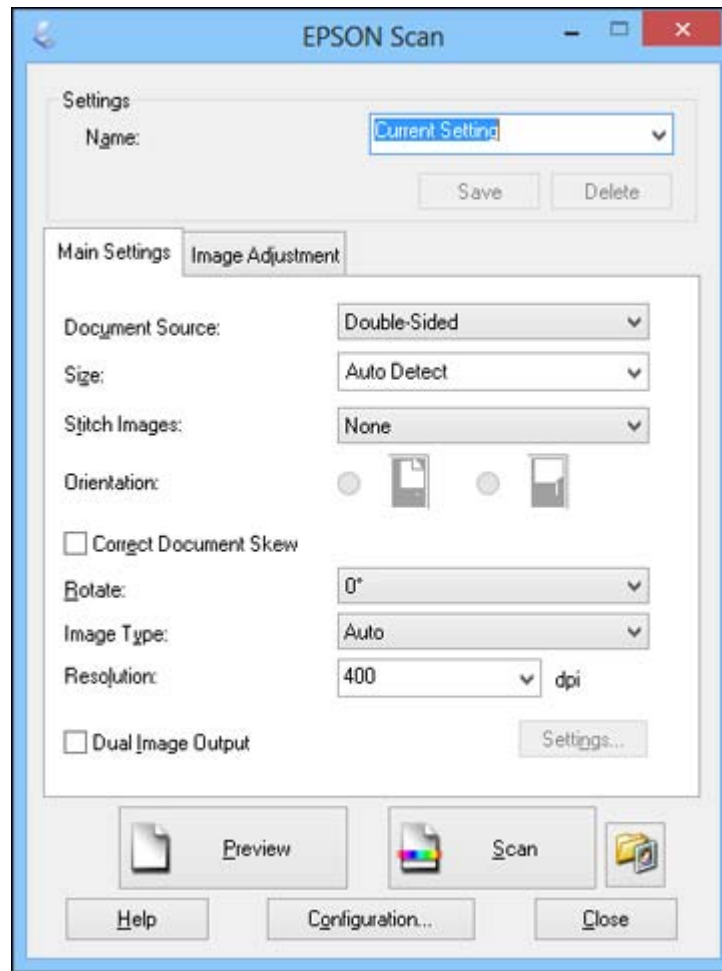

4. Select **Double-Sided** as the Source setting.
5. Select the original document size as the Size setting.
6. Select one of the following as the Stitch Images setting:
 - **Top&Bottom**: Places the scanned images one above the other.
 - **Left&Right**: Places the scanned images side by side.
7. With Windows, click **OK**.

8. Click **Scan**.

The scanned image is displayed.

Note: If the scanned images are not stitched together correctly, click **Configuration** on the Epson Scan window and select the **Binding Position (for Double-Sided Scanning)** setting.

Parent topic: [Scanning Special Projects](#)

Related tasks


[Loading Originals in the Input Tray](#)

[Loading Cards in the Input Tray](#)


[Loading Special Documents](#)


Scanning Multi-Page Originals as Separate Files - Windows

You can use Document Capture Pro (Windows only) to scan multi-page originals as separate scanned files. You indicate where you want the new scanned files to start by inserting a blank page or barcode between the pages of your original.

1. Load a multi-page original with blank pages or barcodes inserted where you want to start a new scanned file.
2. Do one of the following to start Document Capture Pro:
 - **Windows 8:** Navigate to the **Start** screen, right-click the screen, and select **All apps**. Select **Document Capture Pro**.
 - **Windows (other versions):** Click  or **Start**, and select **All Programs** or **Programs**. Select **EPSON Software**, then select **Document Capture Pro**.

You see this window:

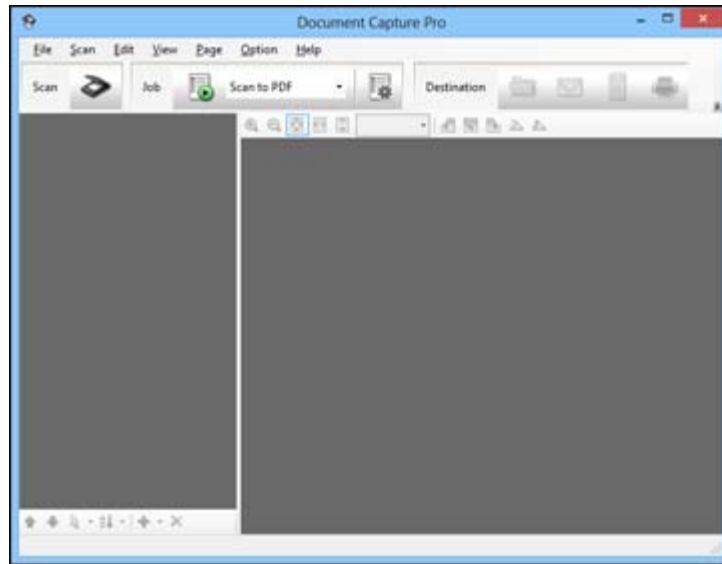

3. Click the  **Scan** icon.
4. Select any displayed scan settings you want to use.
5. Click **Scan**.
You see a preview of your scan in the Document Capture Pro or Document Capture window.
6. Open the **File** menu and select **Save As**.
7. Select **Apply Job Separation** and click **Separation Settings**.
8. Select the method you used to separate the originals, select a folder name specification and click **OK**.
9. Select any additional settings from the Save As menu and click **OK**.
Your originals are saved into separate files as specified.

Parent topic: [Scanning Special Projects](#)

Related tasks


[Loading Originals in the Input Tray](#)

[Loading Cards in the Input Tray](#)


[Loading Special Documents](#)


Scanning to a SharePoint Server or Cloud Service

You can use Document Capture Pro (Windows) or Document Capture (Mac OS X) to upload scanned images to a SharePoint server or a cloud service.

1. Do one of the following to start Document Capture Pro (Windows) or Document Capture (Mac OS X):
 - **Windows 8:** Navigate to the **Start** screen, right-click the screen, and select **All apps**. Select **Document Capture Pro**.
 - **Windows (other versions):** Click  or **Start**, and select **All Programs** or **Programs**. Select **EPSON Software**, then select **Document Capture Pro**.
 - **Mac OS X:** Open the **Applications** folder, select the **Epson Software** folder, and select **Document Capture**.



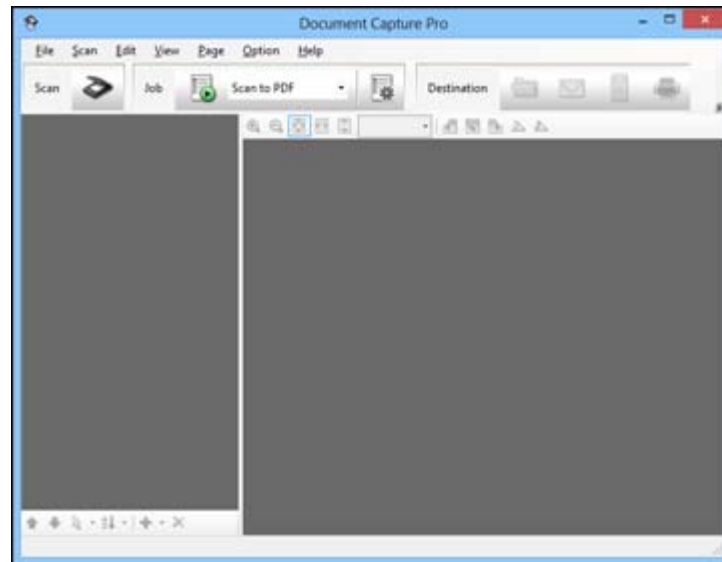


You see a window like this:



2. Click the  **Scan** icon.
3. Select any displayed scan settings you want to use.
4. Click **Scan**.

You see a preview of your scan in the Document Capture Pro or Document Capture window.

5. Select one of the cloud service destination icons:

-  Web Folder (WebDAV)
-  Evernote (Windows only)
-  Google Docs
-  SugarSync
-  Microsoft SharePoint server (Windows only)

You see the Transfer Settings window.

6. Click **Destination Settings**, click **Add**, and enter information for the server to which you are uploading images.
7. Click **OK** to create a listing for the new destination.
8. Select the name of the destination you created and click **OK**.
9. Adjust any additional scan setting and click **OK**.

Your originals are scanned and uploaded to the indicated server.

Parent topic: [Scanning Special Projects](#)

Related tasks

[Loading Originals in the Input Tray](#)

[Loading Cards in the Input Tray](#)

[Loading Special Documents](#)

Cleaning and Transporting Your Scanner

See these sections if you need to clean or transport your scanner.

[Cleaning Your Scanner](#)

[Cleaning Inside Your Scanner](#)

[Replacing the Scanner Rollers](#)

[Transporting Your Scanner](#)

Cleaning Your Scanner

To keep your product working at its best, you should clean it several times a year.

Caution: Do not use a hard brush, alcohol, or paint thinner to clean the product or you may damage it. Do not use oil or other lubricants inside the product or let water get inside it.

1. Turn off the scanner.
2. Unplug the AC adapter.
3. Disconnect any connected cables.
4. Clean the outer case with a soft, dry cloth. Do not use liquid or chemical cleansers.


Note: If the outer case still requires additional cleaning, use a slightly damp cloth to wipe the outer case. Then wipe the case with a soft, dry cloth.

Parent topic: [Cleaning and Transporting Your Scanner](#)


Cleaning Inside Your Scanner

Clean regularly to make sure that no dust builds up on the glass scanning surfaces. Dust can cause spots or lines in your scanned images.


Caution: Do not use a hard brush, alcohol, or paint thinner to clean the product or you may damage it. Do not use oil or other lubricants inside the product or let water get inside it.

1. Press the  power button to turn off the scanner.
2. Unplug the AC adapter.
3. Disconnect any connected cables.


4. Pull down on the cover open lever and open the scanner cover.

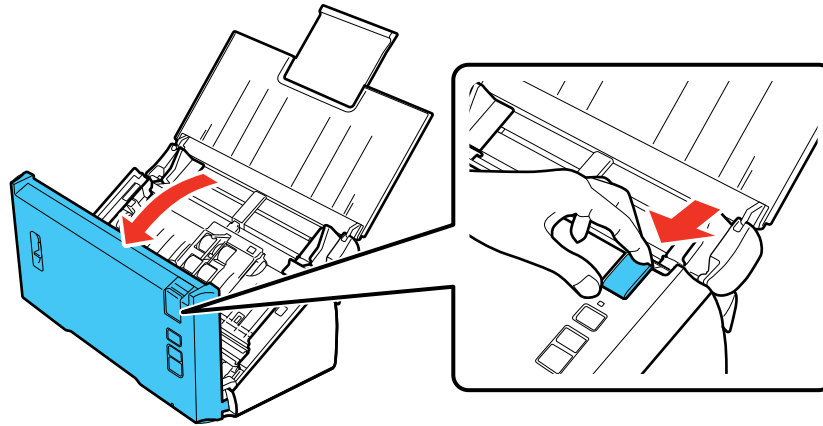




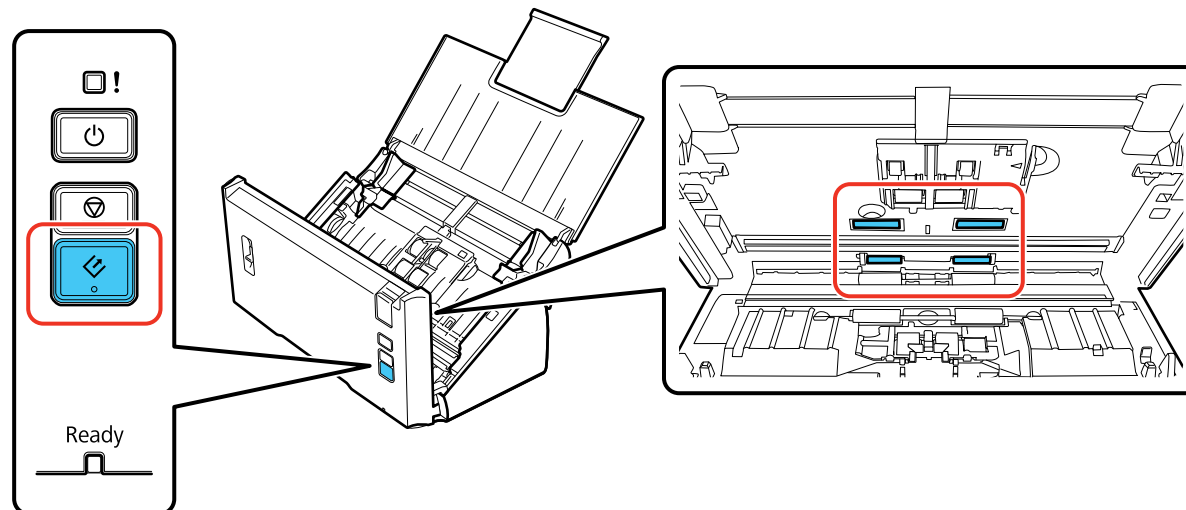
5. Use a soft, dry cloth to wipe off any stains on the rollers inside the scanner cover.

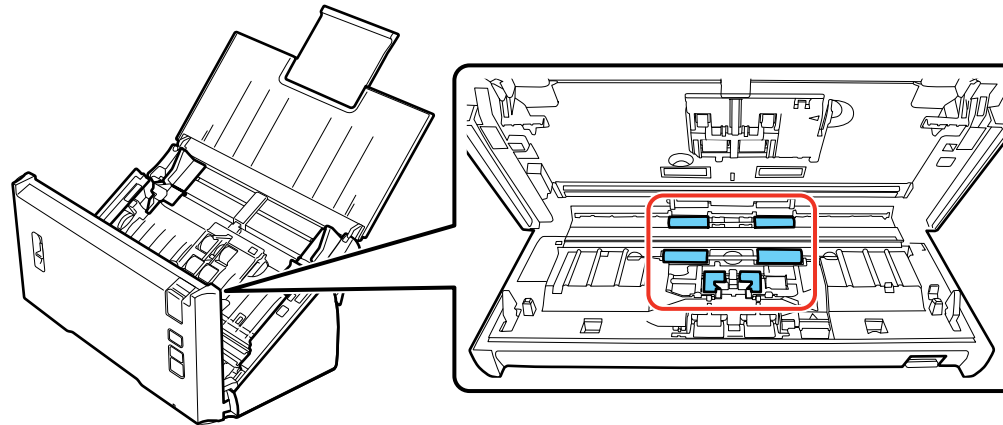


6. Wipe off any stains on the pickup rollers.

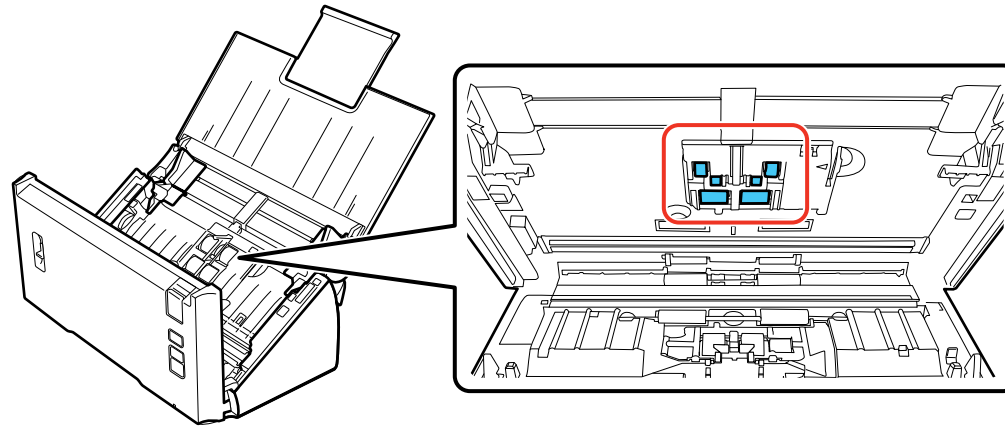


7. Plug in the AC adapter and press the  power button to turn on the scanner.
8. Wipe off any stains on the remaining four rollers.
9. Hold down the  start button for at least two seconds, then press the  start button several times to rotate the rollers. Continue to wipe off any stains on the rollers.



10. Press the  power button to turn off the scanner.
11. Unplug the AC adapter.

Note: Wipe off any stains on the glass scanning surfaces using a soft, dry cloth. If the glass surface is stained with grease or some other hard-to-remove material, use a small amount of glass cleaner on a soft cloth to remove it. Wipe off all remaining liquid.

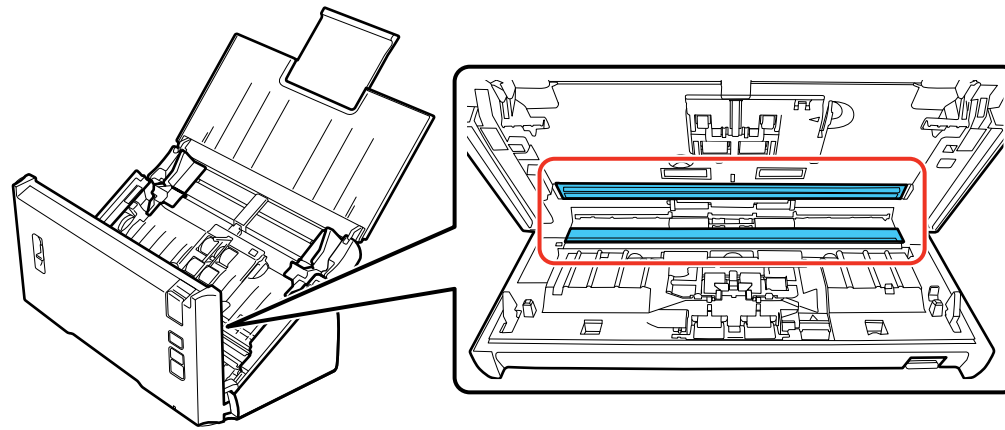


Caution: Do not spray glass cleaner directly on the scanning surfaces. Be careful not to place too much force on the glass.

12. Plug in the AC adapter.
13. Close the scanner cover.


Parent topic: [Cleaning and Transporting Your Scanner](#)

Replacing the Scanner Rollers


Replace the scanner rollers after you have scanned 100,000 times. Check the scanner roller counter to see when you need to replace the rollers.

1. Press the  power button to turn off the scanner.
2. Unplug the AC adapter.
3. Disconnect any connected cables.


4. Pull down on the cover open lever and open the scanner cover.

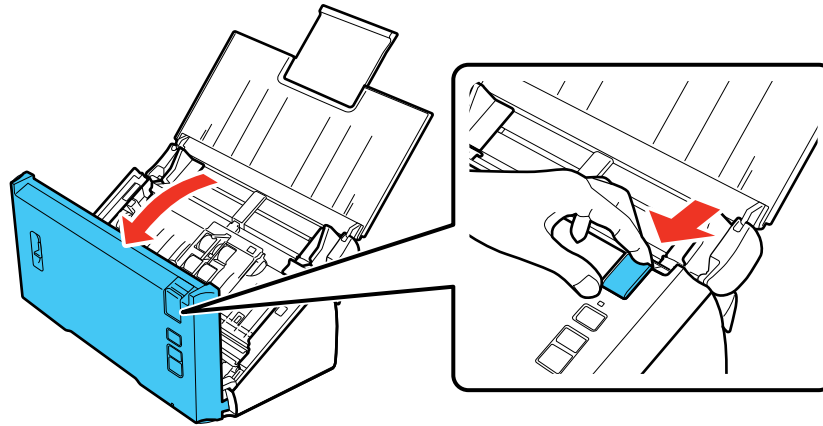


5. Squeeze the tab on the right side of the pickup roller cover and open the cover.

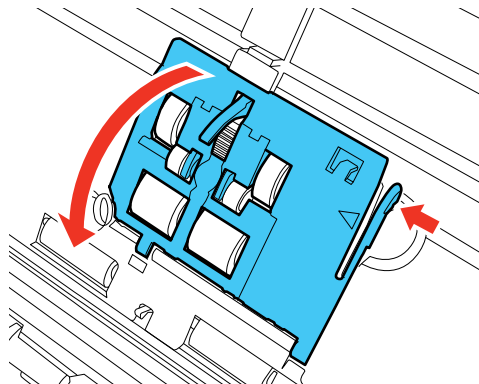


Caution: Do not place too much force on the arm inside the cover when replacing the pickup roller.

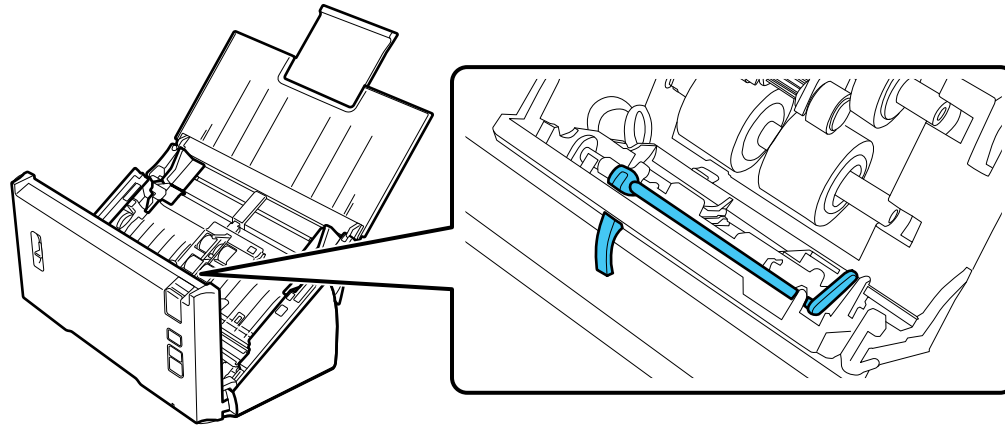


6. Slide the pickup rollers to the right and remove them.

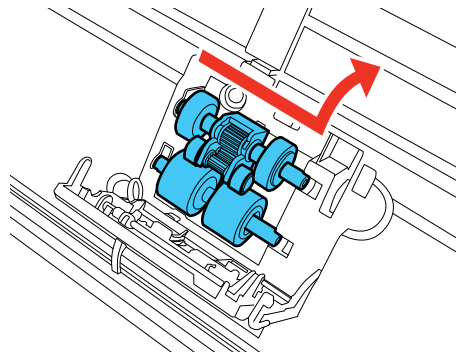

7. To install the new lower pickup roller, align the notches on the roller and slide it to the left.

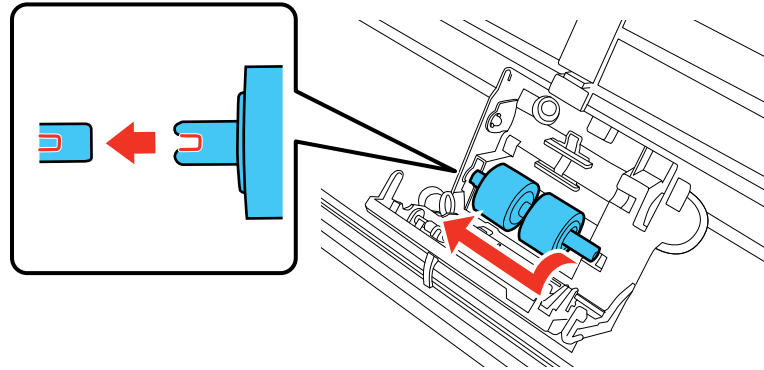

8. To install the new upper pickup roller, align the notches on the roller and slide it to the left. Make sure the smaller roller is on the bottom.

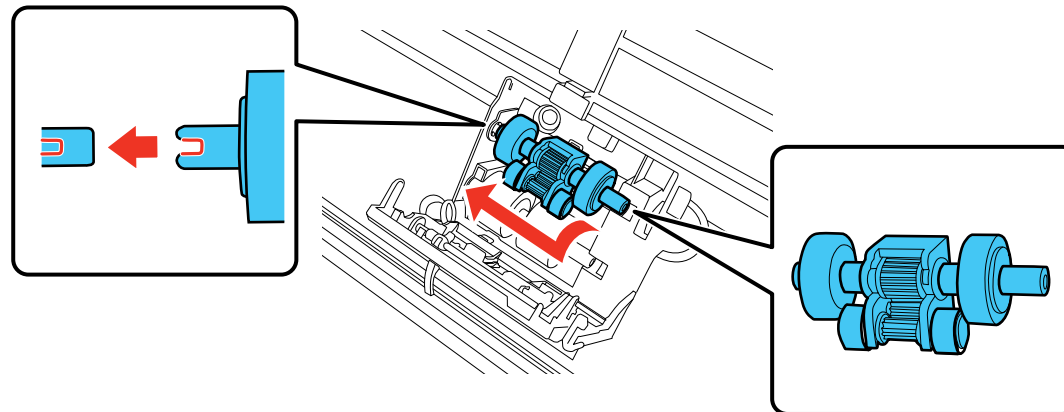


Caution: Do not touch the surface of the rollers.

9. Close the pickup roller cover.


Note: If you are not able to close the cover, the pickup rollers are not installed correctly. Remove the rollers and reinstall them, then try to close the cover again.

10. Press down on the separation roller cover latch inside the scanner cover and pull down the cover to open it.

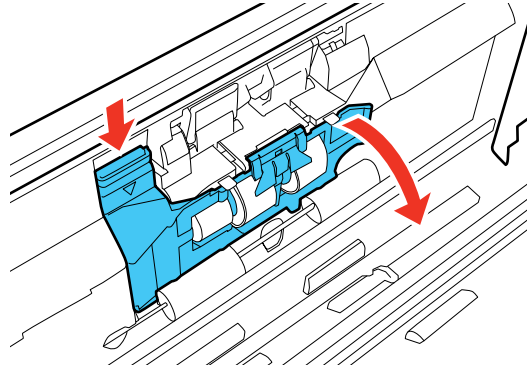


Caution: Be careful not to apply too much force when opening the cover.


11. Press in on the separation roller to release it, then slide the roller to the side and remove it.

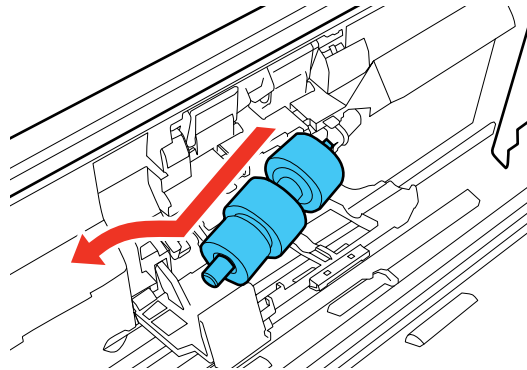


12. Pull the release tab on the separation roller and remove it from the spindle.

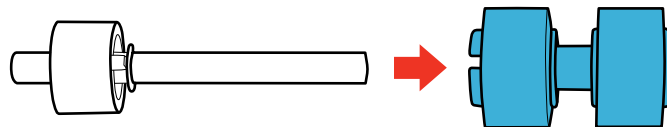


13. Slide the new separation roller onto the spindle as shown. Make sure that the notches on the roller and spindle align properly.

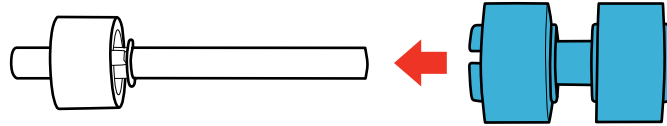

Note: Check that there are no gaps between the roller and spindle. You hear a click when the roller is firmly locked into place.

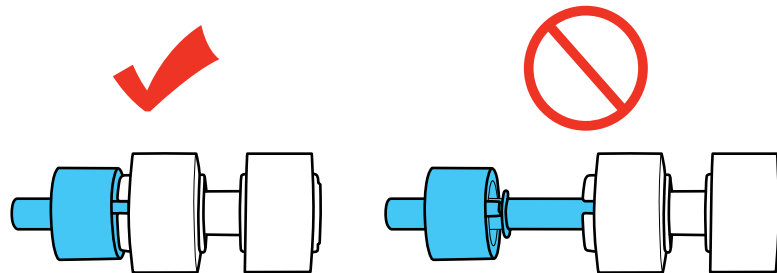

14. Align the notches on the spindle and the scanner, then slide the separation roller into the scanner and gently push it into place. You hear a click when the roller is correctly aligned and locked into place.

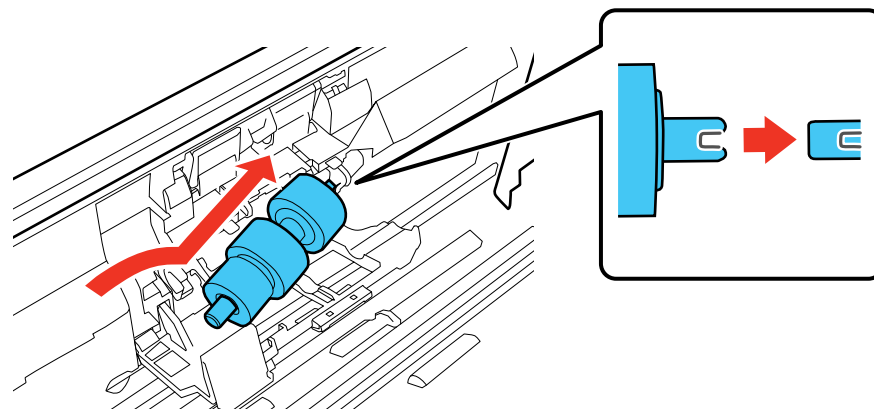

15. While applying gentle pressure on the separation roller, close the separation roller cover.

Note: If you are not able to close the cover, the roller is not installed correctly. Remove the roller and reinstall it, then try to close the cover again.

16. Close the scanner cover.

17. Plug in the AC adapter.

18. Press the  power button to turn on the scanner.

Reset the roller counter after replacing the rollers.

[Resetting the Scanner Roller Counter](#)


Parent topic: [Cleaning and Transporting Your Scanner](#)

Related references


[User Replaceable Epson Scanner Parts](#)

Resetting the Scanner Roller Counter

When you replace the scanner rollers, reset the scanner roller counter so you know when you may need to replace the rollers again.

1. Make sure the scanner is turned on and connected to your computer.
2. Do one of the following to start Epson Scan Settings:
 - **Windows 8:** Navigate to the **Start** screen, right-click the screen, and select **All apps**. Select **EPSON Scan Settings**.
 - **Windows (other versions):** Click  or **Start > All Programs** or **Programs > EPSON > EPSON Scan > EPSON Scan Settings**.
 - **Mac OS X:** Open the **Applications** folder, click **Epson Software**, and click **Epson Scan Settings**.
3. Click **Maintenance**.


You see a screen like this:

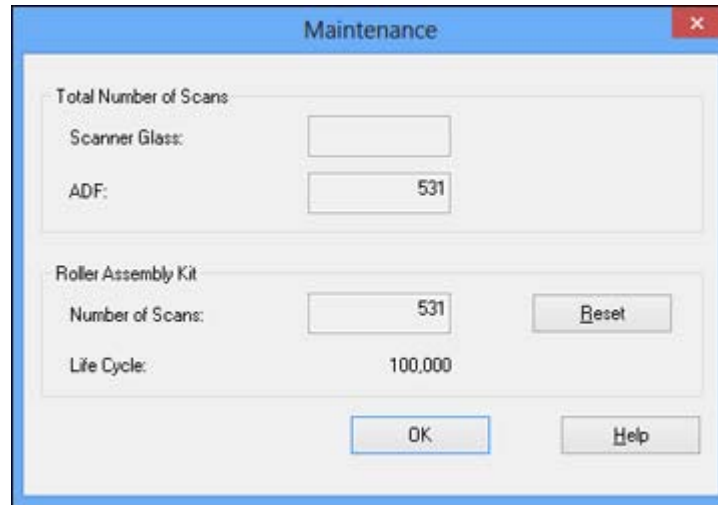

4. Click **Reset**.
The number of scans changes to 0 (zero).
 5. Click **OK**.
- Parent topic:** [Replacing the Scanner Rollers](#)

Transporting Your Scanner

If you need to ship your product, transport it a long distance, or stored it for an extended period, prepare it for transportation as described here.

1. Press the  power button to turn off the scanner.
2. Unplug the AC adapter.
3. Disconnect any connected cables.
4. Close the feeder tray and the output tray.

Note: Make sure the output tray is securely closed.

5. Place the scanner in its original packing materials, if possible, or use equivalent materials with cushioning around the product.

Parent topic: [Cleaning and Transporting Your Scanner](#)

Solving Problems

Check these sections for solutions to problems you may have using your product.

[Scanner Light Status](#)

[Solving Scanning Problems](#)

[Solving Network Interface Unit Problems](#)


[Solving Scanned Image Quality Problems](#)

[When to Uninstall Your Scanner Software](#)

[Where to Get Help](#)

Scanner Light Status

You can often diagnose problems with your scanner by checking its lights.

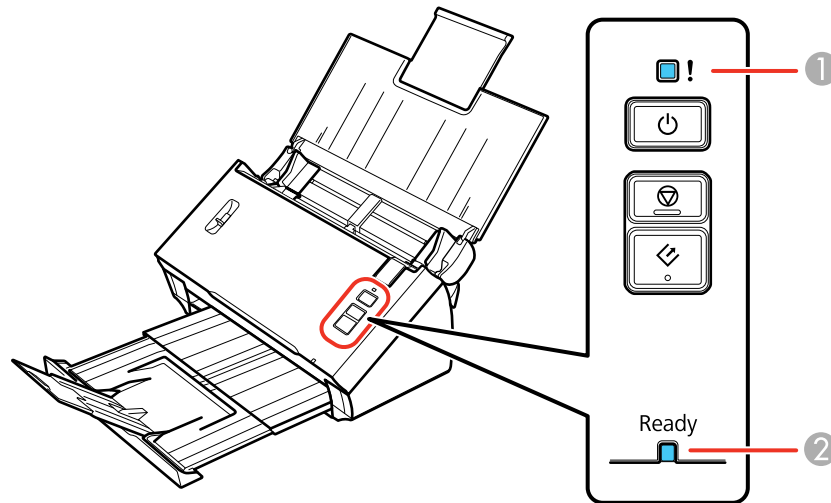

Lights	
1	! error
2	Ready

Light status	Condition/solution
The Ready light is on	The scanner is turned on and ready to scan.
The Ready light is flashing	The scanner is scanning or initializing. Wait for the Ready light to stop flashing before turning off the scanner.
The ! error light is on	An error has occurred. Try the following: <ul style="list-style-type: none"> • Check the scanner connection to your computer to make sure it is secure. • Make sure the scanner cover is closed and there is no jammed paper inside. • If the ! error light is still on, turn off the scanner, then turn it on again. If the error continues, the scanner may be malfunctioning. Contact Epson for support.
The ! error light and the Ready light are flashing alternately	The scanner firmware is updating. Do not turn off the scanner or disconnect any cables until the status lights have stopped flashing.
The ! error light and the Ready light are flashing at the same time	A fatal error has occurred. Turn the scanner off and then back on again. If the error continues, contact Epson for support.

Parent topic: [Solving Problems](#)

Solving Scanning Problems

Check these solutions if you have problems scanning with your product.

[Scanner Does Not Turn On or Turns Off Unexpectedly](#)

[Scanner Button Does Not Work as Expected](#)

[Scanning Software Does Not Operate Correctly](#)

[Cannot Start Epson Scan](#)

[Original Feeds Incorrectly in Scanner](#)

[Original Jams in Scanner](#)

[Scanning is Slow](#)

Parent topic: [Solving Problems](#)

Scanner Does Not Turn On or Turns Off Unexpectedly

If the scanner does not turn on or if it turns off unexpectedly, try these solutions:

- Make sure the AC adapter is securely connected to the scanner and to a working electrical outlet.
- If the scanner turns off unexpectedly, you may need to adjust the Power Off Timer setting.

Parent topic: [Solving Scanning Problems](#)

Related tasks

[Changing the Power Off Timer Setting](#)

Scanner Button Does Not Work as Expected

If the scanner button does not start the correct program or perform the correct action, try these solutions:

- Make sure Document Capture Pro (Windows) or Document Capture (Mac OS X) is installed correctly. If necessary, uninstall and reinstall it.
- Make sure you have assigned the correct program to the scanner button and change it, if necessary.
- With Windows, if you selected **Keep Blocking** in a Windows Security Alert window during or after installation of Document Capture Pro, unblock the EEventManager Application program in the Windows security settings; see Windows help for details.

Parent topic: [Solving Scanning Problems](#)

Related tasks

[Assigning Scan Button Settings or Scan Jobs](#)

Scanning Software Does Not Operate Correctly

If your scanning software does not operate correctly, try these solutions:

- Make sure your computer has adequate memory and meets the system requirements for your operating system.
- Make sure your computer is not running in a power-saving mode, such as sleep or standby. If so, wake your system and restart your scanning software.
- If you upgraded your operating system but did not reinstall your scanning software, try reinstalling it.
- If you are scanning from a Mac, make sure no other Epson scanner drivers are installed. If other drivers are installed, uninstall them, then reinstall this scanner's software.

Parent topic: [Solving Scanning Problems](#)

Related tasks

[Uninstalling Scanner Software - Windows](#)


[Uninstalling Scanner Software - Mac OS X](#)

Cannot Start Epson Scan

If you cannot start Epson Scan, try these solutions:

- Make sure your scanner is turned on and any interface cables are securely connected at both ends.
- Make sure Epson Scan is selected in your scanning program.
- Make sure your computer is not running in a power-saving mode, such as sleep or standby. If so, wake your system and restart Epson Scan.
- If you connected the scanner using a USB cable, make sure it is connected directly to your computer or through only one USB hub.
- Check the connection setting and test the connection using Epson Scan Settings:

Windows 8: Navigate to the **Start** screen and select **EPSON Scan Settings**. Make sure the correct **Connection** setting is selected, then click the **Test** button.

Windows (other versions): Click  or **Start > All Programs** or **Programs > EPSON > EPSON Scan > EPSON Scan Settings**. Make sure the correct **Connection** setting is selected, then click the **Test** button.

Mac OS X: Open the **Applications** folder, click **Epson Software**, and click **EPSON Scan Settings**. Make sure the correct **Connection** setting is selected, then click the **Test** button.

- Make sure you do not have multiple versions of Epson Scan installed. If you do, uninstall both versions and install one version.
- If you upgraded your operating system but did not reinstall Epson Scan, try reinstalling it.

Parent topic: [Solving Scanning Problems](#)

Related tasks

[Uninstalling Scanner Software - Windows](#)

[Uninstalling Scanner Software - Mac OS X](#)

Original Feeds Incorrectly in Scanner

If you have problems feeding originals in your scanner, try these solutions:

- If multiple pages feed at once, try the following:
 - Make sure the paper separation lever is in the lower position.

- Remove the originals, fan the edges to separate the sheets, if necessary, and reload them.
- Load only originals that meets the specifications for your scanner.
- Clean inside the scanner and replace the roller assembly kit, if necessary.
- If you see a double feed error in the Epson Scan window or the Document Capture Pro window (Windows only), start Epson Scan, select **Configuration**, select the **Detect Double Feed** setting, and select **Standard** as the Paper Thickness setting. If the error persists, deselect the **Detect Double Feed** setting.

Note: For Mac OS X, only Epson Scan displays double feed errors. Document Capture for Mac OS X does not include this setting.

Parent topic: [Solving Scanning Problems](#)

Related tasks

[Loading Originals in the Input Tray](#)

[Loading Cards in the Input Tray](#)


[Loading Special Documents](#)

[Cleaning Inside Your Scanner](#)


Original Jams in Scanner

If an original has jammed inside the scanner, follow these steps:


1. Turn off your scanner.
2. Remove all originals from the input tray.
3. Press the cover open lever and open the scanner cover.

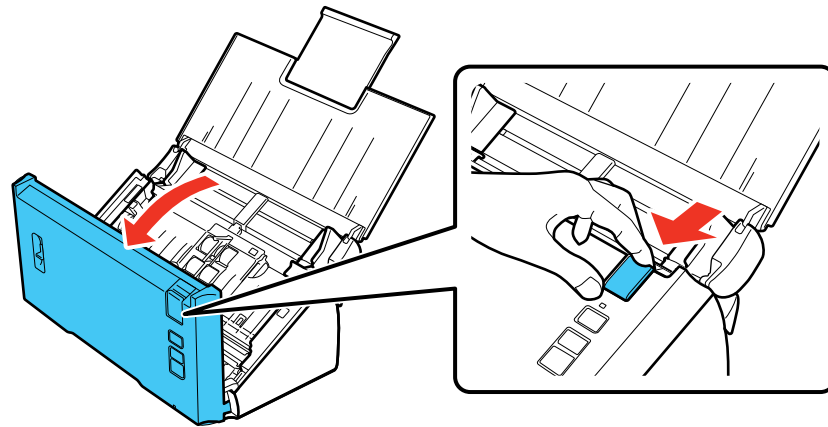

4. Gently pull out any jammed originals from inside the scanner.

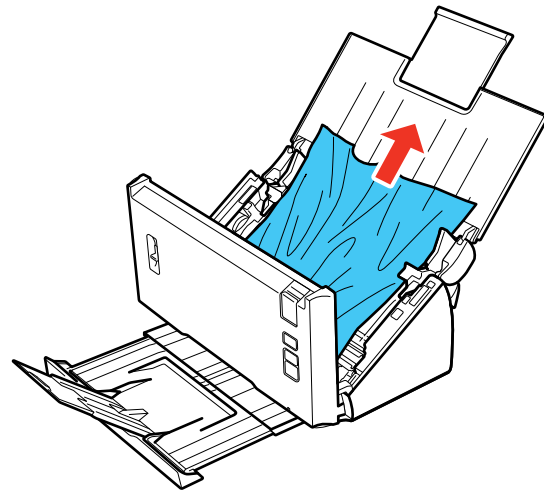

5. Gently pull out any jammed originals from the output tray.

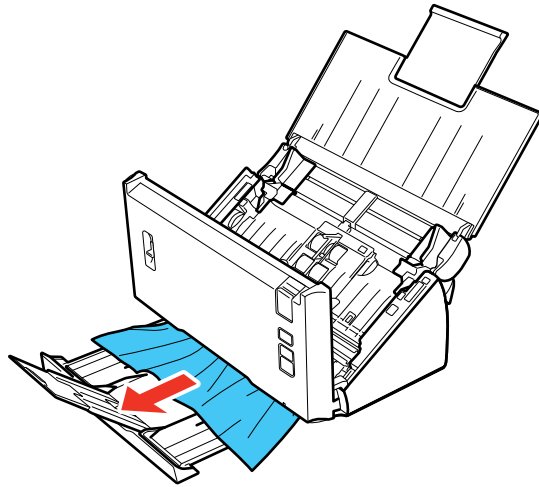

6. Close the scanner cover.
7. Carefully follow all loading instructions when you reload originals.

Parent topic: [Solving Scanning Problems](#)

Related tasks

[Loading Originals in the Input Tray](#)

[Loading Cards in the Input Tray](#)

[Loading Special Documents](#)

Scanning is Slow

If scanning becomes slow, try these solutions:

- Scan your original at a lower resolution, if possible.
- Make sure your system meets the requirements for your operating system. If you are scanning a high-resolution image, you may need more than the minimum requirements, such as a Hi-Speed USB port. If necessary, increase your system's memory.
- If you are running virus protection or other security software, exclude the TWAIN.log files from monitoring or set the TWAIN.log file as read only (Windows). See your virus protection or security software instructions for details. The TWAIN.log file is saved in the following locations:
 - **Windows XP:** C:\Documents and Settings\<(user name)\Local Settings\Temp

- **Windows (other versions):** C:\Users*(user name)*\AppData\Local\Temp

Parent topic: [Solving Scanning Problems](#)

Solving Network Interface Unit Problems

If you have problems scanning using the optional Network Interface Unit, try these solutions:

- Make sure the Network Interface Unit is securely connected to the network or your computer and the scanner with a working cable.
- Make sure your scanning software is installed correctly and that you have selected the correct settings for the program you are using.
- Check that the IP address for the scanner is correct in the Epson Scan Settings utility.
- If you are scanning with Document Capture Pro (Windows) or Document Capture (Mac OS X), check the following:
 - Make sure the Group settings are the same as the Network Interface Unit settings. See the Document Capture Pro or Document Capture Help utility, and the Network Interface Unit *User's Guide* for details.
 - With Windows, make sure the program is not being blocked by a network firewall. If so, you can unblock the EEventManager Application program in the Windows security settings; see Windows help for details.

Parent topic: [Solving Problems](#)

Related tasks

[Setting Up Network Scanning](#)

Solving Scanned Image Quality Problems

Check these sections if a scanned image on your computer screen has a quality problem.

[Back of Original Image Appears in Scanned Image](#)

[Scanned Characters are Blurry](#)

[Characters are not Recognized During Conversion to Editable Text \(OCR\)](#)

[Ripple Patterns Appear in an Image](#)

[Spots or Lines Appear in All Scanned Images](#)

[Scanned Image Edges are Cropped](#)

Parent topic: [Solving Problems](#)

Back of Original Image Appears in Scanned Image

If an image from the back of a thin original appears in your scanned image, make sure you selected the correct Document Type or Image Type settings for your original and select the **Text Enhancement** setting in Epson Scan.

Parent topic: [Solving Scanned Image Quality Problems](#)

Related references

[Available Image Adjustments](#)

Related tasks

[Scanning in Epson Scan](#)

Scanned Characters are Blurry

If characters in a scanned image appear blurry, adjust these Epson Scan settings (if available) and try scanning again:

- Select the **Text Enhancement** setting.
- Adjust the **Threshold** setting.
- Increase the **Resolution** setting.

Parent topic: [Solving Scanned Image Quality Problems](#)

Related references

[Available Image Adjustments](#)

Related tasks

[Scanning in Epson Scan](#)

Characters are not Recognized During Conversion to Editable Text (OCR)

If characters in your scanned images are not recognized during OCR conversion, try these solutions:

- Make sure your original is straight.
- Adjust these Epson Scan settings (if available) and try scanning again:
 - Select **Text Enhancement**
 - Select the correct **Image Type** setting
 - Adjust the **Threshold** setting
- Check the manual for your OCR software for any additional adjustments.

Parent topic: [Solving Scanned Image Quality Problems](#)

Related references

[Available Image Adjustments](#)

Related tasks

[Scanning in Epson Scan](#)

Ripple Patterns Appear in an Image

You may see a ripple pattern (called a moiré) in scanned images of printed documents. This is caused by interference from differing pitches in the scanner's screen and your original's halftone screen. To reduce this effect, adjust these Epson Scan settings (if available) and try scanning again:

- Select the **Descreening** setting.
- Select a lower **Resolution** setting.

Parent topic: [Solving Scanned Image Quality Problems](#)

Related references

[Available Image Adjustments](#)


Related tasks


[Scanning in Epson Scan](#)

[Cleaning Inside Your Scanner](#)


Spots or Lines Appear in All Scanned Images

If spots or lines appear in all your scanned images, follow these steps to clean the scanner glass:

1. Press the  power button to turn off the scanner.
2. Unplug the AC adapter.
3. Disconnect any connected cables.
4. Pull down on the cover open lever and open the scanner cover.

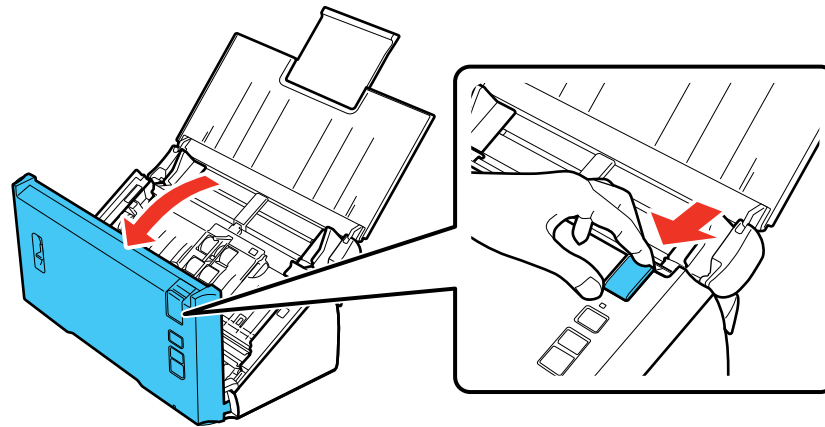

5. Wipe off any stains on the glass scanning surfaces using a soft, dry cloth.

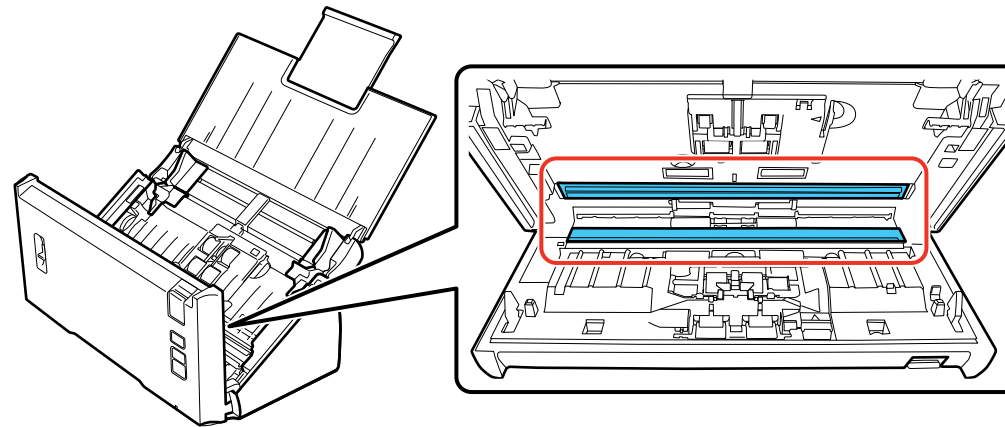

Note: If the glass surface is stained with grease or some other hard-to-remove material, use a small amount of glass cleaner on a soft cloth to remove it. Wipe off all remaining liquid.

Caution: Do not spray glass cleaner directly on the scanning surfaces. Be careful not to place too much force on the glass.

6. Plug in the AC adapter.

7. Close the scanner cover.


Parent topic: [Solving Scanned Image Quality Problems](#)

Related tasks

[Cleaning Inside Your Scanner](#)

Scanned Image Edges are Cropped

If the edges of a scanned image are cropped, try the following solutions:

- Select **Auto Detect** as the Size setting (Epson Scan) or the Document Size setting (Document Capture Pro or Document Capture).
- In Epson Scan, click **Configuration** and select the **Document** tab. Adjust the cropping area shown in **Crop Margins for Size "Auto"**.
- Do one of the following:
 - **Document Capture Pro (Windows):** Select **Detailed Settings** from the Scan window. Click **Configuration** and select the **Document** tab. Adjust the cropping area shown in **Crop Margins for Size "Auto"**.
 - **Document Capture (Mac OS X):** Open the Scan drop-down list and select **Display the EPSON Scan Setup Screen**. Click the  Scan button. Select **Detailed Settings** from the Scan window. Click **Configuration** and select the **Document** tab. Adjust the cropping area shown in **Crop Margins for Size "Auto"**.

Parent topic: [Solving Scanned Image Quality Problems](#)

Related tasks

[Scanning with Document Capture Pro and Document Capture](#)

[Scanning in Epson Scan](#)

When to Uninstall Your Scanner Software

If you have a problem that requires you to uninstall and re-install your software, follow the instructions for your operating system.

[Uninstalling Scanner Software - Windows](#)

[Uninstalling Scanner Software - Mac OS X](#)

Parent topic: [Solving Problems](#)

Uninstalling Scanner Software - Windows

You can uninstall and then re-install your scanner software to solve certain problems.

1. Turn off the scanner.
2. Disconnect any interface cables.
3. Do the following to uninstall each of your scanning software programs, then follow any on-screen instructions:
 - **Windows 8:** Navigate to the **Start** screen, right-click the screen, and select **All apps**. Select **Control Panel > Programs > Programs and Features**. Select the scanner software program and click **Uninstall/Change**.
 - **Windows 7 or Windows Vista:** Open the Windows **Control Panel** utility. Select **Programs and Features**. (In Classic view, select **Programs** and click **Uninstall a program**.) Select the scanner software program and click **Uninstall/Change**.
 - **Windows XP:** Open the Windows **Control Panel** utility. Double-click **Add or Remove Programs**. Select the scanner software program and click **Change/Remove**.
4. Restart your computer, then see the *Start Here* sheet to re-install your software.

Note: If you find that re-installing your scanner software does not solve a problem, contact Epson.

Parent topic: [When to Uninstall Your Scanner Software](#)

Uninstalling Scanner Software - Mac OS X

In most cases, you do not need to uninstall your scanner software before re-installing it. However, you can download the Uninstaller utility from the Epson support website to uninstall your scanner software as described here.

Note: If you find that re-installing your scanner software does not solve a problem, contact Epson.

1. To download the Uninstaller utility, visit the Epson download site ([U.S. downloads](#) or [Canadian downloads](#)).
2. Follow the instructions on the screen to install the Uninstaller utility.
3. Quit all applications currently running on your Mac.
4. Double-click the **Uninstaller** icon.
5. In the Epson Uninstaller screen, select the checkbox for each software program you want to uninstall.

6. Click **Uninstall**.
7. Follow the on-screen instructions to uninstall the software.
8. To reinstall your scanner software, see the *Start Here* sheet for instructions.

Parent topic: [When to Uninstall Your Scanner Software](#)

Where to Get Help

If you need to contact Epson for technical support services, use the following support options.

Internet Support

Visit Epson's support website at epson.com/support (U.S.) or epson.ca/support (Canada) for solutions to common problems. You can download drivers and documentation, get FAQs and troubleshooting advice, or email Epson with your questions.

Speak to a Support Representative

Before you call Epson for support, please have the following information ready:

- Product name
- Product serial number (located on a label on the product)
- Proof of purchase (such as a store receipt) and date of purchase
- Computer configuration
- Description of the problem

Then call:

- U.S.: (562) 276-4382, 6 AM to 8 PM, Pacific Time, Monday through Friday, and 7 AM to 4 PM, Pacific Time, Saturday
- Canada: (905) 709-3839, 6 AM to 8 PM, Pacific Time, Monday through Friday, and 7 AM to 4 PM, Pacific Time, Saturday

Days and hours of support are subject to change without notice. Toll or long distance charges may apply.

Note: For help using any other software on your system, see the documentation for that software for technical support.

Purchase Supplies and Accessories

You can purchase genuine Epson accessories at epson.com (U.S. sales) or epson.ca (Canadian sales). You can also purchase accessories from an Epson authorized reseller. To find the nearest one, call 800-GO-EPSON (800-463-7766).

Parent topic: [Solving Problems](#)

Technical Specifications

These sections list the technical specifications for your scanner.

Note: Epson offers a recycling program for end of life products. Please go to epson.com/recycle for information on how to return your products for proper disposal.

[Windows System Requirements](#)

[Mac System Requirements](#)

[General Specifications](#)

[Dimension Specifications](#)

[Electrical Specifications](#)

[Environmental Specifications](#)

[USB Interface Specifications](#)

[Safety and Approvals Specifications](#)

Windows System Requirements

Make sure your system meets these requirements before using it with your scanner.

System	Microsoft Windows 8, Windows 7, Windows Vista, Windows XP Home Edition, Windows XP Professional Edition, Windows XP Professional x64 Edition
Interface	External USB port (Type A)
Display	Color monitor with 800 × 600 resolution or higher and 24-bit color (Full Color)

Parent topic: [Technical Specifications](#)

Mac System Requirements

Make sure your system meets these requirements before using it with your scanner.

System	Mac OS X 10.8.x, 10.7.x, 10.6.x, 10.5.8 (Fast user switching on Mac OS X is not supported.)
---------------	--

Interface	Macintosh USB
Display	Color monitor with 800 × 600 resolution or higher and millions of colors

Note: Epson Scan does not support the UNIX File System (UFS) for Mac OS X. Install Epson Scan on a disk or in a partition that does not use UFS.

Parent topic: [Technical Specifications](#)

General Specifications

Scanner type	Sheet feed, one pass duplex color scanner
Photoelectric device	1 line CMOS Contact Image Sensor (CIS)
Effective pixels	5,100 × 21,600 pixels at 600 dpi
Document size	Maximum: 8.6 × 36.0 inches (215.9 × 914.4 mm) Minimum: 2.0 × 2 inches (52 × 50.8 mm)
Paper input	Facedown loading
Paper output	Facedown ejection
Paper capacity	50 sheets of paper at 21 lb (80 g/m ²) weight
Scanning resolution	600 dpi (main scan) 600 dpi with Micro Step (sub scan)
Output resolution	75, 100, 150, 200, 240, 300, 400, 600, 1200 dpi (in increments of 1 dpi)
Image data	16 bits per pixel per color internal 1 to 8 bits per pixel per color external
Interface	One Hi-Speed USB port
Light source	RGB LED

Parent topic: [Technical Specifications](#)

Dimension Specifications

Height	11.7 inches (297.0 mm)
Width	6.0 inches (152.0 mm)
Depth	6.1 inches (154.0 mm)
Weight	Approx. 5.5 lb (2.5 kg)

Note: Dimensions do not include projecting parts.

Parent topic: [Technical Specifications](#)

Electrical Specifications

Scanner

Note: Check the label on the scanner and the AC adapter for voltage information. Power consumption varies depending on operating conditions or whether an option is installed.

Rated input voltage	DC 24 V
Rated input current	1.37 A
Rated input frequency	50 to 60 Hz
Power consumption	Operating: Approx. 18 W Ready mode: Approx. 7 W Sleep mode: Approx. 1.6 W Power off mode: 0.4 W

AC Adapter

AC adapter model	A441H
Rated input voltage	AC 100 to 240 V
Rated input current	AC 0.6 to 0.3 A
Rated input frequency	50 to 60 Hz

Rated output voltage	DC 24 V
Rated output current	1.37 A

Parent topic: [Technical Specifications](#)

Environmental Specifications

Temperature	Operating: 41 to 95 °F (5 to 35 °C) Storage: -25 to 60 °F (-13 to 140 °C)
Humidity (non-condensing)	Operating: 10 to 85% RH Storage: 10 to 85% RH
Operating conditions	Ordinary office or home conditions

Note: Avoid operating the scanner in direct sunlight, near a strong light source, or in extremely dusty conditions.

Parent topic: [Technical Specifications](#)

USB Interface Specifications

Interface type	Universal Serial Bus Specification Revision 2.0
Electrical standard	Full Speed mode (12 Mbits per second) and Hi-Speed mode (480 Mbits per second) of Universal Serial Bus Specification Revision 2.0
Connector type	One Type B port

Parent topic: [Technical Specifications](#)

Safety and Approvals Specifications

Scanner

United States	EMC: FCC part 15 Subpart B Class B
Canada	EMC: CAN/CSA-CEI/IEC CISPR 22 Class B

AC Adapter

United States

Safety: UL60950-1

EMC: FCC part 15 Subpart B Class B

Canada

Safety: CAN/CSA C22.2 No. 60950-1

EMC: CAN/CSA-CEI/IEC CISPR 22 Class B

Parent topic: [Technical Specifications](#)

Notices

Check these sections for important notices about your scanner.

Note: Epson offers a recycling program for end of life products. Please go to [epson.com/recycle](https://www.epson.com/recycle) for information on how to return your products for proper disposal.

[Important Safety Instructions](#)

[Restrictions on Copying](#)

[Default Delay Times for Power Management for Epson Products](#)

[Trademarks](#)

[Copyright Notice](#)

Important Safety Instructions

Follow these safety instructions when setting up and using the scanner:

- Read all these instructions, and follow all warnings and instructions marked on the scanner.
- Place the scanner close enough to the computer for the interface cable to reach it easily.
- Do not place or store the scanner or the AC adapter outdoors, near excessive dirt or dust, water, heat sources, or in locations subject to shocks, vibrations, high temperature or humidity, direct sunlight, strong light sources, or rapid changes in temperature or humidity.
- Do not use with wet hands.
- Place the scanner and the AC adapter near an electrical outlet where the adapter can be easily unplugged.
- The AC power cord should be placed to avoid abrasions, cuts, fraying, crimping, and kinking.
- Do not place objects on top of the AC power cord and do not allow the AC adapter or the power cord to be stepped on or run over. Be particularly careful to keep the AC power cord straight at the end and the point where it enters the AC adapter.
- Use only the AC adapter that comes with your scanner. Using any other adapter could cause fire, electrical shock, or injury.
- The AC adapter is designed for use with the scanner with which it was included. Do not attempt to use it with other electronic devices unless specified.

- Use only the type of power source indicated on the AC adapter's label, and always supply power directly from a standard domestic electrical outlet with the AC adapter that meets the relevant local safety standards.
- When connecting this product to a computer or other device with a cable, ensure the correct orientation of the connectors. Each connector has only one correct orientation. Inserting a connector in the wrong orientation may damage both devices connected by the cable.
- Avoid using outlets on the same circuit as photocopiers or air control systems that regularly switch on and off.
- If you use an extension cord with the scanner, make sure the total ampere rating of the devices plugged into the extension cord does not exceed the cord's ampere rating. Also, make sure the total ampere rating of all devices plugged into the wall outlet does not exceed the wall outlet's ampere rating.
- Never disassemble, modify, or attempt to repair the AC adapter, scanner, or scanner option by yourself except as specifically explained in the scanner's guides.
- Do not insert objects into any opening as they may touch dangerous voltage points or short out parts. Beware of electrical shock hazards.
- If damage occurs to the plug, replace the cord set or consult a qualified electrician. If there are fuses in the plug, make sure you replace them with fuses of the correct size and rating.
- Unplug the scanner and the AC adapter, and refer servicing to qualified service personnel under the following conditions: The AC adapter or plug is damaged; liquid has entered the scanner or the AC adapter; the scanner or the AC adapter has been dropped or the case has been damaged; the scanner or the AC adapter does not operate normally or exhibits a distinct change in performance. (Do not adjust controls that are not covered by the operating instructions.)
- Unplug the scanner and the AC adapter before cleaning. Clean with a damp cloth only. Do not use liquid or aerosol cleaners.
- If you are not going to use the scanner for a long period, be sure to unplug the AC adapter from the electrical outlet.
- Place the product on a flat, stable surface that extends beyond the base of the product in all directions. If you place the product by the wall, leave at least 3.9 inches (10 cm) between the back of the product and the wall. The product will not operate properly if it is tilted at an angle.
- After replacing consumable parts, dispose of them correctly following the rules of your local authority. Do not disassemble them.

Parent topic: [Notices](#)

Restrictions on Copying

Observe the following restrictions to ensure responsible and legal use of your scanner.

Copying of the following items is prohibited by law:

- Bank bills, coins, government-issued marketable securities, government bond securities, and municipal securities
- Unused postage stamps, pre-stamped postcards, and other official postal items bearing valid postage
- Government-issued revenue stamps, and securities issued according to legal procedure

Exercise caution when copying the following items:

- Private marketable securities (stock certificates, negotiable notes, checks, etc.), monthly passes, concession tickets, etc.
- Passports, driver's licenses, warrants of fitness, road passes, food stamps, tickets, etc.

Note: Copying these items may also be prohibited by law.

Restriction on disassembling and decompiling

You may not disassemble, decompile or otherwise attempt to derive the source code of any software included with this product.

Parent topic: [Notices](#)

Default Delay Times for Power Management for Epson Products

This product will enter sleep mode after a period of nonuse. The time interval has been set at the factory to ensure that the product meets Energy Star standards of energy efficiency, and cannot be modified by the consumer.

Parent topic: [Notices](#)

Trademarks

EPSON® is a registered trademark, EPSON Exceed Your Vision is a registered logomark, and Epson Connect™ is a trademark of Seiko Epson Corporation.

Epson StoreSM is a service mark of Epson America, Inc.

Mac OS is a trademark of Apple Inc., registered in the U.S. and other countries.

General Notice: Other product names used herein are for identification purposes only and may be trademarks of their respective owners. Epson disclaims any and all rights in those marks.



Parent topic: [Notices](#)

Copyright Notice

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of Seiko Epson Corporation. The information contained herein is designed only for use with this Epson product. Epson is not responsible for any use of this information as applied to other products.

Neither Seiko Epson Corporation nor its affiliates shall be liable to the purchaser of this product or third parties for damages, losses, costs, or expenses incurred by purchaser or third parties as a result of: accident, misuse, or abuse of this product or unauthorized modifications, repairs, or alterations to this product, or (excluding the U.S.) failure to strictly comply with Seiko Epson Corporation's operating and maintenance instructions.

Seiko Epson Corporation shall not be liable for any damages or problems arising from the use of any options or any consumable products other than those designated as Original Epson Products or Epson Approved Products by Seiko Epson Corporation.

Seiko Epson Corporation shall not be held liable for any damage resulting from electromagnetic interference that occurs from the use of any interface cables other than those designated as Epson approved Products by Seiko Epson Corporation.

This information is subject to change without notice.

[libTIFF Software Acknowledgment](#)

[libjpeg-turbo](#)

[A Note Concerning Responsible Use of Copyrighted Materials](#)

[Copyright Attribution](#)

Parent topic: [Notices](#)

libTIFF Software Acknowledgment

Copyright © 1988-1997 Sam Leffler

Copyright © 1991-1997 Silicon Graphics, Inc.

Permission to use, copy, modify, distribute, and sell this software and its documentation for any purpose is hereby granted without fee, provided that (i) the above copyright notices and this permission notice appear in all copies of the software and related documentation, and (ii) the names of Sam Leffler and Silicon Graphics may not be used in any advertising or publicity relating to the software without the specific, prior written permission of Sam Leffler and Silicon Graphics.

THE SOFTWARE IS PROVIDED "AS-IS" AND WITHOUT WARRANTY OF ANY KIND, EXPRESS, IMPLIED OR OTHERWISE, INCLUDING WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

IN NO EVENT SHALL SAM LEFFLER OR SILICON GRAPHICS BE LIABLE FOR ANY SPECIAL, INCIDENTAL, INDIRECT OR CONSEQUENTIAL DAMAGES OF ANY KIND, OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER OR NOT ADVISED OF THE POSSIBILITY OF DAMAGE, AND ON ANY THEORY OF LIABILITY, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Parent topic: [Copyright Notice](#)

libjpeg-turbo

Copyright (C) 1991-2012 Thomas G. Lane, Guido Vollbeding

Copyright (C) 1999-2006 MIYASAKA Masaru

Copyright (C) 2009 Pierre Ossman for Cendio AB

Copyright (C) 2009-2013 D. R. Commander

Copyright (C) 2009-2011 Nokia Corporation and/or its subsidiary(-ies)

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- Neither the name of the libjpeg-turbo Project nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS", AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDERS OR CONTRIBUTORS BE LIABLE

FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Parent topic: [Copyright Notice](#)

A Note Concerning Responsible Use of Copyrighted Materials

Epson encourages each user to be responsible and respectful of the copyright laws when using any Epson product. While some countries' laws permit limited copying or reuse of copyrighted material in certain circumstances, those circumstances may not be as broad as some people assume. Contact your legal advisor for any questions regarding copyright law.

Parent topic: [Copyright Notice](#)

Copyright Attribution

© 2013 Epson America, Inc.

9/13

CPD-39183

Parent topic: [Copyright Notice](#)