


Product End of Life Instructions


Smart-UPS ≤ 1500 VA

Smart-UPS ≤ 1500 VA Uninterruptible Power Supply (UPS) products protect equipment and critical data from interruptions by supplying reliable, network-grade back up power reliably and efficiently.




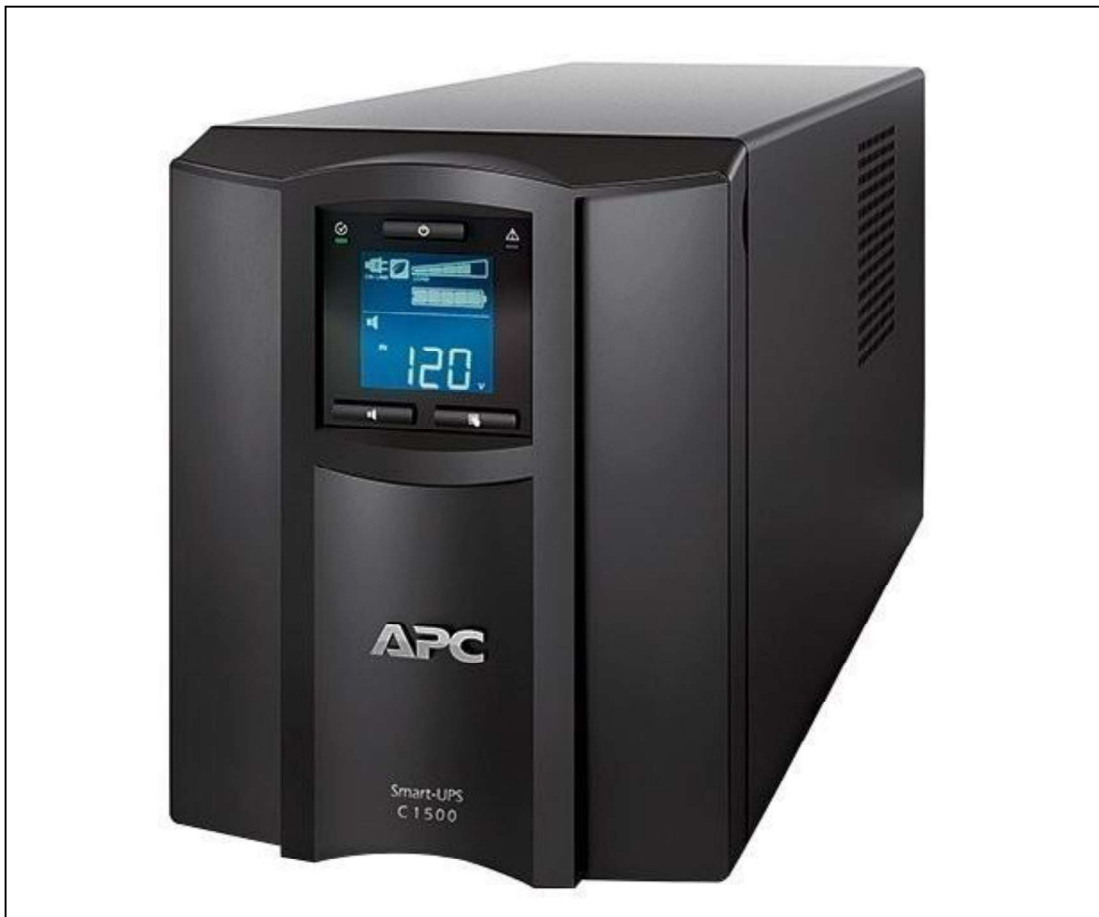

Potential disassembly risks



End of Life Instructions

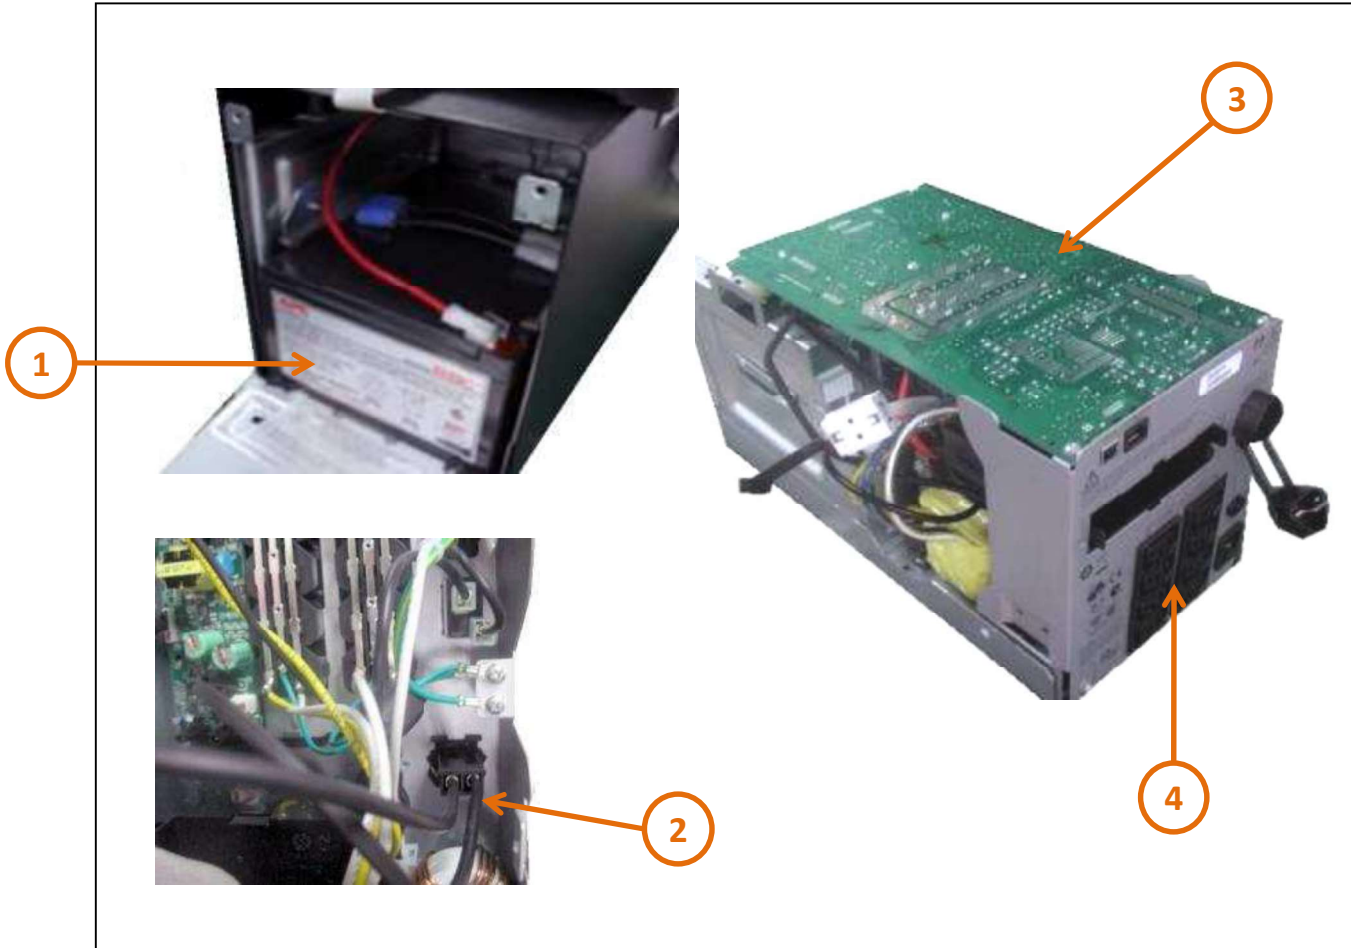

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be depolluted		Sealed Lead Acid Batteries	3940	See: RBC, Battery Module, Extended Run Time Battery Module for End of Life Instructions of battery pack. See: Material Safety Data Sheet Available at www.apc.com Use authorized battery recycler. Caution: Batteries may contain and electrical charge- avoid creating short across terminals. Caution: Cracked or bloated batteries may be hazardous and represent a lead (Pb) exposure.
To be depolluted		External Power Cables	478	Power cables with the unit.
To be depolluted		Printed Circuit Boards (PCBA)	470	Mass is for PCBAs >10cm ² in surface area.

To be dismantled

Outlet Assemblies

50

Mass is for ABS-PC parts with brominated flame retardant.



Product description

Manufacturer identification	Schneider Electric Industries SAS
Brand name	APC
Product function	Smart-UPS ≤ 1500 VA Uninterruptible Power Supply (UPS) products protect equipment and critical data from interruptions by supplying reliable, network-grade back up power reliably and efficiently.
Product reference	SMT1000I
Additional similar product references	Smart-UPS: DLA(XXXX)(Y), DLT(XXXX)(Y), FJX(XXXX)(Y), HTX(XXXX)(Y), NMX(XXXX)(Y), SMT(XXXX)(Y), SMX(XXXX)(Y), SMV(XXXX)(Y), SUA(XXXX)(Y), where XXXX is a number between 500 and 2000, and Y is blank or any combination of letters and numbers.
Total representative product mass	18738
Representative product dimensions	219mm x 171mm x 439mm
Accessories	None
Date of information release	01/2017



Additional information

Legal information	This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.	
In case of special transportation: transportation method	The battery pack used in this product range contains lead acid batteries that are regulated as Dangerous Goods shipping must be performed in accordance with the appropriate transportation regulations.	
Recyclability potential	51%	Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

Schneider Electric Industries SAS

Customer Care Center

www.schneider-electric.com/contact

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439
Capital social 896 313 776 €

www.schneider-electric.com

ENVEOLI1612028_V1

Published by Schneider Electric

© 2016 - Schneider Electric – All rights reserved

01/2017