


## 2-Port HDMI Video Switch - 8K 60Hz - USB Powered


### Product ID

2PORT-HDMI-SWITCH-8K


#### Front

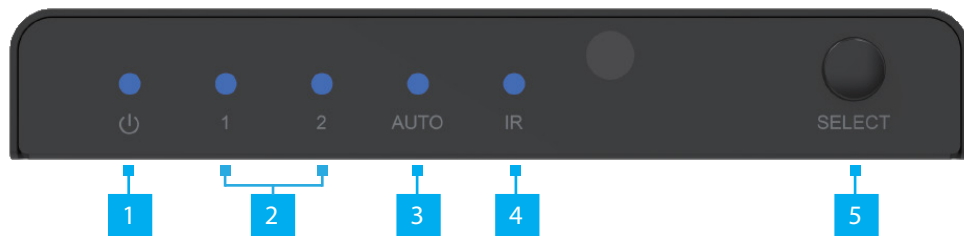

#### Rear

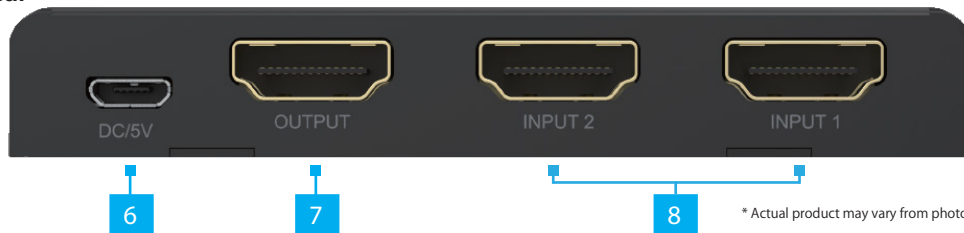

#### Sides

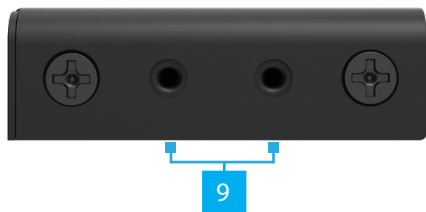

#### Remote Control



Component	Function
1 Power LED Indicator	<ul style="list-style-type: none"> <li>• <b>Solid Red:</b> HDMI Switch in Standby Mode</li> <li>• <b>Solid Blue:</b> HDMI Switch is powered on and operational</li> </ul>
2 Port Selection Indicator	<ul style="list-style-type: none"> <li>• <b>Solid Blue:</b> HDMI Input Port is active</li> </ul>
3 Auto Switching Indicator	<ul style="list-style-type: none"> <li>• <b>Solid Blue:</b> Automatic Switching is enabled</li> <li>• <b>LED Off:</b> Automatic Switching is disabled</li> </ul>
4 IR Mode Indicator	<ul style="list-style-type: none"> <li>• <b>Solid Blue:</b> IR Receiver enabled, Remote Control will operate the HDMI Switch</li> <li>• <b>LED Off:</b> IR Receiver disabled, Remote Control will not operate the HDMI Switch</li> </ul>
5 Push Button Selector	<ul style="list-style-type: none"> <li>• Switch between <b>HDMI Input 1</b> and <b>HDMI Input 2</b></li> </ul>
6 USB Power Input	<ul style="list-style-type: none"> <li>• Connect the included <b>USB Wall Charger</b> and <b>USB Micro-B Power Cable</b></li> </ul>
7 HDMI Output Port	<ul style="list-style-type: none"> <li>• Connect to an <b>HDMI Display</b></li> </ul>
8 HDMI Input Ports	<ul style="list-style-type: none"> <li>• Connect to an <b>HDMI Source Device</b></li> </ul>
9 Mounting Bracket Screw Holes	<ul style="list-style-type: none"> <li>• Connect the included <b>Mounting Brackets</b></li> <li>• Holes are on each side of the <b>HDMI Video Switch</b></li> </ul>

### Product Information

For the latest manuals, product information, technical specifications, and declarations of conformance, please visit: [www.StarTech.com/2PORT-HDMI-SWITCH-8K](http://www.StarTech.com/2PORT-HDMI-SWITCH-8K)

### Package Contents

- HDMI Video Switch x 1
- Remote Control (Batteries Not Included) x 1
- Mounting Kit x 1
- USB Wall Charger x 1
- USB Micro-B Power Cable x 1
- Rubber Feet x 4
- Quick-Start Guide x 1

## Requirements

- HDMI Source x 2
- HDMI Display x 1
- HDMI Cables (sold separately) x 3
- AAA Batteries (for remote control) x 2
- Philips Head Screwdriver x 1

## Installation

### (Optional) Mounting Kit

**Note:** Before mounting the **HDMI Video Switch** make sure that the surface you are mounting to is strong enough to support the weight of the **HDMI Video Switch**. It is recommended that you mount the **HDMI Video Switch** on a wall stud to provide the correct support.

1. Determine the **Mounting Surface** for the **HDMI Video Switch**.
2. Place the **Mounting Brackets** on each side of the **HDMI Video Switch**. Align the **Holes** in the **Mounting Brackets** with the **Holes** on the sides of the **HDMI Video Switch**.
3. Insert two **Screws** through each **Mounting Bracket** and into the **HDMI Video Switch**.
4. Tighten each **Screw** using a **Phillips Head Screwdriver**.
5. Mount the **HDMI Video Switch** to the desired **Mounting Surface** using the appropriate **Mounting Hardware** (e.g. Wood Screws).

### HDMI Video Switch

**Note:** Ensure your **HDMI Source Device**, and the **HDMI Displays** are powered off before you begin installation.

1. Connect an **HDMI Cable** (sold separately) from an **HDMI Source Device** to **HDMI Input 1** on the **HDMI Switch**.
2. Connect an **HDMI Cable** (sold separately) from an **HDMI Source Device** to **HDMI Input 2** on the **HDMI Switch**.

**Note:** Each **HDMI Port** is numbered, please take note of which number is assigned to each **HDMI Source Device**.

## Regulatory Compliance

### FCC - Part 15

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by StarTech.com could void the user's authority to operate the equipment.

### Industry Canada Statement

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe [B] est conforme à la norme NMB-003 du Canada.

CAN ICES-3 (B)/NMB-3(B)

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

(1) This device may not cause interference, and (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

(1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

3. Connect an **HDMI Cable** (sold separately) to the **HDMI Output Port** on the **HDMI Switch** and to an **HDMI Input Port** on the **HDMI Display**.
4. Connect the **USB Wall Charger** and **USB Micro-B Power Cable** to an available **Power Source** and to the **USB Power Input** on the **HDMI Switch**.
5. Power on your **HDMI Display**, followed by each of your **HDMI Source Devices**.

## Operation

### Push Button Operation

#### Short Press

Press the **Push Button Selector** to switch between **HDMI Input 1** and **HDMI Input 2**.

#### 3-5 Second Button Press

Enable or disable the **Automatic Switching** feature of the **HDMI Switch**. For example, if you are watching TV and would like to watch your Blu-ray player, turn the Blu-ray player on. To switch back to the TV you can turn the Blu-ray player off, or switch the TV Box back on after being switched off, when the Blu-ray player is active.

#### 6 Second Button Press

Enable or disable the **IR functionality** of the **HDMI Switch**. The **IR Functionality** enables use of the **HDMI Switch's** included **Remote Control**.

### Remote Control Operation

**Note:** Ensure the **IR Mode Indicator** on the front of the **HDMI Switch** is solid blue, indicating that **IR Functionality** is enabled.

Remove the backplate from the **Remote Control** and install the 2x AAA Batteries (not included). Point the **Remote Control** at the front of the **HDMI Switch**. Press the **"1"** or **"2"** **Button** to manually switch between **HDMI Inputs**. Using the **"IR"** **Button** will disable the **IR Functionality** of the **HDMI Switch**.

**Note:** To re-enable **IR Functionality**, see the section **"6 Second Button Press"** under **"Push Button Operation"**.

The **"Auto"** **Button** will enable or disable the **Automatic Switching** feature on the **HDMI Switch**.

### Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols

This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to StarTech.com. Where they occur these references are for illustrative purposes only and do not represent an endorsement of a product or service by StarTech.com, or an endorsement of the product(s) to which this manual applies by the third-party company in question. StarTech.com hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders.

### Warranty Information

This product is backed by a two-year warranty.

For further information on product warranty terms and conditions, please refer to [www.startech.com/warranty](http://www.startech.com/warranty).

### Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.

**StarTech.com Ltd.**  
415 Artisans Cres  
London, Ontario  
N5V 5E9  
Canada

**StarTech.com LLP**  
4490 South Hamilton  
Road  
Groveport, Ohio  
43125  
U.S.A.

**StarTech.com Ltd.**  
Unit B, Pinnacle 15  
Gowerton Rd,  
Brackmills  
Northampton  
NN4 7BW  
United Kingdom

**StarTech.com Ltd.**  
Siriusdreef 17-27  
2132 WT Hooftdorp  
The Netherlands

FR: [startech.com/fr](http://startech.com/fr)  
DE: [startech.com/de](http://startech.com/de)  
ES: [startech.com/es](http://startech.com/es)  
NL: [startech.com/nl](http://startech.com/nl)  
IT: [startech.com/it](http://startech.com/it)  
JP: [startech.com/jp](http://startech.com/jp)