

Your EOS  
adventure  
starts here



**EOS 600D**

you can



**Canon**

# EOS 600D



## Remarkable image quality

The EOS 600D delivers images and movies that are packed with detail and rich in colour and tone, thanks to an 18-megapixel CMOS sensor working in tandem with Canon's 14-bit DIGIC 4 processor.

## Easy to use

Taking good pictures doesn't have to be difficult. Basic + technology, Scene Intelligent Auto and a suite of Creative Filters ensure you can remain creative without thinking about technical details.

## Part of the EOS system

The perfect entry in to the world of EOS photography. The EOS 600D is supported by the world's most extensive range of lenses and accessories, trusted by amateur and professional photographers alike.

Tv (Shutter Speed): 1/15  
Av (Aperture Value): f/3.5  
ISO Speed: 100  
Lens: EF-S 17-55mm f/2.8 IS USM  
Image shot on a tripod to capture the sunset

# Remarkable image quality

State-of-the-art imaging technology ensures that Canon EOS 600D captures stunning images in every situation.



Tv (Shutter Speed): 1/640  
 Av (Aperture Value): f/8.0  
 ISO Speed: 100  
 Lens: EF70-200mm f/2.8L USM  
 18 MP sensor provides great detail to enable extensive cropping



Original image



Image showing cropped layout



ISO 100



ISO 6400



Cropped image without loss of quality

**18.0** MEGA PIXELS  
 CMOS

## 18-megapixel resolution

Thanks to its 18-megapixel CMOS sensor, the EOS 600D sees the world in stunning high resolution. Pictures are packed with detail, and the camera's 5184 x 3456 pixel image files can be printed at large sizes for maximum impact. Such resolution also allows for extensive cropping of photographs in post-production, opening up new creative avenues and alternative compositions.

**ISO 6400**  
 <12800>

## CMOS sensor technology

Only Canon controls every aspect of CMOS sensor design, from concept and design through to manufacture and realisation. This means that each EOS camera uses a sensor that is specifically designed for the job in hand.

Each light-sensitive photodiode on a Canon CMOS sensor is fitted with its own micro lens and signal amplifier to provide extraordinary sensitivity in low-light conditions. Such technology allows the EOS 600D to shoot with a sensitivity range of ISO 100-6400, expandable to ISO12,800 in extreme conditions.



Frames per sec Example

**DIGIC 4**  
**3.7** Frames Per Sec

## 14-bit DIGIC 4 image processor

At the heart of the EOS 600D is Canon's DIGIC 4 image processor, which controls all aspects of the camera's operation, including conversion of raw sensor data into image files. The DIGIC 4's fast, efficient design enables the EOS 600D to shoot full-resolution images continuously at 3.7fps, while 14-bit architecture provides exceptional tonal range and colour depth. The DIGIC 4 also helps to reduce noise at high ISO sensitivities, enabling flash-free shooting in low-light conditions.



Metering Zones Example

**63** ZONE  
 Dual-Layer Metering

## iFCL exposure metering

Canon's state-of-the-art iFCL exposure metering system analyses each scene by dissecting it into 63 separate zones. Luminance and colour information, as well as data from the camera's focusing system, is then also used to help calculate the perfect exposure settings, even in tricky lighting conditions.



Autofocus points Example

**9-point** AF

## 9-point wide-area autofocus

Nine autofocus points, spread out across the frame in a diamond formation, enable accurate focusing even in the toughest lighting conditions. Subjects in the middle of the frame, as well as those off centre, are tracked and focus-locked quickly and accurately. A central, cross-type sensor provides extra precision, being sensitive to both vertical and horizontal lines.




Tv (Shutter Speed): 1/1000  
 Av (Aperture Value): f/5.0  
 ISO Speed: 100  
 Lens: EF-S 55-250mm f/4-5.6 IS  
 Fast shutter speeds allows the decisive moment to be captured



# Full HD Movies

Whether you are grabbing movie clips on holiday, or working on your latest short film, the EOS 600D's HD video features will open new creative doors.

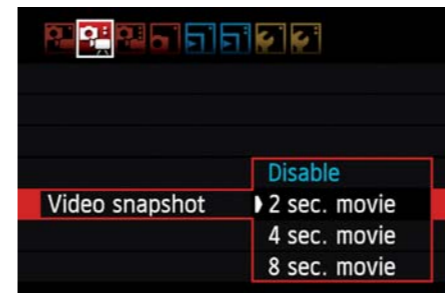

**Video snapshot**  
 Improve the quality of your movie footage with Canon's Video Snapshot technology. Users can capture short movie clips of 2, 4 or 8 seconds as easily as shooting a still picture. The EOS 600D then combines these clips into a single, high-quality movie file that has the look and feel of professionally edited footage. Video has never been this easy, or looked so good.



**Movie Digital Zoom**  
 Using the central portion of its 18-megapixel sensor, the EOS 600D can magnify video footage by between three and ten times, getting you closer to the action while still maintaining Full-HD video quality at 1920x1080 resolution.

**Digital quality stereo sound**  
 The EOS 600D uses 48KHz, 16-bit stereo recording to give your movies the high-quality soundtrack they deserve. Recording level can be adjusted manually to one of 64 settings and monitored using an on-screen level meter. An external microphone, connected via a standard 3.5mm mini plug, further improves sound quality.



Movie Digital Zoom - x10 zoom



Movie Digital Zoom - 100%



**Full-HD quality**  
 The EOS 600D allows photographers to shoot stunning Full-HD movie footage in 1080p resolution, and explore creative opportunities that are not possible with conventional camcorders.


Using lenses from the extensive EOS range enables photographers to work in low light and take tight control over depth of field, restricting focus and producing beautiful background blur. Full manual control is provided over frame rate, exposure and focus.





## Scene Intelligent Auto

Not just another Scene mode, the EOS 600D Scene Intelligent Auto mode individually assesses every picture you take, as you take it – picking the right combination of settings each and every time.

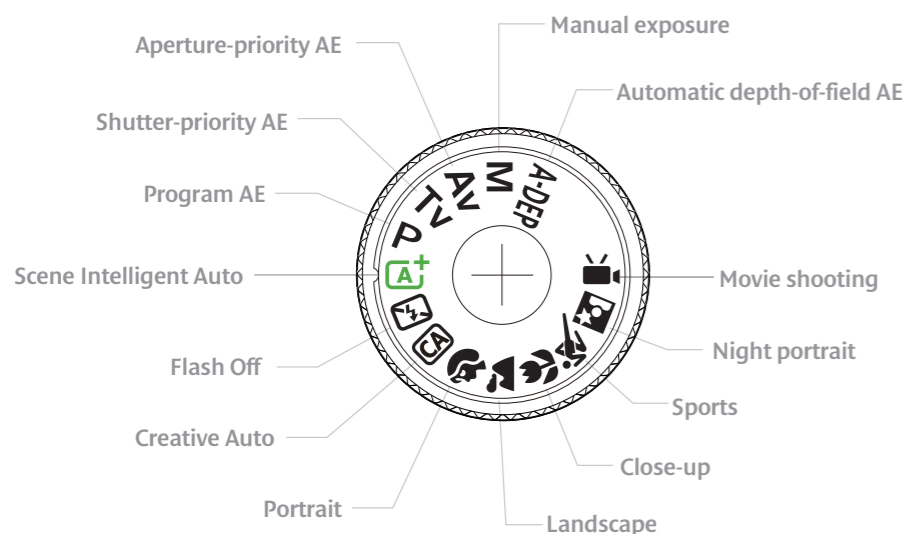

Canon's unique Scene Intelligent Auto technology makes it easier than ever before to shoot every picture with the perfect combination of camera settings. Each scene is first analysed in detail for elements such as the presence of movement, and during Live View, faces. Lighting conditions are assessed and colour and contrast are measured. Even distance information from the camera's AF system is taken into account.

In a split second this information is combined and used to set all of the camera's main functions automatically. Exposure parameters, as well as white balance and focus mode, are chosen according to what is in front of the lens, and a unique Picture Style comprising colour saturation, contrast and sharpness is formulated. Even the EOS 600D's Auto Lighting Optimiser is fine-tuned according to dynamic range, so that highlights and shadows are rendered perfectly.


Scene Intelligent Auto does all of this so that you can concentrate on being creative. Compose and shoot fantastic images safe in the knowledge that each and every camera setting has been carefully considered and chosen for you.

Tv (Shutter Speed): 1/60  
 Av (Aperture Value): f/4.0  
 ISO Speed: 400  
 Lens: EF-S 17-55mm f/2.8 IS USM  
 DIGIC 4 enables stunning colour tonal reproduction

# Photography, made easy



With its intelligent design and user-friendly features, the EOS 600D makes great quality, creative photography easier to achieve than ever before.



Basic+ Function

## Scene modes and Basic + technology

The EOS 600D's scene modes select a combination of aperture, shutter speed, ISO and focus mode that is appropriate to the subject matter being photographed. Users can choose from Creative Auto, Portrait, Landscape, Close-up, Sports and Night Portrait, and are able to fine-tune each of these modes with Basic + technology.

Basic + was developed to allow photographers to express their creative intent. Each shooting mode can be customised with one of nine ambience settings or seven lighting types, allowing the atmosphere of an occasion to be captured without compromising ease of use.



Creative Filters

## Creative Filters

Express yourself by applying Creative Filter effects to images after they have been shot. Choose from Soft Focus, Grainy Black & White, Toy Camera, Miniature Effect and Fisheye Effect. Filters can even be applied to an image more than once for combination effects and the results saved to card as a new JPEG file.



Grainy B/W



Soft focus



Fisheye



Toy camera



Miniature effect

Tv (Shutter Speed): 1/1250

Av (Aperture Value): f/2.8

ISO Speed: 100

Lens: EF 100 f/2.8L Macro IS USM

With portraits use a shallow depth of field to isolate the subject from the background



Vari-angle LCD

## Vari-angle LCD screen

A 7.7cm (3-inch) vari-angle LCD screen swings away from the camera's body and rotates through 270-degrees, providing access to alternative shooting angles.

Photographing architecture from a dramatic low-down viewpoint, or portraits from waist level, becomes easy and intuitive. The vari-angle design even makes it possible to shoot over the top of crowds and compose self portraits.


With a resolution of 1,040,000-dots, the EOS 600D's LCD screen is a joy to use for both still-image and video shooting. Live View can be used to preview depth of field as well as creative effects, like black & white photography.



High angles



Vari-angle screen

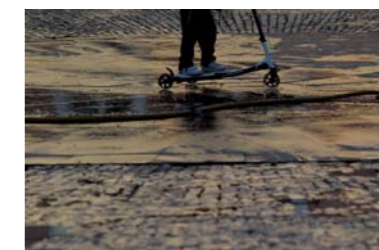

Low angles

Tv (Shutter Speed): 1/80  
 Av (Aperture Value): f/2.8  
 ISO Speed: 200  
 Lens: EF-S 60mm f/2.8 Macro USM  
 Easy Wireless flash was used to creatively light the subject



# Advanced features. Simple design

With its blend of sophisticated technology and user-friendly design, the EOS 600D performs in the hands of every photographer, no matter how experienced.



Quick Control Screen



Feature Guide




Image Rating



Built-in flash

## Quick Control Screen and on-screen Feature Guide

Showing the status of the camera at a glance, and enabling quick access to virtually all shooting functions, the EOS 600D's Quick Control Screen is an intuitive and user-friendly design feature. It may be accessed at any time by pressing the easily accessible Q button on the rear of the camera.

An on-screen Feature Guide is displayed whenever options are selected from the Quick Control Screen or when exposure modes are selected from the main mode dial. The Feature Guide provides descriptions of the camera's modes and functions and advice on how to use them - the ideal tool for learning about EOS photography.

## Image ratings and copyright metadata

Begin your digital workflow while you are still in the field, and save time when editing back at home. The EOS 600D allows images to be ranked according to a star-rating system while they are being viewed in camera. This information is preserved in the file's metadata and can be read by applications such as Canon's Digital Photo Professional (DPP) and other third party software, allowing you to quickly identify the shots you wish to work on further.

Additionally, copyright data can be inserted automatically into the metadata of each image as it's captured, asserting your identity as the image's author.

## Creative off-camera flash made easy

The EOS 600D's integrated wireless flash transmitter makes remote wireless flash photography easier than ever before. Multiple Canon Speedlite flashguns can be positioned off-camera and triggered without the need for additional accessories. What's more Canon's new Easy Wireless technology simplifies the set up process, meaning you can focus on being as creative as possible with your lighting.

Flashes can be grouped together and controlled on different wireless channels allowing photographers to control lighting ratios easily.

**EF** Lenses **EF-S** Lenses



# Welcome to the EOS system

The EOS system is about more than just digital cameras. It's a collection of superb lenses, sophisticated flashes and versatile accessories that are trusted the world over by enthusiasts and professional photographers alike.

## Some of the 60+ lenses in the EOS system

- Landscape
- Wildlife
- Portrait
- Macro



EF-S 10-22mm f/3.5-4.5 USM



EF-S 55-250mm f/4-5.6 IS



EF-S 18-200mm f/3.5-5.6 IS



EF 50mm f/1.4 USM



EF-S 17-55mm f/2.8 IS USM



EF-S 60mm f/2.8 Macro USM

### Canon EF lenses and accessories

The Canon EOS 600D is compatible with accessories such as remote controls, and more than 60 EF and EF-S lenses. From ultra wide-angle to super-telephoto, there is a Canon lens for every type of photography, whether you are looking for a versatile zoom or a specialist prime lens.

Exceptional lens technology gives Canon photographers the advantage. Image Stabilisation allows hand-held photography with shutter speeds up to four stops longer than usual without camera shake. Ultra-Low Dispersion (UD), Super UD and Fluorite lens elements tackle chromatic aberrations (or coloured fringing), while Aspherical elements correct for spherical aberrations, maintaining sharpness across the frame.

Ultrasonic AF motors provide rapid, near-silent focusing with excellent accuracy.

### Speedlite flash

Powerful and versatile – Canon Speedlite flashguns allow you to go beyond what is possible with a camera's built-in flash and explore new imaginative lighting opportunities. For example, used in the camera's hotshoe, a Canon Speedlite 430EX II offers more power for increased range, as well as features like a 180-degree bounce and swivel head. This enables flash to be bounced off walls and ceilings, giving a softer, more flattering, look to portraits.

Canon Speedlites can also be used off-camera, triggered wirelessly and without additional accessories thanks to the EOS 600D's built-in wireless trigger. Off-camera flash lets a photographer to illuminate their subject from any angle, and use creative flash to create whatever look and feel they wish.

The EOS 600D is compatible with all EX-series Speedlite Flashguns, and makes use of the continuous light source built into the Speedlite 320EX, which can be activated automatically during video mode in low-light conditions.

### Flashes




Speedlite 320EX



Speedlite 270EX II

## System Chart

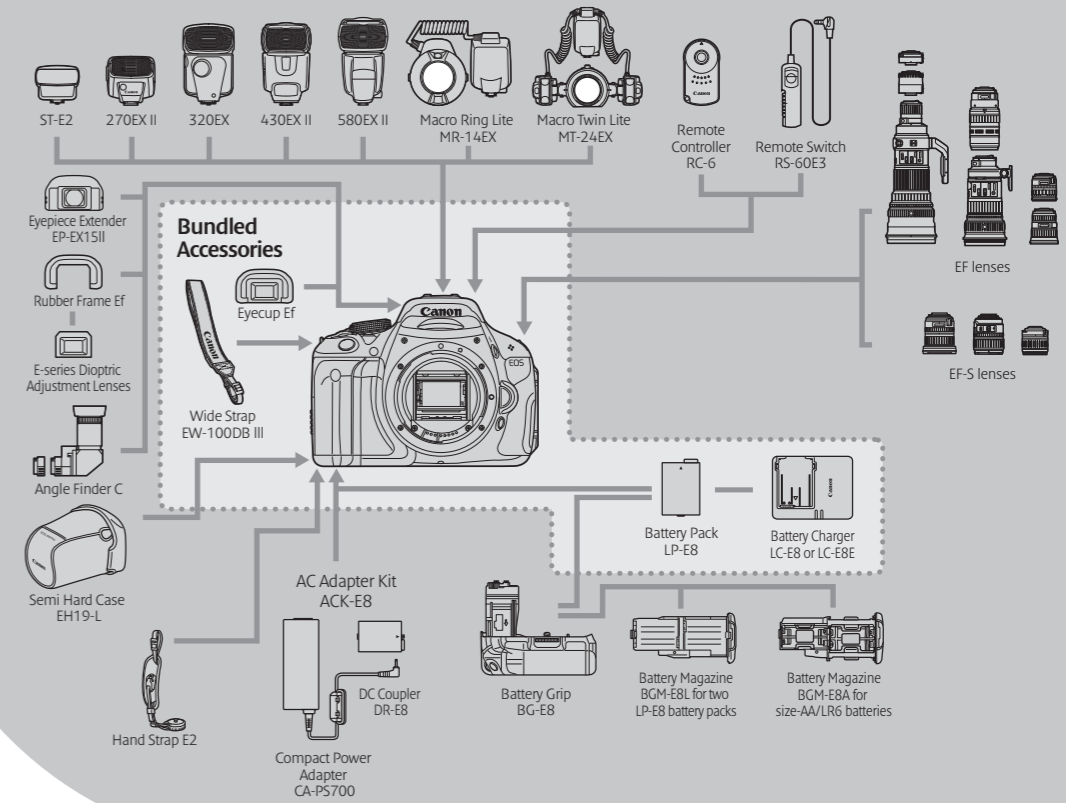

### Digital Photo Professional and EOS Solution software

Supplied with every Canon EOS camera, Digital Photo Professional (DPP) is professional imaging software for viewing, editing and processing RAW and JPEG files. Its intuitive interface allows photographers to adjust images for exposure, colour saturation and contrast as well as apply settings such as white balance and sharpening retrospectively.

Also included on the EOS Solution disk are other applications that add new functionality to your EOS camera. ZoomBrowser EX (PC) and ImageBrowser (Mac) offer simple download and image browsing, while EOS Utility provides remote and tethered shooting facilities. Picture Style Editor lets photographers create and edit their own picture styles and upload them to their cameras.

### Canon Photographic Printing

Canon's range of PIXMA inkjet printers allow EOS photographers to make fine-art quality prints at home. Tiny ink-droplet sizes deliver remarkable image quality and phenomenal levels of detail in borderless print up to A3+ in size. Canon SELPHY dye-sublimation printers offer the speed and affordability of a high-street minilab in a compact and easy-to-use form.



Digital Photo Professional

PIXMA MG6150



SELPHY CP800



# Specifications: EOS 600D

<b>IMAGE SENSOR</b>	Type Effective Pixels Total Pixels Aspect Ratio Low-Pass Filter Sensor Cleaning Colour Filter Type	22.3 x 14.9mm CMOS Approx. 18.0 megapixels Approx 18.7 megapixels 3:2 Built-in/Fixed EOS integrated cleaning system Primary Colour
<b>IMAGE PROCESSOR</b>	Type	DIGIC 4
<b>LENS</b>	Lens Mount Focal Length	EF/EF-S Equivalent to 1.6x the focal length of the lens
<b>FOCUSING</b>	Type AF System/ <sup>(1)</sup> Points AF working range AF Modes AF Point Selection Selected AF point display Predictive AF <sup>(7)</sup> AF Lock AF Assist Beam Manual Focus AF Microadjustment	TTL-CT-SiR with a CMOS sensor 9 AF points (f/5.6 cross type at centre, extra sensitivity at f/2.8) EV -0.5 -18 (at 23°C & ISO100) AI Focus, One Shot, AI Servo Automatic selection, Manual selection Superimposed in viewfinder and indicated on LCD monitor Yes up to 8m Locked when shutter button is pressed half way in One Shot AF mode. Intermittent firing of built-in flash or emitted by optional dedicated Speedlite Selected on lens, default in Live View Mode No
<b>EXPOSURE CONTROL</b>	Metering modes Metering Range AE Lock Exposure Compensation AEB ISO Sensitivity <sup>(8)</sup>	TTL full aperture metering with 63-zone SPC (1) Evaluative metering (linked to all AF points) (2) Partial metering at center (approx. 9% of viewfinder) (3) Spot metering (approx. 4% of viewfinder at center) (4) Center weighted average metering EV 1-20 (at 23°C with 50mm f/1.4 lens ISO100) Auto: In 1-shot AF mode with evaluative metering exposure is locked when focus is achieved. Manual: By AE lock button in creative zone modes. +/-5 EV in 1/3 or 1/2 stop increments (can be combined with AEB). 3 shots +/- 2 EV, 1/2 or 1/3-stop increments AUTO(100-6400), 100-6400 Expandable to H (approx 12800) in 1-stop increments
<b>SHUTTER</b>	Type Speed	Electronically-controlled focal-plane shutter 30-1/4000 sec (1/2 or 1/3 stop increments), Bulb (Total shutter speed range, Available range varies by shooting mode)
<b>WHITE BALANCE</b>	Type Settings Custom White Balance WB Bracketing	Auto white balance with the imaging sensor AWB, Daylight, Shade, Cloudy, Tungsten, White Fluorescent light, Flash, Custom. White balance compensation: 1. Blue/Amber +/-9 2. Magenta/ Green +/-9 Yes, 1 setting can be registered +/-3 levels in single level increments 3 bracketed images per shutter release. Selectable Blue/Amber bias or Magenta/ Green bias.
<b>VIEWFINDER</b>	Type Coverage (Vertical/ Horizontal) Magnification Eyepoint Dioptre Correction Focusing Screen Mirror Viewfinder Information	Pentamirror Approx. 95% Approx. 0.85x <sup>(4)</sup> Approx. 19mm (from eyepiece lens centre) -3 to +1 m-1 (dioptre) Fixed Quick-return half mirror (Transmission: reflection ratio of 40:60, no mirror cut-off with EF600mm f/4 or shorter) AF information: AF points, focus confirmation light Exposure information: Shutter speed, aperture value, ISO speed (always displayed), AE lock, exposure level/compensation, spot metering circle, exposure warning, AEB Flash information: Flash ready, high-speed sync, FE lock, flash exposure compensation, red-eye reduction light Image information: Highlight tone priority (D+), monochrome shooting, maximum burst (1 digit display), White balance correction, SD card information Yes, with Depth of Field preview button. On strap
<b>LCD MONITOR</b>	Type Coverage Viewing Angle (horizontally/vertically) Coating Brightness Adjustment Display Options	Vari angle 7.7cm (3.0") 3:2 Clear View TFT, approx. 1040k dots Approx. 100% Approx 170° Dual Anti-reflection, anti smudge Adjustable to one of seven levels (1) Quick Control Screen (2) Camera settings

<b>FLASH</b>	Built-in Flash GN (ISO 100, meters) Built-in Flash Coverage Built-in Flash recycle time Modes Red-Eye Reduction X-sync Flash Exposure Compensation Flash Exposure Bracketing Flash Exposure Lock Second Curtain Synchronisation HotShoe/ PC terminal External Flash Compatibility External Flash Control	13 up to 17mm focal length (35mm equivalent: 27mm) Approx. 3 seconds Auto, Manual flash, Integrated Speedlite Transmitter Yes - with red eye reduction lamp 1/200sec +/- 2EV in 1/2 or 1/3 increments Yes, with compatible External Flash Yes Yes Yes - E-TTL with EX series Speedlites, wireless multi-flash support via camera menu screen
<b>SHOOTING</b>	Modes Picture Styles Colour Space Image Processing	Scene Intelligent Auto, No Flash, Creative Auto, Portrait, Landscape, Close-up, Sports, Night Portrait, Movie, Program AE, A-DEP, Shutter priority AE, Aperture priority AE, Manual Auto, Standard, Portrait, Landscape, Neutral, Faithful, Monochrome, User Defined (x3) sRGB and Adobe RGB Highlight Tone Priority Auto Lighting Optimizer (4 settings) Long exposure noise reduction High ISO speed noise reduction (4 settings) Auto Correction of Lens Peripheral Illumination Basic+ (Shoot by ambient selection, Shoot by lighting or scene type) Creative filters (Grainy B/W, Soft focus, Toy camera, Miniature effect, Fish-eye) - during image Playback only Single, Continuous, Self timer (2s, 10s+ remote, 10s + continuous shots 2-10) Max. Approx. 3.7fps for approx. 34 JPEG images <sup>(1)</sup> 6 images RAW <sup>(2)</sup>
<b>LIVE VIEW MODE</b>	Type Coverage Frame Rate Focusing Metering Display Options	Electronic viewfinder with image sensor Approx. 99% (horizontally and vertically) 30 fps Manual Focus (Magnify the image 5x or 10x at any point on screen) Autofocus: Quick mode, Live mode Real-time evaluative metering with image sensor Active metering time can be changed Grid overlay, Histogram
<b>FILE TYPE</b>	Still Image Type RAW+JPEG simultaneous recording Image Size	JPEG: Fine, Normal (Exif 2.30 compliant) / Design rule for Camera File system (2.0), RAW: RAW (14bit, Canon original RAW 2nd edition), Digital Print Order Format [DPOF] Version 1.1 compliant Yes, RAW + Large JPEG JPG 3:2: (L) 5184x3456, (M) 3456x2304, (S1) 2592x1728, (S2) 1920x1280, (S3) 720x480 JPG 4:3: (L) 4608x3456, (M) 3072x2304, (S1) 2304x1728, (S2) 1696x1280, (S3) 640x480 JPG 16:9: (L) 5184x2912, (M) 3456x1944, (S1) 2592x1456 (S2) 1920x1080, (S3) 720x400 JPG 1:1: (L) 3456x3456, (M) 2304x2304, (S1) 1728x1728, (S2) 1280x1280, (S3) 480x480 RAW: (RAW) 5184x3456 MOV (Video): H.264, Sound: Linear PCM) 1920 x 1080 (29.97, 25, 23.976 fps) 1280 x 720 (59.94, 50 fps) 640 x 480 (59.94, 50 fps) Max duration 29min 59sec, Max file size 4GB New folders can be manually created and selected (1) Consecutive numbering (2) Auto reset (3) Manual reset
<b>OTHER FEATURES</b>	Custom Functions Metadata Tag Intelligent Orientation Sensor Playback zoom Display Formats Slide Show Histogram Highlight Alert	11 Custom Functions with 34 settings User copyrighting information (can be set in camera) Image rating (0-5 stars) Yes 1.5x - 10x enabled in 15steps (1) Single image with information (2 levels) (2) Single image (3) 4 image index (4) 9 image index (5) Jump Display Image selection: All images, by Date, by Folder, Movies, Still Playback time: 1/2/3/5 seconds Repeat: On/Off Brightness: Yes RGB: Yes Yes

Image Erase/Protection	Erase: Single image, All images in folder, Checkmarked images, unprotected images Protection: Erase protection of one image at a time	
Menu Categories	(1) Shooting menu (x4) (2) Playback menu (x2) (3) Setup menu (x3) (4) My Menu	
Menu Languages	25 Languages English, German, French, Dutch, Danish, Portuguese, Finnish, Italian, Norwegian, Swedish, Spanish, Greek, Russian, Polish, Czech, Hungarian, Romanian, Ukrainian, Turkish, Arabic, Thai, Simplified Chinese, Traditional Chinese, Korean and Japanese	
Firmware Update	Update possible by the user.	
<b>INTERFACE</b>	Computer Other	
	Hi-Speed USB Video output (PAL/ NTSC) (integrated with USB terminal), HDMI mini output (HDMI-CEC compatible), External microphone (3.5mm Stereo mini jack)	
<b>DIRECT PRINT</b>	Canon Printers PictBridge	
<b>STORAGE</b>	Type SD card, SDHC card or SDXC card	
<b>SUPPORTED OPERATING SYSTEM</b>	PC & Macintosh Windows XP inc SP3 / Vista inc SP1 and SP2 (excl. Starter Edition) / 7 (excl. Starter Edition) OS X v10.4-10.6	
<b>SOFTWARE</b>	Browsing & Printing Image Processing Other	
	ZoomBrowser EX / ImageBrowser Digital Photo Professional PhotoStitch, EOS Utility (inc. Remote Capture), Picture Style Editor	
<b>POWER SOURCE</b>	Batteries Battery life Battery Indicator Power saving Power Supply & Battery Chargers	1 x Rechargeable Li-Ion Battery LP-E8 Approx. 440 (at 23°C, AE 50%, FE 50%) <sup>(5)</sup> Approx. 400 (at 0°C, AE 50%, FE 50%) 4 levels Power turns off after 30sec or 1, 2, 4, 8 or 15mins. AC Adapter Kit ACK-E8, Battery charger LC-E8, LC-E8E
<b>PHYSICAL SPECIFICATIONS</b>	Body Materials Operating Environment Dimensions (WxHxD) Weight (body only)	Stainless Steel and polycarbonate resin with glass fiber 0 - 40 °C, 85% or less humidity 133.1 x 99.5 x 79.7 mm Approx. 570g (CIPA testing standard, including battery and memory card)
<b>ACCESSORIES</b>	Viewfinder Wireless File Transmitter Lenses Flash Battery Grip Remote Controller/ Switch Other	Eyecup Ef, E-series Diopter Adjustment Lens with Rubber Frame Ef, Eyepiece Extender EP-EX15II, Angle Finder C Semi-Hard Case EH19-L Compatible with Eye-Fi cards All Ef and Ef-S lenses Canon Speedlites (220EX, 270EX, 270EX II, 320EX, 420EX, 430EX, 430EX II, 550EX, 580EX, 580EX II, Macro-Ring-Lite, MR-14EX, Macro Twin Lite MT-24EX, Speedlite Transmitter ST-E2) BG-E8 Remote Switch RS-60E3, Remote Controller RC-6 Hand Strap E2
All data is based on Canon standard testing methods except where indicated. Subject to change without notice.		
<ol style="list-style-type: none"> <li>Large/Fine(Quality B) resolution</li> <li>Based on Canon's testing conditions, JPEG, ISO 100, Standard Picture Style. Varies depending on the subject, memory card brand and capacity, image recording quality, ISO speed, drive mode, Picture Style, Custom functions etc.</li> <li>Compatible with large memory card capacities, including cards of 2GB and more (camera may require firmware update).</li> <li>With 50mm lens at infinity, 1m-1 dpt</li> <li>Based on the CIPA Standard and using the batteries and memory card format supplied with the camera, except where indicated</li> <li>Memory card and battery door only</li> <li>With EF300mm f/2.8L IS USM at 50kph</li> <li>Recommended Exposure Index</li> <li>Environmental protection</li> </ol>		
Some images are simulated for clarity of reproduction. All company and/or product names are trademarks and/or registered trademarks or their respective manufacturers in their markets and/or countries		

Canon Inc.  
canon.com

Canon Europe  
canon-europe.com

English Edition 0150W463  
© Canon Europa N.V., 2011

Canon Europe Ltd  
3 The Square, Stockley Park  
Uxbridge, Middlesex  
UB11 1ET, UK