



# COOLPIX®

*At the heart of the image*™

Compact Digital Camera Lineup | Spring 2012

Capture more.  
Feel more.



Capture more.  
Feel more.

Each day is filled with special moments.

Moments that move your heart and soul.

Of feelings to be remembered.

And cherished forever.

Capture more of what you see.

Capture all the emotions, too.

COOLPIX®



Creating exceptional memories everyday.

New



COOLPIX P510  
Imagine what's possible

16.1  
Megapixels | 42x  
Zoom | 3-inch  
LCD



New



COOLPIX P310  
See the light

16.1  
Megapixels | 4.2x  
Zoom | 3-inch  
LCD



New



COOLPIX S9300  
Explore new horizons

16.0  
Megapixels | 18x  
Zoom | 3-inch  
LCD



New



COOLPIX S6300  
Memories near or far

16.0  
Megapixels | 10x  
Zoom | 2.7-inch  
LCD



New



COOLPIX S4300  
Make the scene

16.0  
Megapixels | 6x  
Zoom | 3-inch  
LCD



New



COOLPIX S3300  
Give it your best shot

16.0  
Megapixels | 6x  
Zoom | 2.7-inch  
LCD



New



COOLPIX L810  
Go the distance

16.1  
Megapixels | 26x  
Zoom | 3-inch  
LCD



New



COOLPIX L26  
Ready when you are

16.1  
Megapixels | 5x  
Zoom | 3-inch  
LCD



New



COOLPIX S30  
Non-stop family fun

10.1  
Megapixels | 3x  
Zoom | 2.7-inch  
LCD



New



COOLPIX P7100  
Uncompromising creative  
portability

10.1  
Megapixels | 7.1x  
Zoom | 3-inch  
LCD



New



COOLPIX AW100  
Born to be extreme

16.0  
Megapixels | 5x  
Zoom | 3-inch  
LCD



New



COOLPIX S1200pj  
Connect and project

14.1  
Megapixels | 5x  
Zoom | 3-inch  
LCD



New



COOLPIX S100  
A sleek look, a beautiful touch

16.0  
Megapixels | 5x  
Zoom | 3.5-inch  
OLED



New



COOLPIX S8200  
Step up from ordinary to  
extraordinary

16.1  
Megapixels | 14x  
Zoom | 3-inch  
LCD



New



COOLPIX S6200  
Bring the smiles closer

16.0  
Megapixels | 10x  
Zoom | 2.7-inch  
LCD



Imagine what's possible

See the light



## COOLPIX P510

16.1 Megapixels | 42x Zoom | 3-inch LCD |



Black

Red

### 42x optical zoom and highly advanced VR image stabilization

The 42x Zoom-NIKKOR ED glass lens for the COOLPIX P510 features phenomenal focal range coverage of 24mm wide-angle to 1,000mm super-telephoto\*. Included is Vibration Reduction (VR), image stabilization technology that minimizes blur caused by camera shake and delivers sharp images when shooting. Advanced VR is critical to aid in achieving consistently sharp results, particularly when taking advantage of the super-zoom or macro.

\* 35mm format equivalent

### Backside illumination CMOS image sensor helps realize high image quality

16.1 effective megapixels of pure imaging power yields the high-resolution images you desire. Continuous shooting and compositing capabilities of the Backside illumination CMOS image sensor optimize performance when shooting at night, delivering beautiful results and reproducing the finest details.

### High-speed continuous shooting helps capture all the action

The COOLPIX P510 keeps you ahead of the action with high-speed shooting options. High-speed continuous shooting enables rapid capturing at 7-fps (approx.) for full-resolution (4608 x 3456) images\*. Other high-speed modes include Sports continuous mode (approx. 60fps/120fps) and the Pre-shooting cache.

\* Up to five consecutive images

### GPS geotagging and logging function

A high-performance GPS system records location data for each shot, and can also log your movement even when you're not taking pictures. Add a new dimension to photographic fun with geo-tagging! Track your progress as you explore and record the location of that great image. There's also an Electronic compass to record the camera's orientation so you can later view the direction, along with location data, for each shot.

### Optimized controls and designed for efficient handling

 Versatile reach and range is enhanced by a 3-inch Vari-angle 921k-dot (approx.) high-resolution Clear color display. Tilt the display as much as 90° (approx.) upward or 82° (approx.) downward. The handgrip is designed to help minimize camera shake. A side zoom control stabilizes handling.



### Other features

- EXPEED C2 image processing engine
- COOLPIX Picture Control
- Silhouette and High ISO monochrome effects added to the lineup of available Special effects
- Enhanced Scene auto selector

- Full 1080p HD movie recording with stereo sound and capability to capture still images
- 16 optimized scene modes
- Charge camera using included USB AC adapter
- Eye-Fi™ card support

Note: Images shown on this page are simulated.



The iFrame logo and the iFrame symbol are trademarks of Apple Inc. Products and services are trademarks or registered trademarks of their respective companies. iMovie, Mac, and the Mac logo are trademarks of Apple Inc., registered in the U.S. and other countries. The Works with iMovie logo is a trademark of Apple Inc.



## COOLPIX P310

16.1 Megapixels | 4.2x Zoom | 3-inch LCD |



Black

### Bright f/1.8, 24mm wide-angle lens and highly advanced VR image stabilization

A specially crafted f/1.8 zoom NIKKOR lens, which includes the use of High refractive index glass elements, yields sharp images with high contrast. Its design also helps achieve a highly compact form factor. The lens' fast aperture, 4.2x optical zoom and 24 mm wide-angle coverage\* expand creative possibilities, particularly when shooting indoors or at night. Newly advanced Lens-shift VR image stabilization helps consistently sharp results by realizing the equivalent of using a faster shutter speed setting to effectively compensate for camera shake.

\* 35mm format equivalent

### Backside illumination CMOS image sensor helps realize high image quality

With 16.1 effective-megapixels of pure imaging power, you get the high-resolution images desired. The continuous shooting capabilities of the Backside illumination CMOS image sensor optimize performance for photography at night, delivering beautiful results and reproducing the fine details.

### Full HD 1080p movie recording with stereo sound

 Record Full HD 1080p movies with stereo sound at the press of a button. Operate the 4.2x zoom while recording to better realize your vision for the scene. The highlight digest function groups together in order all movie files made during a single session. A built-in HDMI mini connector enables output to HDTV.\*

\* HDMI cable sold separately

### Other features

- Enhanced Scene auto selector
- Full HD 1080p movie recording with stereo sound
- 19 optimized scene modes
- Charge camera using included USB AC adapter
- Eye-Fi™ card support

Note: Images shown on this page are simulated.



The iFrame logo and the iFrame symbol are trademarks of Apple Inc. Products and services are trademarks or registered trademarks of their respective companies. iMovie, Mac, and the Mac logo are trademarks of Apple Inc., registered in the U.S. and other countries. The Works with iMovie logo is a trademark of Apple Inc.



## Make the scene



## COOLPIX S4300

**16.0 Megapixels** | **6x Zoom** | **3-inch LCD** |



### High-performance zoom and VR image stabilization

A 6x Zoom-NIKKOR lens with 26mm wide-angle coverage\* is paired with the advantage of Nikon's Lens-shift VR image stabilization to help consistently capture sharp and beautiful pictures.

\* 35mm format equivalent

### Intuitive touch-control wrapped in ultra-slim elegance

A 3-inch 460k-dot (approx.) touch-control LCD is housed within a fashionably slim body that fits perfectly in your hand. The touch-control maximizes fun and efficiency, whether navigating menus or enjoying streamlined control during shooting and playback.

### 720p movie

Record 720p movies with zoom and auto focus.

### Special effects and Filter effects

Enhance your images with unique artistic expression by applying one of the Soft, High key, Low key, Nostalgic sepia, Selective color or High-contrast monochrome Special effects when shooting pictures or movies. Or apply one of the in-camera Filter effects such as Fisheye, Miniature effect, Selective color, Soft, Cross screen, Color options or Painting to shots already taken and add a creative touch.

#### Filter effects



Soft



Miniature effect



Cross screen



Selective color

### Other features

- EXPEED C2 image processing engine
- Smart portrait system
- Scene auto selector

- Subject tracking
- Eye-Fi™ card support

- 19 optimized scene modes
- Charge camera using included USB AC adapter

Note: Images shown on this page are simulated.

## Give it your best shot



## COOLPIX S3300

**16.0 Megapixels** | **6x Zoom** | **2.7-inch LCD** |



### Versatility and image quality with 6x zoom and Lens-shift VR image stabilization

A 6x Zoom-NIKKOR lens with 26mm wide-angle coverage\* is paired with the advantages of Nikon's Lens-shift VR image stabilization to help consistently capture sharp and beautiful pictures.

\* 35mm format equivalent

### Ultra-slim body



Elegant styling and a 0.8 inch (19.5 mm) ultra-slim body deliver function and advanced performance. Available in several colors to best match your personal style.

### Fun Scene auto selector

Make the best photos while letting the camera select the right Scene mode for you. Select from Portrait, Night portrait, Night landscape, Landscape, Backlighting and Macro.

### Add a creative touch with Special effects and Filters

Apply Special effects when shooting pictures or movies to explore your own unique artistic expression. Try Soft, High key, Low key, Nostalgic sepia, Selective color, or High-contrast monochrome effects. In-camera Filter effects bring the ability to add a creative touch to shots already taken.

#### Special effects



High key



Nostalgic sepia



Selective color

#### Filter effects



Miniature effect



Cross screen



Painting



## Go the distance

### COOLPIX L810

16.1 Megapixels | 26x Zoom | 3-inch LCD |



#### Wide-angle 26x zoom with VR image stabilization

It's hard to imagine such a delightfully compact body could house a powerful 26x optical zoom NIKKOR lens with 22.5 mm wide-angle to 585 mm super-telephoto coverage.\* Outstanding range and reach makes it as easy to frame a large group or broad vista as it is to zoom right in and capture an extreme close-up from a distance.

\*35mm format equivalent

#### Engineered to ensure consistently sharper results



Nikon's Lens-shift VR image stabilization compensates for camera shake to help ensure sharper results. The handgrip is designed to help ensure a firm hold and minimize camera shake. A side zoom control facilitates more stable handling.

#### 720p movie with stereo

Record at 30 fps with zoom, autofocus and stereo sound. A mic input jack allows for optional microphone to be used during recording, and HDMI\* output allows easy in-camera playback or convenient playback on HDTV or computer.

\* HDMI cable sold separately

#### Easy auto mode and 3-inch high-resolution LCD monitor

Easy auto mode permits you to simply turn on the camera and start shooting; the camera determines the best settings for the environment. To enhance the experience, use the 3-inch 921k-dot (approx.) high-resolution TFT LCD monitor, which offers highly visible and sharp display whether viewing indoors or out.

##### Easy auto mode



## Ready when you are




### COOLPIX L26

16.1 Megapixels | 5x Zoom | 3-inch LCD |



#### Easy auto mode and bright 3-inch TFT LCD monitor

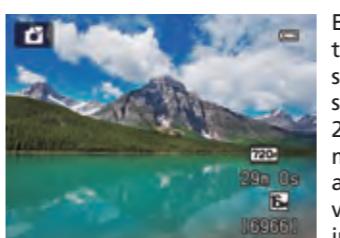

Easy auto mode lets you simply turn on the camera and start shooting. Helping with the shooting process is a 3-inch 230k-dot (approx.) TFT LCD monitor with brightness adjustment that offers highly visible, sharp views whether indoors or out.

#### 720p movie with sound

Record at 30 fps with one press of the dedicated button on the back of the camera.

#### 16.1 effective megapixels of pure imaging power

The 16.1 effective-megapixel CCD image sensor yields high-resolution images that reproduce the finest details with ample leeway for creative cropping. Nikon's EXPEED C2 image processing engine renders pictures quickly and faithfully, while ensuring optimum speed and efficiency.



#### 5x zoom with wide-angle capability

With focal range coverage from 26mm to 130mm telephoto\*, the 5x optical Zoom-NIKKOR lens makes shooting everything from group pictures and architecture, to expressive close-ups from a distance, simple and fast.

\*35mm format equivalent

#### Other features

- Powered by commonly available AA-size/R6 batteries
- Smart portrait system
- 19 optimized scene modes
- 3D photography

- Eye-Fi™ card support
- Pet portrait mode

Note: Images shown on this page are simulated.

#### Other features

- Powered by commonly available AA-size/R6 batteries
- Smart portrait system
- 18 optimized scene modes
- Electronic VR image stabilization
- Eye-Fi™ card support

Note: Images shown on this page are simulated.

## Non-stop family fun



## COOLPIX S30

**10.1 Megapixels | 3x Zoom | 2.7-inch LCD** | \*

Blue ■ Pink ■ White



### Waterproof and shockproof\*\*

Shoot with confidence! \*\*Built to resist shock when dropped from heights of about 2.6 feet, and able to withstand depths of about 9.8 feet plus resist dirt, the COOLPIX S30 is the compact camera that welcomes all hands. It's perfectly safe to use this camera at the pool and around water.



### Large buttons, simple layout and user-friendly interface

The COOLPIX S30 features a unique symmetrical design with buttons placed and sized for maximum ease of use. The large LCD monitor offers a clear view of the interface, which is designed to be easy to understand. And the camera goes from power-up to either still image or movie shooting mode with one press of dedicated buttons.



Power switch  
Movie-record button  
Shutter-release button




### Other features

- 10.1 effective-megapixel CCD image sensor
- EXPEED C2 image processing engine
- 720p movie recording
- 10 optimized scene modes
- Change colors (Creative slider/Color options)

Note: Images shown on this page are simulated.  
\*Available as 'Point and Shoot' on this model



## Uncompromising creative portability

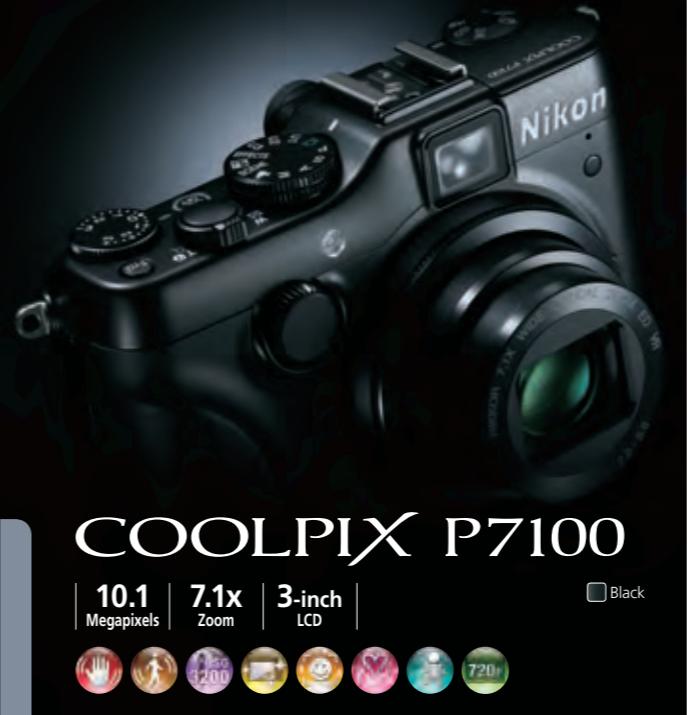

## COOLPIX P7100

**10.1 Megapixels | 7.1x Zoom | 3-inch LCD** |



### Other features

- Virtual horizon display
- Enhanced NRW (RAW) file format support
- Zoom memory (quick switch between seven preset focal lengths)


- Tone level information for quick and precise image adjustment

- Versatile Exposure and White balance bracketing functions
- Optional WC-E75A wide-angle converter lens

Note: Images shown on this page are simulated.

## Manual control puts you in charge

P, S, A and M exposure modes and Control options put you in charge of capture and create. COOLPIX Picture Control, HDR, special effects and filter effects further expand your creative vision. Customize camera functions to match your shooting style. Use the COOLPIX P7100 to bring out your inner artist and unique view of the world.

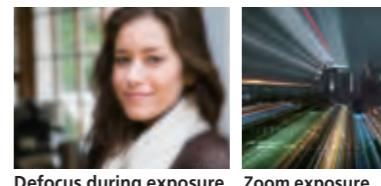

Defocus during exposure



Zoom exposure



Cross process

## 3-inch Vari-angle 921,000-dot high-resolution display



The Vari-angle VGA display frees you to shoot creatively from difficult angles and unusual vantage points. Clear color display technology, anti-reflection coating and brightness adjustment maximize viewing quality, whether indoors or out.

### 720p movie with stereo sound

Record at 24 fps with zoom, autofocus and stereo sound. A mic input jack allows for optional microphone to be used during recording, and HDMI\* output allows easy in-camera playback or convenient playback on HDTV or computer.

\* HDMI cable sold separately

- 720p
- Record at 24 fps with zoom, autofocus and stereo sound. A mic input jack allows for optional microphone to be used during recording, and HDMI\* output allows easy in-camera playback or convenient playback on HDTV or computer.
- Tone level information for quick and precise image adjustment
- Versatile Exposure and White balance bracketing functions
- Optional WC-E75A wide-angle converter lens



## COOLPIX AW100

**16.0 Megapixels | 5x Zoom | 3-inch LCD** |



The iFrame logo and the iFrame symbol are trademarks of Apple Inc. Products and brand names are trademarks or registered trademarks of their respective companies. iMovie, Mac, and the Mac logo are trademarks of Apple Inc., registered in the U.S. and other countries. The Works with iMovie logo is a trademark of Apple Inc.

## Waterproof, shockproof, freezeproof\*

Enjoy shooting Nikon quality still photos and Full HD 1080p movies wherever life takes you. \*This can include diving to depths of up to 33 feet, drops of up to 5 feet, and temperatures as cold as 14° F. Whether snowboarding or scuba diving, press the one-touch movie record button and explore new ways to capture all the action with a camera that's as rugged and capable as you.

## GPS geotagging and World map display

Say you're white water rafting and wish to track your progress by recording the journey with great pictures and videos. Despite freezing water and a grueling ride, the COOLPIX AW100 meets the challenge, right down to the GPS and Electronic compass functionality that record location, track routes and display results on the built-in world map function.



Electronic compass

## Full HD 1080p movie recording with stereo sound

Record Full HD 1080p movies with stereo sound at the press of a button. Operate the 5x zoom while recording to better realize your vision for the scene. A built-in HDMI mini connector enables output to HDTV.\*

\* HDMI cable sold separately

### Other features

- 3-inch high-resolution 460k-dot (approx.) Clear color display
- EXPEED C2 image processing engine
- 16.0 effective-megapixel
- Backside illumination CMOS image sensor
- Combination of Lens shift and Electronic VR
- Easy auto mode
- Smart portrait system
- 19 optimized scene modes

Note: Images shown on this page are simulated.



# COOLPIX PREMIUM FEATURES

## Image Stabilization



**VR Image Stabilization** All models

Nikon VR (Vibration reduction) image stabilization technologies help achieve beautifully clear results by producing blur-free images when shooting in low light or unsteady conditions.



**Motion Detection** All models

Motion detection automatically selects a faster shutter speed and higher ISO (light sensitivity) setting to compensate for subject movement or camera shake.




**High Sensitivity** All models

High ISO capability helps capture subjects beautifully in low light, without compromising natural light or requiring long exposure time. By enabling the selection of faster shutter speeds, it also makes it easier to capture fast-moving subjects with greater clarity.



**Backside illumination CMOS Sensor** P510 | P310 | S9300 | S6300  
AW100 | S100 | S8200

Back illuminated structure improves image sensor sensitivity and noise reduction to realize highly capable shooting of night scenes or dark indoor situations.

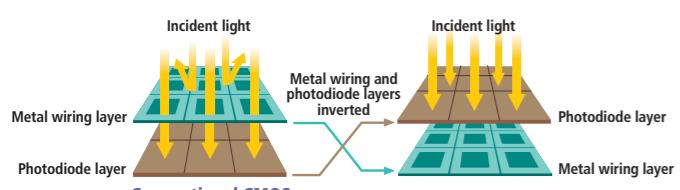

**Clear Color Display** P510 | P310 | S9300 | S4300 | L810  
P7100 | AW100 | S1200p | S100 | S8200

Nikon's innovative Clear color display technology improves visibility for a more vivid, clearer image preview and playback.



**Touch Screen** S4300 | S100

Simply touch the screen to select your subject, lock autofocus and exposure, zoom in for close-ups, or to scroll through and select images for viewing.



Each of the advanced functions of the Smart portrait system is designed to help produce consistently great portraits.

**Skin Softening**

**Face-Priority AF**

**Smile Timer**

**Blink Warning**

**Blink Proof**

All models

All models

All models

All models

L26 | S30 | AW100 | S1200p | S6200

**In-Camera Red-Eye Fix**

All models



**Scene Auto Selector/  
Easy Auto Mode**

All models

These functions provide quick, carefree picture-taking in a variety of situations by determining the subject and surrounding conditions, and then automatically selecting the appropriate scene mode for the shot.\*



\*Available as 'Point and Shoot' on the S30



**Subject Tracking**

P510 | P310 | S9300 | S6300 | S4300 | S3300  
P7100 | AW100 | S1200p | S100 | S8200 | S6200

Subject tracking enhances your shooting experience by following the movement of your subject.



**Full HD Movie**

P510 | P310 | S9300 | S6300  
AW100 | S100 | S8200



**720p Movie**

S4300 | S3300 | L810  
L26 | S30 | P7100 | S1200p | S6200

COOLPIX cameras that carry the 720p logo can record at 1,280 x 720 pixels (720p). Those marked with the Full HD logo can record at 1,920 x 1,080 pixels (1080p).



**Projector**

S1200p


Project your favorite photos or movie clips on a large surface individually or as slide shows complete with music and added effects.



**Rugged Reliability**

S30 | AW100

Water-resistant, shock resistant, and weather-resistant COOLPIX models are built tough enough to serve well while enjoying outdoor activities at any time of the year.



**Built-in GPS**

P510 | S9300 | AW100

A high-performance GPS chip records the latitude and longitude locating where each picture was taken.



**Built-in World Map**

AW100

Offers a handy reference by displaying the location where pictures were taken, or the route defined by log records made using the GPS chip.



**3D Photography**

P510 | P310 | S9300 | S6300 | L810 | S100

3D image shooting capability makes it easy to create composite images that achieve realistic playback on 3D-capable TVs and computers.



## Specifications

	<b>New</b> 	<b>New</b> 	<b>New</b> 	<b>New</b> 	<b>New</b> 
<b>Effective pixels</b>	16.1 million	16.1 million	16.0 million	16.0 million	16.0 million
<b>Lens</b>	42x zoom NIKKOR; 4.3-180 mm (35mm [135] format angle of view: 24-1000 mm); f/3.5-9; Digital zoom: up to 2x (35mm [135] format angle of view: Approx. 2000 mm)	4.2x zoom NIKKOR; 4.3-17.9 mm (35mm [135] format angle of view: 24-100 mm); f/3.8-4.9; Digital zoom: up to 4x (35mm [135] format angle of view: Approx. 200 mm)	18x zoom NIKKOR; 4.5-81.0 mm (35mm [135] format angle of view: 25-450 mm); f/3.5-5.9; Digital zoom: up to 4x (35mm [135] format angle of view: Approx. 1800 mm)	10x zoom NIKKOR; 4.5-45.0 mm (35mm [135] format angle of view: 25-250 mm); f/3.2-5.8; Digital zoom: up to 4x (35mm [135] format angle of view: Approx. 1000 mm)	6x zoom NIKKOR; 4.6-27.6 mm (35mm [135] format angle of view: 26-156 mm); f/3.5-6.5; Digital zoom: up to 4x (35mm [135] format angle of view: Approx. 624 mm)
<b>Focus range (from lens)</b>	1 ft 8 in. (50 cm) to infinity (∞), Macro close-up mode: 0.4 in. (1 cm) to infinity (∞)	1 ft (30 cm) to infinity (∞), Macro close-up mode: 0.8 in. (2 cm) to infinity (∞)	1 ft 8 in. (50 cm) to infinity (∞), Macro mode: 1.6 in. (4 cm) to infinity (∞)	1 ft 8 in. (50 cm) to infinity (∞), Macro mode: 4 in. (10 cm) to infinity (∞)	1 ft 8 in. (50 cm) to infinity (∞), Macro mode: 2 in. (5 cm) to infinity (∞)
<b>Monitor</b>	3-in., approx. 921k-dot, wide-viewing angle TFT LCD with anti-reflection coating	3-in., approx. 921k-dot, wide-viewing angle TFT LCD with anti-reflection coating	3-in., approx. 921k-dot, wide-viewing angle TFT LCD with anti-reflection coating	2.7-in., approx. 230k-dot, TFT LCD with anti-reflection coating	3-in., approx. 460k-dot, TFT LCD with touch screen control and anti-reflection coating
<b>Storage media</b>	SD/SDHC/SDXC memory card* <sup>3</sup>	SD/SDHC/SDXC memory card* <sup>3</sup>	SD/SDHC/SDXC memory card* <sup>3</sup>	SD/SDHC/SDXC memory card* <sup>3</sup>	SD/SDHC/SDXC memory card* <sup>3</sup>
<b>ISO sensitivity</b>	ISO 100, 200, 400, 800, 1600, 3200, Hi1 (equivalent to 6400), Auto (auto gain ISO 100-1600), Fixed range auto (ISO 100-400, 100-800), Hi2 (equivalent to 12800) (High ISO monochrome in special effect mode)	ISO 100, 200, 400, 800, 1600, 3200, Hi1 (equivalent to 6400), Auto (auto gain ISO 100-1600), Fixed range auto (ISO 100-400, 100-800), Hi2 (equivalent to 12800) (High ISO monochrome in special effect mode)	ISO 125, 200, 400, 800, 1600, 3200, Auto (auto gain ISO 125-1600), Fixed range auto (ISO 125-400, 125-800)	ISO 125, 200, 400, 800, 1600, 3200, Auto (auto gain ISO 125-1600), Fixed range auto (ISO 125-400, 125-800)	ISO 80, 100, 200, 400, 800, 1600, 3200, Auto (auto gain ISO 80-1600), Fixed range auto (ISO 80-400, 80-800)
<b>Power sources</b>	Rechargeable Li-ion Battery EN-EL5, Charging AC Adapter EH-69P	Rechargeable Li-ion Battery EN-EL12, Charging AC Adapter EH-69P	Rechargeable Li-ion Battery EN-EL12, Charging AC Adapter EH-69P	Rechargeable Li-ion Battery EN-EL12, Charging AC Adapter EH-69P	Rechargeable Li-ion Battery EN-EL19, Charging AC Adapter EH-69P
<b>Optional</b>	AC Adapter EH-62A, Battery Charger MH-61	AC Adapter EH-62F, Battery Charger MH-65	AC Adapter EH-62F, Battery Charger MH-65	AC Adapter EH-62F, Battery Charger MH-65	AC Adapter EH-62G, Battery Charger MH-66
<b>Battery life*<sup>1</sup></b>	Approx. 240 shots with EN-EL5 battery	Approx. 230 shots with EN-EL12 battery	Approx. 200 shots with EN-EL12 battery	Approx. 230 shots with EN-EL12 battery	Approx. 180 shots with EN-EL19 battery
<b>Dimensions (W x H x D)</b>	Approx. 4.8 x 3.3 x 4.1 in. (119.8 x 82.9 x 102.2 mm) excluding projections* <sup>2</sup>	Approx. 4.1 x 2.3 x 1.3 in. (103.0 x 58.3 x 32.0 mm) excluding projections* <sup>2</sup>	Approx. 4.3 x 2.5 x 1.3 in. (108.7 x 62.3 x 30.6 mm) excluding projections* <sup>2</sup>	Approx. 3.7 x 2.3 x 1.1 in. (93.6 x 57.7 x 26.0 mm) excluding projections* <sup>2</sup>	Approx. 3.8 x 2.4 x 0.9 in. (95.5 x 58.9 x 20.8 mm) excluding projections* <sup>2</sup>
<b>Weight</b>	Approx. 1 lb 3.6 oz (555 g) with battery and SD memory card* <sup>2</sup>	Approx. 6.9 oz (194 g) with battery and SD memory card* <sup>2</sup>	Approx. 7.6 oz (215 g) with battery and SD memory card* <sup>2</sup>	Approx. 5.7 oz (160 g) with battery and SD memory card* <sup>2</sup>	Approx. 5.0 oz (139 g) with battery and SD memory card* <sup>2</sup>

\*1 Based on CIPA industry standard for measuring life of camera batteries. Measured at 73° F (23° C), zoom adjusted with each shot, built-in flash fired with every other shot, image mode set to Normal.

\*2 Focus range (from the protective glass).

\*3 Not compatible with Multi Media Cards (MMC).

\*4 Setting is available only for image sizes of 4M (2,272 x 1,704) or 2M (1,600 x 1,200) or VGA (640 x 480).

\*5 In case of using four AA Energizer® Ultimate Lithium batteries.

\*6 In case of using two AA Energizer® Ultimate Lithium batteries.

\*7 Method of noting dimensions and weight is in accordance with CIPA DCG-005-2009 guideline.

Note: Camera lineup and color availability may vary according to region.

## Specifications

	 New COOLPIX S3300	 New COOLPIX L810	 New COOLPIX L26	 New COOLPIX S30	 New COOLPIX P7100					
<b>Effective pixels</b>	16.0 million	16.1 million	16.1 million	10.1 million	10.1 million	16.0 million	14.1 million	16.0 million	16.1 million	16.0 million
<b>Lens</b>	6x zoom NIKKOR; 4.6-27.6 mm (35mm [135] format angle of view: 26-156 mm); f/3.5-6.5; Digital zoom: up to 4x (35mm [135] format angle of view: Approx. 624 mm)	26x zoom NIKKOR; 4.0-104 mm (35mm [135] format angle of view: 22.5-585 mm); f/3.1-5.9; Digital zoom: up to 4x (35mm [135] format angle of view: Approx. 2340 mm)	5x zoom NIKKOR; 4.6-23.0 mm (35mm [135] format angle of view: 26-130 mm); f/3.2-6.5; Digital zoom: up to 4x (35mm [135] format angle of view: Approx. 520 mm)	3x zoom NIKKOR; 4.1-12.3 mm (35mm [135] format angle of view: 29.1 - 87.3 mm); f/3.3-5.9; Digital zoom: up to 4x (35mm [135] format angle of view: Approx. 349 mm)	7.1x zoom NIKKOR; 6.0-42.6 mm (35mm [135] format angle of view: 28-200 mm); f/2.8-5.6; Digital zoom: up to 4x (35mm [135] format angle of view: Approx. 800 mm)	5x zoom NIKKOR; 5.0-25.0 mm (35mm [135] format angle of view: 28-140 mm); f/3.9-4.8; Digital zoom: up to 4x (35mm [135] format angle of view: Approx. 560 mm)	5x zoom NIKKOR; 5.0-25.0 mm (35mm [135] format angle of view: 28-140 mm); f/3.9-4.8; Digital zoom: up to 4x (35mm [135] format angle of view: Approx. 560 mm)	5x zoom NIKKOR; 5.0-25.0 mm (35mm [135] format angle of view: 25-350 mm); f/3.3-5.9; Digital zoom: up to 2x (35mm [135] format angle of view: Approx. 560 mm)	14x zoom NIKKOR; 4.5-63.0 mm (35mm [135] format angle of view: 25-250 mm); f/3.2-5.8; Digital zoom: up to 4x (35mm [135] format angle of view: Approx. 700 mm)	10x zoom NIKKOR; 4.5-45.0 mm (35mm [135] format angle of view: 25-250 mm); f/3.2-5.8; Digital zoom: up to 4x (35mm [135] format angle of view: Approx. 1000 mm)
<b>Focus range (from lens)</b>	1 ft 8 in. (50 cm) to infinity (∞), Macro mode: 2 in. (5 cm) to infinity (∞)	1 ft 8 in. (50 cm) to infinity (∞), Macro mode: 0.4 in. (1 cm) to infinity (∞)	1 ft 8 in. (50 cm) to infinity (∞), Macro mode: 4 in. (10 cm) to infinity (∞)	1 ft (30 cm) to infinity (∞), Shoot close-ups/Shoot under water/Photograph food/ Highlight colors/Take soft pictures/Create a diorama effect: 2 in. (5 cm) to infinity (∞) <sup>2</sup>	1 ft 8 in. (50 cm) to infinity (∞), Macro close-up mode: 0.8 in. (2 cm) to infinity (∞)	1 ft 8 in. (50 cm) to infinity (∞), Macro mode: 0.4 in. (1 cm) to infinity (∞)	1 ft 8 in. (50 cm) to infinity (∞), Macro mode: 1.2 in. (3 cm) to infinity (∞)	1 ft 8 in. (50 cm) to infinity (∞), Macro mode: 0.4 in. (1 cm) to infinity (∞)	1 ft 8 in. (50 cm) to infinity (∞), Macro mode: 0.4 in. (1 cm) to infinity (∞)	1 ft 8 in. (50 cm) to infinity (∞), Macro mode: 4.0 in. (10 cm) to infinity (∞)
<b>Monitor</b>	2.7-in., approx. 230k-dot, TFT LCD with anti-reflection coating	3-in., approx. 921k-dot, wide-viewing angle TFT LCD with anti-reflection coating	3-in., approx. 230k-dot, TFT LCD	2.7-in., approx. 230k-dot, TFT LCD	3-in., approx. 921k-dot, wide-viewing angle, vari-angle TFT LCD with anti-reflection coating	3-in., approx. 460k-dot, wide-viewing angle TFT LCD with anti-reflection coating	3-in., approx. 460k-dot, TFT LCD with anti-reflection coating	3.5-in., approx. 820k-dot, wide-viewing angle OLED monitor with touch screen control and anti-reflection coating	3-in., approx. 921k-dot, wide-viewing angle TFT LCD with anti-reflection coating	2.7-in., approx. 230k-dot, TFT LCD with anti-reflection coating
<b>Storage media</b>	SD/SDHC/SDXC memory card <sup>*3</sup>	SD/SDHC/SDXC memory card <sup>*3</sup>	SD/SDHC/SDXC memory card <sup>*3</sup>	SD/SDHC/SDXC memory card <sup>*3</sup>	SD/SDHC/SDXC memory card <sup>*3</sup>	SD/SDHC/SDXC memory card <sup>*3</sup>	SD/SDHC/SDXC memory card <sup>*3</sup>	SD/SDHC/SDXC memory card <sup>*3</sup>	SD/SDHC/SDXC memory card <sup>*3</sup>	SD/SDHC/SDXC memory card <sup>*3</sup>
<b>ISO sensitivity</b>	ISO 80, 100, 200, 400, 800, 1600, 3200 <sup>*4</sup> , Auto (auto gain ISO 80-1600), Fixed range auto (ISO 80-400, 80-800)	ISO 80, 100, 200, 400, 800, 1600, Auto (auto gain ISO 80-1600)	Auto (auto gain ISO 80-1600)	Auto (auto gain ISO 80-1600)	ISO 100, 200, 400, 800, 1600, 3200, Hi 1 (equivalent to 6400), Auto (auto gain ISO 100-800), High ISO sensitivity auto (ISO 100-1600), Fixed range auto (ISO 100-200, 100-400), Low noise night mode (ISO 400-12800)	ISO 125, 200, 400, 800, 1600, 3200, Auto (auto gain ISO 125-800), Fixed range auto (ISO 125-400)	ISO 80, 100, 200, 400, 800, 1600, 3200, 6400, Auto (auto gain ISO 80-800), Fixed range auto (ISO 80-200, 80-400)	ISO 125, 200, 400, 800, 1600, 3200, Auto (auto gain ISO 125-800), Fixed range auto (ISO 125-400)	ISO 100, 200, 400, 800, 1600, 3200, Auto (auto gain ISO 100-1600), Fixed range auto (ISO 100-400, 100-800), High-speed continuous (ISO 100-1600)	ISO 80, 100, 200, 400, 800, 1600, 3200, Auto (auto gain ISO 80-1600), Fixed range auto (ISO 80-400, 80-800)
<b>Power sources</b>	<b>Supplied</b>	Rechargeable Li-ion Battery EN-EL19, Charging AC Adapter EH-69P	Four LR6/L40 (AA-size) alkaline batteries	Two LR6/L40 (AA-size) alkaline batteries	Two LR6/L40 (AA-size) alkaline batteries	Rechargeable Li-ion Battery EN-EL14, Battery Charger MH-24	Rechargeable Li-ion Battery EN-EL12, Battery Charger MH-65	Rechargeable Li-ion Battery EN-EL12, Charging AC Adapter EH-69P	Rechargeable Li-ion Battery EN-EL19, Charging AC Adapter EH-69P	Rechargeable Li-ion Battery EN-EL12, Charging AC Adapter EH-69P
	<b>Optional</b>	AC Adapter EH-62G, Battery Charger MH-66	Four FR6/L91 (AA-size) lithium batteries, Four EN-MH2 rechargeable Ni-MH batteries, AC Adapter EH-67, Battery Charger MH-73	Two FR6/L91 (AA-size) lithium batteries, Two EN-MH2 rechargeable Ni-MH batteries, AC Adapter EH-65A, Battery Charger MH-72/MH-73	Two FR6/L91 (AA-size) lithium batteries, Two EN-MH2 rechargeable Ni-MH batteries, AC Adapter EH-5b with Power Connector EP-5A	AC Adapter EH-62F	AC Adapter EH-62F, Battery Charger MH-65	AC Adapter EH-62F, Battery Charger MH-66	AC Adapter EH-62F, Battery Charger MH-65	AC Adapter EH-62F, Battery Charger MH-65
<b>Battery life<sup>*1</sup></b>	Approx. 210 shots with EN-EL19 battery	Approx. 300 shots with alkaline, 740 shots with lithium <sup>*5</sup> , or 450 shots with EN-MH2 battery	Approx. 200 shots with alkaline, 680 shots with lithium <sup>*6</sup> , or 350 shots with EN-MH2 battery	Approx. 240 shots with alkaline, 700 shots with lithium <sup>*6</sup> , or 410 shots with EN-MH2 battery	Approx. 350 shots with EN-EL14 battery	Approx. 250 shots with EN-EL12 battery	Approx. 220 shots with EN-EL12 battery	Approx. 150 shots with EN-EL19 battery	Approx. 250 shots with EN-EL12 battery	Approx. 250 shots with EN-EL12 battery
<b>Dimensions (W x H x D)</b>	Approx. 3.8 x 2.3 x 0.8 in. (94.8 x 57.8 x 19.5 mm) excluding projections <sup>*7</sup>	Approx. 4.4 x 3.1 x 3.3 in. (111.1 x 76.3 x 83.1 mm) excluding projections <sup>*7</sup>	Approx. 3.8 x 2.4 x 1.2 in. (96.0 x 59.7 x 28.8 mm) excluding projections <sup>*7</sup>	Approx. 4.1 x 2.6 x 1.6 in. (101.9 x 64.8 x 39.4 mm) excluding projections <sup>*7</sup>	Approx. 4.6 x 3.1 x 1.9 in. (116.3 x 76.9 x 48.0 mm) excluding projections <sup>*7</sup>	Approx. 4.4 x 2.6 x 0.9 in. (110.1 x 64.9 x 22.8 mm) excluding projections <sup>*7</sup>	Approx. 4.3 x 2.5 x 0.9 in. (107.0 x 63.4 x 22.6 mm) excluding projections <sup>*7</sup>	Approx. 3.9 x 2.6 x 0.8 in. (99.0 x 65.2 x 18.1 mm) excluding projections <sup>*7</sup>	Approx. 4.1 x 2.4 x 1.3 in. (103.7 x 59.3 x 32.7 mm) excluding projections <sup>*7</sup>	Approx. 3.7 x 2.3 x 1.0 in. (93.0 x 56.7 x 25.4 mm) excluding projections <sup>*7</sup>
<b>Weight</b>	Approx. 4.6 oz (128 g) with battery and SD memory card <sup>*7</sup>	Approx. 15.2 oz (430 g) with battery and SD memory card <sup>*7</sup>	Approx. 5.8 oz (164 g) with battery and SD memory card <sup>*7</sup>	Approx. 7.6 oz (214 g) with battery and SD memory card <sup>*7</sup>	Approx. 14.0 oz (395 g) with battery and SD memory card <sup>*7</sup>	Approx. 6.3 oz (178 g) with battery and SD memory card <sup>*7</sup>	Approx. 6.6 oz (186 g) with battery and SD memory card <sup>*7</sup>	Approx. 4.9 oz (138 g) with battery and SD memory card <sup>*7</sup>	Approx. 7.6 oz (213 g) with battery and SD memory card <sup>*7</sup>	Approx. 5.7 oz (160 g) with battery and SD memory card <sup>*7</sup>

\*1 Based on CIPA industry standard for measuring life of camera batteries. Measured at 73° F(23°C); zoom adjusted with each shot, built-in flash fired with every other shot, image mode set to Normal.

\*2 Focus range (from the protective glass).

\*3 Not compatible with Multi Media Cards (MMC).

\*4 Setting is available only for image sizes of 4M (2272 x 1704) or 2M (1600 x 1200) or VGA (640 x 480).

\*5 In case of using four AA Energizer® Ultimate Lithium batteries.

\*6 In case of using two AA Energizer® Ultimate Lithium batteries.

\*7 Method of noting dimensions and weight is in accordance with CIPA DCG-005-2009 guideline.

Note: Camera lineup and color availability may vary according to region.

## ■ Innovation for Imaging Excellence



### NIKKOR®

NIKKOR lenses have long met the exacting standards of top professional photographers. And they continue to demonstrate Nikon's total commitment to craftsmanship and reliability in today's world of digital photography.



### EXPEED C2

EXPEED C2 continues to expand the possibilities of photography with improved levels of high image quality, fine detail and processing speed. Engineered to deliver optimal performance on each COOLPIX model, the latest evolution of Nikon's renowned digital image processing engine helps ensure beautiful photographs of every scene you shoot.

[www.nikonusa.com](http://www.nikonusa.com)



#### Versatile ViewNX 2

Each COOLPIX camera includes a CD-ROM that contains exclusive Nikon software or installer designed to make photography more fun.

### my Picturetown

Bring Your Circle Closer.  
<http://mypicturtown.com>

2GB FREE storage with my Picturetown  
The secure, safe, photo and video storage and sharing service brought to you by Nikon.  
Sign up Now!

Nikon  
PHOTO CONTEST  
INTERNATIONAL  
Since 1969  
2010 - 2011

<http://www.nikon-ncpi.com>



FotoNation™

ArcSoft®

SD™  
XC

CERTIFIED  
USB

HDMI™  
HIGH-DEFINITION MULTIMEDIA INTERFACE

NAVTEQ  
MAPS.

POWERED BY  
ZENRIN

PICTURE BY  
DLP®  
TEXAS INSTRUMENTS

Microsoft®, Windows®, Windows Vista™, and Windows® 7 are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. Macintosh®, Mac® OS and QuickTime® are either registered trademarks or trademarks of Apple Inc. in the United States and/or other countries. The SDXC logo is a registered trademark of SD-3C, LLC in the United States and/or other countries. PictBridge is a trademark. The FotoNation logo is a trademark. "ZENRIN" is a registered trademark of ZENRINCO., LTD. NAVTEQ Maps is a trademark of NAVTEQ. DLP® and the DLP logo are trademarks of Texas Instruments. Products and brand names are trademarks or registered trademarks of their respective companies. Images on displays shown in this brochure are simulated.

Specifications and equipment are subject to change without any notice or obligation on the part of the manufacturer. February 2012  
©2012 Nikon Corporation Nikon symbol is a registered trademark of Nikon Corporation in Japan and the USA.



WARNING

TO ENSURE CORRECT USAGE, READ MANUALS CAREFULLY BEFORE USING YOUR EQUIPMENT.  
SOME DOCUMENTATION IS SUPPLIED ON CD-ROM ONLY.



Nikon Canada Inc. 1366 Aerowood Drive, Mississauga, Ontario, L4W 1C1, Canada [www.nikon.ca](http://www.nikon.ca)  
Nikon Inc. 1300 Walt Whitman Road, Melville, N.Y. 11747-3064, U.S.A. [www.nikonusa.com](http://www.nikonusa.com)

CDP-CPSRNG-01-2/12