

4. Notes and Precautions

- Use only the Getac battery pack model BP3S1P2160-S / BP3S2P2160-S in the charger.
- **DO NOT** touch the connectors of the office dock.
- **DO NOT** attempt to make connections if there is any object between the computer and the office dock. Doing so could damage the computer and the office dock.
- **DO NOT** attempt to move the office dock when it is connected to the computer.
- If the computer malfunctions while the office dock is connected, turn off the computer and disconnect the office dock. Connect the AC adapter to the computer and check to see if the computer operates normally. If the computer operates normally, the office dock may be malfunctioning.
- **DO NOT** place metal objects or containers of liquid on top of the office dock. If metal objects (such as paper clips and coins) or any liquid spills get inside the office dock, fire or electric shock may result. Immediately unplug the power cable and remove the computer from the office dock.
- Unplug the power cord and remove the computer from the office dock if any of the following occurs:
 - the office dock is damaged
 - smoke is emitted
 - an unusual smell is emitted
 - the office dock is unusually hot
 Continuing to use the office dock while any of the above conditions are present may result in fire or electric shock.

Getac Contact Information



Company name	Getac Technology GmbH.
Address	Kanzlerstrasse 4 40472 Dusseldorf
Phone	+49 (0) 211-984819-0



Company name	Getac UK Ltd.
Address	Getac House, Stafford Park 12, Telford, Shropshire, TF3 3BJ, UK
Phone	+44 (0) 1952-207-222



Company name	Getac Inc.
Address	15495 Sand Canyon Rd., Suite 350 Irvine, CA 92618 USA
Phone	+1-949-681-2900



5 6 1 5 8 5 7 1 0 0 0 5 R 0 3

Getac


F110

Office Dock with
Twin Battery Charger
User Guide

1. Introduction

This office dock with twin battery charger provides extra ports for F110 and has two slots for charging battery packs.

With peripherals such as a keyboard, mouse, monitor, and printer all connected to the office dock, you have a handy work area on your desk.

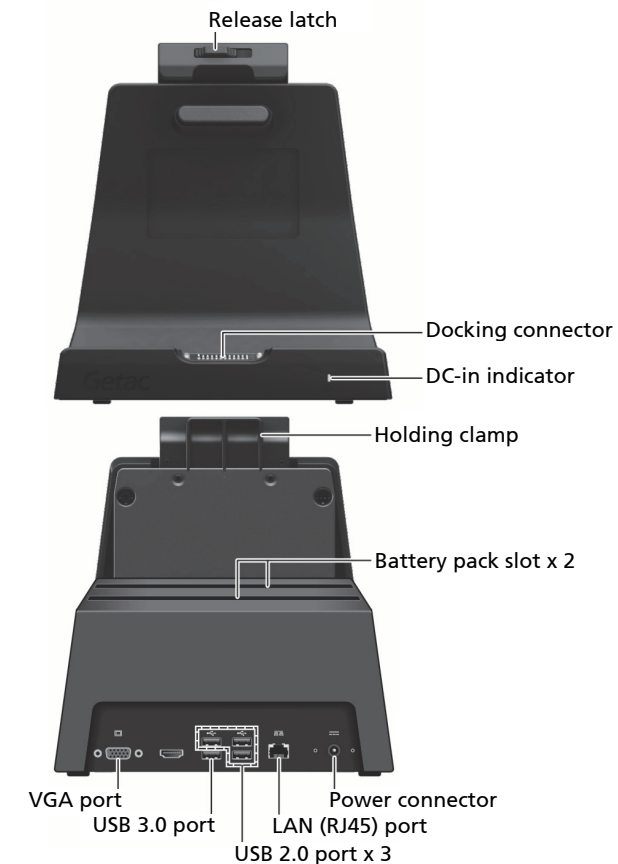

2. Installation

1. Push the release latch toward the right. The holding clamp will slide up slowly.




2. Align the connector and place F110 on the dock. Press down the holding clamp until it clicks into place.



3. Connect the peripherals' cables to the corresponding connectors on the office dock.
4. Connect the AC adapter to the power connector at the back of the office dock (❶). Connect the power cord, one end to the AC adapter and the other end to an electrical outlet (❷).

The DC-In LED lights up, indicating power is connected.

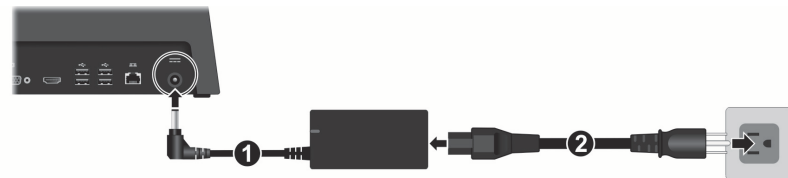

3. Charging Battery Packs

The office dock also serves as a charger for up to two battery packs. Both standard and high capacity ones are supported.

To charge a battery pack, align the battery pack's connector with the connector in the slot and insert the battery pack into the slot.


CAUTION: While inserting the battery pack, keep the ribbon strip in a flipped up position. If left unattended, a squeezed strip inside the battery slot can result in poor battery connector contact.

When a battery pack is inserted and the office dock is connected to power, the Charge indicator (🔋) at the side of the office dock shows the charging status of the battery pack:

- lights in orange when the battery pack in the slot is being charged.
- lights in green when the battery pack in the slot is fully charged.
- flashes in amber to indicate a charging problem.

Existing battery packs, including the one(s) in the charger and the ones inside F110 (when docked), will be charged in parallel.

CAUTION: When inserting or removing the battery pack, be sure to do it in a straight up or down manner. Never insert or remove the battery pack in a slanted way because this can damage the connector pins.

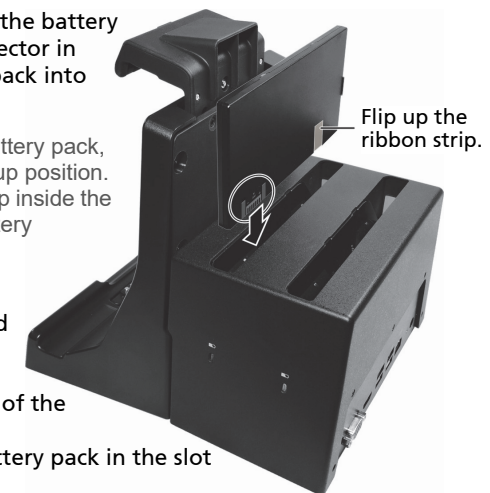

See reverse side for notes and precautions.