

zBoost ZB645SL




Cell Phone Signal Booster

zBoost, a leader in consumer cell phone signal boosters, offers the improved zBoost ZB645SL as the solution to your missed and dropped calls inside your larger home or office space. The innovative ZB645SL boosts voice coverage on 4G/3G phones for all North American carriers operating on CEL 800 MHz and PCS 1900 MHz frequencies.

The ZB645SL captures the marginal to reliable cellular signal you have outdoors and rebroadcasts it indoors, **up to 10,000 square feet**, so you can enjoy clearer, faster and more reliable service without interruption.

Everything you need is included: amplifier base unit, indoor panel antenna, power supply, (2) 15 ft. and (1) 35 ft. of RG6 cable, flat window entry cable, external antenna, and mounting hardware.

- High performance dual band signal booster - coverage **up to 10,000 sq. ft.** (up to 84 dB system gain)
- Ideal for large homes and offices that have reliable outside signal or for smaller spaces that have weaker outside signal
- External directional antenna for increased system performance
- Indoor panel antenna for better in-building signal penetration
- Reduces dropped and missed calls and can provide faster 3G data performance for multiple simultaneous users
- Boosts performance on iPhone™, Samsung™, Android™ and other phones and mobile devices
- Automatically operates at maximum gain – no manual adjustments needed
- Extends phone battery life - phone uses less power when the indoor signal is stronger
- Easier to set up – window entry cable included
- Designed in Silicon Valley – Made in North America

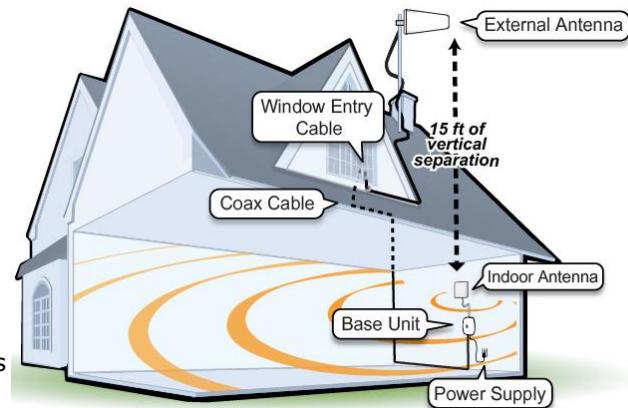

Product Specifications – ZB645SL

PCS	
Frequency	1850 to 1990 MHz
System Gain	84 dB
PCS band supported	A, D, B, E, F, C
Networks	CDMA, GSM, GPRS, EDGE, EVDO, 1xRTT, UMTS, HSPA, 3G
Cellular band	
Frequency	824 to 894 MHz
System Gain	75 dB
Cellular band supported	A, B, A', B'
Networks	CDMA, GSM, GPRS, EDGE, EVDO, 1xRTT, UMTS, HSPA, 3G
General	
Power Consumption – Power Supply Current	3W standby; 7W max signal - 2.0A Max
Wall Supply Input; Voltage	100-240VAC 50-60 Hz; 5.0VDC
System Certifications	FCC Parts 15 & 20, Industry Canada (IC)
Base Unit Size and Weight	5" x 7" x 1.25" – 9 oz.
Coverage (depends on outside signal quality)	Up to 10,000 sq. ft.