

2x or 4 x VGA Matrix Video Switch Splitter with Audio

ST222MXA
ST224MX
ST224MXGB

DE: Bedienungsanleitung - de.startech.com
FR: Guide de l'utilisateur - fr.startech.com
ES: Guía del usuario - es.startech.com
IT: Guida per l'uso - it.startech.com
NL: Gebruiksaanwijzing - nl.startech.com
PT: Guia do usuário - pt.startech.com

Packaging Contents

- 1 x ST222MXA video splitter
- 1 x Power Adapter
- 1 x Installation Guide


System Requirements

- VGA enabled display devices (e.g. monitor, projector, TV, etc)
- VGA enabled video source (e.g. computer, game console, etc)
- Available AC power outlet


Installation

1. Make sure all devices are powered off before trying to install.
2. Use male/male DE-15 VGA cables and male/male 3.5mm mini-jack audio cables to connect the video source device(s) to the "IN" side on the rear of the video splitter. Make sure the audio and video from the same device are connected to the same A or B ports on the splitter.
3. Connect the display devices to the "OUT" VGA connectors on the rear of the video splitter with male/male DE-15 VGA cables.
4. Connect speakers or headphones to the 3.5mm mini-jack audio "OUT" connectors.
5. Connect the power adapter to the video splitter and make sure the Power LED on the front lights up.
6. Power on the video display devices first, followed by the video sources.

Front View

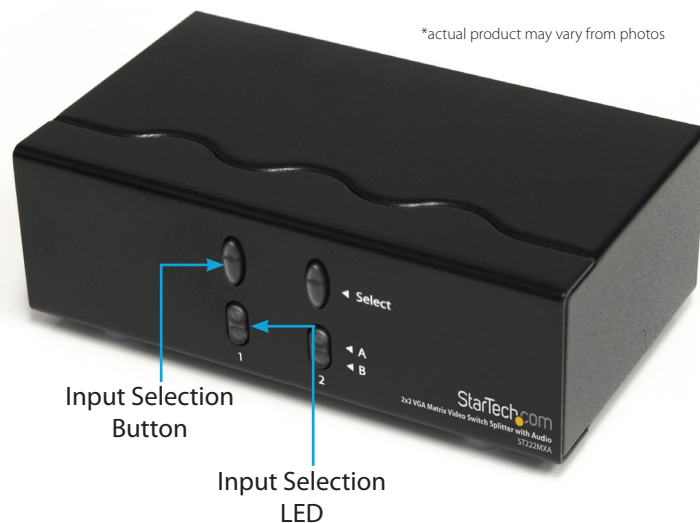

Front View

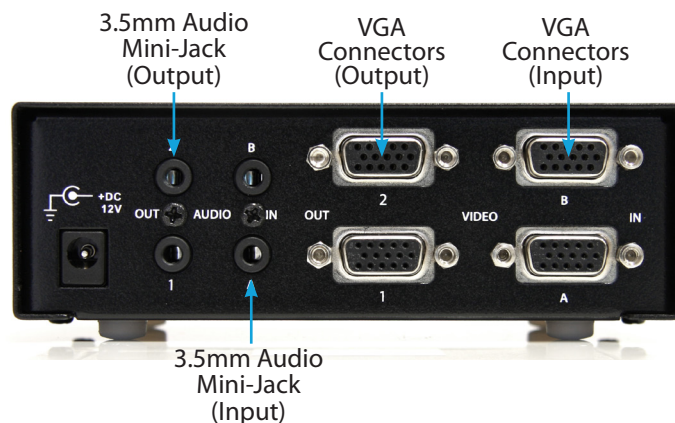

Specifications

Video Signal	VGA (RGBHV, RGsB, RGBS)
Number of Inputs	2
Number of Outputs	2
Connectors	2 x DE-15 VGA female (input) 2 x DE-15 VGA female (output) 2 x 3.5mm mini-jack female (input) 2 x 3.5mm mini-jack female (output) 1 x DC Power
LEDs	2 x Input A selection 2 x Input B selection
Maximum Video Resolution	1920x1440
Video Bandwidth	250 MHz
Maximum Cable Distance	65 m / 213 ft
Audio Support	Yes (stereo)
DDC Support	DDC, DDC2, DDC2B
Power Adapter	12VDC, 600mA, center positive, type M plug
Operating Temperature	0°C ~ 70°C (32°F ~ 158°F)
Storage Temperature	-20°C ~ 85°C (-4°F ~ 185°F)
Humidity	0% ~ 95%
Dimensions	130.0mm x 75.0mm x 42.0mm
Weight	450 g

FCC Compliance Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols

This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to StarTech.com. Where they occur these references are for illustrative purposes only and do not represent an endorsement of a product or service by StarTech.com, or an endorsement of the product(s) to which this manual applies by the third-party company in question. Regardless of any direct acknowledgement elsewhere in the body of this document, StarTech.com hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders.

Technical Support

StarTech.com's lifetime technical support is an integral part of our commitment to provide industry-leading solutions. If you ever need help with your product, visit www.startech.com/support and access our comprehensive selection of online tools, documentation, and downloads.

For the latest drivers/software, please visit www.startech.com/downloads

Warranty Information

This product is backed by a two year warranty.

In addition, StarTech.com warrants its products against defects in materials and workmanship for the periods noted, following the initial date of purchase. During this period, the products may be returned for repair, or replacement with equivalent products at our discretion. The warranty covers parts and labor costs only. StarTech.com does not warrant its products from defects or damages arising from misuse, abuse, alteration, or normal wear and tear.

Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.