

Introduction

The trolley dock duplicates most of your computer's ports and provides extra ports. With peripherals such as a keyboard, mouse, monitor, and printer all connected to the trolley dock, you have a handy work area on your desk.

This product consists of a base dock and an adapter. The two should be assembled before usage.

Base dock (top):



Adapter:



Base dock (rear):



USB 3.0 port x 3
DisplayPort
LAN (RJ45) port
Microphone connector
Audio output connector
Power connector
Parallel printer port
RS-232 serial port

Base dock (left):



Kensington lock


NOTE: On the base dock, there are components (such as latches and the lower docking connector) that are not intended for A140. Please ignore these components.

Assembly

1. Slide and fully open the connector cover on the base dock.




2. Aligning the four knob screws of the adapter with the four holes of the base dock, fit the adapter into place. Then, tighten the four knobs.

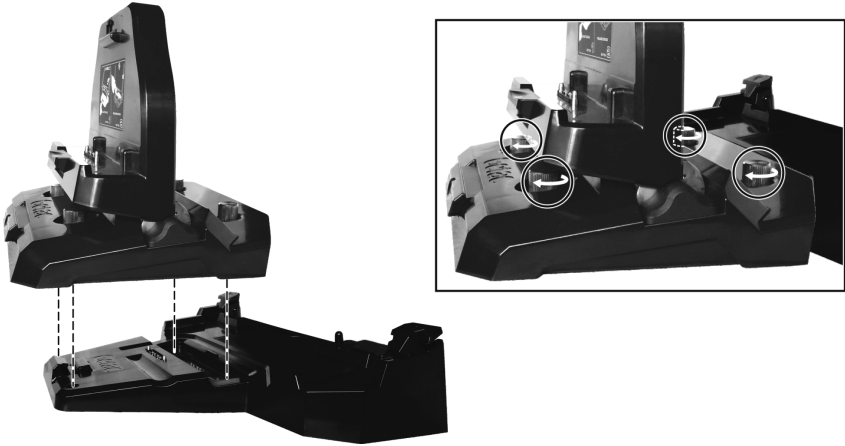


Docking

1. Align and seat A140 on the adapter. Push A140 toward the adapter until the latch clicks into place.

NOTE: To undock A140, press the release latch and detach A140.

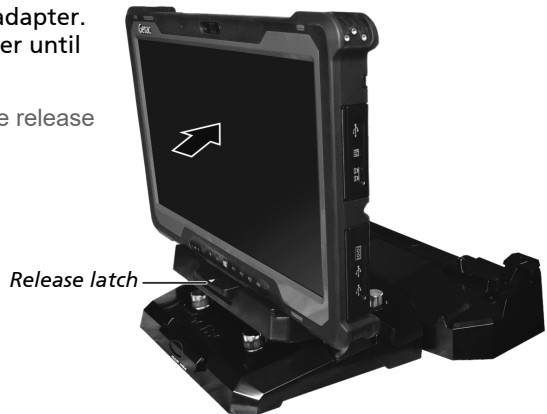

2. You can adjust the viewing angle of A140. To adjust, press in the angle adjust latch, and while holding the latch, tilt A140 forward or backward to the desired angle. Release the latch to lock A140 in the current angle.

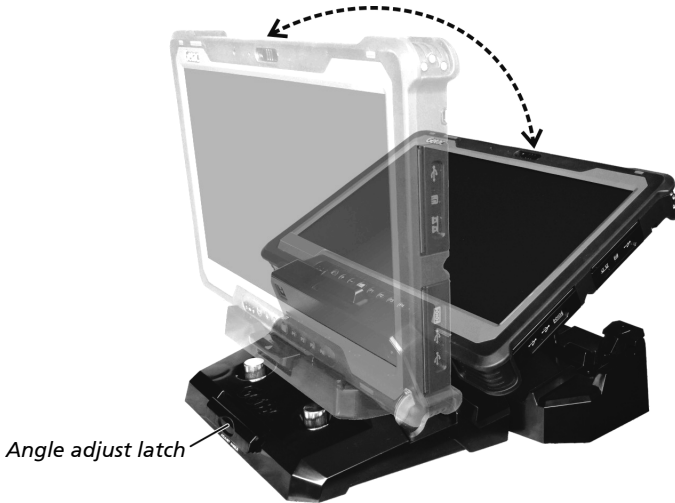

3. Connect the peripherals' cables to the corresponding connectors on the base dock.
4. Connect the AC adapter to the base dock (❶). Connect the power cord, one end to the AC adapter and the other end to an electrical outlet (❷).

The DC-In LED (located at the top right area of the base dock) lights up, indicating power is connected.



See reverse side for notes and precautions.

Notes and Precautions

- **DO NOT** touch the connectors of the trolley dock.
- **DO NOT** attempt to make connections if there is any object between the computer and the trolley dock. Doing so could damage the computer and the trolley dock.
- **DO NOT** attempt to move the trolley dock when it is connected to the computer.
- If the computer malfunctions while the trolley dock is connected, turn off the computer and disconnect the trolley dock. Connect the AC adapter to the computer and check to see if the computer operates normally. If the computer operates normally, the trolley dock may be malfunctioning.
- **DO NOT** place metal objects or containers of liquid on top of the trolley dock. If metal objects (such as paper clips and coins) or any liquid spills get inside the trolley dock, fire or electric shock may result. Immediately unplug the power cable and remove the computer from the trolley dock.
- Unplug the power cord and remove the computer from the trolley dock if any of the following occurs:
 - the trolley dock is damaged
 - smoke is emitted
 - an unusual smell is emitted
 - the trolley dock is unusually hotContinuing to use the trolley dock while any of the above conditions are present may result in fire or electric shock.

Getac Contact Information



Company name	Getac Technology GmbH.
Address	Kanzlerstrasse 4 40472 Dusseldorf
Phone	+49 (0) 211-984819-0



Company name	Getac UK Ltd.
Address	Getac House, Stafford Park 12, Telford, Shropshire, TF3 3BJ, UK
Phone	+44 (0) 1952-207-222



Company name	Getac Inc.
Address	15495 Sand Canyon Rd., Suite 350 Irvine, CA 92618 USA
Phone	+1-949-681-2900



5 6 1 5 1 4 0 1 0 0 0 4 R 0 2