



RMCARD305 Remote Management Card



Remotely manage, monitor and control your UPS or ATS PDU from a web browser, command line interface (CLI), SNMP or network management system (NMS).

The CyberPower RMCARD305 is a full-featured network UPS management device that remotely manages, monitors, and controls CyberPower UPS systems and ATS PDU products.

The internal card allows remote monitoring and control of a UPS via web browser, command line interface (CLI), SNMP or network management system (NMS). PowerPanel® Business Edition Client software protects servers and workstations from data loss due to power failure by initiating auto-shutdown command from a UPS when a power loss event occurs. An optional environmental sensor (ENVIROSENSOR) can be connected to the RMCARD205 to monitor the ambient temperature and humidity of a server room, IT closet, or other critical environments.

The firmware can be updated via FTP or SCP by users to insure you have the latest features and updates.

A Three-Year Warranty ensures that this network management card has passed our highest quality standards in design, assembly, material and workmanship.

FEATURES

- Real time UPS monitoring
- Supports environment sensor
- Remote management via web browser (HTTP/HTTPS), CLI (Telnet/SSH), or NMS (SNMPv1/v3)
- Automatic events notification via email, SMS, SNMP traps, and Syslog
- View and save Event Logs and Status Records
- Supports RADIUS, LDAP, LDAPS, and Windows Active Directory external authentication protocols
- User upgradeable firmware via FTP or SCP
- Update firmware and configuration file on multiple cards simultaneously using Upgrade and Configuration Utility
- Compatible with select Smart App UPS and ATS PDUs*


SPECIFICATIONS

GENERAL	
Type	Network Management Card
Network Port	Ethernet RJ-45
Data Link Protocol	Ethernet 100Base-TX &
LED Status Indicators	Tx/Rx, Link
Unversal Port	Optional EVIROSENSOR
SUPPORTED PROTOCOLS	
HTTP	v1.1: RFC 2616
HTTPS	RFC 2818
SNMP	v1: RFC 1155, RFC 1156, RFC 1157 v3: RFC 3414
MIB	RFC 1213, RFC 1628

SMTP	RFC 2821
SMTSPS	RFC 3207
TLS	v1.0: RFC 2246, v1.1: RFC 4346
SSL	v3.0: RFC 6101
Telnet	RFC 854
SSH	v2: RFC 4253, RFC 4254
FTP	RFC 959
SCP	v2: RFC 4253, RFC 4254
DNS	RFC 1035
DHCP	RFC 2131
TCP/IP	v4: RFC 791 v6: RFC 2460

*Please see reference

RMCARD305 Remote Management Card

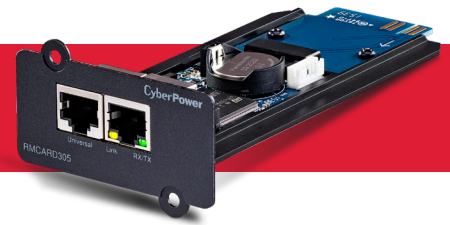

SPECIFICATIONS CONT.

RADIUS	RFC 2865
LDAP	v3: RFC 2251
LDAPS	v3: RFC 4513
SysLog	RFC 5424
NTP	RFC 958
Cisco EnergyWise	v1.2.0 and newer
PHYSICAL	
Dimensions (WxHxD, in)	2.6 x 1.7 x 5.3
Dimensions (WxHxD, mm)	66.04 x 43.18 x 134.62
Weight (lb)	0.2
Weight (kg)	0.09
SHIPPING DIMENSIONS	
Dimensions (WxHxD, in)	6.8 x 2.4 x 6.5
Dimensions (WxHxD, mm)	172 x 60 x 165
Weight (lb)	0.62
Weight (kg)	0.28
ENVIRONMENTAL	
Operating Temperature	32 °F to 104 °F (0 °C to 40 °C)
Operating Relative Humidity	0% to 90% non-condensing
Operating Elevation	0 ft to 10000 ft (0 m to 3000 m)
Storage Temperature	14 °F to 122 °F (-10 °C to 50 °C)
Storage Relative Humidity	0% to 95% non-condensing

Storage Elevation	0 ft to 50000 ft (0 m to 15000 m)
COMPATIBILITY	
Supported CyberPower Models ¹	Select OL series UPS systems
CERTIFICATIONS	
Safety	FCC DoC Class A CE
Environmental	RoHS Compliant
WARRANTY	
Product Warranty	3 years limited
Extended 2-Year Warranty	Optional WEXT5YR-ACC1A

¹Please see Reference Guide for full list of supported models