



Reference - ATEN UPS Runtime Table




ATEN UPS Runtime Table (OL1000)



Battery (HH : MM : SS) \ Load (Watt)	100	200	300	400	500	600	700	800	900	1000 (Full Load)
OL1000	1:03:40	0:29:54	0:18:31	0:12:55	0:09:26	0:07:02	0:05:22	0:04:14	0:03:36	0:03:06
OL1000 + (1)BP24V18AH	3:52:51	1:55:57	1:13:11	0:52:04	0:39:32	0:31:13	0:25:27	0:21:29	0:18:40	0:16:28
OL1000 + (2)BP24V18AH	6:51:13	3:31:53	2:16:57	1:38:55	1:15:46	1:00:08	0:49:12	0:41:04	0:36:41	0:32:30
OL1000 + (3)BP24V18AH	9:50:59	5:09:55	3:23:16	2:28:30	1:54:46	1:31:43	1:15:23	1:04:29	0:56:34	0:50:19
OL1000 + (4)BP24V18AH	12:51:14	6:48:45	4:30:36	3:19:17	2:35:04	2:04:38	1:42:57	1:28:15	1:17:39	1:09:15

OL1000 Runtime Chart

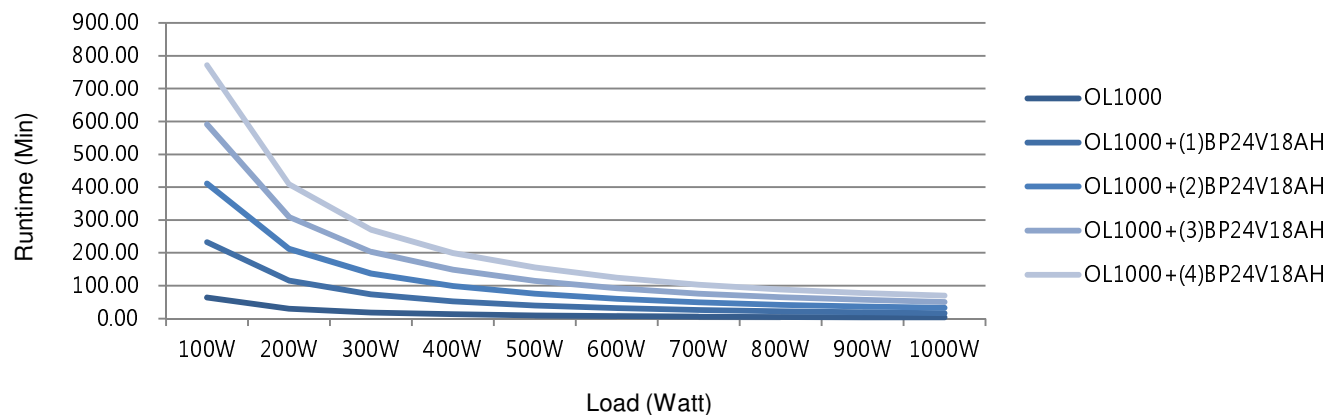




ATEN UPS Runtime Table (OL1500)



Battery \ Load (Watt)	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500 (Full Load)
OL1500	1:41:11	0:42:26	0:29:27	0:21:10	0:16:03	0:12:54	0:10:19	0:08:33	0:07:04	0:05:54	0:05:02	0:04:26	0:03:59	0:03:37	0:03:18
OL1500 + (1)BP36V18AH	5:53:48	2:40:50	1:54:16	1:23:14	1:03:46	0:51:59	0:42:40	0:36:27	0:31:18	0:27:18	0:24:22	0:22:03	0:20:07	0:18:28	0:17:04
OL1500 + (2)BP36V18AH	10:14:49	4:48:58	3:28:58	2:34:45	2:00:07	1:38:45	1:21:35	1:10:01	1:00:18	0:52:44	0:47:14	0:42:55	0:39:17	0:36:12	0:33:32
OL1500 + (3)BP36V18AH	14:36:51	6:58:52	5:05:47	3:48:42	2:59:06	2:28:16	2:03:18	1:46:19	1:31:58	1:20:41	1:12:26	1:05:59	1:00:33	0:55:56	0:51:56
OL1500 + (4)BP36V18AH	18:59:15	9:09:25	6:43:24	5:03:38	3:59:10	3:18:58	2:46:17	2:23:57	2:04:59	1:50:00	1:38:47	1:30:10	1:22:54	1:16:42	1:11:21

OL1500 Runtime Chart

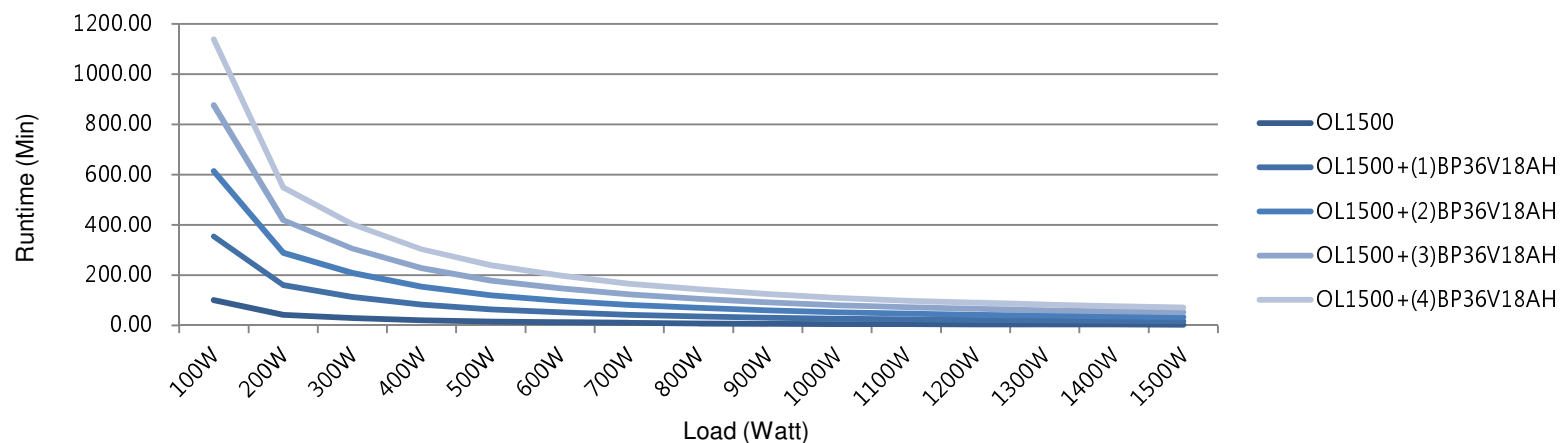




ATEN UPS Runtime Table (OL2000)



Battery Load (Watt) (HH:MM:SS)	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000 (Full Load)
OL2000	2:38:36	1:08:23	0:44:52	0:31:04	0:24:11	0:19:07	0:15:50	0:13:12	0:11:11	0:09:34	0:08:13	0:07:08	0:06:03	0:05:18	0:04:45	0:04:20	0:03:59	0:03:41	0:03:25	0:03:11
OL2000 + (1)BP48V18AH	8:52:32	4:08:22	2:49:18	2:00:13	1:34:40	1:15:28	1:02:58	0:53:07	0:45:45	0:39:57	0:35:18	0:31:33	0:27:53	0:25:31	0:23:29	0:21:44	0:20:12	0:18:51	0:17:40	0:16:37
OL2000 + (2)BP48V18AH	15:14:12	7:17:26	5:03:25	3:39:14	2:54:51	2:21:00	1:58:39	1:40:50	1:27:18	1:16:34	1:07:50	1:00:45	0:53:44	0:49:20	0:45:33	0:42:16	0:39:25	0:36:53	0:34:39	0:32:40
OL2000 + (3)BP48V18AH	21:36:37	10:27:49	7:19:15	5:20:20	4:17:20	3:29:03	2:57:00	2:31:17	2:11:38	1:55:56	1:43:06	1:32:38	1:22:06	1:15:26	1:09:48	1:04:55	1:00:38	0:56:52	0:53:31	0:50:31
OL2000 + (4)BP48V18AH	3:59:16	13:38:41	9:35:42	7:02:13	5:40:44	4:38:08	3:56:27	3:22:55	2:57:13	2:36:36	2:19:42	2:05:52	1:51:53	1:43:00	1:35:28	1:28:56	1:23:12	1:18:07	1:13:37	1:09:34

OL2000 Runtime Chart

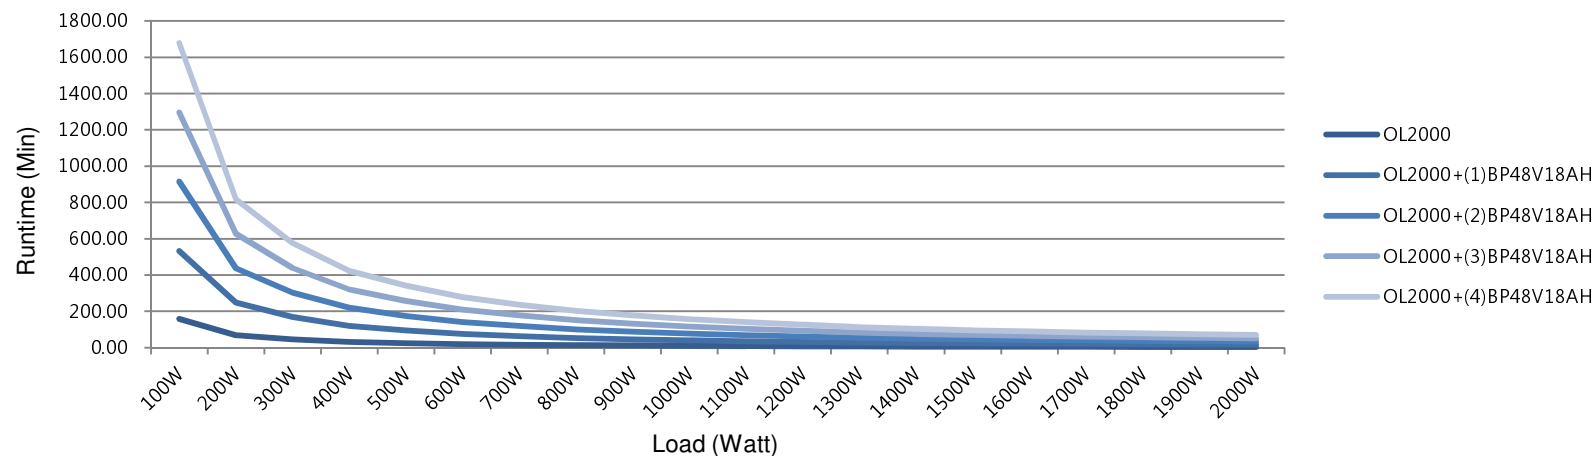



ATEN UPS Runtime Table (OL3000)



Battery (HH : MM : SS) \ Load (Watt)	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500
OL3000	3:57:33	1:54:05	1:12:32	0:54:42	0:41:10	0:32:36	0:27:29	0:23:10	0:19:54	0:17:16	0:15:13	0:13:31	0:12:05	0:10:51	0:09:47
OL3000 + (1)BP72V18AH	12:53:24	6:34:25	4:21:58	3:22:54	2:36:24	2:05:51	1:47:01	1:30:49	1:18:26	1:08:24	1:00:37	0:54:16	0:48:59	0:44:33	0:40:46
OL3000 + (2)BP72V18AH	21:56:40	11:22:58	7:40:22	6:00:33	4:41:24	3:48:58	3:16:22	2:48:05	2:26:16	2:08:24	1:54:27	1:42:55	1:33:16	1:25:05	1:18:04
OL3000 + (3)BP72V18AH	7:00:27	16:12:27	11:00:04	8:39:42	6:48:12	5:34:07	4:47:55	4:07:43	3:36:36	3:11:01	2:50:56	2:34:18	2:20:19	2:08:24	1:58:09
OL3000 + (4)BP72V18AH	16:04:26	21:02:15	14:20:12	11:19:25	8:55:39	7:20:01	6:20:18	5:28:16	4:47:55	4:14:41	3:48:33	3:26:51	3:08:35	2:52:59	2:39:31


Battery (HH : MM : SS) \ Load (Watt)	1600	1700	1800	1900	2000	2100	2200	2300	2400	2500	2600	2700	2800	2900	3000 (Full Load)
OL3000	0:08:52	0:08:03	0:07:20	0:06:34	0:06:01	0:05:32	0:05:11	0:04:53	0:04:37	0:04:22	0:04:08	0:03:56	0:03:45	0:03:34	0:03:25
OL3000 + (1)BP72V18AH	0:37:31	0:34:42	0:32:14	0:29:46	0:28:00	0:26:26	0:25:01	0:23:44	0:22:34	0:21:30	0:20:32	0:19:38	0:18:48	0:18:02	0:17:20
OL3000 + (2)BP72V18AH	1:12:00	1:06:42	1:02:03	0:57:22	0:54:07	0:51:12	0:48:33	0:46:09	0:43:59	0:41:59	0:40:09	0:38:28	0:36:54	0:35:27	0:34:07
OL3000 + (3)BP72V18AH	1:49:15	1:41:26	1:34:33	1:27:23	1:22:33	1:18:13	1:14:17	1:10:43	1:07:28	1:04:29	1:01:45	0:59:13	0:56:53	0:54:43	0:52:42
OL3000 + (4)BP72V18AH	2:27:48	2:17:30	2:08:24	1:58:41	1:52:14	1:46:26	1:41:12	1:36:26	1:32:05	1:28:06	1:24:25	1:21:02	1:17:54	1:14:59	1:12:17



ATEN UPS Runtime Table (OL3000)



OL3000 Runtime Chart

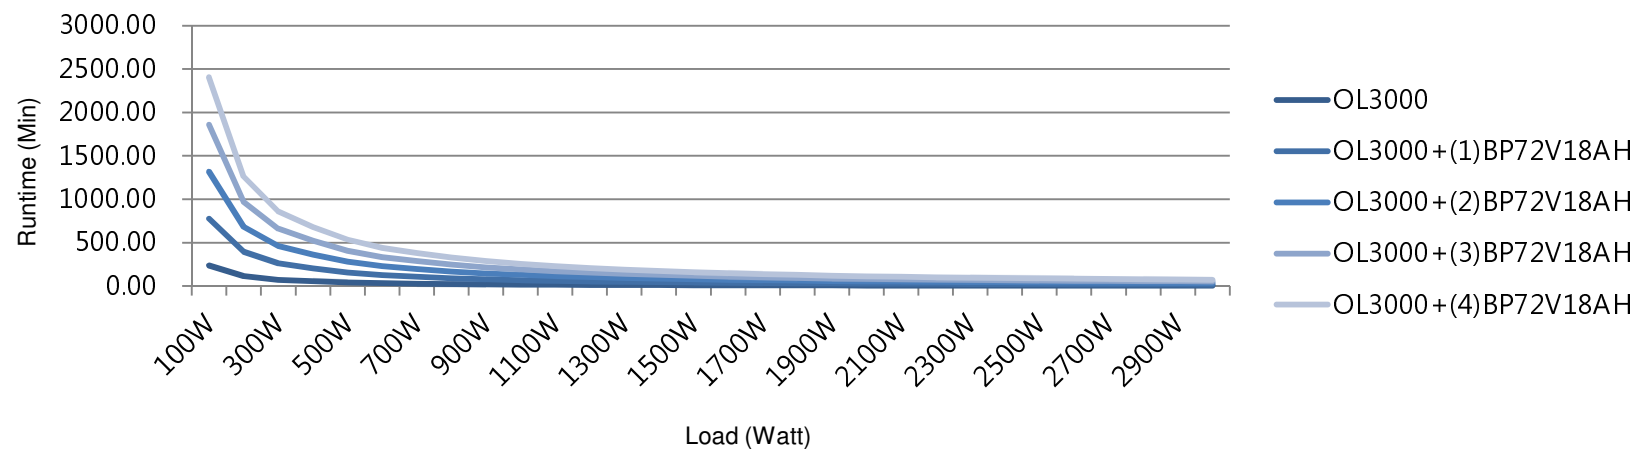

Simply Better Connections



This file contains information that is for sole use of the intended recipient and may be confidential or privileged. ANY UNAUTHORIZED REVIEW, COPYING, DISCLOSURE, USE OR DISTRIBUTION IS STRICTLY PROHIBITED.