



Disclosure and photocopying of this document, exploitation and communication of its contents are not permitted, unless permission is expressly granted. All rights are reserved.

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugelassen. Alle Rechte vorbehalten.


FRONT VIEW

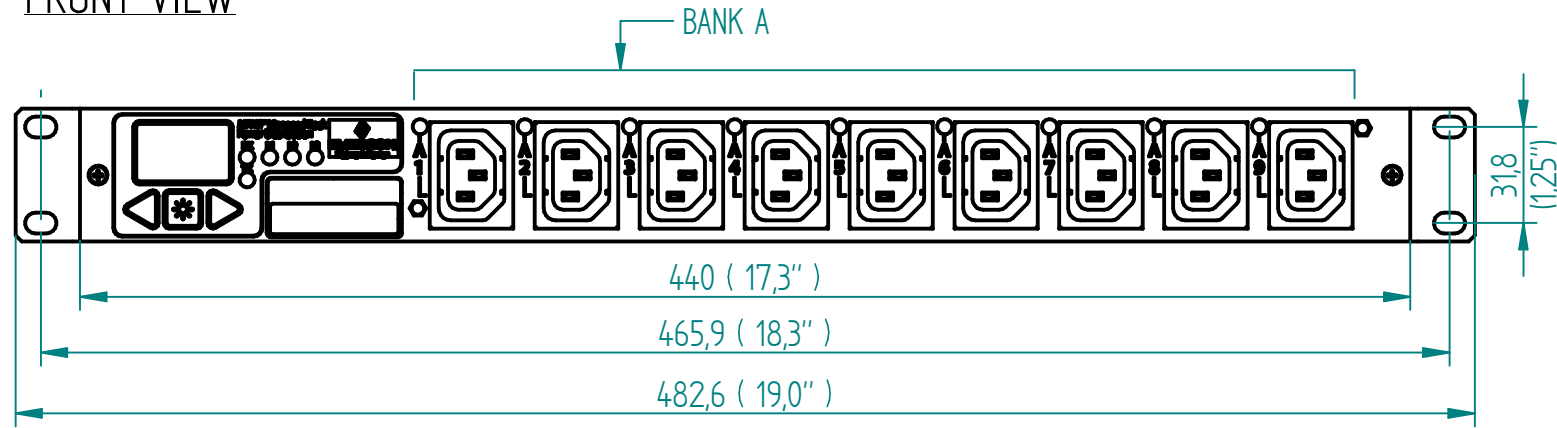

REAR VIEW

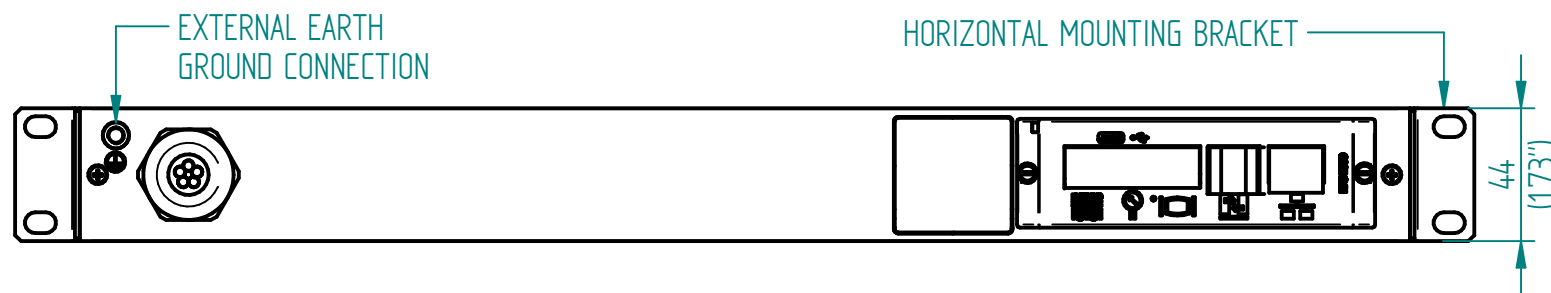

UPPER VIEW

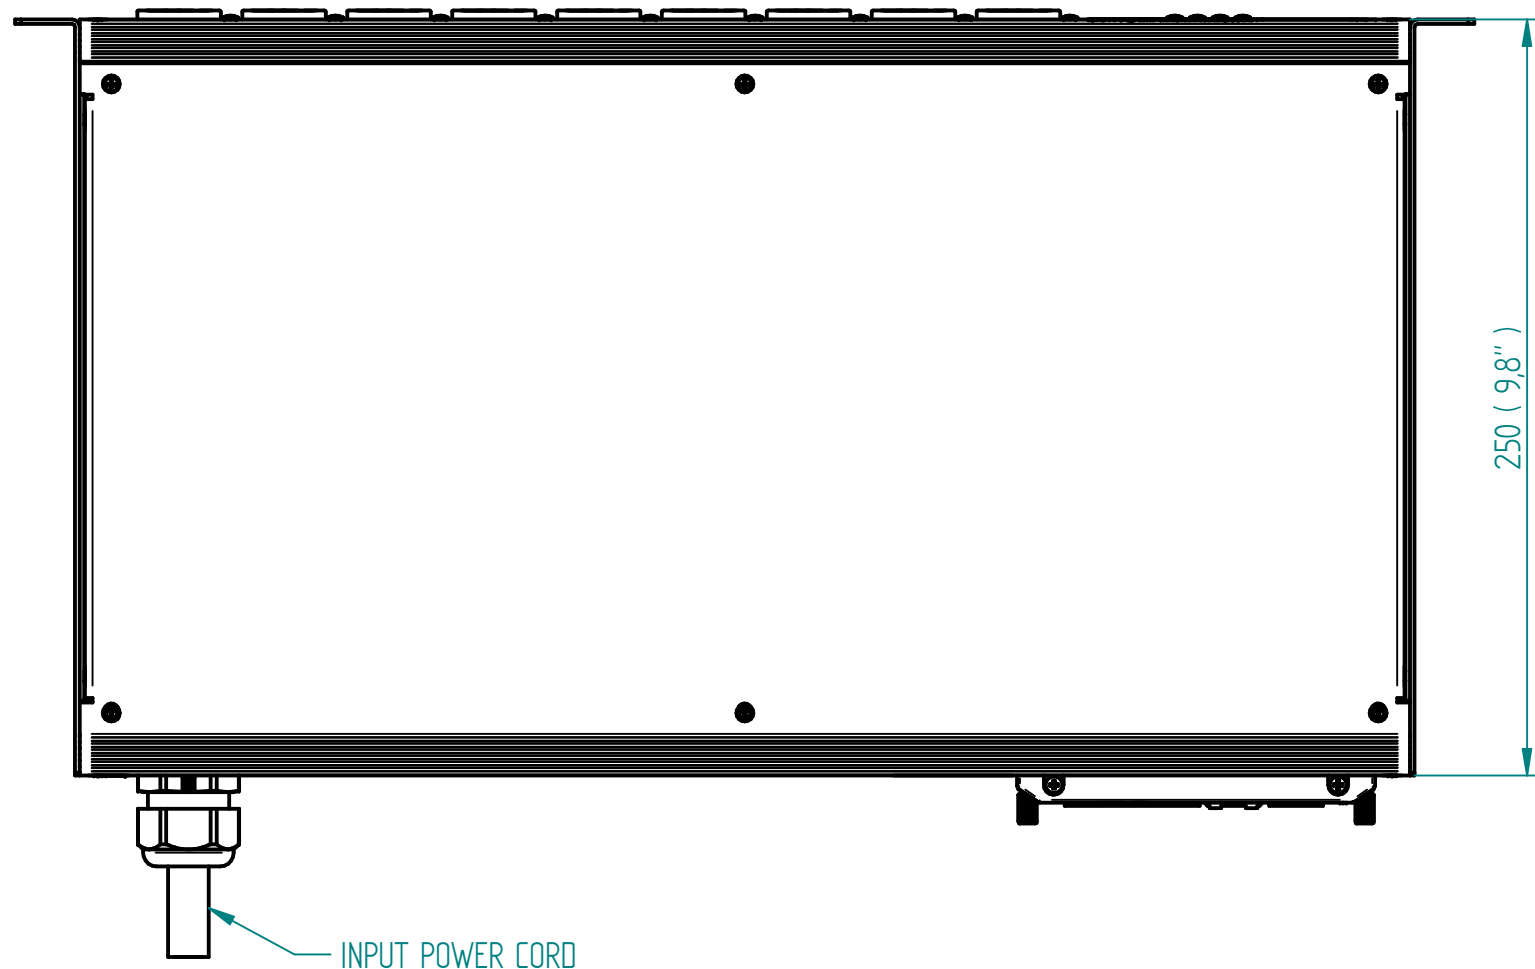

RoHS COMPLIANT

OUTPUT POWER

BANK	PHASE	RECEPTACLE TYPE (QUANTITY)	VOLTAGE (V)	MAX. CONTINUOUS AMPS (A)	
				PER RECEPTACLE	PER BANK
A	L1-L2	9xC13	200-240	12	16


METERING PARAMETER

MEASUREMENT ACCURACY

VOLTAGE	±1 % + 0.1 VAC
CURRENT	±1.5 % + 0.01 A FROM 1 % TO 10 % OF UNIT RATING; ±1 % FROM >10 % TO 125 % OF UNIT RATING

INPUT POWER

INPUT CORD	INPUT PLUG	WIRE COUNT	FREQUENCY (Hz)	VOLTAGE (V)	RATED AMPS (A)	MAX. CONT. AMPS (A)
10 ft / 3 m	NEMA L6-20P	2/PE	50/60	200-240	20	16



NEMA L6-20P
(20 A, 2/PE, 200-240 V)

AGENCY COMPLIANCE:


- UL certification: UL 60950-1 (2nd), CSA C22.2 No. 60950-1-07
- FCC certification
- CB certification: IEC 60950-1 (2nd)
- "-100" SUFFIX (PSE MODELS): INTERPRETATION OF DENAN TECHNICAL REQUIREMENTS MINISTERIAL ORDINANCE APPENDIX 12, J60950-1(H26), J55022(H21)

ENVIRONMENTAL RATING:

OPERATING TEMPERATURE: 5 °C - 60 °C (41 °F - 140 °F) NON-CONDENSING, NON-CORROSIVE, 10 % - 90 % RH
STORAGE TEMPERATURE: -20 °C - 85 °C (-4 °F - 185 °F)
MAX. OPERATING ALTITUDE: 2000 m

NOTES:

1. UNIT DIMENSIONS: 440 mm (17.3") W x 250 mm (9.8") D x 44 mm (1.7") H
2. UNIT WEIGHT: 5.3 kg / 11.7 lbs
3. SHIPPING DIMENSIONS: 543 mm (21.4") W x 410 mm (16.1") D x 165 mm (6.5") H
4. SHIPPING WEIGHT: 5.9 kg / 13 lbs
5. (2) MOUNTING BRACKETS SUPPLIED WITH EACH UNIT. BOTH SIDES CAN BE USED TO MOUNT THE PDU.

 Dimensions in mm				Allgemeintoleranzen General tolerances		Oberfläche Finish		Werkstoff / Material		Gewicht: Weight: —			
				—		—		—					
				Drawn	Date 20/05/16	Name Racek	Bezeichnung / Description MPH2-NCC_L6-20P_9N Input and Branch Metered + Outlet Switched						
				Checked	20/05/16	Votýpka							
				Approved	—	—							
				 EMERSON™ Network Power					Zeichnungs-Nr. / Drawing no.			Maßstab Scale 1:5	
A	17835	12/08/16	Racek						MPHC2111				
Rev.	Change	Date	Name						Verwendet in / Used in			Blatt/Sheet 1/1	
									—				