

Alienware Area-51



[Views](#)

[Specifications](#)

NOTE: The images in this document may differ from your computer depending on the configuration you ordered.

Copyright © 2014 Dell Inc. All rights reserved. This product is protected by U.S. and international copyright and intellectual property laws. Alienware™, AlienFX®, and the AlienHead logo are trademarks or registered trademarks of Alienware Corporation. Dell and the Dell logo are trademarks of Dell Inc. in the United States and/or other jurisdictions. All other marks and names mentioned herein may be trademarks of their respective companies.

2014 - 10 Rev. A00

Regulatory model: D03X | Type: D03X001

Computer model: Alienware Area-51 R2

ALIENWARE 



Front




Front



Back



Back panel

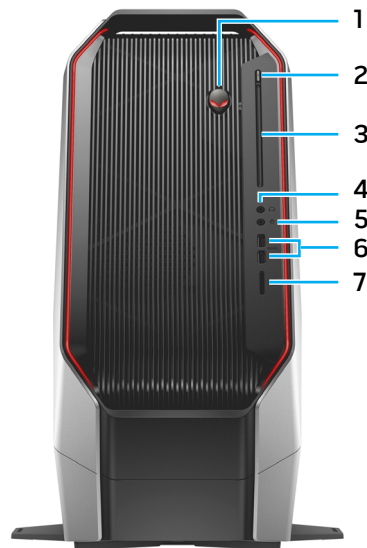

- 1 Power button (Alien head button)**
Press to turn on the computer if it is turned off or in Sleep state.
Press to shut down the computer if it is turned on.
Press and hold for 4 seconds to force shut-down the computer.
- 2 Optical-drive eject button**
Press to eject the media from the optical drive.

- 3 Optical drive**
Reads from and writes to CDs, DVDs, and Blu-ray discs.
- 4 Headphone port**
Connect a headphone or speakers.
- 5 Microphone port**
Connect an external microphone to provide sound input.

- 6 USB 3.0 ports (2)**
Connect peripherals such as storage devices, printers, and so on. Provides data transfer speeds up to 5 Gbps.
- 7 Media-card reader**
Reads from and writes to media cards.



Back




Front



Back



Back panel

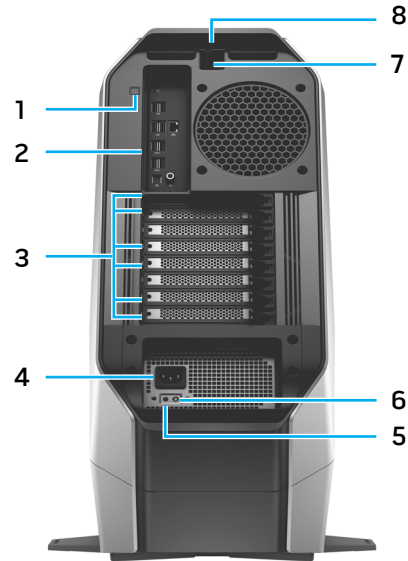

1 Rear I/O accessibility lighting button

Press to illuminate the back panel ports.

2 Back panel

Connect USB, audio, video, and other devices.

3 Expansion bays

Connect external displays or projectors via graphics cards or other peripherals via their respective PCI-Express cards.

NOTE: If you have two graphics cards, the one on the top graphics slot will be the primary graphics card. If you have three graphics cards, the one on the bottom graphics slot will be the primary graphics card.

4 Power cable port

Connect a power cable to provide power to your computer.

5 Power-supply diagnostics button

Press to check the power-supply state.

6 Power-supply diagnostics light

Indicates the power-supply state.

7 Security-cable slot

Connect a security cable to prevent unauthorized movement of your computer. This prevents the latch from opening.

8 Security-cable slot latch

Release to allow opening the side panel.



Back panel




Front



Back



Back panel

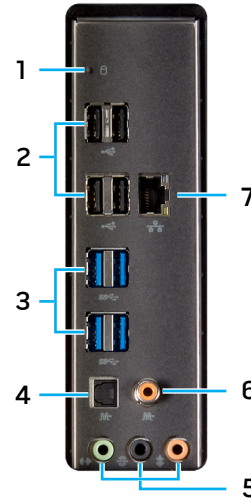

1 Hard-drive activity light

Turns on when the computer reads from or writes to the hard drive.

2 USB 2.0 ports (4)

Connect peripherals, such as storage devices, printers, and so on. Provides data transfer speeds up to 480 Mbps.

3 USB 3.0 port (4)

Connect peripherals such as storage devices, printers, and so on. Provides data transfer speeds up to 5 Gbps.

4 Optical S/P DIF port

Connect an amplifier, speakers, or a TV for digital audio output through optical cables.

5 Audio ports

Connect speakers.

6 Coaxial S/P DIF port

Connect an amplifier, speakers, or a TV for digital audio output through coaxial cables.

7 Network port

Connect an Ethernet (RJ45) cable from a router or a broadband modem for network or internet access.

The two lights next to the connector indicate the connectivity status and network activity.







Specifications

Dimensions and Weight

Height	569.98 mm (22.411 in)
Width	638.98 mm (25.156 in)
Depth	272.71 mm (10.736 in)
Weight (maximum)	28 kg (61.73 lbs)

NOTE: The weight of your desktop varies depending on the configuration ordered and the manufacturing variability.






Specifications

System Information


Computer model	Alienware Area-51 R2
Processor	Intel Core i7
Chipset	Intel X99 Express



Dimensions and Weight



System Information



Memory




Ports and Connectors



Communications



Video



Audio




Storage



Media-Card Reader



Power Ratings




Computer Environment



Specifications

Memory


Connector	Four internally-accessible DDR4 DIMM socket
Type	DDR4
Speed	2133 MHz
Configurations supported	8 GB, 12 GB, 16 GB, and 32 GB



Dimensions and Weight



System Information



Memory



Ports and Connectors



Communications



Video




Audio



Storage



Media-Card Reader



Power Ratings



Computer Environment



Specifications




Ports and Connectors

External:

Network	One RJ45 port
USB	<ul style="list-style-type: none">• Four USB 2.0 ports• Six USB 3.0 port
Audio	<ul style="list-style-type: none">• Four audio output/headphone ports• One audio input/microphone port• One optical S/P DIF port• One coaxial S/P DIF port
Media-card reader	One 9-in-1 card slot

Internal:

M.2	<ul style="list-style-type: none">• One M.2 card slot for WLAN and Bluetooth
Storage	<ul style="list-style-type: none">• Six SATA ports





Specifications


Communications

Ethernet

10/100/1000 Mbps Ethernet controller integrated on system board

Wireless


- Wi-Fi 802.11 ac
- Bluetooth 4.0



Dimensions and Weight



System Information



Memory




Ports and Connectors



Communications



Video



Audio



Storage



Media-Card Reader



Power Ratings



Computer Environment







Specifications

Video

- | | |
|-----------------------|--|
| Type | • Up to three PCI-Express x16, single-/double-width, full length graphics card |
| Controller (Discrete) | • Single AMD and NVIDIA
• Also supports Dual/Triple AMD and NVIDIA (SLI) |

NOTE: The graphics configuration of your desktop varies depending on the power supply and graphics card configuration ordered.








Specifications

Audio

Controller
Type

Creative Sound Core 3D

- Integrated 5.1 channel
- Intel High Definition Audio with S/PDIF support





Specifications




Storage

Externally accessible

One 5.25-inch drive bay for DVD+/-RW, Blu-ray Disc combo (optional), or Blu-ray Disc writer (optional)

Internally accessible

- Three 3.5-inch drive bay for SATA hard drives
- Two 2.5-inch drive bay for SATA solid-state drives








Specifications

Media-Card Reader

Type	One 9-in-1 slot
Cards supported	<ul style="list-style-type: none">• Secure Digital (SD)• Secure Digital Input Output (SDIO)• Secure Digital High Capacity (SDHC)• SD Extended Capacity (SDXC 3.0)• MultiMedia Card (MMC)/MultiMedia Card (MMC) Plus• Memory Stick (MS)• Memory Stick PRO (MS PRO)• Memory Stick PRO Duo (with adapter)• Memory XC Duo (with adapter)






Specifications

Power Ratings


Type	850 W	1500 W
Input voltage	100 VAC–240 VAC	
Input frequency	50 Hz–60 Hz	
Input current (maximum):	10 A	16 A
Output current:	+3.3 V/20 A, +5 V/20 A, +12 VA/32 A, +12 VB/48 A, +12 VD/16 A, –12 V/0.5 A, +5 Vaux/4 A	+3.3 V/20 A, +5 V/25 A, +12 VA/32 A, +12 VB/48 A, +12 VC/48 A, +12 VD/16 A, –12 V/0.5 A, +5 Vaux/4 A
Rated output voltage	+3.3 V, +5 V, +12 VA, +12 VB, +12 VD, –12 V, +5 Vaux	+3.3 V, +5 V, +12 VA, +12 VB, +12 VC, +12 VD, –12 V, +5 Vaux
Temperature range:		
Operating	5°C to 50°C (41°F to 122°F)	
Storage	–40°C to 70°C (–40°F to 158°F)	



**Dimensions and
Weight**



**System
Information**



Memory




**Ports and
Connectors**



Communications



Video




Audio



Storage



**Media-Card
Reader**



Power Ratings



**Computer
Environment**




Specifications

Computer Environment

Airborne contaminant level	G2 or lower as defined by ISA-S71.04-1985	
	Operating	Storage
Temperature range	5°C to 35°C (41°F to 95°F)	-40°C to 65°C (-40°F to 149°F)
Relative humidity (maximum)	10% to 90% (non-condensing)	0% to 95% (non-condensing)
Vibration (maximum)	0.26 grms	1.37 grms
Shock (maximum)	40 G for 2 ms with a change in velocity of 20 in/s (51 cm/s) [†]	105 G for 2 ms with a change in velocity of 52.5 in/s (133 cm/s)
Altitude (maximum)	-15.24 m to 3048 m (-50 ft to 10,000 ft)	-15.24 m to 10,668 m (-50 ft to 35,000 ft)

* Measured using a random vibration spectrum that simulates user environment.


† Measured using a 2 ms half-sine pulse when the hard drive is in use.



Dimensions and Weight



System Information



Memory




Ports and Connectors



Communications



Video



Audio



Storage



Media-Card Reader



Power Ratings



Computer Environment