



## Product End-of-Life Disassembly Instructions

Product Category: Monitors and Displays

Marketing Name / Model  
[List multiple models if applicable.]

HP 527pu

HP Series 5 Pro 527pu

HP Series 5 Pro 27 inch QHD USB-C Monitor - 527pu

**Purpose:** The document is intended for use by end-of-life recyclers or treatment facilities. It provides the basic instructions for the disassembly of HP Inc. products to remove components and materials requiring selective treatment, as defined by EU directive 2012/19/EC, Waste Electrical and Electronic Equipment (WEEE).

NOTE: Recyclers should sort plastic materials into resin streams for recycling based on the ISO 11469 plastic marking code on the plastic part. For any questions on plastic marking or identification of location of parts or components requiring selective treatment, please contact [HP's Sustainability Contact](#).

### 1.0 Items Requiring Selective Treatment

1.1 Items listed below are classified as requiring selective treatment. An "X" in the list of components and parts indicates the product contains the component or part requiring selective treatment

Item Description	Components and parts requiring selective treatments	Quantity of items included in product
Printed Circuit Boards (PCB) or Printed Circuit Assemblies (PCA) with a surface greater than 10 sq cm	<input checked="" type="checkbox"/> Main board (MB) PCB <input type="checkbox"/> Solid state drive (SSD) PCB <input type="checkbox"/> Wireless WAN module (WWAN) PCB <input type="checkbox"/> Touch module PCB <input checked="" type="checkbox"/> Power supply PCB <input checked="" type="checkbox"/> External Keyboard (KB) <input type="checkbox"/> External Mouse <input checked="" type="checkbox"/> Others: ___ USB board _____	4
Batteries, excluding Li-Ion batteries. This includes standard alkaline, coin or button style batteries	<input type="checkbox"/> RTC/CMOS battery <input type="checkbox"/> Others: _____	0
Li-Ion batteries. Includes all Li-Ion batteries if more than one is provided with the product (such as a detachable notebook keyboard battery, etc.)	Li-ion battery(ies) are attached to the product by: <input type="checkbox"/> screws <input type="checkbox"/> snaps <input type="checkbox"/> adhesive <input type="checkbox"/> other. Explain _____	0
Mercury-containing components. For example, mercury in lamps, display backlights, scanner lamps, switches, batteries		0

Item Description	Components and parts requiring selective treatments	Quantity of items included in product
Liquid Crystal Displays (LCD) with a surface greater than 100 sq cm. Includes background illuminated displays with gas discharge lamps	<input checked="" type="checkbox"/> Panel LCD	1
Cathode Ray Tubes (CRT)		0
Capacitors / condensers (Containing PCB/PCT)		0
Electrolytic Capacitors / Condensers measuring greater than 2.5 cm in diameter or height	<input checked="" type="checkbox"/> Power Supply capacitor(s) or condenser(s)	3
External electrical cables and cords	<input checked="" type="checkbox"/> AC power cord <input type="checkbox"/> Audio, video or data cables <input checked="" type="checkbox"/> Other: __CABLE, USB3.1Gen1____	2
Gas Discharge Lamps		0
Plastics containing Brominated Flame Retardants (not including external electrical cables and cords, PCBs or PCAs already listed as a separate item above)		0
Components and parts containing toner and ink, including liquids, semi-liquids (gel/paste) and toner. Include the cartridges, print heads, tubes, vent chambers, and service stations.		0
Components and waste containing asbestos		0
Components, parts and materials containing refractory ceramic fibers		0
Components, parts and materials containing radioactive substances		0
Components containing chlorofluorocarbons (CFC), hydrochlorofluorocarbons (HCFC) or hydrofluorocarbons (HFC), hydrocarbons (HC)		0

## 2.0 Tools Required

List the type and size of the tools that would typically be used to disassemble the product to a point where components and materials requiring selective treatment can be removed.

Tool Description	Tool Size (if applicable)
Screwdriver	Philip #0
Screwdriver	Torx T8
Heatgun	N/A
Suction cup	N/A

## 3.0 Product Disassembly Process

3.1 List the basic steps that should typically be followed to remove components and materials requiring selective treatment including the required steps to remove the external enclosure.

EL-MF877-00

Template Revision D

Page 2

last updated May-2022

1. Remove X
2. Remove Y
3. Remove Z

3.2 Location of components requiring selective treatment. The photos and/or graphics below identify the location of the parts or components requiring selective treatment within the main unit. For End-of-Life product disassembly instructions of external accessories including external power supply (EPS), external keyboard (KB) external mouse and external cables and cords, refer to the following URL: [End-of-Life Product Disassembly Instructions \(hp.com\)](https://www.hp.com/go/end-of-life)


## Mechanical Instructions

### 1. Precaution

Please read the precautions as follows to prevent any damages to the LCD Monitor.

Make sure all power connection is removed. Be sure that the LCD Monitor is in power off status.

**Prepare soft cloth and sponge as working platform to place LCD monitor horizontally.**



**Hold LCD by the side carefully and DON'T touch or press panel directly.**



### 2. Appropriate tools

Select the appropriate tools for disassembly and re-assembly.

**Screwdriver**  
RUBICON  
NO-107 NO.2



**Screwdriver**  
RUBICON  
NO-101 NO.0#






**HEX header screwdriver**  
Pro'sKit  
5.0mm 9400-M5 Pro'sKit







**Disassembly tool**  
INOUE日本井上工具株式会社







last updated May-2022

Step	Figure	Description
Preparation		Lay the monitor on a flat, soft and clean surface.
Remove the Stand-base Ass'y		Press the button to remove the stand-base ass'y.
Remove the Rear cover		Use screwdriver to release 4 screws to remove the rear cover.

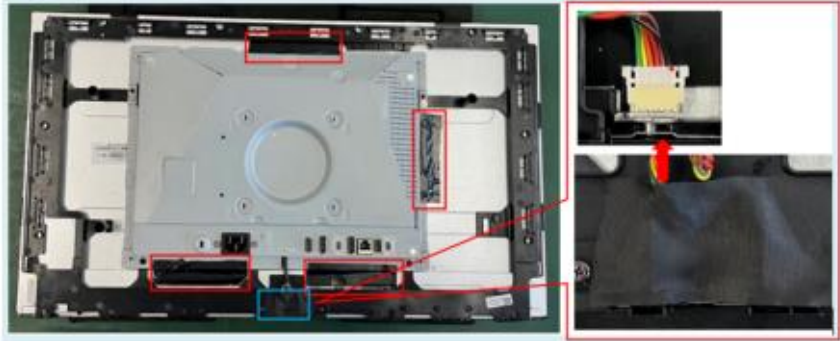


<p><b>Open the rear cover</b></p>		<p>Use disassembly tool to open all the latches along the edge of the rear cover.</p>
<p><b>Remove the rear cover</b></p>		<p>Lift the rear cover. Disconnect the connector.</p>
<p><b>Tear off the tapes and disconnect the pin</b></p>		<p>Tear off the tapes, disconnect the pin</p>
<p><b>Remove the Main frame</b></p>		

last updated May-2022
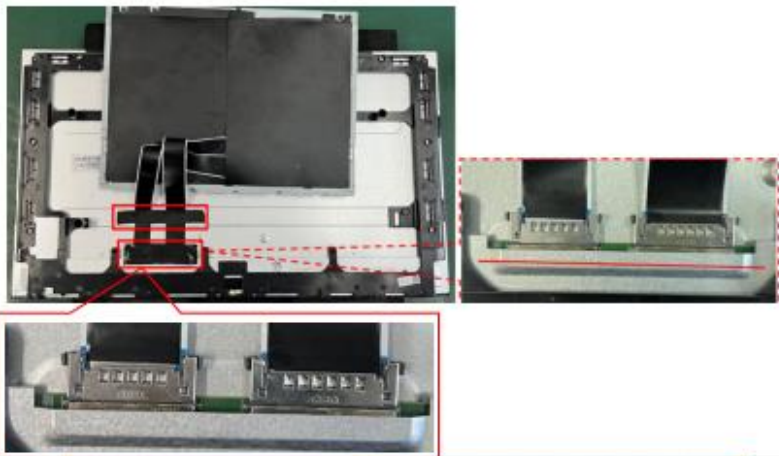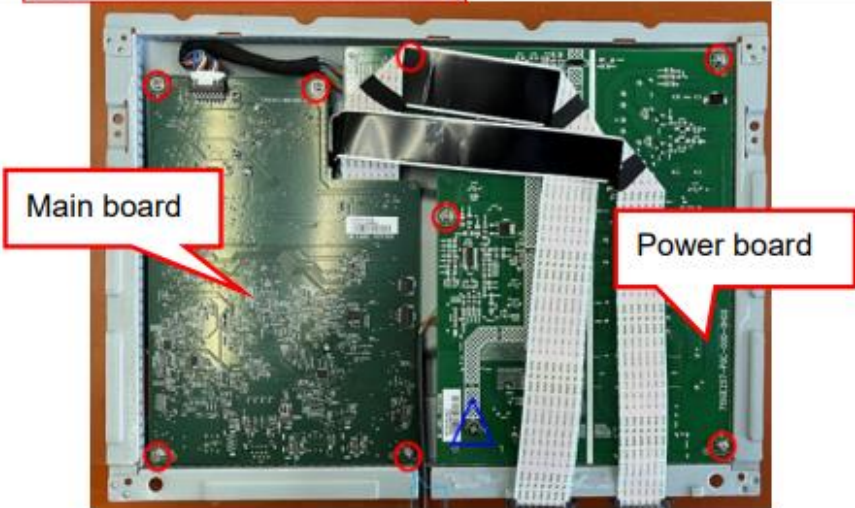
<p><b>Remove the middle frame and Panel</b></p>		<p>Use screwdriver to release 17 screws to remove middle frame and panel.</p>
<p><b>Remove the DECO BEZEL</b></p>		<p>Remove the screws to remove the DECO BEZEL</p>
<p><b>Remove the Mylar</b></p>		<p>Remove the Mylar. Disconnect the LVDS cable.</p>
<p><b>Remove the main board and power board</b></p>		<p>Use screwdriver to release 3 screws to remove the power board. Disconnect the pin.</p>



Remove the  
connectors

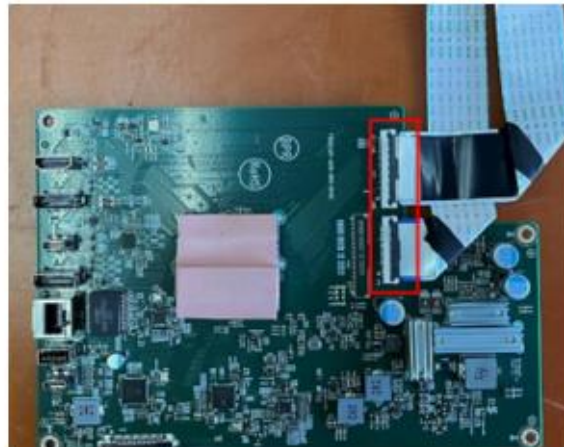

Capacitors greater  
than 2.5cm in  
diameter or height






Remove the  
connectors.



The  
Mainframe



The  
mainframe

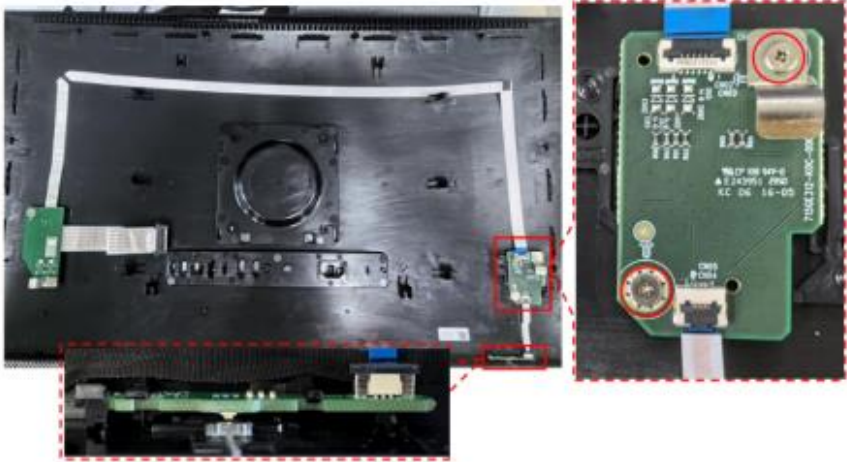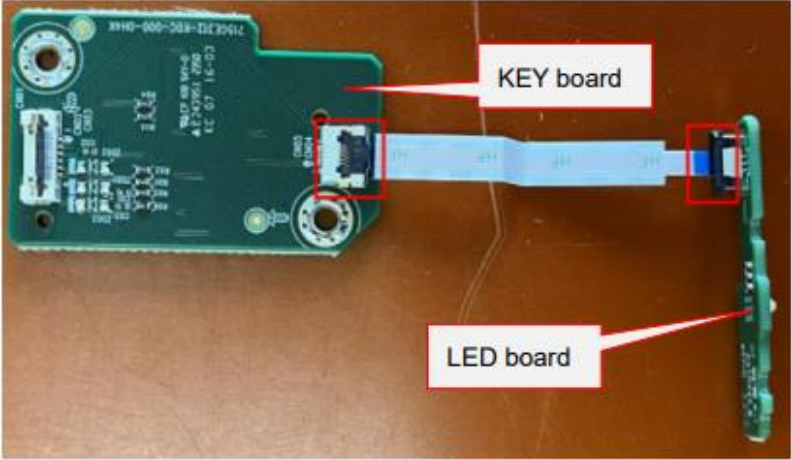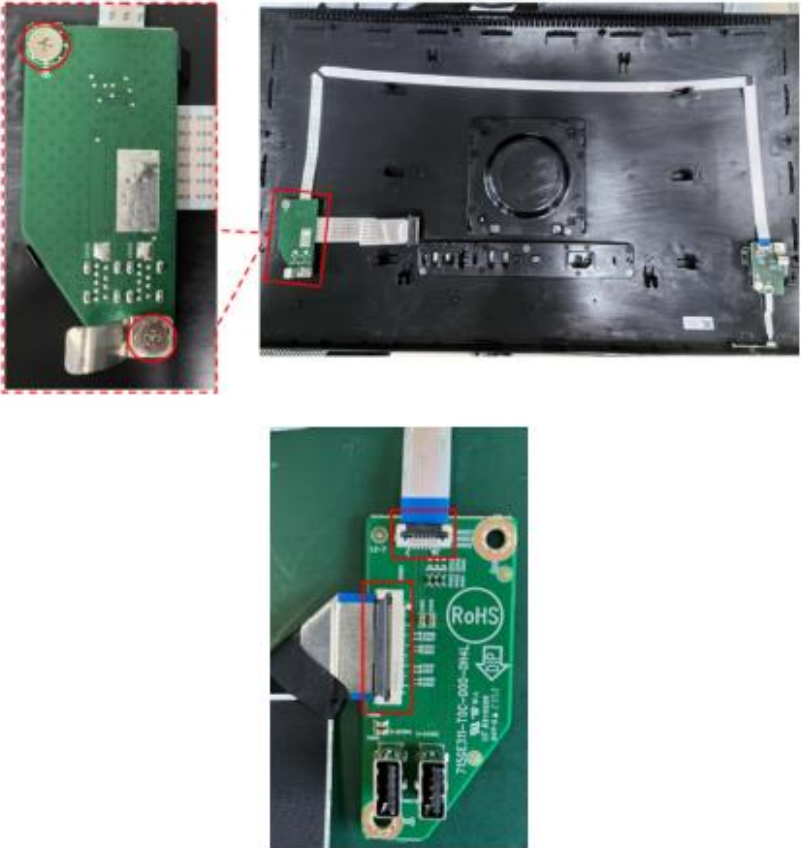

<p>Remove the key board and LED board</p>		<p>Disconnect the pin and use screwdriver to release 2 screws to remove the key board and the LED board.</p>
<p>Disconnect the pins</p>		
<p>Remove the USB board</p>		

<p><b>The rear cover</b></p>		
<p><b>The Middle frame</b></p>		
<p><b>The Panel</b></p>	