

**FORTINET**



FortiExtenderVehicle 211F/211F-AM

**QuickStart Guide**

# Register for Support

Register your Fortinet product to receive:

- Technical Support
- New product features
- Protection from new threats

Vous devez enregistrer le produit pour recevoir:

- Support technique
- Nouvelles fonctionnalités du produit
- Protection contre de nouvelles menaces

La reistruzione ti permette di usufruire di:

- Supporto Tecnico
- Nuove funzionalità
- Protezione dalle ultime minacce

Debe registrar el producto para recibir:

- Apoyo técnico
- Nuevas funcionalidades del producto
- Protección contra ataques

登録のお願い

本日、フォーティネット製品の登録をしてください。

登録すると次のメリットがあります。

テクニカルサポート・新機能の追加・新しい脅威への防御

请马上注册

您的飞塔产品

您在注册以后才能得到技术支持、新产品特点信息、最新威胁防护

<https://support.fortinet.com>

Toll free: 1 866 648 4638

Phone: 1 408 486 7899

Fax: 1 408 235 7737

Email: [register@fortinet.com](mailto:register@fortinet.com)



February 22, 2024

Copyright © 2023 Fortinet, Inc. All rights reserved. Fortinet®, FortiGate®, FortiCare® and FortiGuard®, and certain other marks are registered trademarks of Fortinet, Inc., in the U.S. and other jurisdictions, and other Fortinet names herein may also be registered and/or common law trademarks of Fortinet. All other product or company names may be trademarks of their respective owners. Performance and other metrics contained herein were attained in internal lab tests under ideal conditions, and actual performance and other results may vary. Network variables, different network environments and other conditions may affect performance results. Nothing herein represents any binding commitment by Fortinet, and Fortinet disclaims all warranties, whether express or implied, except to the extent Fortinet enters a binding written contract, signed by Fortinet's General Counsel, with a purchaser that expressly warrants that the identified product will perform according to certain expressly-identified performance metrics and, in such event, only the specific performance metrics expressly identified in such binding written contract shall be binding on Fortinet. For absolute clarity, any such warranty will be limited to performance in the same ideal conditions as in Fortinet's internal lab tests. In no event does Fortinet make any commitment related to future deliverables, features or development, and circumstances may change such that any forward-looking statements herein are not accurate. Fortinet disclaims in full any covenants, representations, and guarantees pursuant hereto, whether express or implied. Fortinet reserves the right to change, modify, transfer, or otherwise revise this publication without notice, and the most current version of the publication shall be applicable.

## Packing List

FortiExtenderVehicle 211F



2 x WiFi & 1 x Bluetooth Antennas



LTE/GNSS Vehicle Antenna (Optional)



Mounting Kit



Anchors

Screws

SIM Card Adapter



Vehicle Power Adapter



Drill Template Sticker



QuickStart Guide



## Product Description

FortiExtenderVehicle 211F/211F-AM is a secure LTE wireless WAN extender device for vehicular and industrial applications. It has a CAT12 LTE/GNSS module, 2x2 2.4G/5G WiFi 5 (11ac Wave2), and BLE integrated in the device. It features one (1) GE WAN, four (4) GE LAN RJ45 ports, one (1) USB 2.0, one (1) DB9 console, and an industrial digital I/O port of 1x opto input and 1x relay NC/NO output. It provides 2x2 2.4/5GHz concurrent 802.11 a/b/g/n/ac Wave2 WiFi up to 1200 Mbps and Bluetooth 5.0 communication.


FEV-211F-AM is for North America and supports Band 14 (FirstNet band). FEV-211F is for EU/APAC countries and supports Band 28.

Model	Modem
FEV-211F	One (1) Sierra Wireless EM7565 LTE module.
FEV-211F-AM	One (1) Sierra Wireless EM7511 LTE module.

### Notes:

- EM7565 is a CAT12 module with LTE speed DL/UL=600/150Mbps and supports GPS/GNSS/Beidou/Galileo navigation system. EM7565 supports Band 28, but does not support Band 14 (FirstNet, emergency communication channel).
- EM7511 is a CAT12 module with LTE speeds of DL/UL=600/150Mbps and supports GPS/GNSS/Beidou/Galileo navigation systems. EM7511 does not support Band 28, but supports Band 14 (FirstNet, emergency communication channel).

## Front Panel LEDs & Controls

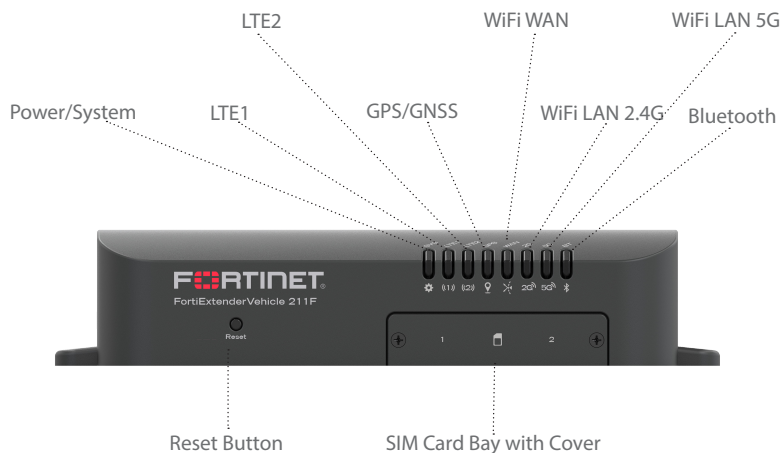


## LED Behavior

LEDs	Behavior and Description
Power/System (Green/Amber)	<ul style="list-style-type: none"> <li>Green Steady: System running normal.</li> <li>Green Flashing: Connected to wireless carrier.</li> <li>Amber Steady: System error.</li> <li>Amber Flashing: System boots up.</li> <li>OFF: No power.</li> </ul>
LTE1 (Green/Amber)	<ul style="list-style-type: none"> <li>Green Steady: LTE1 ON with LTE signal level <math>\geq 50\%</math>.</li> <li>Green Flashing: LTE1 activity with LTE signal level <math>\geq 50\%</math>.</li> <li>Amber Steady: LTE1 ON with LTE signal level <math>&lt; 50\%</math>.</li> <li>Amber Flashing: LTE1 activity with LTE signal level <math>&lt; 50\%</math>.</li> <li>Green and Amber Both Flashing: LTE1 modem firmware upgrade.</li> <li>OFF: LTE1 OFF.</li> </ul>

LEDs	Behavior and Description
LTE2 (Green/Amber)	<ul style="list-style-type: none"> <li>Reserved for FEV-212F/FEV-212F-AM only.</li> </ul>
GPS/GNSS (Green/Amber)	<ul style="list-style-type: none"> <li>Green: GPS/GNSS locked with <math>&gt; 5</math> positioning satellites.</li> <li>Amber: GPS/GNSS locked with <math>\leq 5</math> positioning satellites.</li> <li>OFF: No GPS/GNSS.</li> </ul>
WiFi WAN (Green/Amber)	<ul style="list-style-type: none"> <li>Green Steady: 5G WiFi connected as WAN.</li> <li>Green Flashing: 5G WiFi WAN activity.</li> <li>Amber Steady: 2.4G WiFi connected as WAN.</li> <li>Amber Flashing: 2.4G WiFi WAN activity.</li> <li>OFF: No WAN connection.</li> </ul>
WiFi LAN 2.4G (Green)	<ul style="list-style-type: none"> <li>Green Steady: 2.4G WiFi connected as LAN.</li> <li>Green Flashing: 2.4G WiFi LAN activity.</li> <li>OFF: No 2.4G WiFi LAN.</li> </ul>
WiFi LAN 5G (Green)	<ul style="list-style-type: none"> <li>Green Steady: 5G WiFi connected as LAN.</li> <li>Green Flashing: 5G WiFi LAN activity.</li> <li>OFF: No 5G WiFi LAN.</li> </ul>
Bluetooth (Green/Amber)	<ul style="list-style-type: none"> <li>Green Steady: Bluetooth is ON.</li> <li>OFF: Bluetooth is OFF.</li> </ul>
Amber LEDs all on	<ul style="list-style-type: none"> <li>OS upgrade is in process.</li> </ul>
Reset Button	<ul style="list-style-type: none"> <li>Press and hold for less than five (5) seconds to reset the system.</li> <li>Press and hold for five (5) seconds or more to restore the system to its default factory settings.</li> </ul>



## Ports, LEDs, Buttons, and Antenna Connectors

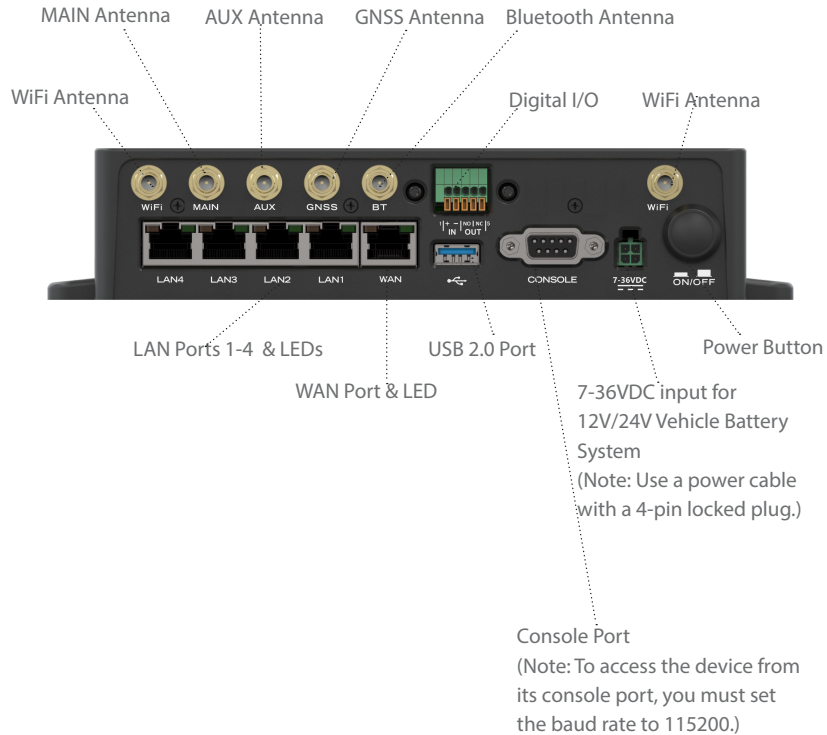


## LED Behavior

LEDs	Behavior and Description
WAN Port LED	<ul style="list-style-type: none"> <li>Green Steady: 1-Gb network connected.</li> <li>Green Flashing: 1-Gb network activity.</li> <li>Amber Steady: 100-Mb network connected.</li> <li>Amber Flashing: 100-Mb network activity.</li> <li>OFF: No network connection.</li> </ul>
LAN Ports 1-4 LEDs	<ul style="list-style-type: none"> <li>Green Steady: 1-Gb network connected.</li> <li>Green Flashing: 1-Gb network activity.</li> <li>Amber Steady: 100-Mb network connected.</li> <li>Amber Flashing: 100-Mb network activity.</li> <li>OFF: No network connection.</li> </ul>


## Button Usage

Power Button	<ul style="list-style-type: none"> <li>Press to lock: Power on.</li> <li>Press to release: Power off.</li> </ul>
--------------	------------------------------------------------------------------------------------------------------------------

## Digital I/O Definitions

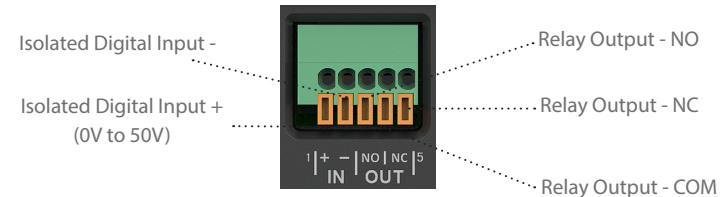


## Power Input Pin Definitions

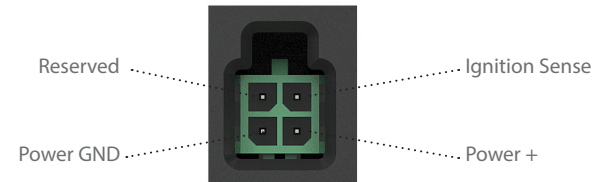

## Mounting Holes



## Battery Adapter Cable

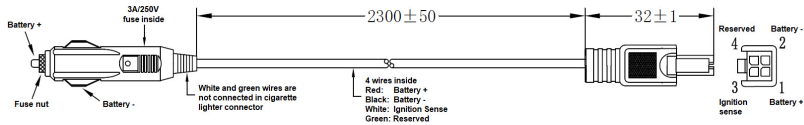


## 1 Basic Connections



1. Press to release the power button to ensure that the device is in power-off state (the power button is fully out).
2. Plug the cigarette lighter connector of the vehicle power adapter into the vehicle's cigarette lighter socket.
3. Plug the 4-pin locked plug into the device power input socket, and press to lock the power button to power on the device.

## Power Connection to Vehicle Fuse Panel

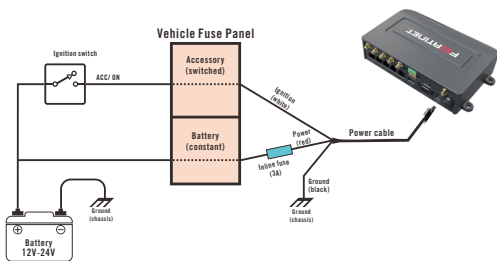

Note: UL/cUL Listing for US/Canada vehicle use does not cover use of products connected to vehicle battery via DC cable/connector.

## 2 Assembly

1. Unscrew the SIM socket dust cover fastening screws, and remove the dust cover.
2. When inserting your MicroSIM (3FF) SIM card(s) into the SIM socket(s), be sure to observe the following guidelines:
  - If installing one SIM card, you can insert the card into either SIM socket.
  - If installing two SIM cards, use SIM1 as the primary socket and SIM2 as the secondary.
3. Insert the SIM card(s) into the SIM socket(s), making sure that the card is facing down with the cut corner on the left. (If necessary, press the card again to remove it.)
4. Replace the SIM socket dust cover, tighten the dust cover screws, and attach the antennas.



## 3 IP Configuration

Connect one of the LAN ports of the device to the Ethernet port of your computer, and the device automatically attempts to obtain an IP address from the DHCP server. If you do not use DHCP, you can configure a static IP address.

To configure a static IP address:


1. Use an Ethernet cable to connect one of the LAN ports to the Ethernet port of your computer.
2. Set the computer Ethernet port to DHCP mode, and connect it to port1, port2, or port3.
3. Open your web browser and point to the default FortiExtender web GUI address: <http://192.168.200.99>
4. In both the username and password fields, type **admin** and press the Enter key on your keyboard. (**Note:** If you are logging into the device for the first time, you will be prompted to change the default password. We strongly recommend that you change the password right away.)
5. Go to `Networking>Interface`, where you'll see all the system interfaces.
6. Select a desired interface, set it to "static" mode, configure the static IP address, and click Save.

## 4 Installation

FortiExtenderVehicle 211F/211F-AM is designed for placement inside an automotive vehicle. Refer to the following diagram for proper placement and mounting.

### Fasten onto the wall of your vehicle

1. Peel off the drill template sticker, and stick it in a desired location on the wall.
2. Use the template to mark and drill the pilot holes.
3. If desired, insert the anchors into the holes.
4. Align the device with the holes or anchors.
5. Insert the screws into the holes or anchors and tighten.

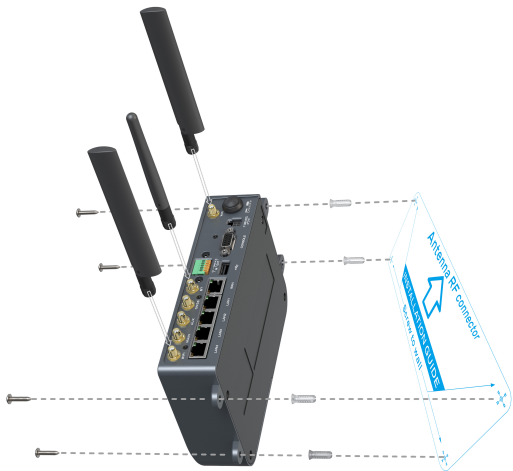

## Cautions and Warnings

### Environmental specifications

Ambient operating temperature: -40°C to 70°C.

*Refer to specific Product Model Data Sheet for Environmental Specifications (Operating Temperature, Storage Temperature, Humidity, and Altitude).*

*Référez à la Fiche Technique de ce produit pour les caractéristiques environnementales (Température de fonctionnement, température de stockage, humidité et l'altitude).*

### Safety

Warning: The equipment is intended for installation in Restricted Access Location.

Avertissement: Le matériel est conçu pour être installé dans un endroit où l'accès est restreint.

The equipment must be installed by skilled personnel.

L'équipement doit être installé par une personne qualifiée.

For use in a vehicle in US/Canada, a UL/CUL Listed (UL 2089) vehicle power adapter shall be used.

Pour usage dans un véhicule au États Unis/Canada, un adaptateur de courant homologué UL/CUL (UL 2089) doit être utilisé.

For use in a vehicle in US/Canada, this product is intended to be supplied by a listed vehicle power adapter marked Class 2 and rated 12Vdc, 2A or 24Vdc, 1A.

Pour usage dans un véhicule au États Unis/Canada, Ce produit est destiné à être alimenté par un adaptateur d'alimentation marqué Classe 2 et évalué 12Vdc, 2A ou 24Vdc, 1A.

This product is intended to be supplied by a listed power adapter marked LPS/PS2 or Class 2 and rated 12Vdc, 3A for indoor use only.

Ce produit est destiné à être alimenté par un adaptateur d'alimentation marqué LPS/PS2 ou Classe 2 et évalué 12Vdc, 3A pour usage intérieur seulement.

## Regulatory Notices

For FortiExtenderVehicle 211F-AM only.

### Federal Communication Commission (FCC)—USA

This device complies with Part 15 of the FCC Rules. Operation of the device is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in residential installation. This equipment generates, uses, and can radiate radio frequency energy, and if it is not installed and used in accordance with the instruction manual, it may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the distance between the equipment and receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

**WARNING:** Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment

This equipment complies with the FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance 20 cm between the radiator and your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

This device meets all the other requirements specified in Part 15E, Section 15.407 of the FCC Rules.

This radio transmitter (FCC TVE-3317E142) has been approved by the FCC to operate with the antenna types listed below with the maximum permissible gain and required antenna impedance for each antenna type indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

Antenna No.	Manufacturer	Part No.	Antenna Type	Connector	Antenna Peak Gain
1	ADVANCED WIRELESS & ANTENNA, INC.	A8EEE-000002	Dipole	SMA	3.5 dBi for 2.4GHz (WLAN) 5.5 dBi for 5GHz
2	Master Wave Technology Co., Ltd.	98619PRSX018	Dipole	SMA	3.19 dBi for 2.4GHz (WLAN) 5.85 dBi for 5GHz
3	ADVANCED WIRELESS & ANTENNA, INC.	A8EEE-000003	Dipole	SMA	2.0 dBi for 2.4GHz(BLE)

### Professional Installation Instructions

1. Installation personnel—This product is designed for specific application and needs to be installed by qualified personnel who has RF and related regulatory knowledge. The general user shall not attempt to install or change the settings.
2. Installation location—The product shall be installed at a location where the radiating antenna can be kept 20 cm from the nearby person in normal operation condition to meet the Regulatory RF exposure requirement. The installation applies to both indoor and outdoor locations.
3. External antenna(s)—Use only the antennas that have been approved by the manufacturer. Non-approved antennas may produce unwanted spurious or excessive RF transmitting power that may lead to violation of the FCC/ISED limit and is prohibited.
4. Warning—Carefully select the installation location and ensure that the final output power does not exceed the limit set forth in relevant rules. Violation of the rule could lead to serious federal penalty.

For FortiExtenderVehicle 211F-AM only.

### Industry Canada Equipment Standard for Digital Equipment (ICES) – Canada

CAN ICES-003 (B) / NMB-003 (B)

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

### Innovation, Science and Economic Development (ISED) – Canada

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

1. This device may not cause interference.
2. This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

1. L'appareil ne doit pas produire de brouillage;
2. L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

For product available in the USA/Canada market, only channel 1–11 can be operated. Selection of other channels is not possible.

Pour les produits disponibles aux États-Unis / Canada du marché, seul le canal 1 à 11 peuvent être exploités. Sélection d'autres canaux n'est pas possible. Caution: The device for the band 5150-5250 MHz is only for indoor usage to reduce potential for harmful interference to co-channel mobile satellite systems.

Attention: Le dispositif de la bande 5150-5250 MHz est réservé à un usage intérieur afin de réduire l'interférence nuisible potentielle aux systèmes mobiles par satellite co-canal.

The maximum antenna gain permitted for devices in the bands 5250-5350 MHz and 5470-5725 MHz shall comply with the e.i.r.p. limit; and

Le gain maximal d'antenne permis pour les dispositifs utilisant les bandes 5250-5350 MHz et 5470-5725 MHz doit se conformer à la limite de p.i.r.e.;

The worst-case tilt angle(s) necessary to remain compliant with the e.i.r.p. elevation mask requirement set forth in Section 6.2.2(3) shall be clearly indicated.

Les pires angles d'inclinaison nécessaires pour rester conforme à l'exigence de la p.i.r.e. applicable au masque d'élévation, et énoncée à la section 6.2.2 3), doivent être clairement indiqués.

The maximum antenna gain permitted for devices in the band 5725-5850 MHz shall be such that the equipment still complies with the e.i.r.p. limits specified for point-to-point and non-point-to-point operation as appropriate.

Le gain maximal d'antenne permis (pour les dispositifs utilisant la bande 5725-5850 MHz) doit se conformer à la limite de p.i.r.e. spécifiée pour l'exploitation point à point et non point à point, selon le cas.

This equipment complies with ISED radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 26cm between the radiator & your body.

Cet équipement est conforme aux limites d'exposition aux rayonnements ISED établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 26cm de distance entre la source de rayonnement et votre corps.

This radio transmitter (IC: 72808-3317E142) has been approved by ISED to operate with the antenna types listed below with the maximum permissible gain and required antenna impedance for each antenna type indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

Le présent émetteur radio (IC: 72808-3317E142) a été approuvé par ISED pour fonctionner avec les types d'antenne énumérés ci-dessous et ayant un gain admissible maximal et l'impédance requise pour chaque type d'antenne. Les types d'antenne non inclus dans cette liste, ou dont le gain est supérieur au gain maximal indiqué, sont strictement interdits pour l'exploitation de l'émetteur.

This device and its antennas(s) must not be co-located or operating in conjunction with any other antenna or transmitter except in accordance with IC multi-transmitter product procedures.

Cet appareil et son antenne (s) ne doit pas être co-localisés ou fonctionner en association avec une autre antenne ou transmetteur.

Antenna No.	Manufacturer	Part No.	Antenna Type	Connector	Antenna Peak Gain
1	ADVANCED WIRELESS & ANTENNA, INC.	A8EEE-000002	Dipole	SMA	3.5 dBi for 2.4GHz (WLAN) 5.5 dBi for 5GHz
2	Master Wave Technology Co., Ltd.	98619PRSX018	Dipole	SMA	3.19 dBi for 2.4GHz (WLAN) 5.85 dBi for 5GHz
3	ADVANCED WIRELESS & ANTENNA, INC.	A8EEE-000003	Dipole	SMA	2.0 dBi for 2.4GHz(BLE)

#### Professional Installation Instruction

1. Installation personnel—This product is designed for specific application and needs to be installed by qualified personnel who has RF and related rule knowledge. The general user shall not attempt to install or change the settings.
2. Installation location—The product shall be installed at a location where the radiating antenna can be kept 26cm from nearby person in normal operation condition to meet Regulatory RF exposure requirement. The installation applies to both indoor and outdoor location.
3. External antenna(s)—Use only the antenna(s) that have been approved by the manufacturer. The non-approved antenna(s) may produce unwanted spurious or excessive RF transmitting power that may lead to the violation of FCC/ISED limit and is prohibited.
4. Warning—Please carefully select the installation position and ensure that the final output power does not exceed the limit set forth in relevant rules. Violation of the rule could lead to serious federal penalty.

#### Instructions d'installation professionnelle

1. Installation—Ce produit est conçu pour un usage spécifique et doit être installé par un personnel qualifié maîtrisant les radiofréquences et règle similaires. L'utilisateur ne doit pas tenter d'installer ou de modifier les paramètres.
2. Emplacement d'installation—En usage normal, afin de respecter les exigences réglementaires concernant l'exposition aux radiofréquences, ce produit doit être installé de façon à respecter une distance de 26cm entre l'antenne émettrice et l'installation s'applique aux emplacements intérieur et extérieur.
3. Antenne externe(s)—Utiliser uniquement l'antenne (s) approuvées par le fabricant. L'utilisation d'autres antennes peut conduire à un niveau de rayonnement essentiel ou non essentiel dépassant les niveaux limites définis par FCC/ISED, ce qui est interdit.
4. Avertissement—Choisir avec soin la position d'installation et s'assurer que la puissance de sortie ne dépasse pas les limites en vigueur. La violation de cette règle peut conduire à de sérieuses pénalités fédérales.

For FortiExtenderVehicle 211F only

#### European Conformity (CE)—EU

This is a Class B product. In a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures.



The product transmits within the frequency ranges and less than or equal to the power listed below:

Standard	Frequency Range	Max. Transmit Power
Bluetooth	2402–2480 MHz	10 dBm (EIRP)
WLAN	2.4 GHz: 2412–2472 MHz	20 dBm (EIRP)
WLAN	5 GHz: 5180–5240 MHz	23 dBm (EIRP)
WLAN	5 GHz: 5260–5320 MHz	23 dBm (EIRP)*
WLAN	5 GHz: 5500–5700 MHz	30 dBm (EIRP)*
WLAN	5 GHz: 5745–5825 MHz	14 dBm (EIRP)
WCDMA	Band 1: 1920–1980 MHz (Uplink); 2110–2170 MHz (Downlink) Band 8: 880–915 MHz (Uplink); 925–960 MHz (Downlink)	25.7 dBm (Conducted)
LTE	Band 1: 1920–1980 MHz (Uplink); 2110–2170 MHz (Downlink) Band 3: 1710–1785 MHz (Uplink); 1805–1880 MHz (Downlink) Band 7: 2500–2570 MHz (Uplink); 2620–2690 MHz (Downlink) Band 8: 880–915 MHz (Uplink); 925–960 MHz (Downlink) Band 20: 832–862 MHz (Uplink); 791–821 MHz (Downlink) Band 28: 703–748 MHz (Uplink); 758–803 MHz (Downlink) Band 32: 1452–1496 MHz (Downlink) Band 42: 3400–3600 MHz (Uplink); 3400–3600 MHz (Downlink) Band 43: 3600–3800 MHz (Uplink); 3600–3800 MHz (Downlink) Band 46: 5150–5925 MHz (Downlink)	25.7 dBm (Conducted)

Note: \* Only with DFS bands certification.

This equipment should be installed and operated with a minimum distance 20 cm between the radiator & your body.

#### Simplified EU Declaration of Conformity

This declaration is only valid for Fortinet products (including combinations of software, firmware and hardware) provided by Fortinet or Fortinet's authorized partners to the end-customer directly for use within the EU or countries that have implemented the EU Directives and/or spectrum regulation. Any Fortinet products not obtained directly from Fortinet or Fortinet's authorized partners may not comply with EU Directives and Fortinet makes no assurances for such products.

#### Български

Този продукт е в съответствие с Директива 2014/53/ЕС.

#### Česky

Tento produkt je v souladu se směrnici 2014/53/EU.

#### Dansk

Denne produkt er i overensstemmelse med direktiv 2014/53/EU.

#### Deutsch

Dieses Produkt entspricht der Richtlinie 2014/53/EU.

**Eesti**

See toode vastab direktiivile 2014/53/EL.

**English**

This product is in compliance with Directive 2014/53/EU.

**Español**

Este producto cumple con la Directiva 2014/53/UE.

**Ελληνική**

Το προϊόν αυτό συμμορφώνεται με την Οδηγία 2014/53/ΕΕ.

**Français**

Ce produit est conforme à la Directive 2014/53/UE.

**Hrvatski**

Ovaj proizvod je u skladu s Direktivom 2014/53/EU.

**Italiano**

Questo prodotto è conforme alla Direttiva 2014/53/EU.

**Latviski**

Questo prodotto è conforme alla Direttiva 2014/53/EU.

**Lietuvių**

Šis gaminys atitinka direktyvą 2014/53/ES.

**Malti**

Dan il-prodott huwa konformi mad-Direttiva 2014/53/UE.

**Magyar**

Ez a termék megfelel a 2014/53/EU irányelvnek.

**Nederlands**

Dit product is in overeenstemming met Richtlijn 2014/53/EU.

**Norsk**

Denne produktet er i samsvar med direktiv 2014/53/EU.

**Polski**

Ten produkt jest zgodny z dyrektywą 2014/53/UE.

**Português**

Este produto está em conformidade com a Diretiva 2014/53/UE.

**Rumunski**

Acest produs este în conformitate cu Directiva 2014/53/UE.

**Slovensky**

Tento produkt je v súlade so smernicou 2014/53/EÚ.

**Slovensko**

Ta izdelek je v skladu z Direktivo 2014/53/EU.

**Suomi**

Tämä tuote on direktiivin 2014/53/EU mukainen.

**Svenska**

Denna produkt överensstämmer med direktiv 2014/53/EU.

Note: The full declaration of conformity for this product is available at the link below:

<https://site.fortinet.com/ProductRegulatory/EU>

The device is restricted to indoor use only when operating in the 5150 to 5350 MHz frequency range in the following countries:

	AT	BE	BG	HR	CY	CZ	DK
	EE	FI	FR	DE	EL	HU	IE
	IT	LV	LT	LU	MT	NL	PL
	PT	RO	SK	SI	ES	SE	UK (NI)

**Waste Electrical and Electronic Equipment (WEEE)**

This symbol means that according to local laws and regulations your product and/or its battery shall be disposed of separately from household waste. When this product reaches its end of life, take it to a collection point designated by local authorities. Proper recycling of your product will protect human health and the environment.

For FortiExtenderVehicle 211F only

UK Conformity Assessed (UKCA) – United Kingdom



The product transmits within the frequency ranges and less than or equal to the power listed below:

Standard	Frequency Range	Maximum Transmit Power
Bluetooth	2402–2480 MHz	10 dBm (EIRP)
WLAN	2.4GHz: 2412–2472 MHz	20 dBm (EIRP)
WLAN	5GHz: 5180–5240 MHz	23 dBm (EIRP)
WLAN	5GHz: 5260–5320 MHz	23 dBm (EIRP)*
WLAN	5GHz: 5500–5700 MHz	30 dBm (EIRP)*
WLAN	5GHz: 5745–5825 MHz	14 dBm (EIRP)
WCDMA	Band 1: 1920–1980 MHz (Uplink); 2110–2170 MHz (Downlink) Band 8: 880–915 MHz (Uplink); 925–960 MHz (Downlink)	25.7 dBm (Conducted)
LTE	Band 1: 1920–1980 MHz (Uplink); 2110–2170 MHz (Downlink) Band 3: 1710–1785 MHz (Uplink); 1805–1880 MHz (Downlink) Band 7: 2500–2570 MHz (Uplink); 2620–2690 MHz (Downlink) Band 8: 880–915 MHz (Uplink); 925–960 MHz (Downlink) Band 20: 832–862 MHz (Uplink); 791–821 MHz (Downlink) Band 28: 703–748 MHz (Uplink); 758–803 MHz (Downlink) Band 32: 1452–1496 MHz (Downlink) Band 42: 3400–3600 MHz (Uplink); 3400–3600 MHz (Downlink) Band 43: 3600–3800 MHz (Uplink); 3600–3800 MHz (Downlink) Band 46: 5150–5925 MHz (Downlink)	25.7 dBm (Conducted)

Note: \* Only with DFS bands certification.

This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

This product is in compliance with Statutory Instrument 1206 Radio Equipment Regulations 2017.

The full Declaration of Conformity for this product is available at the link below:  
<https://site.fortinet.com/ProductRegulatory/UK>

The device is restricted to indoor use only when operating in the 5150 to 5350 MHz frequency range in the following countries:



For FortiExtenderVehicle 211F only

Agência Nacional de Telecomunicações (ANATEL) – Brazil

Este equipamento não tem direito à proteção contra interferência prejudicial e não pode causar interferência em sistemas devidamente autorizados. [www.gov.br/anatel/pt-br/](http://www.gov.br/anatel/pt-br/)

Product License Agreement/EULA and Warranty Terms

Visit: <https://www.fortinet.com/content/dam/fortinet/assets/legal/EULA.pdf>



## Fortinet Customer Service & Support

Create a support account, register and manage your products, download updates, firmware images and release notes, and create technical support tickets.

<https://support.fortinet.com>

## Fortinet Document Library

Up-to-date versions of Fortinet publications for the entire family of Fortinet products.

<https://docs.fortinet.com>

## Training Services

Course descriptions, availability, schedules, and location of training programs in your area.

<https://training.fortinet.com>

## Technical Discussion Forums

Communicate with other customers and Fortinet partners about Fortinet products, services, and configuration issues.

<https://forum.fortinet.com>

## FortiGuard Threat Research and Response

Up-to-date information on vulnerabilities and threats, includes a virus scanner, IP signature look-up, and web filtering tools.

<https://fortiguard.com>

**Fortinet.com**