

2 Port VGA Video Splitter - 300MHz

ST122LE

DE: Bedienungsanleitung - de.startech.com

FR: Guide de l'utilisateur - fr.startech.com

ES: Guía del usuario - es.startech.com

IT: Guida per l'uso - it.startech.com

NL: Gebruiksaanwijzing - nl.startech.com

PT: Guia do usuário - pt.startech.com

Packaging Contents

- 1 x ST122LE video splitter
- 1 x USB to DC Power adapter cable
- 1 x Installation Guide

System Requirements

- VGA enabled video source device (i.e. computer, laptop, etc) with an available USB port
- VGA enabled display devices (i.e. monitor, projector, TV, etc)


Installation

NOTE: Before connecting the splitter to the source computer and displays, you should ensure that the workspace is configured to require minimal cable between the computer and splitter, and between the splitter and the displays.

The maximum resolution you will be able to use for your application depends on cable quality and length, and how many interference-causing devices are nearby. You may not be able to use the maximum resolution at longer distances. For the best possible performance, keep the length of cable from the source computer to the splitter to 6 feet (1.8m).

1. Power down the host computer and displays that will be connected.
2. Connect the Video In connector on the splitter to the Video Out port on the host computer.
3. Using a high-quality HD-15 VGA switchbox male-to-male cable (StarTech.com part number MXT101MMHQ), connect one end of the cable to one of the Video Out ports on the splitter. Connect the opposite end to the VGA input on the display. Repeat this process for the remaining display.
4. Connect the tip on the power adapter (provided) to the power port on the video splitter. Connect the remaining end to an available USB port on the host computer.

Once you have completed the steps above, you can power on the displays and the host computer. Each will now display the image from the source computer.

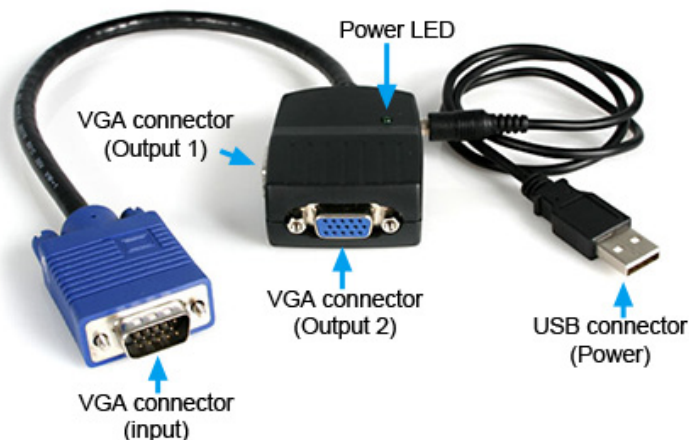

*actual product may vary from photos

Specifications

Video Signal	VGA (RGBHV)
Number of Ports	2
Connectors	2x DE-15 VGA female 1x DE-15 VGA male 1x USB type A male
LEDs	1x Power
Maximum Video Resolution	2048 x 1536
Video Bandwidth	300MHz
Maximum Cable Distance	65m / 210ft
DDC Support	DDC, DDC2, DDC2B (Port 1 only)
Integrated Cable Length	400mm
Operating Temperature	0°C ~ 70°C (32°F ~ 158°F)
Storage Temperature	-20°C ~ 85°C (-4°F ~ 185°F)
Humidity	0% ~ 95% RH
Dimensions	68.0mm x 46.0mm x 21.5mm
Weight	110 g

FCC Compliance Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols

This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to StarTech.com. Where they occur these references are for illustrative purposes only and do not represent an endorsement of a product or service by StarTech.com, or an endorsement of the product(s) to which this manual applies by the third-party company in question. Regardless of any direct acknowledgement elsewhere in the body of this document, StarTech.com hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders.

Technical Support

StarTech.com's lifetime technical support is an integral part of our commitment to provide industry-leading solutions. If you ever need help with your product, visit www.startech.com/support and access our comprehensive selection of online tools, documentation, and downloads.

For the latest drivers/software, please visit www.startech.com/downloads

Warranty Information

This product is backed by a two year warranty.

In addition, StarTech.com warrants its products against defects in materials and workmanship for the periods noted, following the initial date of purchase. During this period, the products may be returned for repair, or replacement with equivalent products at our discretion. The warranty covers parts and labor costs only. StarTech.com does not warrant its products from defects or damages arising from misuse, abuse, alteration, or normal wear and tear.

Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.