



# USB-C Multitask Adapter with Conference Speaker

## User Manual



04-1369A

P/N: JU-DK0S11-S1

## Features

- Support USB 5G speed Type-A port x2,
- HDMI video output resolution up to 4K 3840x2160p@30Hz
- Support 3.5mm audio output
- Support USB PD 3.0 charging  
Input: 100W (max), charging 85W (max)  
(15W for the adapter use)
- Support switch on/off the audio function of the adapter.

## Package contents

- USB-C Multitask Adapter
- USB Type-C to Type-C cable 100W (20V/5A)
- User Manual

## System requirements

- Host computer system with an available USB Type-C (Thunderbolt 3 compatible) Port which supports DP Alt Mode and Power Delivery
- Windows® 11 / 10 / 8.1 (32/64 bit)
- Mac OS X® 12.X, 11.X, 10.X

## What is USB 3.1 Type-C?

- USB 3.1 Type-C is a new generation connector interface of USB 3.1 standard, that is capable to support for the following:
- USB 3.1 Gen 1 support up to 5 Gbps data transfer rate and USB 3.1 Gen 2 support up to 10Gbps data transfer rate
- Bi-directional power delivery up to 100W, if both the USB host connection and the device support it
- DP Alternate modes, the signal is based on the DisplayPort version to deliver different speeds.

Not all USB-C ports support the full functionality of the USB Type-C standard. For more information, please refer to the information provided by the manufacturers.

## **DP alt mode** (DisplayPort alternative mode)

This adapter supports DP alt mode, which means a DisplayPort video signal can be transferred over a USB-C cable.


Because the docking station supports DP alt mode, so the Alt mode video port can output the video directly via DP alt mode without other driver installs.

## **USB Power Delivery**

This adapter supports USB Power Delivery, which means it delivers up to 100 watts of power to your connected host laptop (your laptop's USB-C port must support power delivery). USB Power Delivery is a specification that allows power to be sent over a USB-C or Thunderbolt 3 cable that supports the specification.


Ensure your USB-C cable can support PD 100W transfer or use the included USB-C cable.

## Front View



- 1. USB 5G Type-A port:**  
Support USB UASP mode, 5Gbps speed and 5V/0.9A power output.
- 2. 3.5mm audio output:**  
connect to speaker or earphone
- 3. PD charging input:**  
connect to your PD charger  
Input: 100W (max), charging 85W (max)  
(15W for the adapter use)
- 4. USB audio function:**  
switch on/off the speaker and microphone of the adapter.
- 5. USB-C host:**  
Connect to USB-C port which supports DP Alt Mode and Power Delivery.
- 6. HDMI video output**  
This video output via host DP Alt mode  
Resolution up to 3840x2160p@30Hz

## Top View

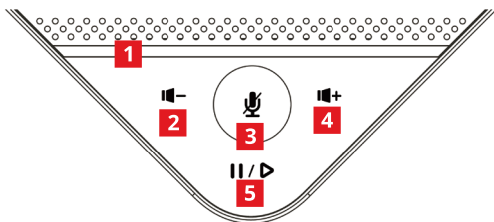

1. **Volume Light:**  
Blue: speaker and microphone are enabled  
Red: microphone is disabled.
2. **Volume key “-“:**  
Please short press to adjust volume
3. **Microphone on/off:**  
Enable/disable the microphone of the adapter.
4. **Volume key “+“:**  
Please short press to adjust volume
5. **Play/Pause:**  
Please short press to Play or Pause music.

## Q & A

- **Why can't my laptop do 85W charging?**

Your laptop must support 85W charging. Not all laptops support or require 85W for charging.

- **Why am I using a 100W PD charger but only getting 85W charging?**

The media hub needs 15W for all the port functions to operate simultaneously ( $100W - 15W = 85W$ ).

- **Why does the HDMI output produce no signal?**

Ensure your USB-C host port support DP Alt mode.

- **Why does the media hub speaker and/or microphone not work?**

Please check the media hub is selected as the primary audio output and input in your computer settings.

Please check the physical On/Off switch is turned on.

**Dear Valued Customer**

**WE REALLY  
APPRECIATE  
YOUR PURCHASE**

***~thank you~***

**Support**

For more info or tech support  
**<http://www.siig.com/support>**