

CyberPower

Battery Replacement Instructions

All CyberPower Systems replacement battery cartridges listed in this manual use Non-Spillable Sealed Lead Acid Batteries.

K01-C000749-00


REPLACEMENT BATTERY PACK TABLE

Model Name	Battery QTY	Compatible UPS/EBM Model
RBP0156	2	OLS1000ERT2UA BPSE24V40ART2U (Contain 2 RBP packs)
RBP0157	4	OLS2000ERT2UA BPSE48V40ART2U (Contain 2 RBP packs)
RBP0169	4	OLS1500ERT2UA
RBP0066	3	OLS1000ERT2U BPSE36V45ART2U (Contain 2 RBP packs)
RBP0067	3	OLS1500ERT2U
RBP0158	6	OLS3000ERT2UA BPSE72V40ART2U (Contain 2 RBP packs)
RBP0069	6	OLS2000ERT2U BPSE72V45ART2U (Contain 2 RBP packs)
RBP0070	6	OLS3000ERT2U

Battery Pack(s) Replacement should be performed or supervised by qualified personnel.

BATTERY PACK REPLACEMENT FOR OLS SERIES

Model Name	Battery QTY	Compatible UPS Model
RBP0066	3	OLS1000ERT2U
RBP0067	3	OLS1500ERT2U
RBP0069	6	OLS2000ERT2U
RBP0070	6	OLS3000ERT2U

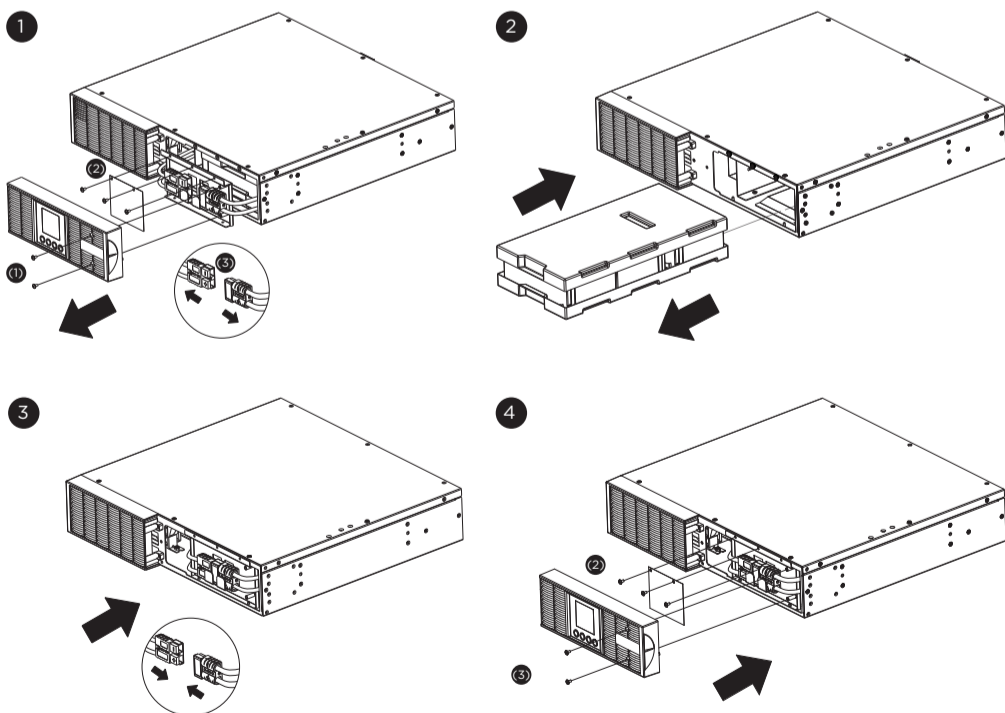

Step 1:
 (1) Remove the right front panel.
 (2) Remove the battery connector from the battery compartment cover and disconnect.
 (3) Loosen the three screws to remove the plastic sheet and the battery compartment cover.


Step 2:
 Pull the battery trays out slowly and then put the new battery trays into the compartment.

Step 3:
 Re-install the battery compartment cover and the plastic sheet by tightening the screws. Connect the battery connector and secure onto the battery compartment cover. Please make sure the connection is properly seated.

Step 4:
 Re-install the right front panel and tighten with two screws.

BATTERY PACK REPLACEMENT FOR OLSA SERIES

Model Name	Battery QTY	Compatible UPS Model
RBP0156	2	OLS1000ERT2UA
RBP0157	4	OLS2000ERT2UA
RBP0169	4	OLS1500ERT2UA
RBP0158	6	OLS3000ERT2UA

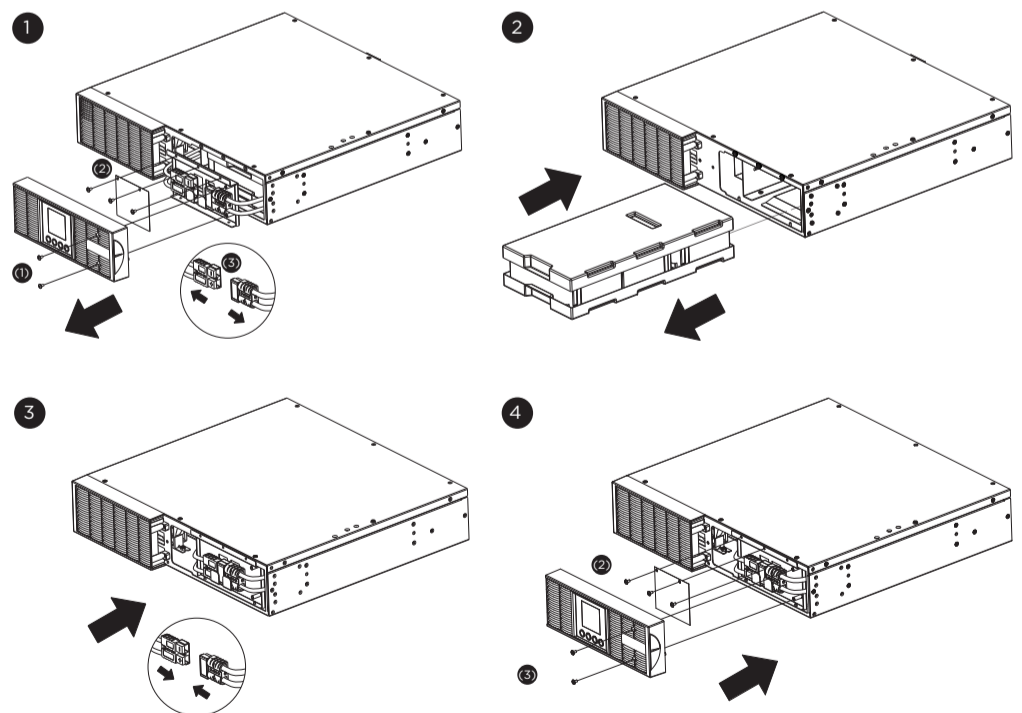

Step 1:
 (1) Remove the right front panel.
 (2) Remove the battery connector from the battery compartment cover and disconnect.
 (3) Loosen the three screws to remove the plastic sheet and the battery compartment cover.


Step 2:
 Pull the battery trays out slowly and then put the new battery trays into the compartment.

Step 3:
 Re-install the battery compartment cover and the plastic sheet by tightening the screws. Connect the battery connector and secure onto the battery compartment cover. Please make sure the connection is properly seated.

Step 4:
 Re-install the right front panel and tighten with two screws.

BATTERY PACKS REPLACEMENT FOR OLS-EBM

Model Name	Battery QTY	Compatible UPS Model
RBPO066 x 2 packs	3 x 2	BPSE36V45ART2U
RBPO069 x 2 packs	6 x 2	BPSE72V45ART2U

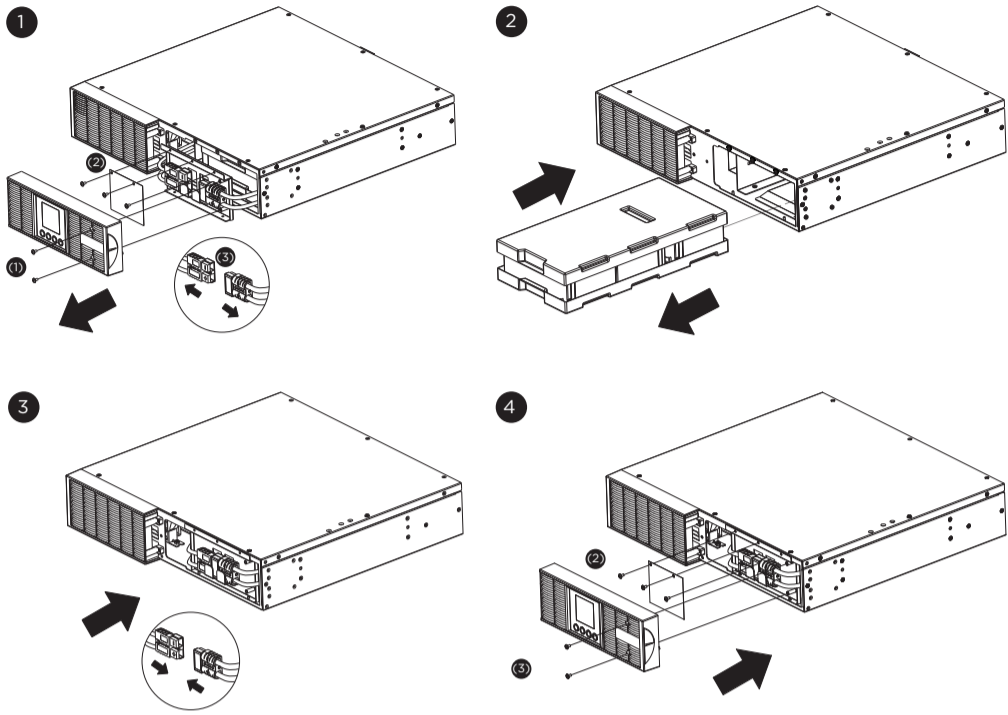

Step 1:

- (1) Remove the right front panel.
- (2) Remove the battery connector from the battery compartment cover and disconnect.
- (3) Loosen the three screws to remove the plastic sheet and the battery compartment cover.

Step 2:

Pull the battery trays out slowly and then put the new battery trays into the compartment.

Step 3:

Re-install the battery compartment cover and the plastic sheet by tightening the screws. Connect the battery connector and secure onto the battery compartment cover. Please make sure the connection is properly seated.


Step 4:

Re-install the right front panel and tighten with two screws.

4

BATTERY PACKS REPLACEMENT FOR OLSA-EBM

Model Name	Battery QTY	Compatible UPS Model
RBP0156 x 2 packs	2 x 2	BPSE24V40ART2U
RBP0157 x 2 packs	4 x 2	BPSE48V40ART2U
RBP0158 x 2 packs	6 x 2	BPSE72V40ART2U

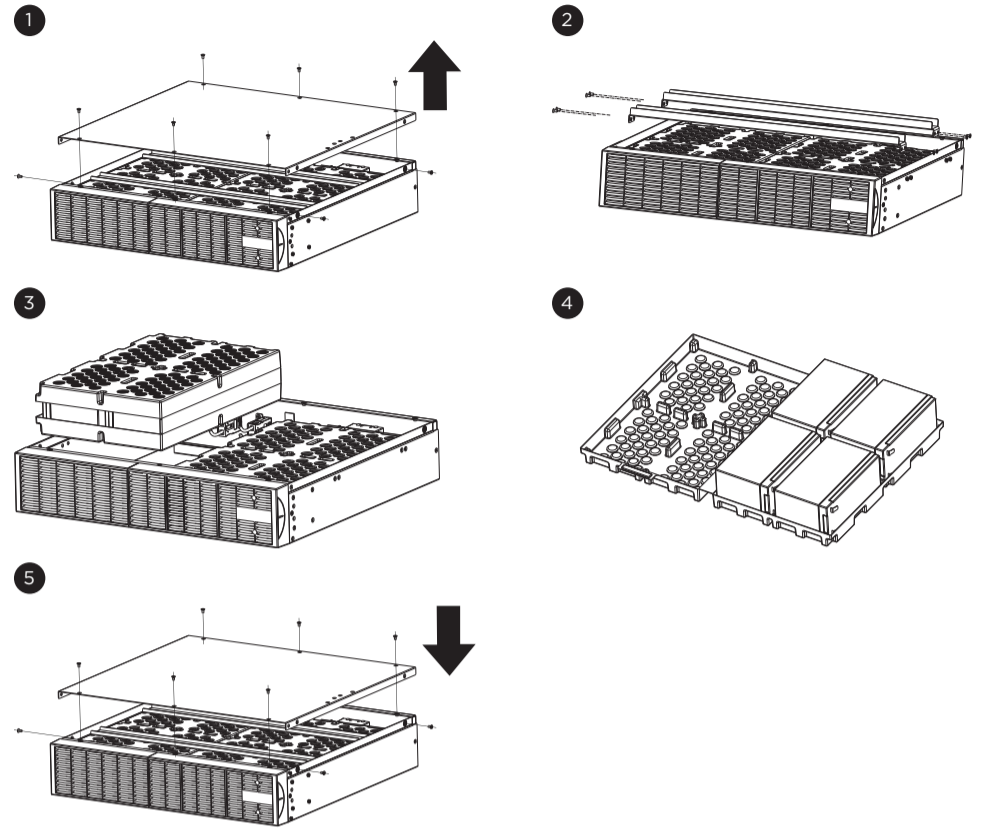

Step 1:

Unscrew the top cover and separate the top cover from the Battery module.

Step 2:

Unscrew the steel bars and separate the steel bars from the Battery module.

Step 3:

Remove the battery pack from the Battery module.

Step 4:

Open the battery pack and change the batteries.

Step 5:

Put the battery pack into the Battery module. Re-install the steel bars and top cover.

5

Cyber Power Systems, Inc.

www.cyberpower.com

11F., No.26, Jinzhuang Rd., Neihu Dist., Taipei City 114, Taiwan

Copyright © 2022 Cyber Power Systems, Inc. All rights reserved.

CyberPower and the CyberPower logo are trademarks of Cyber Power Systems, Inc., and/or affiliates, which are registered in many countries and regions. All other trademarks are the property of their respective owners.

