


innex Meeting Hub CT Series

Quick Start Guide


65", 75", 86"

Package Contents

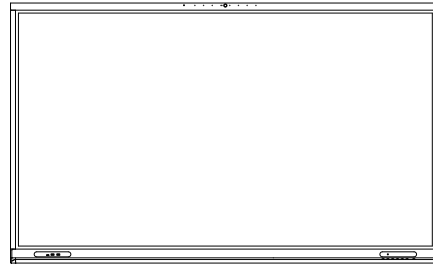

CT touch display
+
Wall mount bracket

Connect Pro



Connect Pro
Receiver




Connect Pro
Button *2

Accessory box



Remote control



IR Pen *2



M3 Screw *2
(for Connect Pro Receiver)



Warranty card



Quick start guide



Safety documents


Accessory bag




USB B-A cable
*1.5m




HDMI cable
*1.5m



Power cable (USA)
*3m



Power cable (EU)
*3m



Power cable (UK)
*3m



Power cable (INDIA)
*3m (Optional)




Wall anchor *8




Self-tapping screw *8

Overview

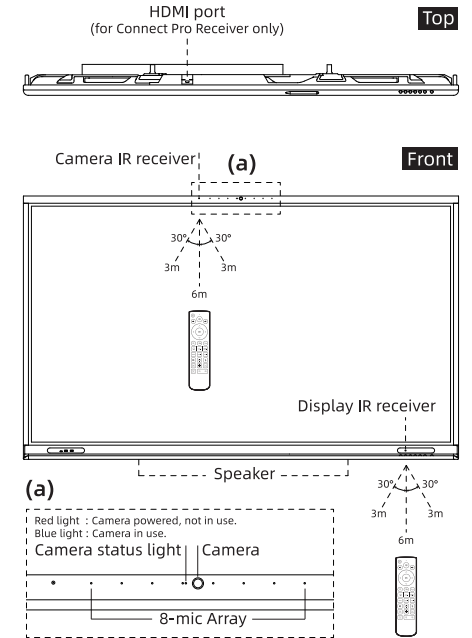

Back

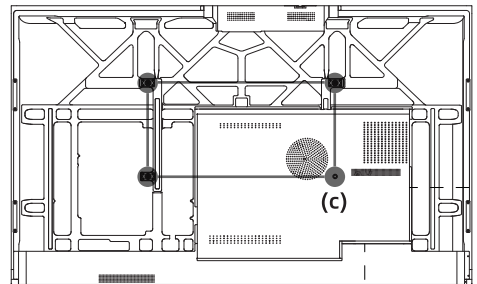

(b) Rear ports




USB 3.0 *2	Connect USB devices such as keyboards, mouse or storage devices. *The USB ports accept a maximum constant current of 1.0A. If the value is exceeded, USB ports may not work.
TOUCH	Connect a device via USB B-A cable for touch control.
HDMI IN 1&2	Connect a device, such as a laptop, using a HDMI cable.
TYPE-C	Connect a device via USB-C cable or USB-C drive.
RS232	RS232 protocol for PC or other devices control.
Service	For display firmware update.
OPTICAL	Connect a external speaker.
HDMI OUT	Outputs signal to a display via HDMI cable.

(c) VESA Mount

65" : 500mm x 400mm
75" : 600mm x 400mm
86" : 800mm x 400mm

Remote Control

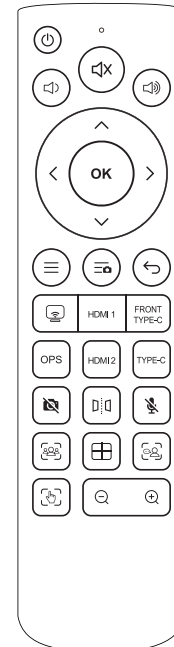

Display (white printing)


Power	Mute
Vol -	Vol +
Navigate	OK Confirm
Menu	Switch source to Screen Share
HDMI 1	Switch source to front type-C
OPS	Switch source to OPS
TYPE-C	Switch source to rear type-c
HDMI 2	Switch source to HDMI 2

Camera (blue printing)

Camera menu	Return
Camera On/Off	Mirror OSD
Mic On/Off	Auto-framing
Gallery	Speaker tracking
Manual	Zoom out
Zoom in	Adjust camera viewing angle

*Use the remote control within 3m to 6m from the sensor on the product at an angle of 30° from the left and right.

Connect Pro Receiver

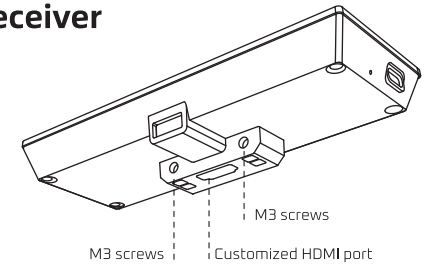

*Please install the Connect Pro Receiver before power on product.


Insert the Connect Pro Receiver into the HDMI port on top of the CT display. This port is exclusively for the receiver. If needed, secure it with the included M3 screws.




Connect Pro Receiver does not support hot plugging. Therefore, you must insert or remove the receiver when the display is powered off. Otherwise, the panel display or the receiver may be damaged.

Display menu

Press the menu button on the display or remote control to open the display menu. Navigate using the arrow keys, and press OK to select and confirm your choice.

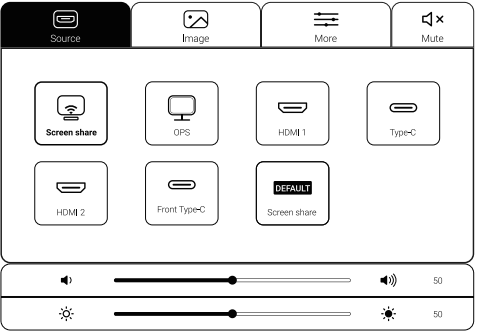

- Source:** Select an icon to switch sources, and select the “default” icon to set a source as default.
- Image:** Select an image mode or customize your own settings by adjusting image properties.
- More:** Access extra display settings like language, aspect ratio, color range, and factory reset.
- Mute** **Volume** **Brightness**

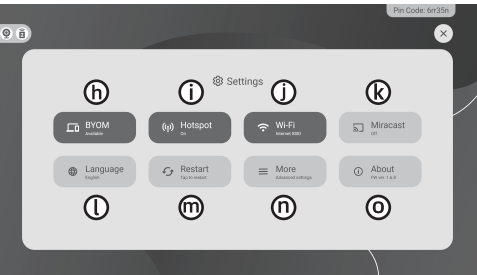


Item	Description
h	BYOM
i	Hotspot
j	Wi-Fi
k	Miracast
l	Language
m	Restart
n	More
o	About


Sources and connections

OPS
Remove the metal cover on the OPS slot. Then, insert the OPS into the OPS slot on the back of display.

HDMI 1 & HDMI 2
Connect your device by using a HDMI cable and USB B-A cable.




Front & Rear Type-c
Connect your device using a USB-C to USB-C cable to a full-featured USB-C port on your laptop.



Screen share
Switch the source to “Screen Share”, follow the instructions on the Connect Pro interface to start sharing your screen.

Innex Connect Pro Button


Please pair the button with display before use. Plug the Connect Pro Button into the USB port of receiver on the top of display, the pairing will start automatically. Follow on-screen instructions to complete setup.





Plug the Connect Pro Button into a full-featured USB-C laptop port. Once the status light turns slow flashing white, press the button to start or pause screen sharing.



To access display camera, microphone and speaker wirelessly, in your video conference software, select “Connect Pro” as your camera, microphone and speaker.

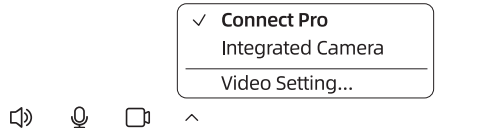

Connect Pro With Connect Pro, the CT display supports screen sharing via Airplay, Miracast, Chromecast, and Innex Connect Pro Button. Access the built-in camera wirelessly from your laptop with the Innex Connect Pro Button.

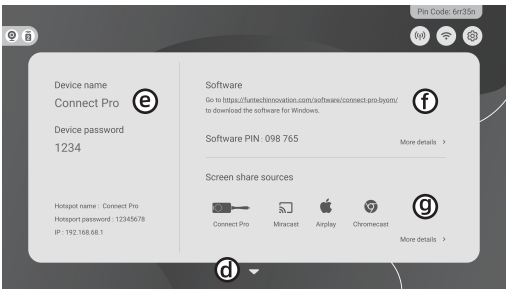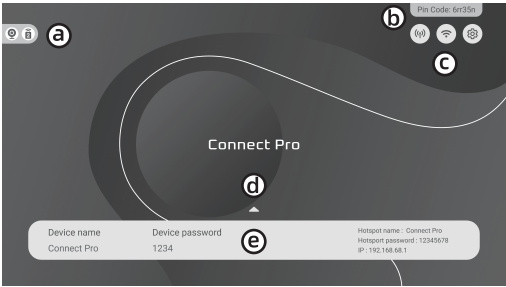

Specification

Display			
Display Dimension	65", 75", 86"	Resolution	Ultra HD 3840 x 2160
Brightness	450 Typ.	Aspect Ratio	16:9
Contrast	1200:1	Response Time	8 ms Typ.
Dynamic Contrast	5000:1	Viewing Angle	178°
Glass Hardness	8H	NTSC	105%
Glass Thickness	3.2 mm	Color Depth	1.07B Colors (8 bits+FRC)
Bonding Type	Zero bonding	Panel Frequency	60Hz
Back-Light	LED	Flicker Free	Yes

Touch / Interactive			
Touch Technology	Infrared Touch	Microsoft Pen Protocol	Stylus, Finger, Palm Eraser
Touch Points	40 Points	Pen Tip Diameter	3 mm / 8 mm
Accuracy	± 1 mm (Over 90% area)	Palm Rejection	Yes
Min. Object Size	2.5 mm	Tracking Rate	≤ 5ms
Touch Resolution	32768 x 32768	Single point scan time	≥ 200Hz
Touch Surface	Anti-Glare Glass		
Pen Type	Passive Pen		

Speaker, Camera and Microphone	
Speaker Output	15W x 2
Built-in Camera	8MP Sony IMX-415 sensor with FOV 120°
Camera Function	Support Remote Control; Support Auto-Framing, Gallery, Speaker Tracking, Manual Mode
Microphone	8-Mic Array with Auto Gain Control/ ANR/ AEC

Wireless Conferencing System	
Device	Connect Pro Receiver
Protocol	Connect Pro Button (BYOM), Airplay, Miracast, Chromecast

Power	
Power Supply	100V ~240V AC
Standby Mode	Yes
Consumption	65": Max. ≤ 250W 75": Max. ≤ 350W 86": Max. ≤ 450W

	Item	Description
a	BYOM icon	Displays when the BYOM function is ready. If the BYOM icon doesn't appear, connect to the internet to activate the product or ensure the camera is connected to the display.
	Device icon	Displays the number of devices ready for screen sharing. Tap to view details.
b	Pin code	Enter this Pin code in the Connect Pro software to connect to the display and start screen sharing.
c	Hotspot	Displays the hotspot status and provides a link to the hotspot page.
	Wi-Fi	Displays the Wi-Fi status and provides a link to the Wi-Fi page.
	Settings	Provides a link to the settings page.
d	Arrow	Tap to expand or collapse the information page.
e	Info	Displays basic device information, including the device name and password needed for screen sharing.
f	Software	Provides links to download the software for Windows and access the quick guide for using it.
g	Source info	Displays screen share source options. Tap “More details” for a quick guide on how to use them.

Operating & Storage Environment

Operating Temperature	0 °C ~ 45 °C	Operating Humidity	10% ~ 90%
Storage Temperature	-20 °C ~ 60 °C	Storage Humidity	10% ~ 90%

Physical Specification

Size	65"	75"	86"
Panel Dimension (mm)	1501.6 x 928.59	1723.92 x 1053.91	1969.6 x 1192
Package Dimension(mm)	1580 x 220 x 1000	1790 x 220 x 1165	2044 x 220 x 1280
Net Weight	36 kg	48 kg	60.5 kg
Gross Weight	45.5 kg	60 kg	74.5 kg

I/O Ports

I/O Ports		
Front	USB-C	1 (DP Alt 1.4 4k@60 in, USB 2.0, PD 20V/3.25A)
	USB-A	2 (USB 3.0 Dynamic)
	HDMI In	2
	HDMI Out	1
	USB-A	2 (USB 3.0 Dynamic)
	USB-C	1 (DP Alt 1.4 4k@60 in, USB 2.0)
Rear	USB-B for Touch	1 (USB 3.0)
	USB-A	1 (USB 2.0 for service only)
	SPDIF Out	1
	RS232	1
	OPS Slot	1
	AC In	1
Top	HDMI (Custom)	1 (HDMI with Power 5V/3A, USB 2.0)

Others

Connect Pro	Connect Pro Receiver x1, Connect Pro Button x2
Accessory Box	Remote control x1, IR pen x2, Warranty Card M3 screw *2 (for Connect Pro Receiver) Quick start guide, Safety documents
Accessory Bag	1.5M HDMI Cable x1, 1.5M USB B-A Cable x1, 3M USA Power Cable x1, 3M EU Power Cable x1, 3M UK Power Cable x1, 3M INDIA Power Cable x1 (optional), Wall anchor x8, Self-tapping screw x8
Certification	CE, FCC

FAQ For any product related question please visit www.funtechinnovation.com/faq