

6050S

SURGE PROTECTOR

Surge protection made simple

FEATURES

6 Grounded Outlets

For standard-sized plugs

Safe-Fail Protection

Power is cut to connected equipment when the unit can no longer provide surge protection

Phone/DSL/Modem

1-in, 1-out line surge protection

On/Off Switch

15 Amp circuit breaker

EMI/RFI Noise Filter

Shields against EMI/RFI interference to improve picture and sound quality

Low-Profile Cord Plug

Fits tightly behind furniture

Keyhole Slots

For easy wall or desk mounting

Lifetime Limited Warranty

Covers defects in material and workmanship for the product under normal use and conditions

Connected

Equipment Guarantee

For as long as you own this product, CyberPower will cover up to \$100,000 of properly connected equipment if it is ever damaged by a surge, including a surge due to lightning strikes. See User Manual for details.

TECHNICAL SPECS

Maximum Energy Dissipation

1500 Joules

UL 1449 4th, Listed

Clamping Voltage

400V (L-N, L-G, N-G)

Maximum Peak Current

60,000A

3 AC Lines Protected

L-N: 30,000A; L-G: 15,000A;

N-G: 15,000A

EMI/RFI Noise Filtration

150kHz to 100MHz

Attenuation

Up to 32dB

Electrical Rating

125V/15A/60Hz 1875W Continuous Duty

Circuit Breaker

Resettable 15A

⚠ WARNING: This product can expose you to chemicals including bisphenol A (BPA) and styrene (ABS), which is known to the State of California to cause reproductive harm and cancer. For more information, go to www.P65Warnings.ca.gov.

Designed for indoor use in dry locations. Connect only to a three-prong grounded outlet. Do not use with aquarium equipment. Do not use with medical or other life-saving equipment.



Cyber Power Systems (USA), Inc.
Shakopee, MN 55379
Phone: 952-403-9500

CyberPowerSystems.com

©2018 Cyber Power Systems (USA), Inc.
All rights reserved. All other trademarks are the property of their respective owners.

6050S | 60L SURGE PROTECTOR



DESIGNED IN THE USA

G18-0000168-05



6
OUTLETS

4
CORD

DATA LINES
PROTECTED

1500
JOULES
PROTECTION

Computers

Audio Video
Equipment

Smart Home
Devices

Chargers

SURGE PROTECTOR

Protect electronic devices
from spikes and surges

\$100K
CONNECTED
EQUIPMENT
GUARANTEE


LIFETIME
LIMITED
WARRANTY

SAFE
SAFE-FAIL
TECHNOLOGY

CyberPower®

CyberPower®

6-OUTLET SURGE PROTECTOR 6050S USER MANUAL

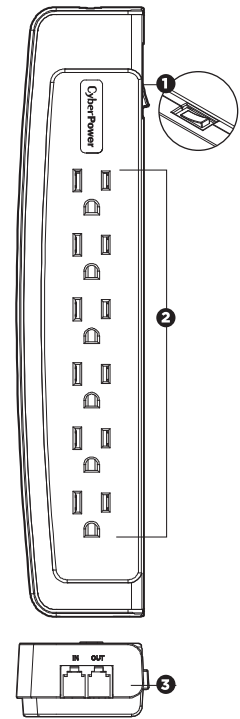

CONGRATULATIONS ON YOUR PURCHASE

Thank you for selecting the CyberPower 6050S Surge Protector. The information contained on this package explains the features and operation of the 6050S. Please take a few moments to read this package.

FEATURES

1. ON/OFF Reset Control Switch and Circuit Breaker
Controls power to all outlets. The switch is also a 15A breaker. When an overload occurs, it will automatically switch off. To resume operation, ensure the overload condition is removed and reset the surge protector by switching the unit ON.
2. Six GroundedOutlets.
3. Surge Protected Data Line Connections
To protect your equipment from surges along phone/ fax/ modem lines. Connect the phone line from wall outlet to the "In" port. Connect the phone/ fax/ modem to the "Out" port.

SPECIFICATIONS

- Model Number: 6050S
- Outlets: 6
- Surge Protection: 1500 Joules
- Electrical Rating: 125V/15A/1875W
- UL Clamping Voltage: UL 1449 4th/400V (L-N, L-G, N-G)
- Maximum Peak Current: 60,000A
- 3 AC Lines Protected: L-N: 30,000A, L-G: 15,000A, N-G: 15,000A;(The maximum surge possible on household wiring is 6,000 volts)
- Response Time: Less than 1 nanosecond
- Attenuation: Up to 32dB
- Telecommunications Protection: RJ11 1-in, 1-out
- Circuit Breaker: Resettable 15 Amp

CAUTION

TO REDUCE THE RISK OF ELECTRIC SHOCK - Use only in dry locations and only indoors. DO NOT plug into another relocatable power tap. DO NOT "daisy chain" surge protectors. DO NOT use with any aquarium equipment. DO NOT use if properly grounded outlets are not available. DO NOT install this device if there is not at least 10 meters (30 feet) or more of wire between the electrical outlet and electrical service panel. This device features an internal protection that will disconnect the surge protective component at the end of its useful life, but will maintain power to the load - now unprotected.

DO NOT use on medical or life saving equipment.

TROUBLESHOOTING

If the ON/OFF is switched off, the 15 AMP circuit breaker may have tripped. Examine your connected equipment and remove the device that is overloading the circuit. Then, turn the ON/OFF switch back to RESET.

TECHNICAL SUPPORT

Please contact our Tech Support department with installation, troubleshooting, or general product questions.

- Phone: 1-877-297-6937
- Email: tech@cpsww.com
- Hours of Operation:
Monday - Friday, 7:00AM - 6:00PM CST

LIMITED LIFETIME WARRANTY AND CONNECTED EQUIPMENT GUARANTEE

Read the following terms and conditions carefully before using the CyberPower 6050S (the "Product"). By using the Product, you consent to be bound by the terms and conditions of this Limited Lifetime Warranty and Connected Equipment Guarantee (together referred to as this "Warranty"). **IE YOU DO NOT AGREE TO THE TERMS AND CONDITIONS OF THIS WARRANTY, YOU SHOULD RETURN THE PRODUCT FOR A FULL REFUND PRIOR TO USING IT.**

WHO IS PROVIDING THIS WARRANTY, WHAT DOES IT COVER?

Cyber Power Systems (USA), Inc. ("CyberPower") provides this Limited Lifetime Warranty. It only covers the original purchaser and ends if you no longer own the Product. This warranty covers defects in materials and workmanship in the Product under normal use and conditions. It also covers equipment connected to the Product and damaged because of the failure of the Product. This warranty covers the Product and connected equipment for as long as you own the Product.

WHAT MUST I DO TO MAKE A WARRANTY CLAIM?

1. Call (877) 297-6937 or write to Cyber Power Systems (USA) Inc. 4241 12th Ave. E., STE 400 Shakopee, MN 55379 or send a message at claims@cpsww.com for instructions.
2. Identify the Product, the Purchase Date, and the item(s) of Connected Equipment.
3. Provide a dated Proof-of-Purchase receipt (or other proof of the original purchase) and provide a description of the defect.
4. Pack and ship the product to CyberPower and, if requested, the item(s) of Connected Equipment, and all claim forms that CyberPower provides to you. Show the Claim Number on the shipping label or include it with the product. You must prepay all shipping costs, you are responsible for packaging and shipment, and you must pay the cost of the repair estimate.
5. Do each of these within ten days of the occurrence.

WHAT WILL CYBERPOWER DO TO CORRECT PROBLEMS?

CyberPower will inspect and examine the Product. If the Product is defective in material or workmanship, CyberPower will replace it at CyberPower's expense, or CyberPower will refund the full purchase price you paid for the Product (purchase receipt showing price paid is required).

If the Product failed to protect any equipment plugged into it, we will also send you forms for making your claim for the connected equipment. We will repair or replace the equipment that was damaged because of the failure of the Product or pay you the fair

market value (NOT REPLACEMENT COST) of the equipment at of the time of the damage. We will use Orion Blue Book, another a third-party valuation guide, eBay, Craigslist, or other source to establish that amount. Our maximum liability is limited to \$100,000 for the 6050S.

WHO PAYS FOR SHIPPING?

We pay when we send items to you; you pay when you send items to us.

WHAT ARE SOME THINGS THIS WARRANTY DOES NOT COVER?

1. **THIS WARRANTY DOES NOT COVER ANY SOFTWARE THAT WAS DAMAGED OR NEEDS TO BE REPLACED DUE TO THE FAILURE OF THE PRODUCT OR ANY DATA THAT IS LOST AS A RESULT OF THE FAILURE OR THE RESTORATION OF DATA OR RECORDS, OR THE REINSTALLATION OF SOFTWARE.**
2. This Warranty does not cover: misuse, modification, operation or storage outside environmental limits of the Product or the equipment connected to it, or for damage while in transit or in storage, nor if there has been improper operation or maintenance, or use with items not designed or intended for use with the Product, such as laser printers, appliances, aquariums, medical or life support devices, etc.

WHAT ARE THE OTHER LIMITATIONS?

The sole and exclusive remedies of the Initial Customer are those provided by this Warranty.

1. This Warranty does not apply unless the Product and the connected equipment were connected to properly wired and grounded outlets (including compliance with electrical and safety codes of the most current electrical code), without the use of any adapters or other connectors.
2. The Product must have been plugged directly into the power source and the equipment connected to the Product must be directly connected in the Product, not "daisy-chained" together in serial fashion with any extension cords, another Product or device similar to the Product, surge suppressor, or power tap. Any such installation voids the Warranty.
3. The Product and connected equipment must have been used properly in a suitable and proper environment, in conformance with any applicable license, instruction manual, or warnings.
4. The Product must have been used at all times within the limitations on the Product's VA capacity.

WHERE CAN I GET MORE INFORMATION?

Contact Cyber Power Systems (USA) Inc. 4241 12th Ave E., STE 400 Shakopee, MN 55379 call us at (877) 297-6937 or send us an e-mail at claims@cpsww.com.

PRODUCT REGISTRATION

Prompt product registration assures coverage under the Limited Warranty, and also allows the opportunity to be notified of product enhancements, upgrades, and other announcements.

Registration is quick and easy at www.cpsww.com/register.

CONTACT INFORMATION

Cyber Power Systems (USA) Inc. 4241 12th Avenue, Suite 400 Shakopee, MN 55379 Toll-free: 1-877-297-6937 CyberPowerSystems.com



UL Listed to U.S. and Canadian Safety Standards UL 1449. This product is listed to applicable U.S. and Canadian safety standards by Underwriters Laboratories Inc.



Please join CyberPower in caring for the environment by recycling this package.



This device is manufactured using environmentally- safe procedures in compliance with the Restriction on Hazardous Substances (RoHS) directive.


CyberPower Project Specifications

PROJECT NAME: CyberPower P604TRC1 Surge Protector + USB
FILE NAME: P604TRC1-Packaging-2018.ai
PROJECT DATE: May 1, 2018
CUSTOMER: CyberPower
PROJECT TYPE: Surge Sleeve
PROJECT NOTES: • Print on matte finish coated 1-side, spot high-gloss varnish

COLORS:



SPOT COLORS:



CONTACTS:	Shawn Wallace <i>Designer</i> Mobile 1-612-207-8442 swallace@cpsww.com	Diesel Ryden <i>Senior Art Director</i> Direct 1-952-567-7906 Mobile 1-612-990-6646 diesel.ryden@cyberpower.com	Thomas “Teej” Thaldorf <i>Retail Product Manager</i> Direct 1-952-567-7948 Mobile 1-651-428-5538 tthaldorf@cpsww.com
------------------	--	--	---



Cyber Power Systems (USA), Inc.
4241 12th Avenue East, Suite 400 Shakopee, MN 55379
Phone 952.403.9500 | Fax 952.403.0009 | www.cyberpower.com