


## Profile Settings

- Allow USB Connection: Will turn on the USB port when connecting to a PC or from a USB host, such as an external hard drive.
- Authorize sponsored links in applications: Authorizes apps to launch browser windows from within an app after a click on certain ads.
- Protect the User Profile with a Password: Prevents another user from accessing the profile, such as a sibling.
- Auto-authorize Applications after Install: Applications downloaded from Parental Area will automatically appear in the child's profile (not recommended).
- Clickable Notifications: Turn this setting on to make notifications sent by apps live & clickable in the profile.

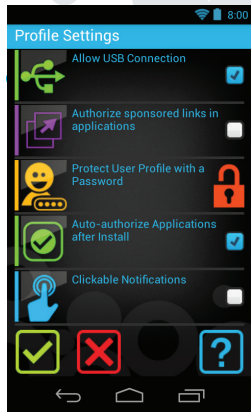

8

## Time Management

You can set the time limits for play each day or every day of the week with a few simple clicks. Define times your child can play with Kurio during the day, or define the maximum play time per day to be used throughout the day.

### TIME CONTROL

- Define the time slots when the handheld will be "usable" by the current profile.
- Activate Time Control by switching "on" the button at the top of the screen.
- Set the time control for each day: tap the icon to set the desired time slots in the day. You can make several time slots and set different time slots for each day of the week.
- Apply the same settings to the entire week: Click on the box at the top of the screen to make the time control settings the same every day.



9


### DAILY PLAYTIME

Activate this control to set the maximum play time for your child throughout the day. With this setting is turned on, the child can use the handheld during any of the time slots, but cannot exceed the max time for the day.

The playtime is displayed below each day. Press on the day you want to manage and a pop up menu will allow you to set-up the max play time for the selected day.

## App Management

- From the master list of apps shown, check the box next to the app to use it in the profile.
- All unchecked apps will not appear on this profile's interface.
- It is also possible to import the settings from another profile or from the predefined 'easy setup' profiles.
- All allowed apps will appear on the main screens of the child's profile interface.

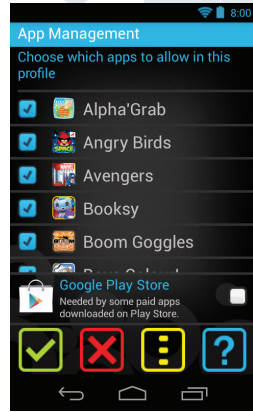


10

## Switching profile

### From Parental Account



### From the Lock Screen (press Power button twice)

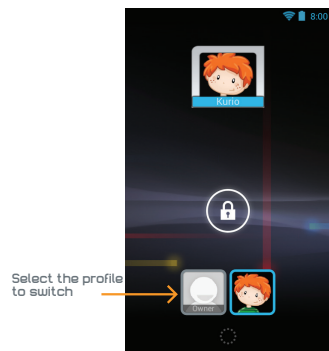

11

## Exposure to Radio Frequency Energy

- Caution: changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
- NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
  - Reorient or relocate the receiving antenna.
  - Increase the separation between the equipment and receiver.
  - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
  - Consult the dealer or experienced radio/TV technician for help.

RF exposure compliance with any body-worn accessory, which contains metal, was not tested and certified, and use such body-worn accessory should be avoided. This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. End user must follow the specific operating instructions for satisfying RF exposure compliance. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. The portable device is designed to meet the requirements for exposure to radio waves established by the Federal Communications Commission (US). These requirements set a SAR limit of 1.6 W/kg averaged over one gram of tissue. The highest SAR value reported under this standard during product certification for use when properly worn on the body is 0.957 W/kg.

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device. This Class [B] digital apparatus complies with Canadian ICES-003.

### Restricted Use of Electronic Devices

- The use of electronic/electric devices may interfere with safe operation of some aircraft and can be restricted with some airline companies. Please check with your airline company before traveling.
- Kurio has an Airplane Mode. Please go into the Settings of the Android Interface to switch the tablet into Airplane Mode. All wireless connections will be turned off.

### Declaration of Conformity

Techno Source, A Division of LF Products, Pte Ltd, A Li & Fung Company  
20 West 22nd St., Suite 1101, New York, NY 10010

Product: Kurio Touch 4S - Model: C13200

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.


### Privacy Policy

We need you to provide us with your email address when activating your Kurio handheld and keep your email address up to date via the Parental Area to be informed of important updates and information.  
Your email address will never be shared with any third parties and you can unsubscribe at any time by clicking on the link provided at the bottom of every Kurio email. To read our Privacy Policy at any time, please go to [www.kurioworld.com](http://www.kurioworld.com).

12

## Tips and Recommendations

- While using some applications that use a lot of the device's processing capacity, the device may become warm. If this occurs, take a short break from using the device to let it cool down.
- Keep the unit clean by wiping it with a slightly damp cloth.
- If you encounter any charging issues, such as not fully charging or shutting off when it has a charge above 5%, you may need to reset the battery level indicator. Plug the unit into the power adapter, and then press and hold the POWER button until the handheld turns off. Continue to hold down the POWER button until the battery icon shows up again. Once it appears, release the POWER button and press it again to start the unit normally.
- Due to Android 4.2's system management, it is no longer possible to move applications to an external SD card. We advise you to store all media files on an external SD card to keep free memory on the device's internal storage for apps and games.

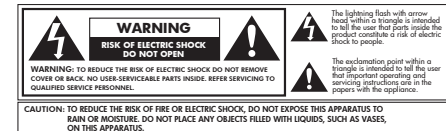

- Do not damage or deform the power supply USB cord. If it is damaged or deformed, it may cause electric shock or malfunction when used. When removing from wall outlet, be sure to remove by holding the plug attachment and not by pulling the cord.
- The power adapter & cord should be plugged in near the unit, so it is easily accessible and does not strain the cord.

### Warning

- All packing materials such as internal bags, plastic collars, plastic films, screen protector film, and carton inserts are not part of this product and should be removed before handing the device over to a child. Please keep the box and this guide for further reference.
- Do not try to disassemble the unit.
- To charge Kurio, only use the power adapter supplied with Kurio handheld.
- Avoid using the handheld while charging; this may alter the battery charging process and the battery life of the device.
- Keep the unit out of direct sunlight and away from any direct heat source.
- Do not expose the unit to moisture or water.
- To prevent hearing damage, never use earphones at excessive volume levels. Listening to loud sounds for an extended period may cause temporary or permanent hearing loss.
- Never use Kurio while operating a motor vehicle or bicycle.
- If you feel discomfort in your hands or any pain using Kurio, please stop immediately.
- In case of long period of use, take frequent breaks.
- If a small part is coming out of the Kurio, don't try to remove it. Keep it away from small children.
- Never force a connector into a port of Kurio. If a connector and a port do not join with reasonable force, make sure that the connector matches the port and that you have positioned the connector correctly in relation to the port.
- To clean up the screen, simply use a soft damp cloth. Do not use alcohol, solvent, aerosol spray or abrasive cleaners to clean your Kurio.
- The product and the adapter should be periodically examined for conditions that may result in the risk of fire, electric shock, or injury to people and that, in an event of such conditions, the adapter should not be used until properly repaired.

13



## SETUP GUIDE

### Interface



- 1 Headphone 3.5mm jack
- 2 Micro USB/Charger
- 3 Micro SD card slot

### IMPORTANT INFORMATION - PLEASE READ BEFORE SETTING UP YOUR KURIO

- The handheld must be set up by an adult to ensure an appropriate level of protection for all users of the device.
- To turn off your Kurio handheld correctly, press the Power button until the pop up message appears on-screen, and then select "Power off". Avoid switching off the device by pressing and holding the Power button until the unit stops.
- Do not fully discharge the battery (keep at 5% or more). Recharge it to full power regularly to preserve the battery.
- Password Reset: Tech Support may not be able to retrieve your Parental Area password, so please don't forget to note it in a safe place. In case of a lost password, the handheld may have to be factory reset and all personal data will be lost.
- Please connect your Kurio handheld to Wi-Fi frequently to receive and enjoy the latest updates. Updates are pushed to your handheld wirelessly.
- If you encounter any issue with your device, please do not return it to the store. Please review our FAQs & troubleshooting info or contact our tech support team for help at [www.kurioworld.com/support/](http://www.kurioworld.com/support/)

Find more tips and information at [WWW.KURIOWORLD.COM](http://WWW.KURIOWORLD.COM)

BC


1

## Installation

### Kurio Parental Account Setup

- Select your language
- Select a Wi-Fi hotspot and connect to Wi-Fi (not mandatory but highly recommended)
- Set the correct date & time (if not connected to Wi-Fi)
- Select Normal mode
- Enter parental email address
- Enter a password for the Parental Area account. There are several password types available, such as text, pattern, or PIN. This is important to make sure the Parental Area is secure.
- The Parental Area is now set! This primary account will use the Android interface without any restrictions.

Create a user profile for a child by following the directions below.

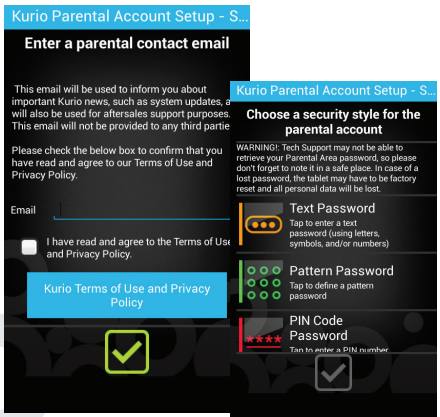

- Confirm
- Cancel
- Back
- Help
- Add an item


2

### Create a Kurio User Profile: Step 1 of 2 - Profile Information

- Press on the 'Create child profile' button.
- Name: Enter the user's name.
- Birthdate: Enter the user's birthdate.
- Gender: Select between boy and girl.

Note: Press the  icon to save the info you entered and move to the next step.

Attention: If you press the  icon at any time while creating a profile, the setup of the profile will be cancelled and all information previously entered will be lost!

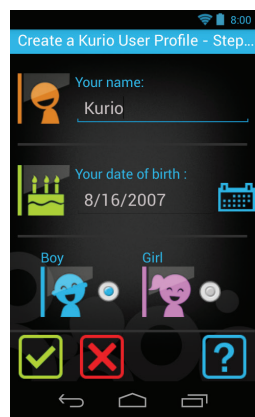


3

### Create a Kurio User Profile: Step 2 of 2 - Select a Profile Type

To help you create a user profile quickly, you can choose one of our predetermined 'easy setup' profiles, or customize each parental control yourself. Please note that in our Kurio settings, time management is set to off, and we provide a default list of apps. Even when using an 'easy setup' profile type, you can adjust the profile settings at any time.

- Child Profile with Web Access: Allows the user to browse the web safely by using our Kurio Genius™ Internet Content Filtering System to block any inappropriate content. Internet Security Level settings are based upon the age of the child.
- Child Profile without Web Access: No web access is allowed, but the child can use apps, meaning an application is allowed to open specific content from the Internet.
- Educational profile: No web access is allowed and this profile will only show the educational apps by default.
- I will define the settings myself: If you select to configure the settings by yourself, other screens will appear to guide you through adjusting the settings.

The child's user profile is now complete!

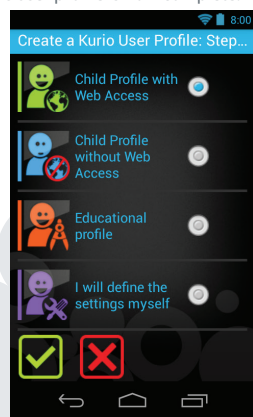


4

## Kurio Parental Area Overview

### Parental Area Main Menu


- On the Parental Area dashboard, you can access:
  - Profiles: Manage all user profiles on Kurio (modify, add, or delete)
  - Settings: Adjust the main tablet settings (date, list of apps on Kurio, language, etc.)
  - Customer Service: Read our FAQ, report a bug, and contact us.
  - Store: Search, purchase, and download more apps from the Kurio Store or download over one million apps on Google Play™.
  - Parental Account: Change your Parental Account password or email, and view your Kurio Serial Number.

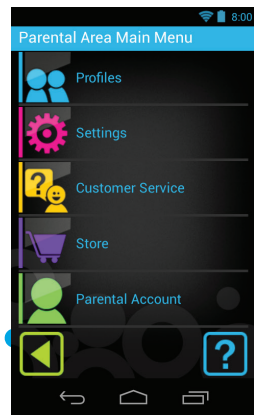

5

### Profile Main Menu


- To modify a profile, use the following settings:
  - Profile information: Edit the user's birthdate, name, & gender.
  - Internet Parameters: Adjust the security level from No Internet Access, Restrict Web Browsing to Specific Sites, Kurio Genius™ Internet Filtering System, Full Internet Access
  - Profile Settings: Review and change the profile's general settings.
  - Time Management: Adjust the time control settings.
  - App Management: Review and change which applications can be used by the profile.

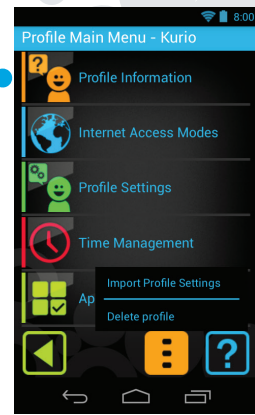

6

### Internet Parameters

- No Internet Access: No Internet access is allowed from the handheld. Apps can still access online content if an Internet connection is active.
- Restrict Web Browsing to Specific Sites: Restricts Internet browsing only to websites that appear on the Safe List of this profile. All other sites will be blocked.
- Kurio Genius™ Filtering System: Our advanced filtering system allows users to browse the Internet safely by blocking websites that may contain inappropriate content.
- Full Internet Access: Removes any and all restrictions to web browsing. Not recommended for a child user profile.

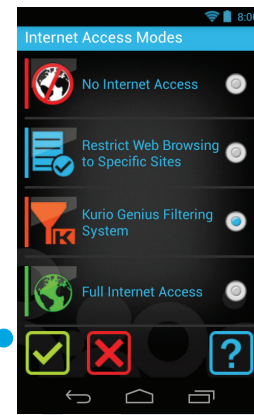

7

### Tech Support & Warranty Information

- If you have any questions setting up or using your handheld, please visit [www.kurioworld.com](http://www.kurioworld.com) to find out more about Kurio, read our related FAQs, and for any technical support. All of our products have a 1 Year Limited Warranty. In the unlikely event you experience any problems with your Kurio, please visit [www.kurioworld.com/support/](http://www.kurioworld.com/support/) to contact Kurio Customer Service. If the service representative is unable to solve the issue, he or she will provide instructions regarding how to have your Kurio serviced if it is under warranty.
- Please note that this handheld is warranted only to the original purchaser for a period of twelve months from the original purchase date, under normal use and service, against defective workmanship and materials. If the product is damaged due to accident, improper or unreasonable use or maintenance, such as a broken screen, fall, water damage, etc., this damage is not covered by the warranty. Please still contact Kurio Customer Service for repair & replacement options, especially for a broken screen or other spare parts.
- Please visit [www.kurioworld.com](http://www.kurioworld.com) for the full details of Kurio's 1 Year Limited Warranty.

### Recycling

Waste electrical products and batteries should not be disposed with household waste. Please recycle where facilities exist. Check with your local authority for recycling advice.  
CAUTION - ELECTRICALLY OPERATED PRODUCT - As with all electric products, precautions should be observed during handling and use to prevent electric shock. Adult supervision is recommended.  
Please retain this manual for further reference.

### Copyrights

ANDROID, GOOGLE PLAY AND OTHER MARKS ARE TRADEMARKS OF GOOGLE INC. ANGRY BIRDS SPACE, COPYRIGHT 2009-2013 ROVIO ENTERTAINMENT LTD. © 2012 DISNEY ENTERPRISES, INC. COPYRIGHT © 2013 KAMEN BLUESBIRD CARTOON CO. LTD. STARFOX. COPYRIGHT © 2013 TOON GOOGLES, INC. COPYRIGHT © 2013 KD PRODUCTIONS™. ALL RIGHTS RESERVED. KD GROUP™, KD™, KD INTERACTIVE™, KURIO™, KD PRODUCTIONS™, THE KD™ LOGO, THE NAMES, THE GRAPHICS, THE MUSICS AND BRANDS MENTIONED ON THIS PRODUCT ARE REGISTERED TRADEMARKS OF KD GROUP™. © 2013 TCL. © 2012 BBIGG APPLICATIONS INC. © 2013 SCIOALIN, INC. PICASART IS A TRADEMARK OF SCIOALIN, INC. COPYRIGHT © 2010-2013 OUT FIT 7. COPYRIGHT © 2013 READ WRITE PHONICS. ALL RIGHTS RESERVED. PRODUCTABLESOLUTIONS.TV © 2012 © BIN WELLS LTD 2013 © 2010 PROSPHERUS. COPYRIGHT © 2010 TITAN, INC. ALL RIGHTS RESERVED. COPYRIGHT © 2013 TOON GOOGLES, INC. CROWNLAB IS A CROWNLAB LIMITED REGISTERED TRADEMARK.

For more information about Kurio, please go to [www.kurioworld.com](http://www.kurioworld.com) or contact:

14