

FOCLNR-PP125-AO Fiber Cleaner Instruction Manual

Thank you for choosing the FOCLNR-PP125-AO Fiber Cleaner. This one-click fiber cleaner is a high-performance device designed for cleaning the ferrule end faces of MU and LC connectors. Please carefully read this manual before use and keep for future reference.

1. Safety Precautions

	<p>Though this device is deemed safe, improper usage or handling can still inflict injury to others.</p>
	<p>FOCLNR-PP125-AO is designed to clean MU and LC connectors only.</p>


2. Notes on Usage

- Use FOCLNR-PP125-AO to clean MU or LC fiber bulkhead adapters
- Use FOCLNR-STK50-AO to clean fiber optic transceivers
- Do not attempt to disassemble as this can cause damage to the device
- Do not touch or re-use cleaning cloth as this will impair the device's cleaning ability
- Do not pull the cleaning cloth, use only the device body
- Do not use device if cleaning cloth is empty, this can cause damage to connector

3. Notes on Storage for Extended Period

- Do not expose device to direct sunlight, high temperature, or high humidity
- The cover on the guide cap should be always closed when device is not in use

4. Device Construction

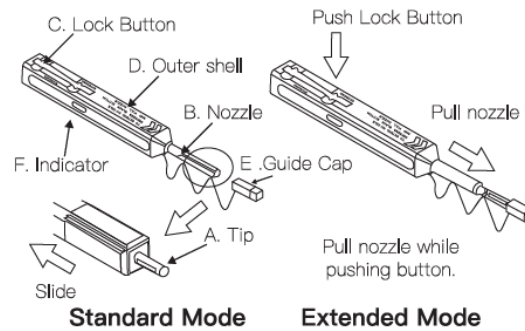

	View of Indicator	View of the Nozzle end
Full	Cloth (White)	Tip(Black) Cloth (White)
Little	Cloth (White) Red	Tip(Black) Slide Cloth (White)
Empty	Red	Tip(Black) Slide No Cloth (Black)

Identification of remaining cloth

No.	Part Name	Function
A	Tip	Lead the cleaning cloth to the optical connector end face
B	Nozzle	Lead tip to the optical connector end face
C	Lock Button	Push the button to extend and contract the nozzle
D	Outer Shell	Push the outer shell to clean the connector
E	Guide Cap	Acts as dust cap or cleaning adapter for connector plug
F	Indicator	Provides indication of remaining cleaning cloth

5. Applications

Connector Inside adapter	Connector plugs alone
<p>1. Remove guide cap from the device.</p>	<p>1. Open the cover on the guide cap.</p>
<p>2. Insert tip of cleaner into MU or LC adapter.</p> <p>Note: This drawing shows only LC, but this product can clean MU too.</p>	<p>2. Insert MU or LC plug into the guide cap.</p> <p>Note: This drawing shows only LC, but this product can clean MU too.</p>
<p>3. Push the outer shell to start cleaning the MU or LC connector end face. A "click" sound indicates end of cleaning process. Close the cover after use.</p> <ul style="list-style-type: none"> • Be careful not to slant the FOCLNR-PP125-AO while inserting into the adapter • Do not overly exert force during insertion as this may cause damage to both the connector and the FOCLNR-PP125-AO. • If pushing outer shell is inhibited, remove FOCLNR-PP125-AO from adapter and ensure that there are no sizeable debris inhibiting the cleaning process. 	<p>3. Push the outer shell to start cleaning the MU or LC connector end face. A "click" sound indicates end of cleaning process. Close the cover after use.</p> <ul style="list-style-type: none"> • Be careful not to slant the FOCLNR-PP125-AO while inserting into the adapter • Do not overly exert force during insertion as this may cause damage to both the connector and the FOCLNR-PP125-AO. • If pushing outer shell is inhibited, remove FOCLNR-PP125-AO from adapter and ensure that there are no sizeable debris inhibiting the cleaning process.