

## OSFP-400G-XDR4-AO

Arista Networks® OSFP-400G-XDR4 Compatible TAA 400GBase-XDR4 PAM4 OSFP Transceiver (SMF, 1310nm, 2km, MPO, DOM)

### Features

- MPO Connector
- Commercial Temperature 0 to 70 Celsius
- Single-mode Fiber
- Hot Pluggable
- Excellent ESD Protection
- Metal with Lower EMI
- RoHS Compliant and Lead Free



### Applications

- 1x Fibre Channel
- 400GBase Ethernet
- Access and Enterprise

### Product Description

This Arista Networks® OSFP-400G-XDR4 compatible OSFP transceiver provides 400GBase-XDR4 throughput up to 2km over single-mode fiber (SMF) using a wavelength of 1310nm via an MPO connector. It is guaranteed to be 100% compatible with the equivalent Arista Networks® transceiver. This easy to install, hot swappable transceiver has been programmed, uniquely serialized and data-traffic and application tested to ensure that it will initialize and perform identically. Digital optical monitoring (DOM) support is also present to allow access to real-time operating parameters. This transceiver is Trade Agreements Act (TAA) compliant. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

AddOn's transceivers are RoHS compliant and lead-free.

TAA refers to the Trade Agreements Act (19 U.S.C. & 2501-2581), which is intended to foster fair and open international trade. TAA requires that the U.S. Government may acquire only "U.S. – made or designated country end products."



## Absolute Maximum Ratings

| Parameter                          | Symbol | Min. | Max. | Unit |
|------------------------------------|--------|------|------|------|
| Power Supply Voltage               | VCC    | -0.5 | 3.6  | V    |
| Storage Temperature                | Ts     | -40  | 85   | °C   |
| Operating Case Temperature         | Top    | 0    | 70   | °C   |
| Relative Humidity (non-condensing) | RH     | 0    | 85   | %    |

## Recommended Operating Conditions

| Parameter                  | Symbol | Min.  | Typ.    | Max.                 | Unit | Notes |
|----------------------------|--------|-------|---------|----------------------|------|-------|
| Operating Case Temperature | TOP    | 0     |         | 70                   | °C   |       |
| Power Supply Voltage       | VCC    | 3.135 | 3.3     | 3.465                | V    |       |
| Data Rate, each Lane       |        |       | 26.5625 |                      | GBd  | PAM4  |
| Data Rate Accuracy         |        | -100  |         | 100                  | ppm  |       |
| Pre-FEC Bit Error Ratio    |        |       |         | $2.4 \times 10^{-4}$ |      |       |
| Post-FEC Bit Error Ratio   |        |       |         | $1 \times 10^{-12}$  |      | 1     |
| Link Distance              | D      | 0.5   |         | 500                  | m    | 2     |

### Notes:

1. FEC provided by host system.
2. FEC required on host system to support maximum distance.

## Electrical Characteristics

| Parameter  | Symbol          | Min.                             | Typ.  | Max. | Unit             | Notes |
|--|-----------------|----------------------------------|-------|------|------------------|-------|
| Power Consumption                                  |                 |                                  |       | 12   | W                |       |
| Supply Current                                     | I <sub>cc</sub> |                                  |       | 3.64 | A                |       |
| <b>Transmitter (each lane)</b>                     |                 |                                  |       |      |                  |       |
| Signaling Rate, each Lane                          | TP1             | 26.5625 ± 100 ppm                |       |      | GBd              |       |
| Differential pk-pk Input Voltage Tolerance         | TP1a            | 900                              |       |      | mV <sub>pp</sub> | 1     |
| Differential Termination Mismatch                  | TP1             |                                  |       | 10   | %                |       |
| Differential Input Return Loss                     | TP1             | IEEE 802.3-2015 Equation (83E-5) |       |      | dB               |       |
| Differential to Common Mode Input Return Loss      | TP1             | IEEE 802.3-2015 Equation (83E-6) |       |      | dB               |       |
| Module Stressed Input Test                         | TP1a            | See IEEE 802.3bs 120E.3.4.1      |       |      |                  | 2     |
| Single-ended Voltage Tolerance Range (Min)         | TP1a            | -0.4 to 3.3                      |       |      | V                |       |
| DC Common Mode Input Voltage                       | TP1             | -350                             |       | 2850 | mV               | 3     |
| <b>Receiver (each lane)</b>                        |                 |                                  |       |      |                  |       |
| Signaling Rate, each lane                          | TP4             | 26.5625 ± 100 ppm                |       |      | GBd              |       |
| Differential Peak-to-Peak Output Voltage           | TP4             |                                  |       | 900  | mV <sub>pp</sub> |       |
| AC Common Mode Output Voltage, RMS                 | TP4             |                                  |       | 17.5 | mV               |       |
| Differential Termination Mismatch                  | TP4             |                                  |       | 10   | %                |       |
| Differential Output Return Loss                    | TP4             | IEEE 802.3-2015 Equation (83E-2) |       |      |                  |       |
| Common to Differential Mode Conversion Return Loss | TP4             | IEEE 802.3-2015 Equation (83E-3) |       |      |                  |       |
| Transition Time, 20% to 80%                        | TP4             | 9.5                              |       |      | ps               |       |
| Near-end Eye Symmetry Mask Width (ESMW)            | TP4             |                                  | 0.265 |      | UI               |       |
| Near-end Eye Height, Differential                  | TP4             | 70                               |       |      | mV               |       |
| Far-end Eye Symmetry Mask Width (ESMW)             | TP4             |                                  | 0.2   |      | UI               |       |
| Far-end Eye Height, Differential                   | TP4             | 30                               |       |      | mV               |       |
| Far-end Pre-cursor ISI Ratio                       | TP4             | -4.5                             |       | 2.5  | %                |       |
| Common Mode Output Voltage (V <sub>cm</sub> )      | TP4             | -350                             |       | 2850 | mV               | 3     |

### Notes:

1. With the exception to IEEE 802.3bs 120E.3.1.2 that the pattern is PRBS31Q or scrambled idle.
2. Meets BER specified in IEEE 802.3bs 120E.1.1.
3. DC common mode voltage generated by the host. Specification includes effects of ground offset voltage.

## Optical Characteristics

| Parameter   | Symbol           | Min.             | Typ. | Max.   | Unit  | Notes     |
|---|------------------|------------------|------|--------|-------|-----------|
| Center Wavelength   | $\lambda_c$      | 1304.5           | 1310 | 1317.5 | nm    |           |
| <b>Transmitter</b>  |                  |                  |      |        |       |           |
| Data Rate, each Lane  |                  | 53.125 ± 100 ppm |      |        | GBd   |           |
| Modulation Format   |                  | PAM4             |      |        |       |           |
| Side-mode Suppression Ratio   | SMSR             | 30               |      |        | dB    | Modulated |
| Average Launch Power, each Lane                                       | PAVG             | -2.9             |      | 4      | dBm   | 1         |
| Outer Optical Modulation Amplitude (OMA <sub>outer</sub> ), each Lane | POMA             | -0.8             |      | 4.2    | dBm   | 2         |
| Launch Power in OMA <sub>outer</sub> minus TDECQ, each Lane           |                  | -2.2             |      |        | dB    |           |
| Transmitter and Dispersion Eye Closer for PAM4, each Lane             | TDECQ            |                  |      | 3.4    | dB    |           |
| Extinction Ratio  | ER               | 3.5              |      |        | dB    |           |
| RIN <sub>21.4</sub> OMA   | RIN              |                  |      | -136   | dB/Hz |           |
| Optical Return Loss Tolerance   | TOL              |                  |      | 21.4   | dB    |           |
| Transmitter Reflectance   | TR               |                  |      | -26    | dB    |           |
| Average Launch Power of OFF Transmitter, each Lane                    | P <sub>off</sub> |                  |      | -15    | dBm   |           |
| <b>Receiver</b>   |                  |                  |      |        |       |           |
| Data Rate, each Lane  |                  | 53.125 ± 100 ppm |      |        | GBd   |           |
| Modulation Format   |                  | PAM4             |      |        |       |           |
| Damage Threshold, each Lane   | TH <sub>d</sub>  | 5                |      |        | dBm   | 3         |
| Average Receive Power, each Lane                                      |                  | -5.9             |      | 4      | dBm   | 4         |
| Receive Power (OMA <sub>outer</sub> ), each Lane                      |                  |                  |      | 4.2    | dBm   |           |
| Receiver Sensitivity (OMA <sub>outer</sub> ), each Lane               | SEN              |                  |      | -4.4   | dBm   | 5         |
| Stressed Receiver Sensitivity (OMA <sub>outer</sub> ), each Lane      | SRS              |                  |      | -1.9   | dBm   | 6         |
| Receiver Reflectance  | RR               |                  |      | -26    | dB    |           |
| LOS Assert  | LOSA             | -30              |      |        | dBm   |           |
| LOS De-assert   | LOSD             |                  |      | -12    | dBm   |           |
| LOS Hysteresis  | LOSH             | 0.5              |      |        | dB    |           |
| <b>Stressed Conditions for Stress Receiver Sensitivity (Note 7)</b>   |                  |                  |      |        |       |           |
| Stressed Eye Closure for PAM4 (SECQ), Lane under Test                 |                  |                  | 3.4  |        | dB    |           |
| OMA <sub>outer</sub> of each Aggressor Lane                           |                  |                  | 4.2  |        | dBm   |           |

### Notes:

1. Average launch power, each lane (min) is informative and not the principal indicator of signal strength. A transmitter with launch power below this value cannot be compliant; however, a value above this does

not ensure compliance.


2. Even if the TDECQ < 1.4 dB, the OMA<sub>outer</sub> (min) must exceed the minimum value specified here.
3. The receiver shall be able to tolerate, without damage, continuous exposure to an optical input signal having this average power level.
4. Average receive power, each lane (min) is informative and not the principal indicator of signal strength. A received power below this value cannot be compliant; however, a value above this does not ensure compliance.
5. Receiver sensitivity (OMA<sub>outer</sub>), each lane (max) is informative and is defined for a transmitter with SECQ of 0.9 dB.
6. Measured with conformance test signal for BER =  $2.4 \times 10^{-4}$ .
7. These test conditions are for measuring stressed receiver sensitivity. They are not characteristics of the receiver.

## Pin Descriptions


| Pin | Symbol    | Description                     | Logic        | Direction       | Plug Sequence |
|-----|-----------|---------------------------------|--------------|-----------------|---------------|
| 1   | GND       |                                 | Ground       |                 | 1             |
| 2   | TX2p      | Transmitter Data Non-Inverted   | CML-I        | Input from Host | 3             |
| 3   | TX2n      | Transmitter Data Inverted       | CML-I        | Input from Host | 3             |
| 4   | GND       |                                 | Ground       |                 | 1             |
| 5   | TX4p      | Transmitter Data Non-Inverted   | CML-I        | Input from Host | 3             |
| 6   | TX4n      | Transmitter Data Inverted       | CML-I        | Input from Host | 3             |
| 7   | GND       |                                 | Ground       |                 | 1             |
| 8   | TX6p      | Transmitter Data Non-Inverted   | CML-I        | Input from Host | 3             |
| 9   | TX6n      | Transmitter Data Inverted       | CML-I        | Input from Host | 3             |
| 10  | GND       |                                 | Ground       |                 | 1             |
| 11  | TX8p      | Transmitter Data Non-Inverted   | CML-I        | Input from Host | 3             |
| 12  | TX8n      | Transmitter Data Inverted       | CML-I        | Input from Host | 3             |
| 13  | GND       |                                 | Ground       |                 | 1             |
| 14  | SCL       | 2-wire Serial interface clock   | LVC MOS- I/O | Bi-directional  | 3             |
| 15  | VCC       | +3.3V Power                     |              | Power from Host | 2             |
| 16  | VCC       | +3.3V Power                     |              | Power from Host | 2             |
| 17  | LPWn/PRSn | Low-Power Mode / Module Present | Multi-Level  | Bi-directional  | 3             |
| 18  | GND       |                                 | Ground       |                 | 1             |
| 19  | RX7n      | Receiver Data Inverted          | CML-O        | Output to Host  | 3             |
| 20  | RX7p      | Receiver Data Non-Inverted      | CML-O        | Output to Host  | 3             |
| 21  | GND       |                                 | Ground       |                 | 1             |
| 22  | RX5n      | Receiver Data Inverted          | CML-O        | Output to Host  | 3             |
| 23  | RX5p      | Receiver Data Non-Inverted      | CML-O        | Output to Host  | 3             |
| 24  | GND       |                                 | Ground       |                 | 1             |
| 25  | RX3n      | Receiver Data Inverted          | CML-O        | Output to Host  | 3             |
| 26  | RX3p      | Receiver Data Non-Inverted      | CML-O        | Output to Host  | 3             |
| 27  | GND       |                                 | Ground       |                 | 1             |
| 28  | RX1n      | Receiver Data Inverted          | CML-O        | Output to Host  | 3             |
| 29  | RX1p      | Receiver Data Non-Inverted      | CML-O        | Output to Host  | 3             |
| 30  | GND       |                                 | Ground       |                 | 1             |
| 31  | GND       |                                 | Ground       |                 | 1             |
| 32  | RX2p      | Receiver Data Non-Inverted      | CML-O        | Output to Host  | 3             |
| 33  | RX2n      | Receiver Data Inverted          | CML-O        | Output to Host  | 3             |
| 34  | GND       |                                 | Ground       |                 | 1             |
| 35  | RX4p      | Receiver Data Non-Inverted      | CML-O        | Output to Host  | 3             |
| 36  | RX4n      | Receiver Data Inverted          | CML-O        | Output to Host  | 3             |
| 37  | GND       |                                 | Ground       |                 | 1             |
| 38  | RX6p      | Receiver Data Non-Inverted      | CML-O        | Output to Host  | 3             |
| 39  | RX6n      | Receiver Data Inverted          | CML-O        | Output to Host  | 3             |
| 40  | GND       |                                 | Ground       |                 | 1             |

|    |          |                                 |             |                 |   |
|----|----------|---------------------------------|-------------|-----------------|---|
| 41 | RX8p     | Receiver Data Non-Inverted      | CML-O       | Output to Host  | 3 |
| 42 | RX8n     | Receiver Data Inverted          | CML-O       | Output to Host  | 3 |
| 43 | GND      |                                 | Ground      |                 | 1 |
| 44 | INT/RSTn | Module Interrupt / Module Reset | Multi-Level | Bi-directional  | 3 |
| 45 | VCC      | +3.3V Power                     |             | Power from Host | 2 |
| 46 | VCC      | +3.3V Power                     |             | Power from Host | 2 |
| 47 | SDA      | 2-wire Serial interface data    | LVCMOS- I/O | Bi-directional  | 3 |
| 48 | GND      |                                 | Ground      |                 | 1 |
| 49 | TX7n     | Transmitter Data Inverted       | CML-I       | Input from Host | 3 |
| 50 | TX7p     | Transmitter Data Non-Inverted   | CML-I       | Input from Host | 3 |
| 51 | GND      |                                 | Ground      |                 | 1 |
| 52 | TX5n     | Transmitter Data Inverted       | CML-I       | Input from Host | 3 |
| 53 | TX5p     | Transmitter Data Non-Inverted   | CML-I       | Input from Host | 3 |
| 54 | GND      |                                 | Ground      |                 | 1 |
| 55 | TX3n     | Transmitter Data Inverted       | CML-I       | Input from Host | 3 |
| 56 | TX3p     | Transmitter Data Non-Inverted   | CML-I       | Input from Host | 3 |
| 57 | GND      |                                 | Ground      |                 | 1 |
| 58 | TX1n     | Transmitter Data Inverted       | CML-I       | Input from Host | 3 |
| 59 | TX1p     | Transmitter Data Non-Inverted   | CML-I       | Input from Host | 3 |
| 60 | GND      |                                 | Ground      |                 | 1 |


### MSA Compliant Connector

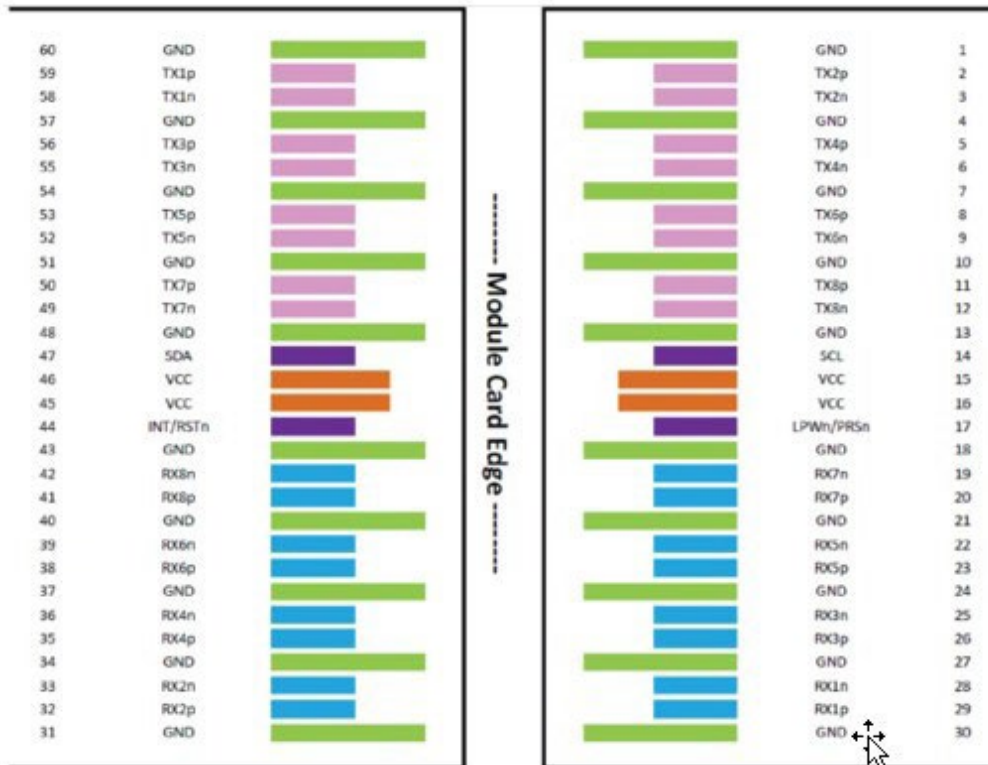

## Voltage Zones

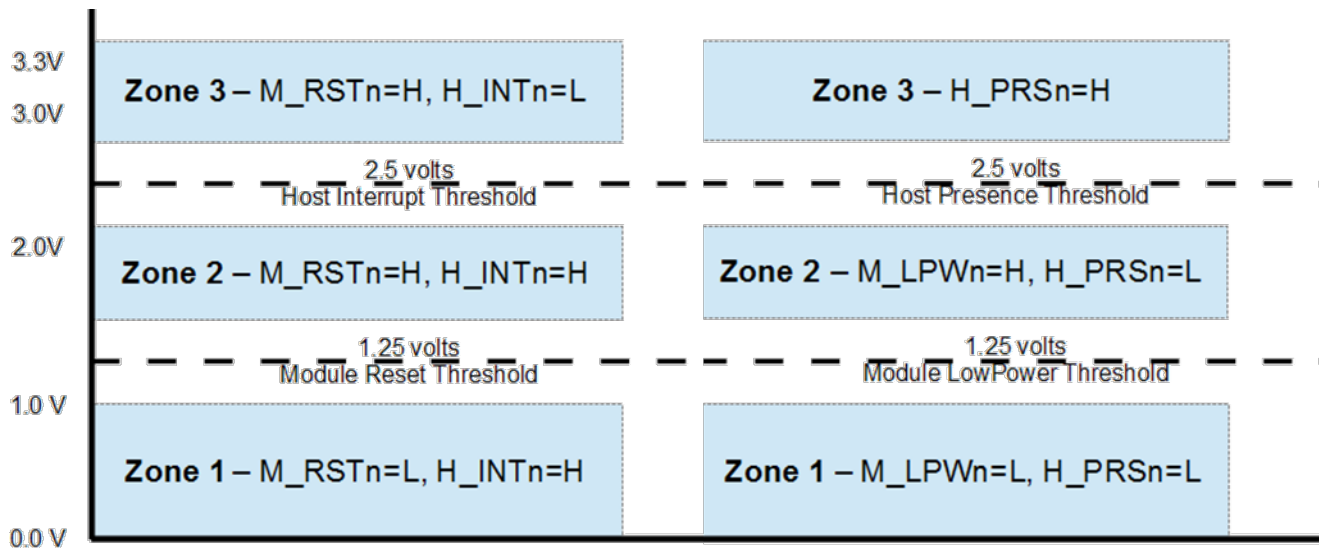

## Recommended Power Supply Filter

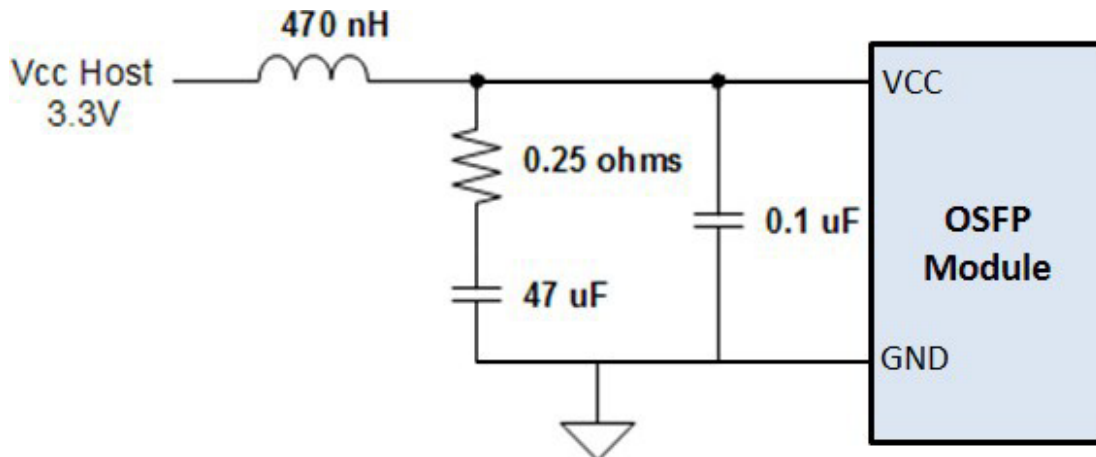



## Digital Diagnostic Functions


The following digital diagnostic characteristics are defined over the normal operating conditions unless otherwise specified.

| Parameter                               | Symbol       | Min  | Max | Units | Notes                            |
|---|--------------|------|-----|-------|----------------------------------|
| Temperature monitor absolute error      | DMI_Temp     | -3   | 3   | degC  | Over operating temperature range |
| Supply voltage monitor absolute error   | DMI_VCC      | -0.1 | 0.1 | V     | Over full operating range        |
| Channel RX power monitor absolute error | DMI_RX_Ch    | -2   | 2   | dB    | 1                                |
| Channel Bias current monitor            | DMI_Ibias_Ch | -10% | 10% | mA    |                                  |
| Channel TX power monitor absolute error | DMI_TX_Ch    | -2   | 2   | dB    | 1                                |


### Notes:

1. Due to measurement accuracy of different single mode fibers, there could be an additional +/-1 dB fluctuation, or a +/- 3 dB total accuracy.

## Transceiver Block Diagram

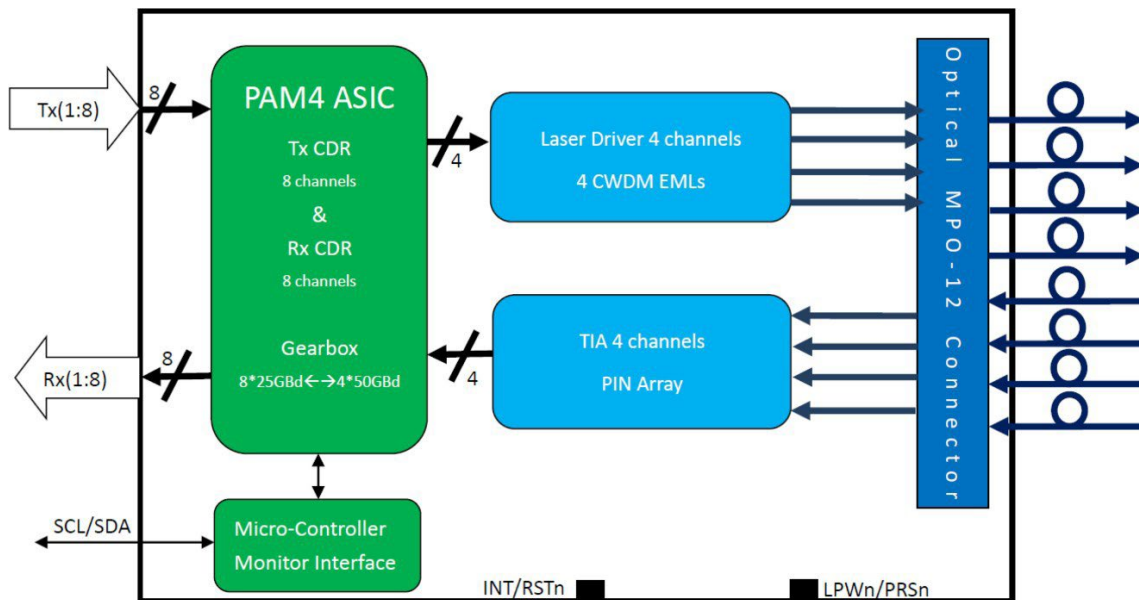

**Mechanical Specifications**

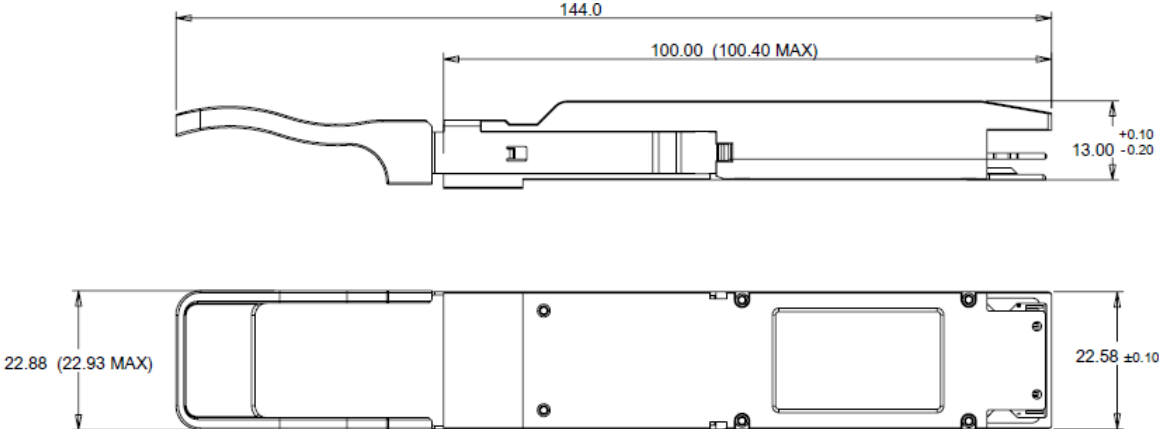

## About AddOn Networks

In 1999, AddOn Networks entered the market with a single product. Our founders fulfilled a severe shortage for compatible, cost-effective optical transceivers that compete at the same performance levels as leading OEM manufacturers. Adhering to the idea of redefining service and product quality not previously had in the fiber optic networking industry, AddOn invested resources in solution design, production, fulfillment, and global support.

Combining one of the most extensive and stringent testing processes in the industry, an exceptional free tech support center, and a consistent roll-out of innovative technologies, AddOn has continually set industry standards of quality and reliability throughout its history.

Reliability is the cornerstone of any optical fiber network and is engrained in AddOn's DNA. It has played a key role in nurturing the long-term relationships developed over the years with customers. AddOn remains committed to exceeding industry standards with certifications from ranging from NEBS Level 3 to ISO 9001:2005 with every new development while maintaining the signature reliability of its products.



## U.S. Headquarters

Email: [sales@addonnetworks.com](mailto:sales@addonnetworks.com)

Telephone: +1 877.292.1701

Fax: 949.266.9273

## Europe Headquarters

Email: [salesupportemea@addonnetworks.com](mailto:salesupportemea@addonnetworks.com)

Telephone: +44 1285 842070