
M14t gen2 Simplified service manual for dismantling

Model Name: Thinkvision M14t gen2

Exploded Diagram

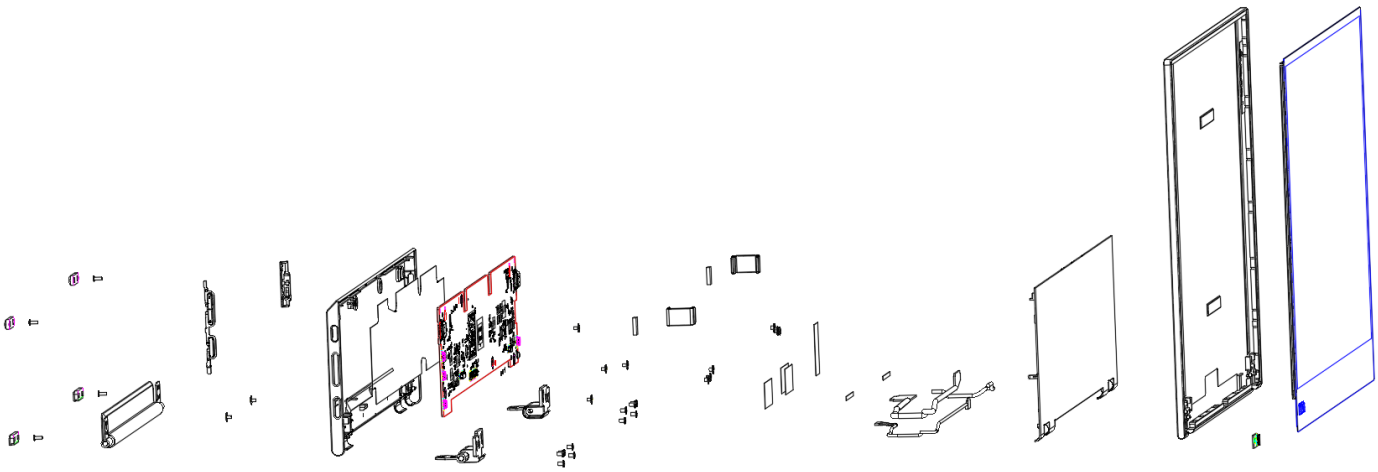

1. Precaution

Please read the precaution as follows to prevent any damages to the LCD Monitor.
Make sure all power connector is removed. Be sure that the LCD Monitor is in power off status.

Prepare soft cloth and sponge as working platform to place LCD monitor horizontally.	
Hold LCD by the side carefully and DON'T touch or press panel directly.	


2. Appropriate tools

Select the Appropriate tools for disassembly and re-assembly.

Phillips screwdriver (#2)	
Gloves or soft cloth	

3. Disassembly SOP

Put the monitor on a flat surface (Put the EPE under the monitor)	
Remove the rubbers * 4pcs Tool : Hand	
Remove the screw * 4pcs Tool : Screwdriver #2	
Remove the screw * 2pcs Tool : Screwdriver #2	
Release base top cover (Notes: four hooks)	 

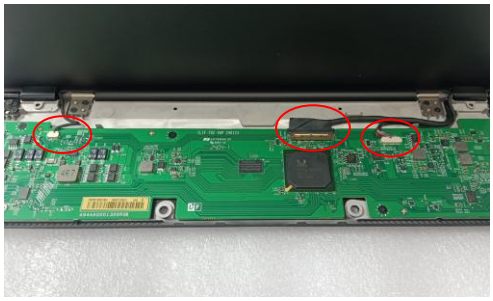Remove the tape*1pcs	
Release the connector*3pcs	
Remove the hinge screw* 6pcs and release the head Tool : Screwdriver #2	 
Remove the tilt-foot screw* 4pcs and release the tilt-foot Tool : Screwdriver #2	 
Remove the PCBA screw* 4pcs and release the PCBA Tool : Screwdriver #2	