



by Schneider Electric

Basic Rack PDU


Overview

The American Power Conversion (APC®) Basic Rack Power Distribution Unit (PDU) distributes power to devices in the rack.

Outlets. The Rack PDU has four (4) IEC-320-C19 outlets.

Power cord. The 12-foot (3.65-meter) power cord terminates with a NEMA L6-30 connector.

AP9570

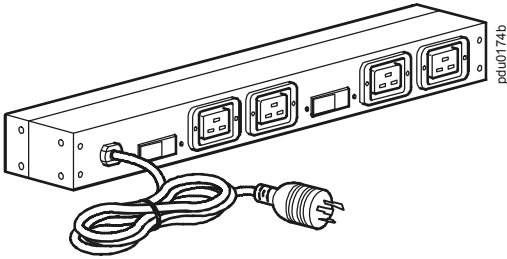

Specifications

Electrical

Input connector	NEMA L6-30 connector
Output connectors	4 – IEC 320-C19 outlets
Nominal input voltage	200–240 VAC
Acceptable input voltage	± 10% of normal voltage
Input frequency	50/60 Hz
Maximum total current draw	30 A (24 A UL (C-UL) derated)
Overcurrent protection (internal)	(2) 20 A, 2-pole breakers

Physical

Size (H × W × D)	1.75 × 17.60 × 2.78 in (4.45 × 44.70 × 7.06 cm)
Shipping Dimensions (H × W × D)	6.75 × 19.00 × 6.875 in (17.14 × 48.26 × 17.46 cm)
Weight	6.0 lb (2.72 kg)
Shipping weight	8.5 lb (3.86 kg)

Environmental

Elevation (above MSL)	
Operating	0–10,000 ft (0–3000 m)
Storage	0–50,000 ft (0–15 000 m)
Temperature	
Operating	0 to 45° C (32 to 115° F)
Storage	–25 to 65° C (–13 to 149° F)
Humidity	
Operating	0–95% RH Non-condensing
Storage	0–95% RH Non-condensing

Compliance

Safety verification	UL (C-UL) listed, PSE
---------------------	-----------------------

Customer support and warranty information is available at the APC Web site, www.apc.com.

© 2009 APC by Schneider Electric. All trademarks are owned by Schneider Electric Industries S.A.S., American Power Conversion Corporation, or their affiliated companies.



990-3614
04/2009

