


Y25-30 Simplified service manual for dismantling

Model Name: Lenovo Y25-30

Exploded Diagram

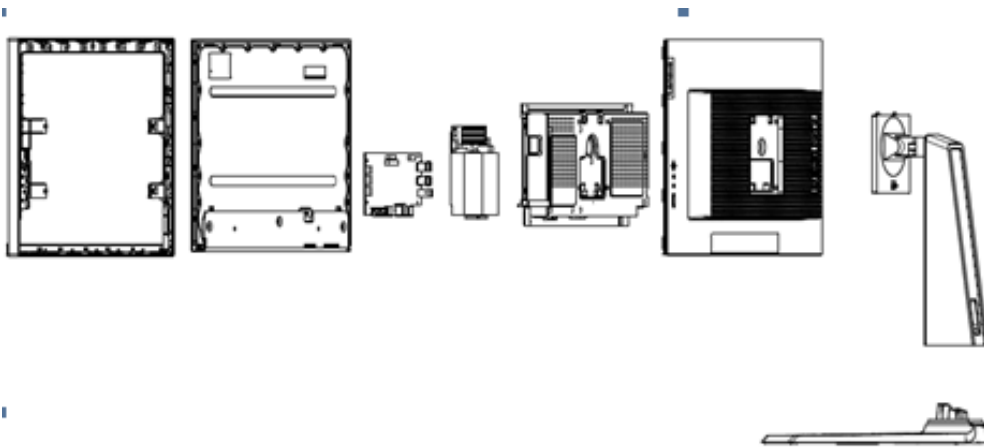

1. Precaution

Please read the precaution as follows to prevent any damages to the LCD Monitor.

Make sure all power connector is removed. Be sure that the LCD Monitor is in power off status.

Prepare soft cloth and sponge as working platform to place LCD monitor horizontally.







Hold LCD by the side
carefully and DON'T touch
or
press panel directly.




2. Appropriate tools

Select the Appropriate tools for disassembly and re-assembly.


Phillips screwdriver (#2)	
spacer screwdriver	

C/D disassembly tool	
Gloves or soft cloth	

3. Disassembly SOP

Put the monitor on a flat surface (Put the EPE on under the monitor)	
---	--

Remove the screw * 1pcs
Tool : Screwdriver #2

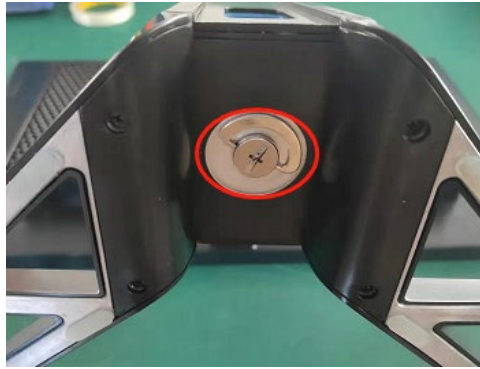


Pull out stand




Remove the back cover




Remove All tape and foil

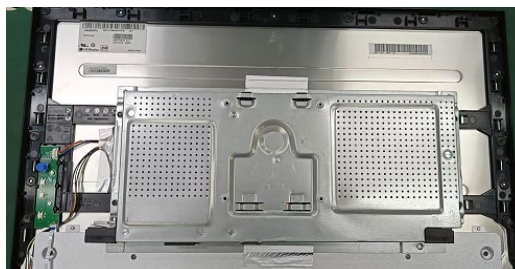


Unplug light bar line and LVDS line

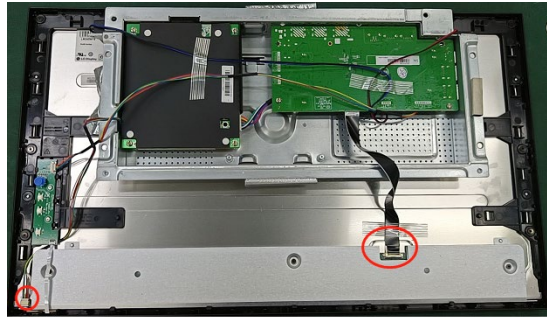


Remove All screw.
Release the keypad pcb from the middle frame
Tool : Screwdriver #2

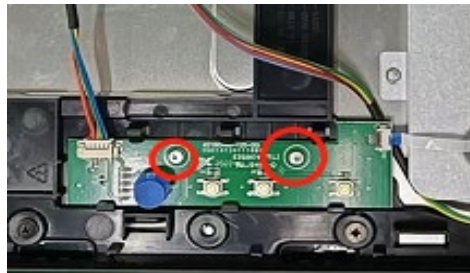

Remove All screw.
Remove All tape
Tool : Screwdriver #2

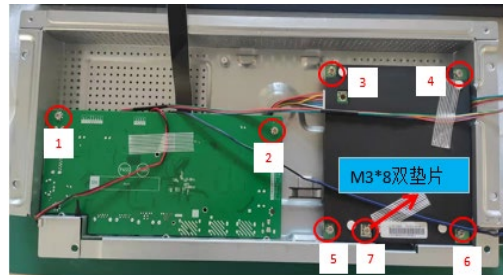

Take out the PCB board

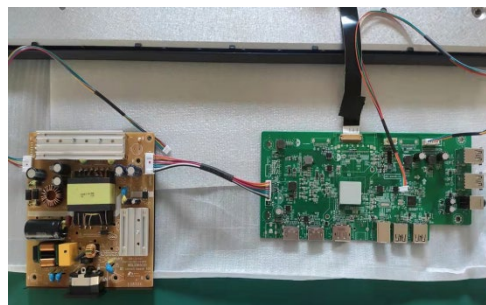

Remove All screw.
Tool : Screwdriver #2



Remove the middle frame.

The panel

