

IR-500R Y

INFRARED WIRELESS RECEIVER




The IR-500R infrared wireless receiver is designed for use with the IR-702T infrared wireless tuner. It can be mounted to a wall or an electrical box.

Key features

- Designed for exclusive use with IR-702T Infrared Wireless Tuner
- Power indicator LED
- Can be mounted to a wall or an electrical box

Specifications

Dimensions

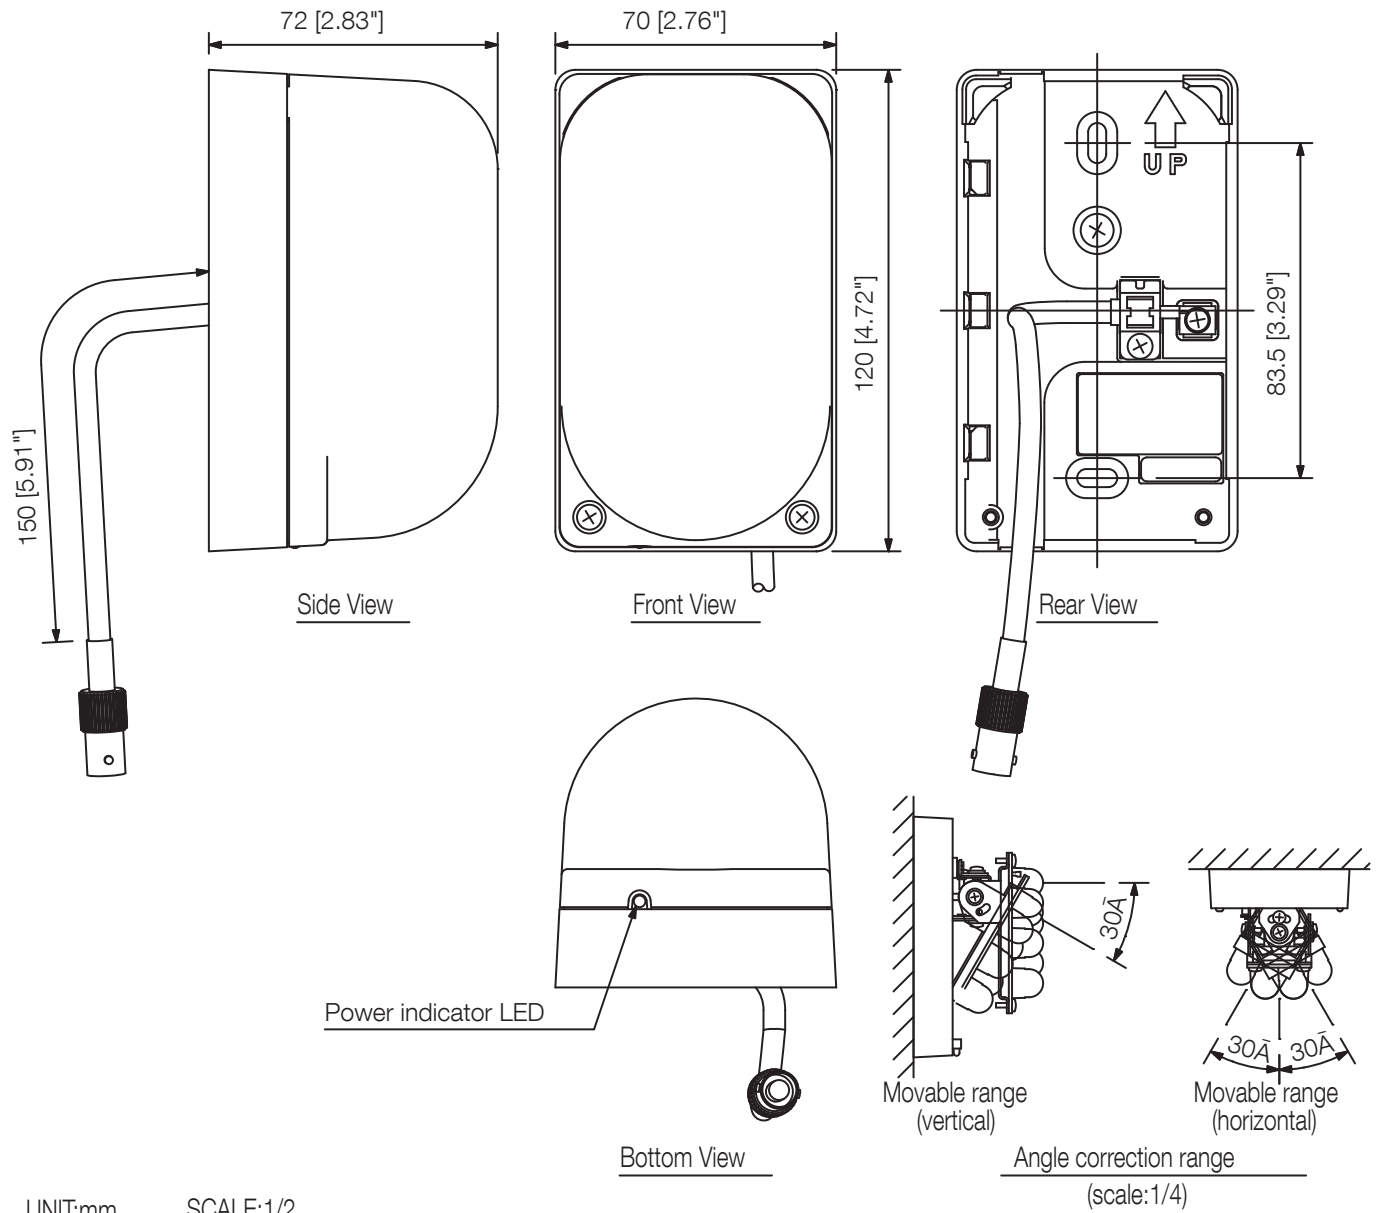

A&E specifications

The wall-mount receiver shall be housed on a metal back plate and fitted with a dark tinted plexiglass cover with overall dimensions of 3.0" (W) x 4.7" (H) x 2.8" (D) and weighing .5 lbs. The unit shall have a BNC-type jack for connection to the IR-702T Tuner from which it will also receive 24VDC power. The receiver shall be capable of being installed in a single-gang electrical circuit box and is equipped with power indicator LED. The receiver shall have a reception area of up to approximately 49' line of sight and shall have an internally adjustable infrared light reception angle of between 50° & 80° both horizontally & vertically. The receiver shall also include a wall-mounting bracket. The unit shall be called the TOA IR-500R.