

Singlewire InformaCast Loudspeaker Amplifier (AC-Powered)

The new Singlewire InformaCast Loudspeaker Amplifier (AC-Powered) is for use with Singlewire's paging and emergency notification software InformaCast® or InformaCast CK. This PoE-powered device now includes some brand new features such as dual registration for both Singlewire and SIP, and hooks up easily to new and existing Singlewire installations, providing an easy method for implementing a loud IP-based overhead paging system for loud areas, warehouses, manufacturing areas, and outdoor areas.

Now with up to 9 user-stored messages, the Amplifier provides direct drive of up two 8 Ohm horns.

The interface is compatible with most SIP-based IP PBX servers that comply with the SIP RFC 3261. For non-SIP environments, the Singlewire InformaCast Loudspeaker Amplifier can be configured to listen to multicast address and port number combinations to form paging zones.

New Features

- Now offers dual registration for both SIP and Singlewire
- SIP Enhanced interoperability for hosted environments
 - CyberData has maintained one of the most comprehensive list of IP PBX servers certified to work with CyberData
- NEW SECURITY FEATURES:
 - Support for security code access for SIP paging
 - Autoprovisioning via HTTPS
 - HTTPS web based configuration
- Support for G.722 codecs
- 802.11q VLAN tagging
- Configurable sense input for use with fault detection
- Configurable event generation for device health and status monitoring
- Optional direct connect RGB strobe kit connection (coming soon)
- 9 user-uploadable page messages

Features

- Packaged in a NEMA 3R/IP42-rated enclosure
- SIP and Simultaneous Multicast
- Dual-speed ethernet 10/100 Mbps
- Web-based configuration
- PoE 802.3at and 802.3af-enabled
- Line-in for background music
- Line-out connector
- DTMF controlled relay
- Direct 8 Ohm speaker drive
- User-uploadable tones and messages
- Digital and manual volume control
- Second SIP endpoint "Night Ringer"
- Autoprovisioning
- Auto-call voice message from input port sense
- Can support two horns
- HTTP Command Interface
- 10 channel prioritized Multicast ports
- Built-in diagnostics
- Delayed page support
- Cisco SRST



Mini Horn Loudspeaker (part #011068) must be purchased separately.

Specifications

| | |
|--------------|---|
| Ethernet I/F | 10/100 Mbps |
| Protocol | InformaCast and SIP RFC 3261 Compatible |
| Power Input | PoE 802.3at or 802.3af |
| Audio Output | 802.3at - SPL 117 dB @ 1 meter* |

Line In:

| | |
|-------------------------|-----------------|
| Input Signal Amplitudes | 2.0 VPP maximum |
| Input Impedance | 10k Ohm |

Line Out:

| | |
|---------------------------|-----------------|
| Output Signal Amplitudes | 2.0 VPP maximum |
| Output Level | +2dBm nominal |
| Total Harmonic Distortion | 0.5% maximum |
| Output Impedance | 10k Ohm |

| | |
|-----------------------|-----------------------------------|
| Operating Temperature | -10° C to 50° C (14° F to 122° F) |
|-----------------------|-----------------------------------|

| | |
|---------------|---|
| Payload Types | G.711 a-law, G.711 μ -law , and G.722 |
|---------------|---|

| | |
|--------------|--|
| Dimensions** | 10 in. [254 mm] Length 4 in. [101.6 mm] Width 14 in. [355.6 mm] Height |
|--------------|--|

| | |
|--------------|--------------------|
| Boxed Weight | 6.5 lbs. [2.95 kg] |
|--------------|--------------------|

| | |
|----------|-----------------|
| Warranty | 2 Years Limited |
|----------|-----------------|

| | |
|-----------------------|--------|
| Part Number | 011406 |
| Mini Horn Loudspeaker | 011068 |



*When used with the 011068 Mini Horn.

**Dimensions are measured from the perspective of the product being upright with the front of the product facing you.

Singlewire InformaCast Features

- Singlewire Informacast compatibility available.
- Includes support for Informacast resiliency.
- Supports both SIP and Singlewire InformaCast
- InformaCast compliant
- InformaCast CK compliant

Singlewire InformaCast Loudspeaker Amplifier (AC-Powered)

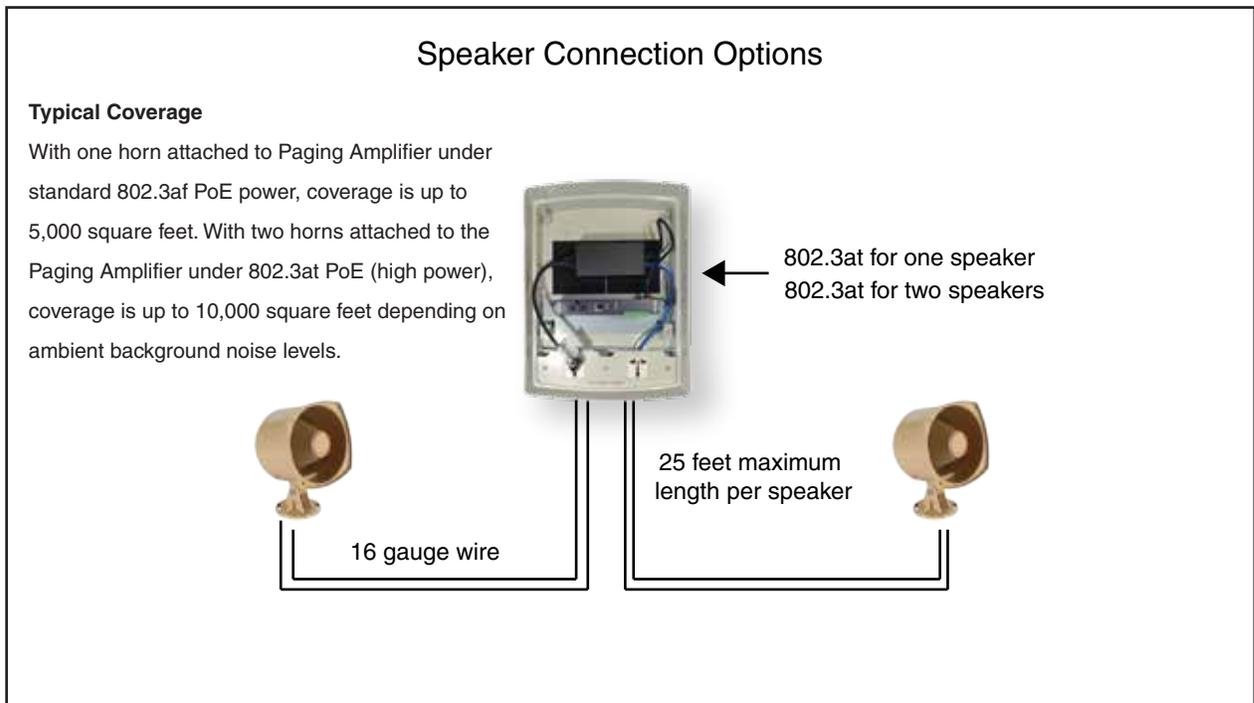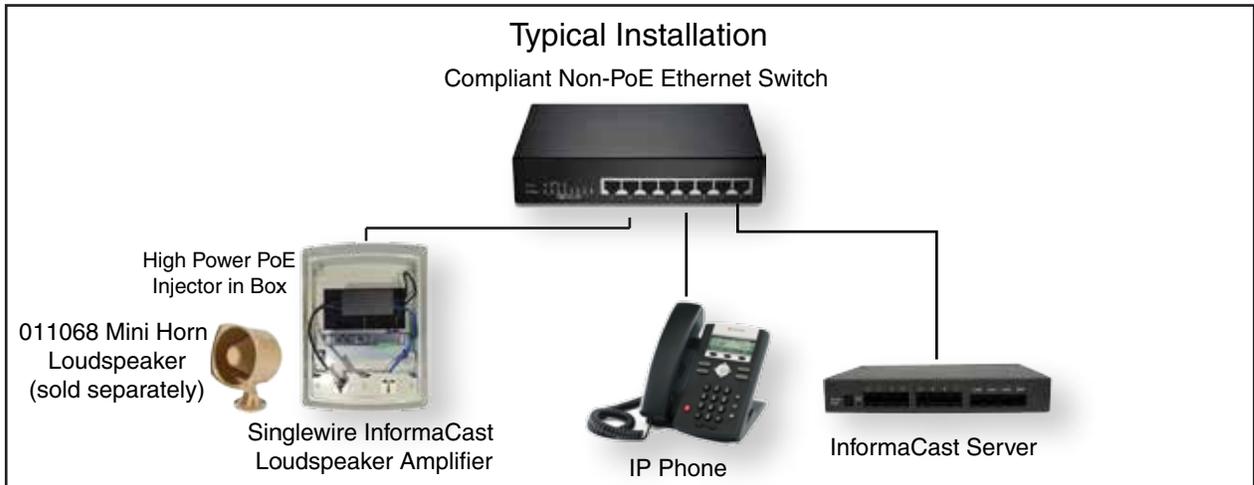

Singlewire InformaCast Loudspeaker Amplifier (AC-Powered)

Upload an Audio Message

User can upload an audio message to the device.

When the "Sense-In" is activated, the stored audio file will play out the local speaker and repeat until the condition is cleared.

The device can also call a pre-set phone number and when that phone answers, the stored audio message will also be played to the phone.



IP Phone



Window Reed Switch

(Not a CyberData device. Sold separately)

Window Reed switch is connected to the "Sense-In" connection.

Connections

CLASS II WIRING

- Primary/Left Spkr (+) - 12
- Primary/Left Spkr (-) - 11
- 2nd/Right Spkr (+) - 10
- 2nd/Right Spkr (-) - 9
- Line-Out (+) - 8
- Line-Out (-) - 7
- Line-In (-) - 6
- Line-In (+) - 5
- Relay COM - 4
- Relay NO/NC - 3
- Door Sense/Button Common (GND) - 2
- Door Sense/Button Contact (+) - 1