


## 200-240V 16A Single-Phase Hot-Swap PDU with Manual Bypass - 4 Schuko Outlets, C20 & Schuko Inputs, Rack/Wall

MODEL NUMBER: PDUBHV20D

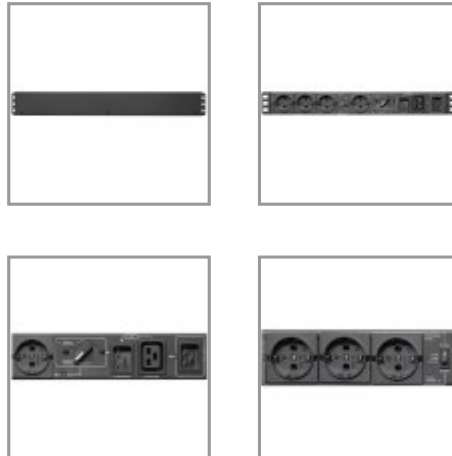

Bypass PDU maintains continuous power to connected equipment during scheduled UPS maintenance or replacement.

### Features

#### Bypass PDU Recommended for Maintaining Continuous Power During UPS Maintenance

Keeping mission-critical data center equipment operating at its optimal level often means scheduled maintenance. But what if you are unable to afford the costly downtime involved in powering down for regular upkeep? This 200-240V 16A single-phase hot-swap PDU works in conjunction with your UPS system to keep everything running 24/7/365. It allows you to manually transfer connected equipment to utility power via the PDU's bypass switch, permitting maintenance or equipment replacement with no interruption of performance.

#### Features Dual Inputs and a Manual Transfer Switch for Uninterrupted Operation

The PDUBHV20D features two C20 inlets that connect to separate UPS and utility input power sources with user-supplied power cables or the included cables. The manual transfer switch allows PDU output power to flow from either input. Flip the switch to Bypass to replace the UPS and flip back to Normal once the maintenance or UPS replacement is complete. Equipment connected to the four Schuko outlets will continue to operate without interruption.

#### Optional ECO Switching Feature Enables Cost-Cutting Power Savings

By enabling the ECO power saving feature, you can power off a single bank of three controlled Schuko outlets all at once when the device connected to the master Schuko outlet is powered off or goes into a low-power consumption mode.

#### Mounts into 2U of Rack Space or on a Wall

Use the included mounting hardware to install the PDUBHV20D's all-metal housing inside a 19-inch rack. Because the PDU's 56.1-millimeter height is larger than 1U in an EIA-standard rack, you will need to mount the unit into 2U of space. You may also use the mounting brackets to secure the PDU to a wall.

### Highlights

- Ideal for supporting critical IT equipment that require 24/7/365 uptime
- Transfers connected components to utility power with no downtime during UPS maintenance
- Dual C20 inlets support connection to separate UPS and utility input power sources
- ECO mode saves power by shutting down controlled outlet bank in certain conditions
- Mounts into 2U of rack space or onto wall using included mounting hardware

### Applications

- Set the bypass switch to UPS during normal operation, so connected equipment can receive fulltime conditioned power
- Set the bypass switch to Utility to bypass the UPS and provide connected equipment with unfiltered power during UPS maintenance or replacement
- Enable ECO Switching to save power by shutting down one load bank when the device connected to the master outlet is powered off or in low-consumption mode

### Package Includes

- PDUBHV20D 200-240V 16A Single-Phase Hot-Swap PDU



- (2) C19-to-C20 power cables
- C19-to-Schuko power cable
- Mounting hardware
- Owner's manual

## Specifications

OVERVIEW	
UPC Code	037332253125
PDU Type	Hot-Swap
INPUT	
PDU Input Voltage	220; 230; 240
Recommended Electrical Service	16A
Maximum Input Amps	16
PDU Plug Type	(2) IEC-320 C20; (1) Schuko 16A CEE 7/4
Input Cord Length Details	Set of 3 power cables included (One 1.8m Schuko CEE 7/4 and Two 1.4m C19-to-C20); Supports user supplied alternate input cabling
Input Phase	Single-Phase
OUTPUT	
Output Capacity Details	3.2kW (200V), 3.5kW (220V), 3.7kW (230V), 3.8kW (240V) / Total capacity 16A / 16A Max per outlet
Frequency Compatibility	50 / 60 Hz
Output Receptacle Details	Set of 4 output receptacles are arranged in two groups to support the optional ECO Power-Saving feature; One MASTER-outlet provides optional current-sense capability that when enabled, automatically powers off the bank of 3 CONTROLLABLE GROUP-outlets when the device connected to the MASTER-outlet is powered off or enters a low power sleep mode consuming 20W or less ( $\pm 5W$ )
Output Receptacles	(4) CEE7/7
Output Nominal Voltage	220; 230; 240
Overload Protection	n/a
USER INTERFACE, ALERTS & CONTROLS	
Front Panel LEDs	Front panel LEDs report UTILITY Input Power ON (green), BYPASS-MODE Switch Setting (yellow), MASTER Outlet Power ON (green), CONTROLLABLE GROUP Outlets Power ON (green)
Switches	2 position Manual Transfer switch offers Break-Before-Make transfer between UPS and Utility operating modes with less than 8 milliseconds (typical) transfer time; Additional switch offers ENABLE/DISABLE control of the ECO Power-Saving feature
PHYSICAL	



**Tripp Lite**  
1111 W. 35th Street  
Chicago, IL 60609 USA  
Telephone: 773.869.1234  
www.triplite.com

Form Factors Supported	Includes installation accessories for wall mount and 2U horizontal rackmount installation in 2 or 4 post equipment racks
Material of Construction	Metal
PDU Form Factor	Horizontal (2U)
Shipping Dimensions (hwd / in.)	5.71 x 21.46 x 8.07
Shipping Weight (kg)	3.18
Unit Dimensions (hwd / cm)	5.61 x 43.79 x 10.01
Unit Dimensions (hwd / in.)	2.21 x 17.24 x 3.94
Unit Weight (kg)	2.36
Unit Weight (lbs.)	5.2
<b>ENVIRONMENTAL</b>	
Storage Temperature Range	-30°C to +50°C (-22°F to +122°F)
Relative Humidity	Up to 90% (non-condensing)
Operating Elevation (ft.)	Up to 10,000 ft
Operating Elevation (m)	Up to 3000 m
<b>STANDARDS &amp; COMPLIANCE</b>	
Certifications	CE (International)
Certification Details	Approving Agency TUV RHEINLAND; Series Number (s) AG-0519; Safety Standards (International) IEC62368-1:2014 (2nd Ed); EMI/EMC Standards Class A; EN55032:2015+AC:2016-07; EN55035:2017; EAC/PCT, CE
<b>WARRANTY</b>	
Product Warranty Period (Worldwide)	2-year limited warranty

© 2021 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies: <https://www.triplite.com/products/product-certification-agencies>