


Installation and Assembly - Light Duty Camera Mount

Patented. Utility Patent No. 5,790,910; D400,085.

Model: CMR 410

MAXIMUM LOAD CAPACITY: 10 lb (4.5 kg)

IMPORTANT! Read entire instruction sheet before you start installation and assembly. Fasteners for wall attachment to be provided by installer.

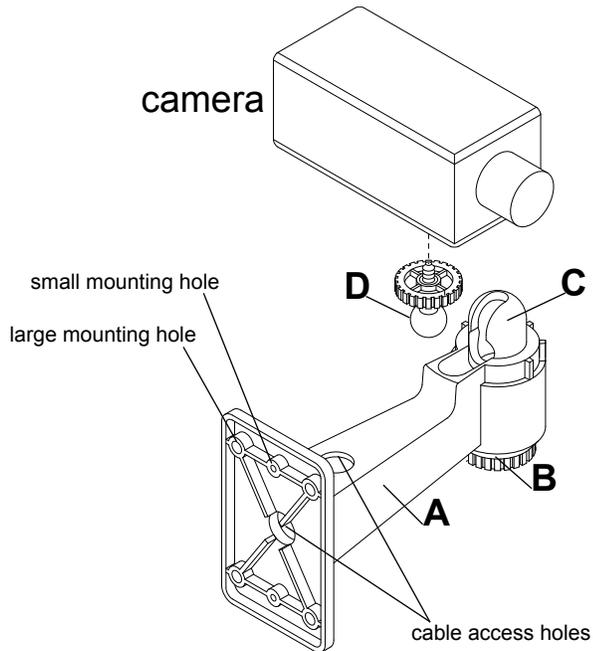

PEERLESS 7" SECURITY CAMERA MOUNT (CMR 410)

⚠ WARNING

- Installer must verify that the wall will safely support four times the combined weight of all attached equipment and hardware.

- 1** Camera housing (A) may be attached to wall or ceiling via the four large mounting holes, or directly to a standard electrical outlet box via two small mounting holes. Hardware for attaching camera housing to mounting surface is not included.
Note: Peerless Industries recommends using #14 x 2.5 phillips hex wood screws.
- 2** **Ball Stud Removal.**
Note: Ball stud removal may not be necessary for camera attachment. Loosen tension screw (B) several turns. Rotate socket (C) as pictured. Push down on ball stud (D) and remove by passing through hole in socket (C).
- 3** Attach ball stud (D) to threaded fitting in bottom of camera. Reinsert ball stud (D) into socket (C). Rotate and angle camera to desired position. Tighten tension screw (B) securely.
Note: Cable(s) may be routed through cable access holes.

PARTS LIST

	QTY.	DESCRIPTION
A	1	housing
B	1	tension screw
C	1	socket
D	1	ball stud