

HIKVISION



Desktop Body Camera Dock Station

User Manual

TABLE OF CONTENTS

Chapter 1 Introduction	6
1.1 Introduction	6
1.2 Key Features	6
1.3 Packing List	6
Chapter 2 Panels Description	7
2.1 Top View	7
2.2 Dock Station Cradle	8
2.3 Front Panel	9
2.4 Rear Panel	10
Chapter 3 Basic Operation	11
3.1 Start Up Dock Station	11
3.2 Activate Dock Station Software	11
3.3 Access Dock Station via Web Browser	12
Chapter 4 Department and Officer Management	14
4.1 Add Department	14
4.2 Police Officer Management	14
Chapter 5 Data Collection	16
5.1 Set Data Saving Path	16
5.1.1 For Dock Station Software User	16
5.1.2 For User Accesses Dock Station via Web Browser	16
5.2 Configure Collection Format	17
5.2.1 For Dock Station Software User	17
5.2.2 For User Accesses Dock Station via Web Browser	18
5.3 Collect Data	18
Chapter 6 Maintenance	20
6.1 Exception	20
6.2 Log Search	20
Chapter 7 Collected Data Management	21
7.1 Search Data	21
7.2 Play Data	21
7.3 Lock Data	21
7.4 File Management	21
Chapter 8 Data Backup	22
8.1 Auto Backup	22
8.2 Manual Backup	22
8.3 Restore Database	22
Chapter 9 Other Settings	24
9.1 Basic Settings	24
9.2 Edit Dock Station Software Password	24
9.2.1 Edit via Dock Station Software	24

9.2.2 Edit via Web Browser	25
9.3 Edit Web Accessing Password via Web Browser	25

User Manual

COPYRIGHT ©2017 Hangzhou Hikvision Digital Technology Co., Ltd.

ALL RIGHTS RESERVED.

Any and all information, including, among others, wordings, pictures, graphs are the properties of Hangzhou Hikvision Digital Technology Co., Ltd. or its subsidiaries (hereinafter referred to be “Hikvision”). This user manual (hereinafter referred to be “the Manual”) cannot be reproduced, changed, translated, or distributed, partially or wholly, by any means, without the prior written permission of Hikvision. Unless otherwise stipulated, Hikvision does not make any warranties, guarantees or representations, express or implied, regarding to the Manual.

About this Manual

This Manual is applicable to Desktop Body Camera Dock Station.

The Manual includes instructions for using and managing the product. Pictures, charts, images and all other information hereinafter are for description and explanation only. The information contained in the Manual is subject to change, without notice, due to firmware updates or other reasons. Please find the latest version in the company website (<http://overseas.hikvision.com/en/>).

Please use this user manual under the guidance of professionals.

Trademarks Acknowledgement

HIKVISION and other Hikvision’s trademarks and logos are the properties of Hikvision in various jurisdictions. Other trademarks and logos mentioned below are the properties of their respective owners.

Legal Disclaimer

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, THE PRODUCT DESCRIBED, WITH ITS HARDWARE, SOFTWARE AND FIRMWARE, IS PROVIDED “AS IS”, WITH ALL FAULTS AND ERRORS, AND HIKVISION MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION, MERCHANTABILITY, SATISFACTORY QUALITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF THIRD PARTY. IN NO EVENT WILL HIKVISION, ITS DIRECTORS, OFFICERS, EMPLOYEES, OR AGENTS BE LIABLE TO YOU FOR ANY SPECIAL, CONSEQUENTIAL, INCIDENTAL, OR INDIRECT DAMAGES, INCLUDING, AMONG OTHERS, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, OR LOSS OF DATA OR DOCUMENTATION, IN CONNECTION WITH THE USE OF THIS PRODUCT, EVEN IF HIKVISION HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

REGARDING TO THE PRODUCT WITH INTERNET ACCESS, THE USE OF PRODUCT SHALL BE WHOLLY AT YOUR OWN RISKS. HIKVISION SHALL NOT TAKE ANY RESPONSIBILITIES FOR ABNORMAL OPERATION, PRIVACY LEAKAGE OR OTHER DAMAGES RESULTING FROM CYBER ATTACK, HACKER ATTACK, VIRUS INSPECTION, OR OTHER INTERNET SECURITY RISKS; HOWEVER, HIKVISION WILL PROVIDE TIMELY TECHNICAL SUPPORT IF REQUIRED.

SURVEILLANCE LAWS VARY BY JURISDICTION. PLEASE CHECK ALL RELEVANT LAWS IN YOUR JURISDICTION BEFORE USING THIS PRODUCT IN ORDER TO ENSURE THAT YOUR USE CONFORMS THE APPLICABLE LAW. HIKVISION SHALL NOT BE LIABLE IN THE EVENT THAT THIS PRODUCT IS USED WITH ILLEGITIMATE PURPOSES.

IN THE EVENT OF ANY CONFLICTS BETWEEN THIS MANUAL AND THE APPLICABLE LAW, THE LATER PREVAILS.

Regulatory Information

FCC Information

Please take attention that changes or modification not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC compliance: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

FCC Conditions

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

EU Conformity Statement



This product and - if applicable - the supplied accessories too are marked with "CE" and comply therefore with the applicable harmonized European standards listed under the EMC Directive 2014/30/EU, the LVD Directive 2014/35/EU, the RoHS Directive 2011/65/EU



2012/19/EU (WEEE directive): Products marked with this symbol cannot be disposed of as unsorted municipal waste in the European Union. For proper recycling, return this product to your local supplier upon the purchase of equivalent new equipment, or

dispose of it at designated collection points. For more information see: www.recyclethis.info.



2006/66/EC (battery directive): This product contains a battery that cannot be disposed of as unsorted municipal waste in the European Union. See the product documentation for specific battery information. The battery is marked with this symbol, which may

include lettering to indicate cadmium (Cd), lead (Pb), or mercury (Hg). For proper recycling, return the battery to your supplier or to a designated collection point. For more information see:

www.recyclethis.info

Industry Canada ICES-003 Compliance




This device meets the CAN ICES-3 (A)/NMB-3(A) standards requirements.

Applicable Models

This manual is applicable to DS-MH4172I.

Symbol Conventions

The symbols that may be found in this document are defined as follows.

Symbol	Description
 NOTE	Provides additional information to emphasize or supplement important points of the main text.
 WARNING	Indicates a potentially hazardous situation, which if not avoided, could result in equipment damage, data loss, performance degradation, or unexpected results.
 DANGER	Indicates a hazard with a high level of risk, which if not avoided, will result in death or serious injury.

Safety Instructions

- Proper configuration of all passwords and other security settings is the responsibility of the installer and/or end-user.
- In the use of the product, you must be in strict compliance with the electrical safety regulations of the nation and region. Please refer to technical specifications for detailed information.
- Input voltage should meet both the SELV (Safety Extra Low Voltage) and the Limited Power Source with 100 to 240 VAC according to the IEC60950-1 standard. Please refer to technical specifications for detailed information.
- Please make sure that the plug is firmly connected to the power socket.
- If smoke, odor or noise rise from the device, turn off the power at once and unplug the power cable, and then please contact the service center.

Preventive and Cautionary Tips

Before connecting and operating your device, please be advised of the following tips:

- Ensure unit is installed in a well-ventilated, dust-free environment.
- Unit is designed for indoor use only.
- Keep all liquids away from the device.
- Ensure environmental conditions meet factory specifications.
- Ensure unit is properly secured to a rack or shelf. Major shocks or jolts to the unit as a result of dropping it may cause damage to the sensitive electronics within the unit.
- Use the device in conjunction with an UPS if possible.
- Power down the unit before connecting and disconnecting accessories and peripherals.

Chapter 1 Introduction

1.1 Introduction

Desktop body camera dock station (hereinafter referred to as the dock station) provides you a simplified way to access and back up law-enforcement data in Hikvision body camera.

1.2 Key Features

- Automatically copy data in connected body camera.
- Charge connected body camera.
- Simultaneously collect data for up to 8 body cameras. Collection priority is configurable.
- Save collected data in dock station HDD.
- Accessible via web browser.

1.3 Packing List

You are recommended to check the objects in the package. Please contact us if anything is damaged or lost.

Table 1-1 Packing List

Item	Quantity	Comment
Dock station	1	
Power cord	1	
Dock station cradle	8	Optional. Only for MH2111 and MH2211 series body cameras.

Chapter 2 Panels Description

2.1 Top View

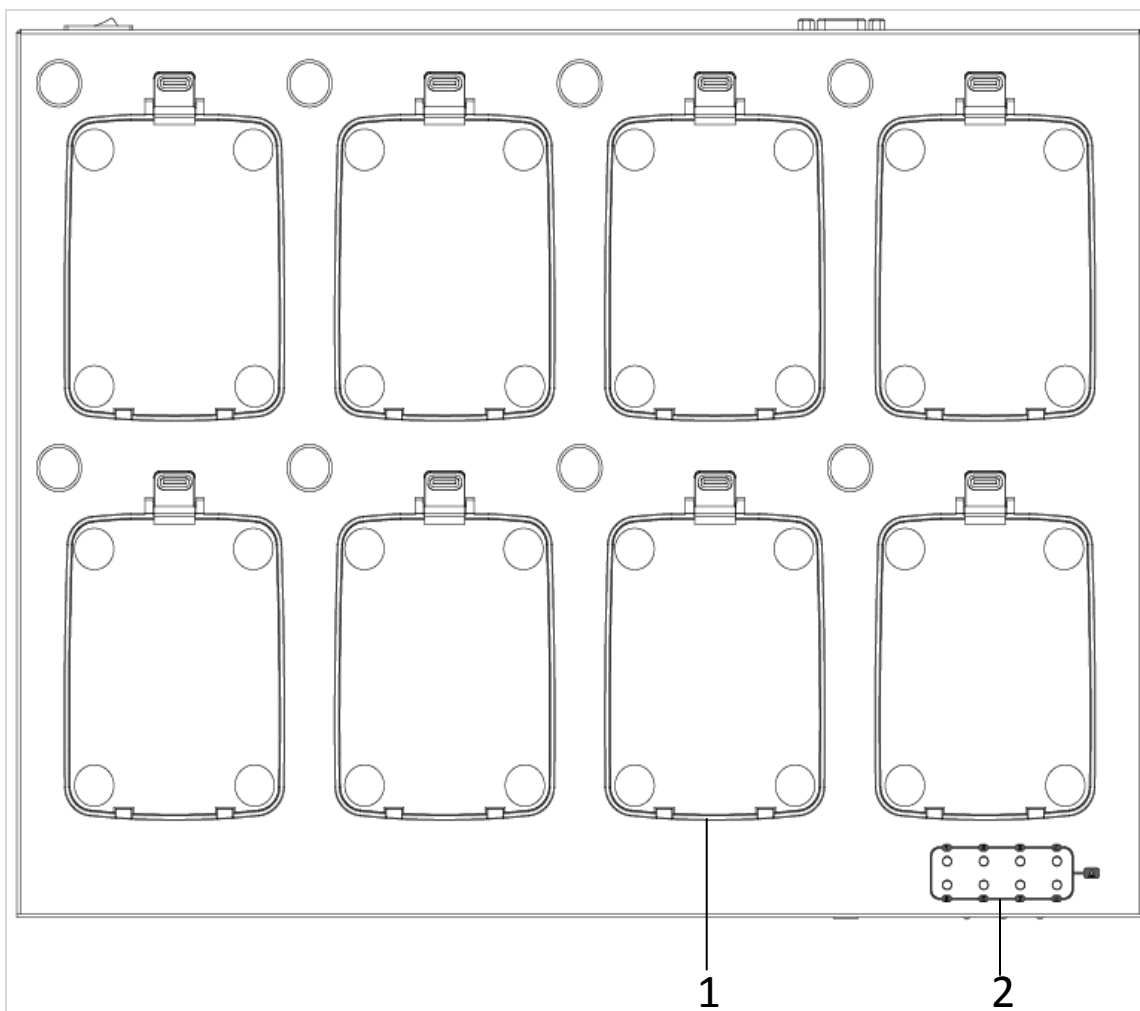


Figure 2-1 Top View

Table 2-1 Indicator Description

No.	Name	Description
1	Body camera cradle	An optional module for Hikvision MH2111 and MH2211 series body cameras.
2	Indicator	<ul style="list-style-type: none"> ● Flashing: Copying data in body camera. ● Solid: Data copying finished. ● Unlit: No body camera is connected.

2.2 Dock Station Cradle

Purpose:

Cradle is an optional module. It is designed to charge Hikvision MH2111 and MH2211 body cameras and copy data from them.

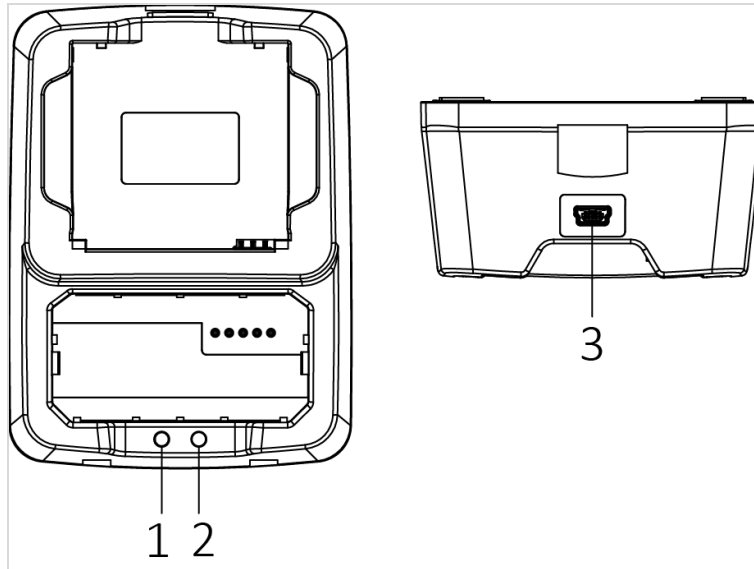


Figure 2-2 Dock Station Cradle

Table 2-2 Description

No.	Name	Description
1	Charge indicator	<ul style="list-style-type: none"> ● Solid red: Battery placed in cradle is being charged. ● Solid green: Battery placed in cradle is fully charged.
2	Power indicator	Solid green: Cradle power supply is connected.
3	Mini USB interface	<ul style="list-style-type: none"> ● Connect cradle with dock station. ● Charge cradle.

2.3 Front Panel

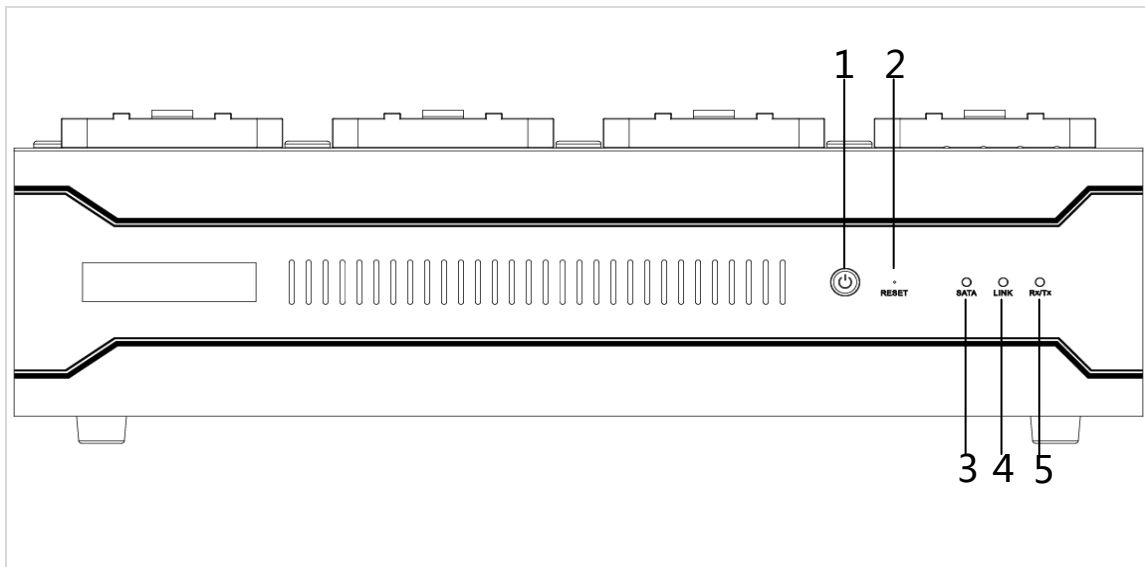


Figure 2-3 Front Panel

Table 2-3 Front Panel Description

No.	Name	Description
1	Power button	<ul style="list-style-type: none"> When device is off, press it to start up device. When device is on, hold it for 3 seconds to shut down device.
2	Reset	Press it to reboot the device.
3	SATA	<ul style="list-style-type: none"> HDD indicator. Solid green: HDD is well connected. Flashing green: HDD is reading or writing.
4	Link	<ul style="list-style-type: none"> Network connection indicator. Solid green: Network connection is normal.
5	Rx/Tx	<ul style="list-style-type: none"> Network transmission indicator. Flashing green: Network transmission is normal.

2.4 Rear Panel

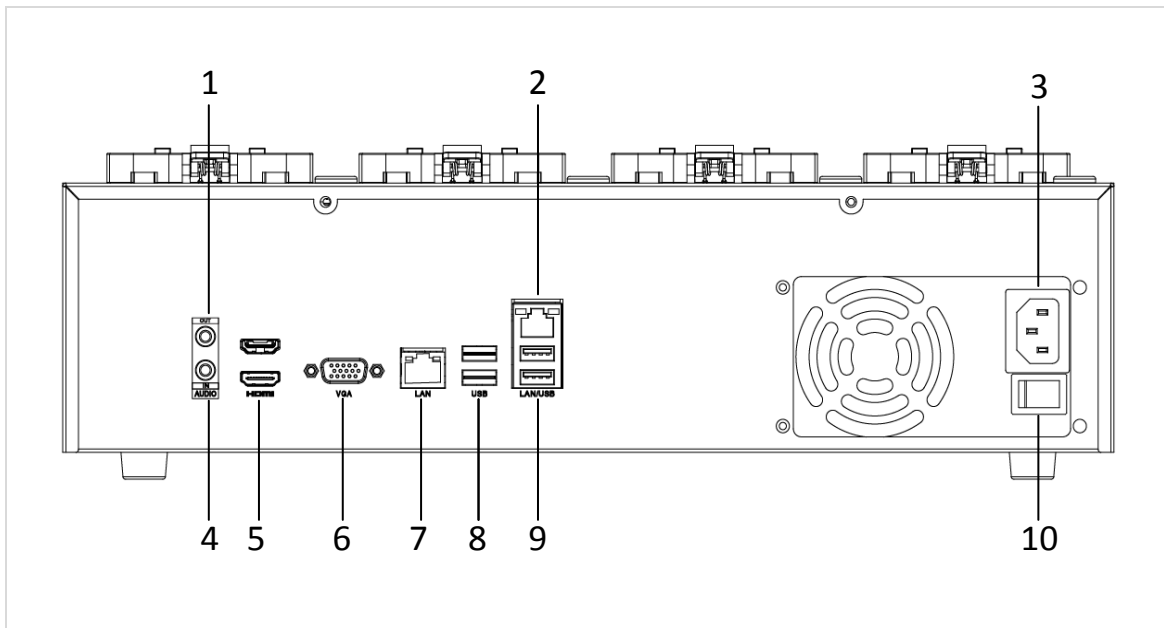


Figure 2-4 Rear Panel

Table 2-4 Rear Panel Description

No.	Name	Description
1	Audio output	Connector for audio output.
2	Network interface	10M/100M/1000M Ethernet interface.
3	Power supply	Connector for power supply.
4	Audio Input	Connector for audio input.
5	HDMI interface	HDMI video output interfaces.
6	VGA interface	VGA video output interface.
7	Network interface	10M/100M/1000M Ethernet interface.
8	USB interfaces	2 × USB 3.0 interface.
9	USB interface	2 × USB 2.0 interface.
10	Power switch	Power on/off device.

Chapter 3 Basic Operation

3.1 Start Up Dock Station

Step 1 Connect a VGA/HDMI display.

Step 2 Plug in power supply into a power socket.

Step 3 Turn on power switch.

Step 4 Enter dock station power-on user name and password and press Enter.

- Default user name: Administrator
- Default password: 12345

3.2 Activate Dock Station Software

Purpose:


For the first-time access, you need to activate the dock station software by setting a password.

Step 1 Run dock station software (body camera station).

Step 2 Enter the same password in **Password** and **Confirm Password** text fields.

The password can only contain the digit and digit number cannot exceeds 20.

Step 3 Click **OK**.

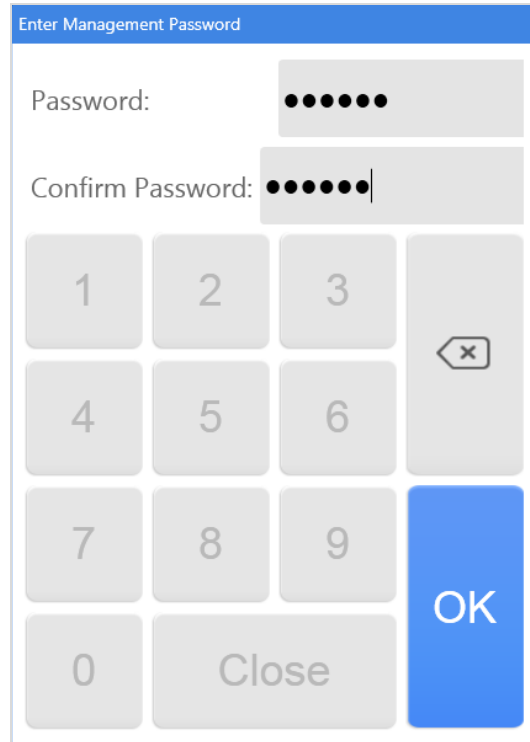

Enter Management Password

Password: ●●●●●●

Confirm Password: ●●●●●●|

1 2 3

4 5 6

7 8 9

0 Close

OK

Figure 3-1 Set Password

3.3 Access Dock Station via Web Browser

Purpose:

You can manage dock station after accessing via web browser installed in dock station or in personal computer that in the same network segment with your dock station.

Step 1 Open web browser, enter the IP address of the dock station and press Enter.

NOTE


- To visit dock station via web browser installed in dock station, use IP address 127.0.0.1.
- To visit dock station via web browser installed in personal computer in the same network segment with your dock station, use dock station IP address.
- Supported web browser: Internet Explorer 8 to 11 and Chrome.

Step 2 Log into the dock station.

- If the dock station has not been activated, activate it before login.

NOTE

You can only activate dock station after log into it via web browser installed in dock station.

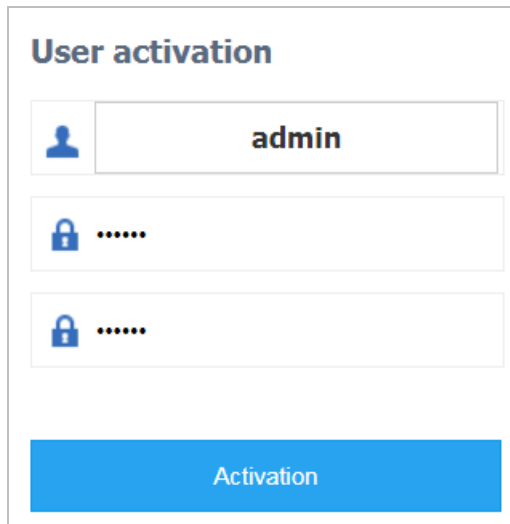

The screenshot shows a 'User activation' window. At the top, the title 'User activation' is displayed. Below the title, there are three input fields. The first field contains a person icon and the text 'admin'. The second and third fields each contain a lock icon and five dots, representing password input. At the bottom of the window is a blue button with the text 'Activation'.

Figure 3-2 Set Admin Password

- 1) Set the password for the admin user account.
 - 2) Click **Activation**.
- If the dock station is already activated, enter the user name and password in the login interface, and click **Login**.

Chapter 4 Department and Officer Management

Purpose:

After adding officer information, you can view officer information when collecting body camera data. Add department information first and then add police officer information.

4.1 Add Department

Step 1 Go to **Department Management** page in web browser.

Step 2 Click **Add**.

Step 3 Enter **Department Name**, **Department No.**, and **Remark**.

Step 4 Optionally, select **Parent Department** if necessary.

Step 5 Click **OK**.

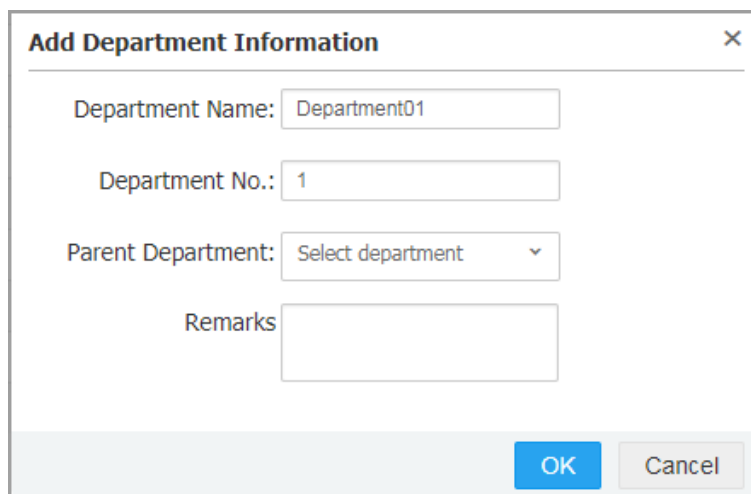


Figure 4-1 Add Department

4.2 Police Officer Management

Step 1 Go to **Police Officer Management** page in web browser.

Step 2 Click **Add**.

Step 3 Enter **Name**, **Officer No.**, and **Device No.**

Device No.: The serial No. of body camera.

Step 4 Select **Gender** and **Department**.

Step 5 Optionally, enter **Mobile Phone** and **Remark** if necessary.

Step 6 Click **OK**.

The screenshot shows a dialog box titled "Add Police Officer Information" with a close button (X) in the top right corner. The dialog contains the following fields and controls:

- Name:
- Gender: Male Female
- Department: (dropdown menu)
- Officer No.:
- Device No.:
- Mobile Phone:
- Remark:

At the bottom right of the dialog, there are two buttons: "OK" (highlighted in blue) and "Cancel".

Figure 4-2 Add Police Officer Information

Chapter 5 Data Collection

5.1 Set Data Saving Path

5.1.1 For Dock Station Software User

Purpose:


Set the saving path for collected data and data clear strategy.

Step 1 Go to **Settings > Disk** in dock station software.

Step 2 Configure following parameters.

- **Path:** Select local disks for collected data.
- **When Free Space Under** and **Clean Up:** When the free space of selected local disks is smaller than the value of **When Free Space Under**, dock station will clear the earliest files to release a space which is specified in **Clean Up**.
- **Delete Original Data:** Delete the data in body camera after it has been collected by dock station.

Step 3 Click **Save**.

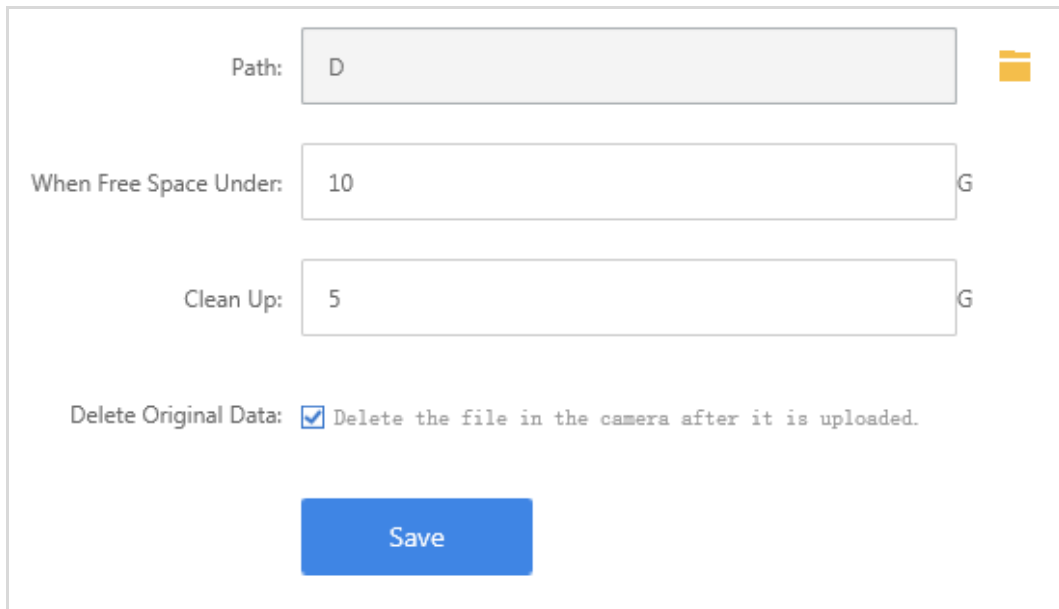

Path: D

When Free Space Under: 10 G

Clean Up: 5 G

Delete Original Data: Delete the file in the camera after it is uploaded.

Save

Figure 5-1 Disk


5.1.2 For User Accesses Dock Station via Web Browser

Step 1 Go to **System Configuration > Disk Management** in dock station webpage.

- **Root Saving Directory:** Select local disks for collected data.

- **Free Space and Min. Space to Clean Up:** When the free space of selected local disks is smaller than the value of **Free Space**, dock station will clear the earliest files to release a space which is specified in **Min. Space to Clean Up**.
- **Delete Original Data:** Delete the data in body camera after it has been collected by dock station.

Step 2 Click **Save**.

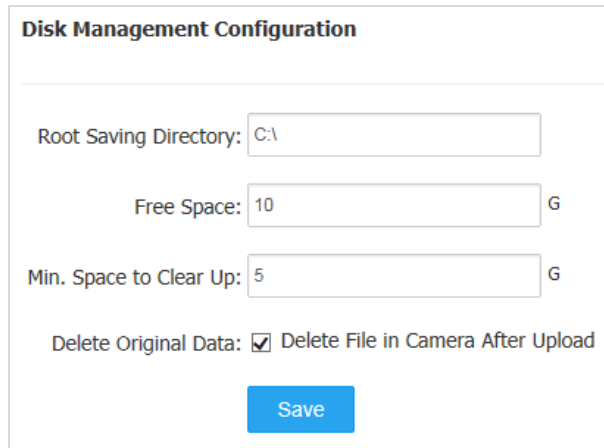

The screenshot shows a dialog box titled "Disk Management Configuration". It contains three input fields: "Root Saving Directory" with the value "C:\", "Free Space" with the value "10" and a unit "G" to its right, and "Min. Space to Clean Up" with the value "5" and a unit "G" to its right. Below these fields is a checkbox labeled "Delete Original Data:" which is checked, followed by the text "Delete File in Camera After Upload". At the bottom center of the dialog is a blue button labeled "Save".

Figure 5-2 Disk

5.2 Configure Collection Format

5.2.1 For Dock Station Software User

Purpose:

Dock station will only collect the files of specified format. Follow the steps to view, modify, or delete format.

Step 1 Go to **Settings > Basic > Collection Format**.

Step 2 Add or delete format for video, audio, and picture.

Step 3 Click **Save**.

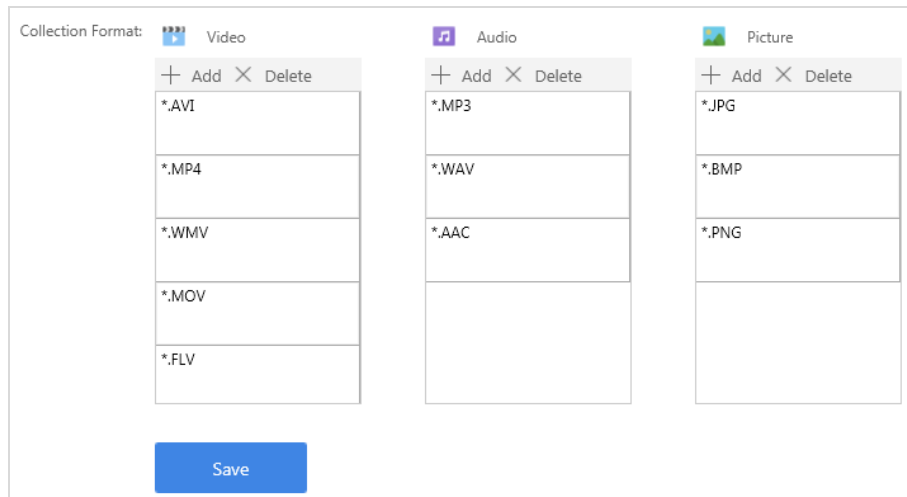


Figure 5-3 Collection Format

5.2.2 For User Accesses Dock Station via Web Browser

Step 1 Go to **System Configuration > Dock Station Parameter**.

Step 2 Add or delete format for video, audio, and picture.

Step 3 Click **Save**.

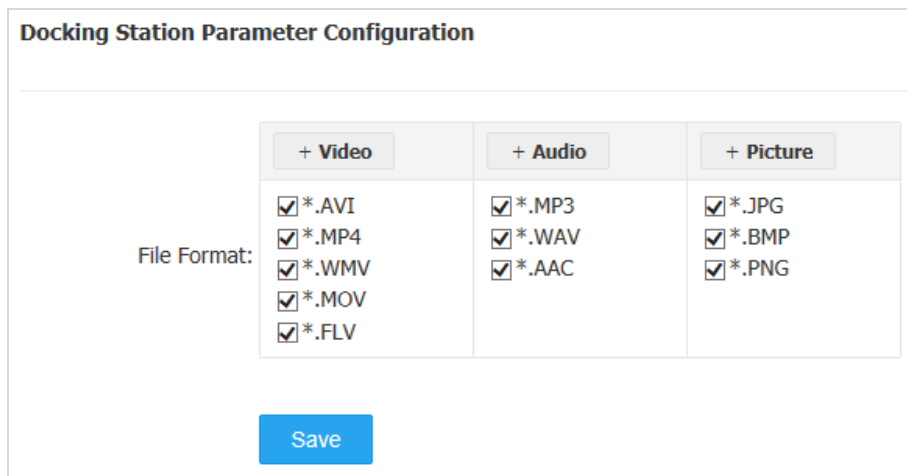


Figure 5-4 Dock Station Parameter Configuration

5.3 Collect Data

Purpose:

After body camera is connected, dock station will automatically copy data from body camera and save them in specified HDD.

Step 1 Run dock station software and go to **Home** page to view data collection formation.

Step 2 Turn on body camera.

Step 3 Connect the body camera USB interface to a USB cable of dock station or a cradle. And then dock station will automatically collect data in the body camera.

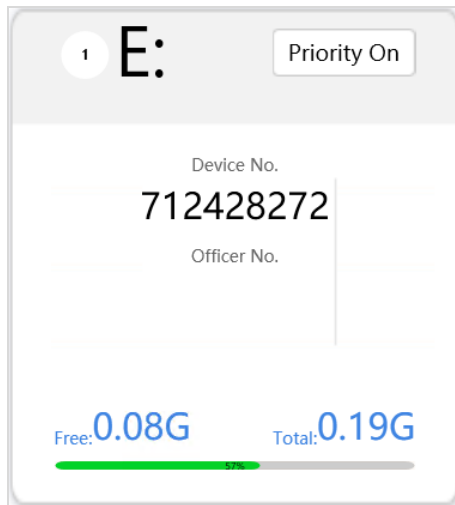


Figure 5-5 Body Camera Data Collection

- **Priority on:** Click it to set the data collection of the body camera as the first priority. Data collection of other body cameras will be stopped till the first priority data collection finished. The feature is only available for one body camera at a time. If no body camera has turned on the function, dock station will collect data from all body cameras simultaneously.
- **Free:** The capacity of uncollected data.
- **Total:** The total capacity of data to collect.
- Green bar: Show the collection progress.
- Collected data will be saved in folder: Data saving disk > **StationData** folder> device No. folder.

Chapter 6 Maintenance

6.1 Exception

When network is abnormal or HDD capacity is insufficient, alarm message will appear and audible warning will be triggered.

- Alarm message: Pop up alarm message in lower-right corner. Alarm message appears after HDD capacity or network recovers to normal.
- Audible warning: Device will send out audible warning. You can turn off audible warning.

Refer to **Logs** tab for detailed alarm information.

6.2 Log Search


Purpose:

Operations of dock station software are recorded in the log. Search and view logs to get knowledge of dock station processes, information, etc.

Step 1 Go to **Logs** interface.

Step 2 Set search conditions, including **Date** and **Event Type**.

Step 3 Click **Search**.

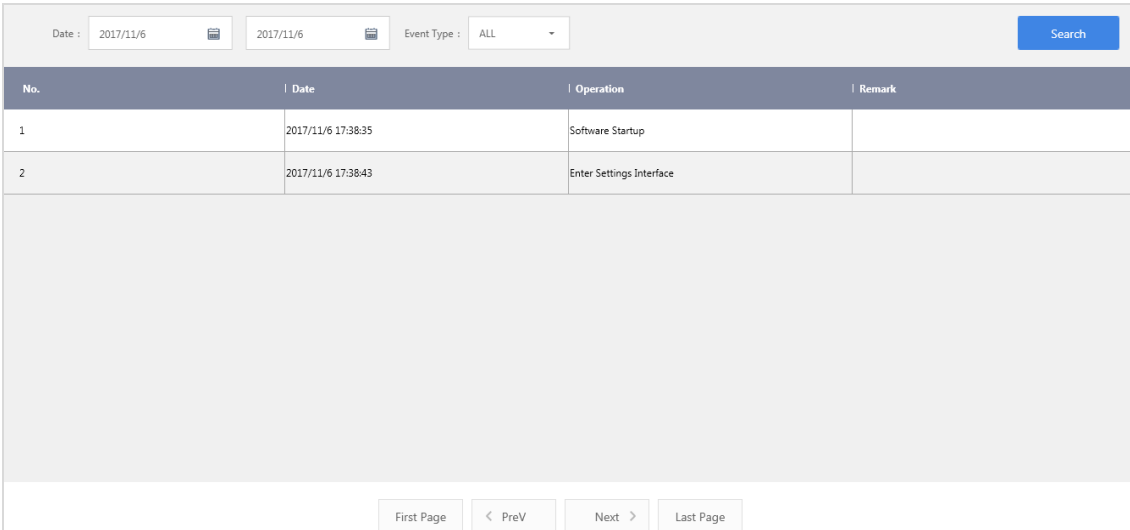

The screenshot shows a web interface for log search. At the top, there are search filters: two date pickers both set to '2017/11/6' and an 'Event Type' dropdown menu set to 'ALL'. A blue 'Search' button is on the right. Below the filters is a table with the following data:

No.	Date	Operation	Remark
1	2017/11/6 17:38:35	Software Startup	
2	2017/11/6 17:38:43	Enter Settings Interface	

At the bottom of the table area, there are navigation buttons: 'First Page', '< PreV', 'Next >', and 'Last Page'.

Figure 6-1 Log Search

Chapter 7 Collected Data Management

Purpose:

In **Local Files** tab, you can search and manage the successfully collected videos, audios, pictures, etc.

7.1 Search Data

Step 1 Go to **Local Files** interface.

Step 2 Set search conditions.

Step 3 Click **Search**.

7.2 Play Data

Step 1 Search data to play. For details, refer to 7.1 Search Data.

Step 2 Click  of a file to play it.

7.3 Lock Data

Purpose:

You can lock collected data to prevent it from being deleted or modified.

Step 1 Search the data to lock. For details, refer to 7.1 Search Data.

Step 2 Check the data to lock.

Step 3 Click . Data lock status is shown in **Unlock Status** column.

7.4 File Management


Purpose:

You can search files and lock files.

Step 1 Go to **File Management** page.

Step 2 Set search conditions.

Step 3 Click **Search**. The files meet the search conditions will be listed.

Step 4 Optionally, click  of a file to lock it to prevent it being modified or overwritten.

Chapter 8 Data Backup

Purpose:

When dock station software is abnormal or is re-installed, you can restore database.

8.1 Auto Backup

Step 1 Go to **Settings > Data**.

Step 2 Enable **Auto-back**.

Step 3 Set **Auto-back Interval**.

Step 4 Enter **Backup to Keep** value.

Backup to Keep: The upper limit of number of database backup file. Once exceeds the number, the earliest database backup file will be replaced by the new one.

Step 5 Click **Save**. Go to **installation root directory of dock station software > BodyCamaraStationBackup** folder to view the database backup file.

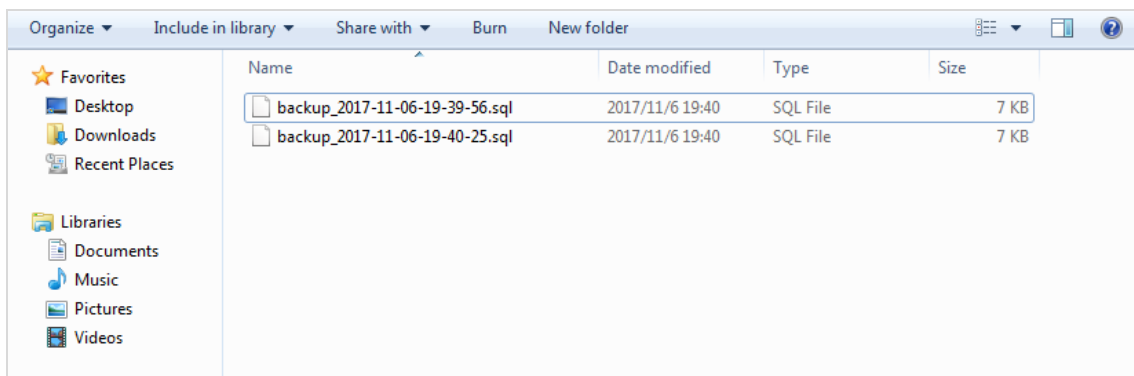


Figure 8-1 BodyCamaraStationBackup Folder

8.2 Manual Backup

Step 1 Go to **Settings > Data**.

Step 2 Click **Manual Backup**. Go to **upper level folder of dock station software installation path > BodyCamaraStationBackup** folder to view the database backup file.

8.3 Restore Database

Purpose:

When dock station database is damaged or lost, you can restore database.

Step 1 Go to **Settings > Data**.

Step 2 Click **Restore Backup** and select the database backup file to restore.

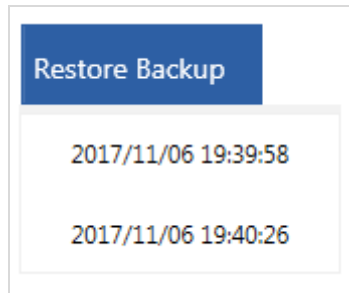


Figure 8-2 Restore Backup

Chapter 9 Other Settings

9.1 Basic Settings

Step 1 Go to **Settings > Basic**.

Step 2 Configure parameters as needed.

- **Station No.:** Number of the dock station.
- **Logo:** Modify the logo shown in the top-left corner. The logo format must be PNG and logo pixel must be 60 × 42.
- **Station Name:** Modify the name shown in the top-left corner.
- **Launch at Startup:** Run dock station software when dock station starts up.

Step 3 Click **Save**.

9.2 Edit Dock Station Software Password

Purpose:

Modify the password of docks station software.

9.2.1 Edit via Dock Station Software

Step 1 Go to **Settings > Basic**.

Step 2 Enter **Current Password**.

Step 3 Enter the same password in **New Password** and **Confirm Password**.

Step 4 Click **Save**.



The screenshot shows a form titled "Change Password:" with three input fields. The first field is labeled "Current Password:" and contains six asterisks. The second field is labeled "New Password:" and contains seven asterisks. The third field is labeled "Confirm Password:" and contains seven asterisks.

Figure 9-1 Change Password


9.2.2 Edit via Web Browser

Step 1 Go to **System Configuration > User Management > Management Password**.

Step 2 Enter **Current Password**.

Step 3 Enter the same password in **New Password** and **Confirm**.

Step 4 Click **Save**.

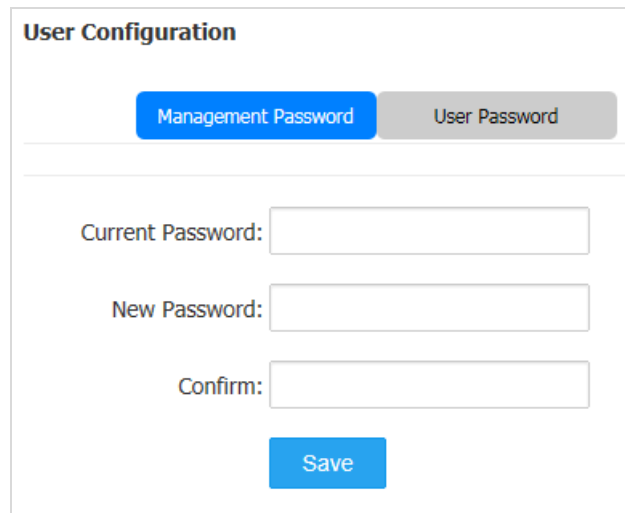

The screenshot shows a web interface titled "User Configuration". At the top, there are two tabs: "Management Password" (which is active and highlighted in blue) and "User Password" (which is greyed out). Below the tabs, there are three input fields: "Current Password:", "New Password:", and "Confirm:". Each field is followed by a text input box. At the bottom of the form, there is a blue "Save" button.

Figure 9-2 Management Password

9.3 Edit Web Accessing Password via Web Browser

Purpose:

Modify the web accessing password of dock station.

Step 1 Go to **System Configuration > User Management > User Password**.

Step 2 Enter **Current Password**.

Step 3 Enter the same password in **New Password** and **Confirm**.

Step 4 Click **Save**.



First Choice for Security Professionals

UD08161B

www.hikvision.com