

ALC[®]

SIGHT HD Lite

720p Indoor Panoramic Wi-Fi Camera



Model AWF08

User Guide

Please read these instructions completely
before operating this product.

IMPORTANT SAFETY INSTRUCTIONS	2
INTRODUCTION	5
System Contents	5
Getting to Know Your Camera	6
INSTALLATION	7
Installation Tips	7
Night Vision	7
Installing the Camera	8
REMOTE ACCESS	9
Overview	9
Requirements For Remote View	9
Connecting to the Internet	10
Connecting Via the App	11
ALC SightHD Lite App Icons	17
To Take Screenshots	19
To Take Videos	21
Time Axis	22
To View Screenshots/Play Videos	23
To Delete Screenshots/Videos	25
Setup Screen	27
Advanced Settings	28
Viewing Camera on Multiple Devices	31
Push Notifications	32
Main Help Menu	33
To Delete a Camera	34
Cellular Data	34
To Edit Device	35
MAINTENANCE	35
TROUBLESHOOTING	36
FACTORY DEFAULT/RESET	37
UPGRADING THE FIRMWARE	37
PRODUCT SPECIFICATIONS	38
WARRANTY	39

PRODUCT SAFETY: When used in the directed manner, this unit has been designed and manufactured to ensure your personal safety. Improper use of this product can result in potential electrical shock or fire hazards. Please read all safety and operating instructions carefully before installation and use, and keep these instructions handy for future reference.

CAUTION

**RISK OF ELECTRIC SHOCK
DO NOT OPEN**



CAUTION: To reduce the risk of electric shock do not remove cover (or back). No user serviceable parts inside. Refer servicing to qualified service personnel.

DANGEROUS VOLTAGE: The lightning flash with arrowhead, within an equilateral triangle, is intended to alert the user to the presence of uninsulated dangerous voltage within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.

ATTENTION: The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.

WARNING: TO PREVENT FIRE OR SHOCK HAZARD, DO NOT EXPOSE THIS UNIT TO RAIN OR MOISTURE.



Products with CE Marking comply with EMC Directive (2004/108/EC); Low Voltage Directive (73/23/EEC); R&TTE(1999/5/EC); ROHS Directive (2011/65/EU) issued by the Commission of the European Community. Compliance with these directives implies conformity to the following European Norms:

EMC: EN 301 489 LVD: EN 60950 Radio: EN 300 328



FCC Compliance Statement: This device complies with Part 15 of the FCC rules. Operation is subjected to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC/CE WARNING

This equipment has been tested and found to comply with limits for a Class B digital device, pursuant to Part 15 of the FCC rules and ETSI(EN) 300328. These limits are designed to provide reasonable protection against harmful interference in residential installations. This equipment generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause interference to radio or television equipment reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving Antenna.
- Move the equipment away from the receiver.
- Plug the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/television technician for additional suggestions.

CAUTION: Any changes or modifications to this equipment not expressly approved by the party responsible for compliance could void your authority to operate the equipment.

WARNING:

STRANGULATION HAZARD: Infants have STRANGLED in power cords. Keep power cords more than 3 feet away from cribs, bassinets, play yards, and other safe sleep environments for infants.

IMPORTANT SERVICE SAFETY INSTRUCTIONS

Damages caused by non-compliance with this operating manual will void the warranty!

1. Read and Follow Instructions - All the safety and operating instructions should be read before the product is operated. Follow all operating instructions.
2. Retain Instructions - The safety and operating instructions should be retained for future reference.
3. Heed Warnings - Comply with all warnings on the product and in the operating instructions.
4. Power Sources - This product should be operated only from the type of power source indicated on the marking label. If you are not sure of the type of power supplied to your location, consult your video dealer or local power company. For products intended to operate from battery power, or other sources, refer to the operating instructions.
5. Overloading - Do not overload wall outlets or extension cords as this can result in the risk of fire or electric shock. Overloaded AC outlets, extension cords, frayed power cords, damaged or cracked wire insulation, and broken plugs are dangerous. They may result in a shock or fire hazard. Periodically examine the cord, and if its appearance indicates damage or deteriorated insulation, have it replaced by your service technician.
6. Power-Cord Protection - Power supply cords should be routed so that they are not likely to be walked on or pinched by items placed upon or against them. Pay particular attention to cords at plugs, convenience receptacles, and the point where they exit from the product.
7. Surge Protectors - It is highly recommended that the video equipment be connected to a surge protector. Doing so will protect the equipment from damage caused by power surges. Surge protectors should bear the UL listing mark or CSA certification mark.
8. Uninterruptible Power Supplies (UPS) - Because this product is designed for continuous, 24/7 operation, it is recommended that you connect the product to an uninterruptible power supply. An uninterruptible power supply has an internal battery that will keep the product running in the event of a power outage. Uninterruptible power supplies should bear the UL listing mark or CSA certification mark.


CAUTION: Maintain electrical safety. Power line operated equipment or accessories connected to this product should bear the UL listing mark or CSA certification mark on the accessory itself and should not be modified so as to defeat the safety features. This will help avoid any potential hazard from electrical shock or fire. If in doubt, contact qualified service personnel.

9. Ventilation - Slots and openings in the case are provided for ventilation to ensure reliable operation of the product and to protect it from overheating. These openings must not be blocked or covered. The openings should never be blocked by placing the video equipment on a bed, sofa, rug, or other similar surface. This product should never be placed near or over a radiator or heat register. This product should not be placed in a built-in installation such as a bookcase or rack unless proper ventilation is provided and the product manufacturer's instructions have been followed.


10. Attachments - Do not use attachments unless recommended by the product manufacturer as they may cause a hazard.
11. Water and Moisture - Do not use receivers or video monitors near water — for example, near a bath tub, wash bowl, kitchen sink or laundry tub, in a wet basement, near a swimming pool and the like.
12. Heat - The product should be situated away from heat sources such as radiators, heat registers, stoves, or other products (including amplifiers) that produce heat.
13. Accessories - Do not place this video equipment on an unstable cart, stand, tripod, or table. The video equipment may fall, causing serious damage to the product. Use this product only with a cart, stand, tripod, bracket, or table recommended by the manufacturer or sold with the product. Any mounting of the product should follow the manufacturer's instructions and use a mounting accessory recommended by the manufacturer.
14. Camera Extension Cables - Check the rating of your extension cable(s) to verify compliance with your local authority regulations prior to installation.
15. Mounting - The cameras provided with this system should be mounted only as instructed in this guide or the instructions that came with your cameras, using the provided mounting brackets.
16. Camera Installation - Cameras are not intended for submersion in water. Not all cameras can be installed outdoors. Check your camera's environmental rating to confirm if it can be installed outdoors. When installing cameras outdoors, installation in a sheltered area is recommended.

System Contents


After unpacking, you will have the following items:

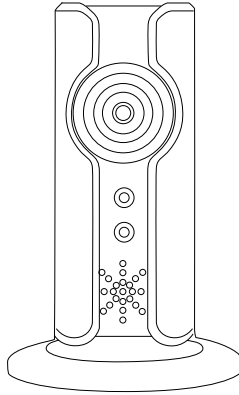

Camera




Screw/Anchor Kit



AC Adapter




Quick Start Guide



MicroUSB to USB Cable

Getting to Know Your Camera

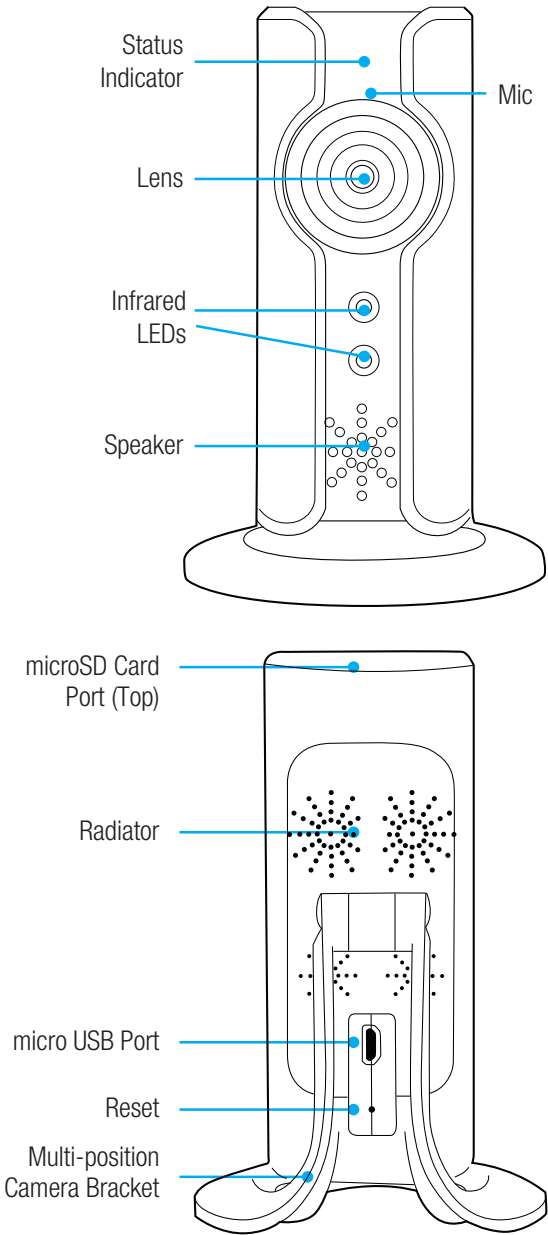

Installation Tips

- Before you install the camera, plan where and how it will be positioned, and where you will route the cable that connects the camera to the power adapter.
- Optimized motion detection range is 6 - 18 feet for camera. The farther away an object is, the less accurate the motion detection.
- Avoid having a direct light source in the view of the camera, including street lights, ceiling or floor lamps, spotlights in the driveway, etc.
- Rainfall, pool water ripples/reflections, tree/shrub leaves blowing in the wind – and the shadows they create – can generate motion detection false alarms.
- Before starting permanent installation, have another person check the camera image on the tablet/phone when camera is positioned in the same place it will be permanently installed.
- It is recommended to ensure a clear line of sight between the camera and Wi-Fi router and to limit the amount of obstructions, such as walls and tree branches, between the camera and Wi-Fi router. Walls made of heavy building materials such as brick or concrete will significantly reduce signal range.
- If the signal will have to pass through a wall, placing the Wi-Fi router or camera next to a window will improve the signal strength.
- Do not install the camera pointing out of a window. The night-time picture will be unusable due to reflection from the night vision LEDs.
- As dust, grime, and cobwebs accumulate on the camera glass, they can reflect light from the infrared LED and might lower video quality. Periodically clean the lens glass with a soft cloth.

Night Vision


The camera has built-in infra-red LEDs to allow you to view at night for 24hrs surveillance. The LEDs will automatically activate at night and the picture viewed will turn to black and white. The night viewing range is up to 35 feet.

Installing the Camera

IMPORTANT: Please set up the camera first before mounting and stay in close range with the camera during setup.


1 If not mounting, but just using on a flat surface (desk, table, etc.), skip to step 3.

2 Secure the multi-position Camera Bracket to a stable surface, ceiling or wall using the two screws. If needed, two anchors are also included.




3 To record videos you must insert a MicroSD card, not included. The MicroSD Slot is located on the top of the camera.

A Class 10 MicroSD card is required.
This camera supports up to 128GB MicroSD card.

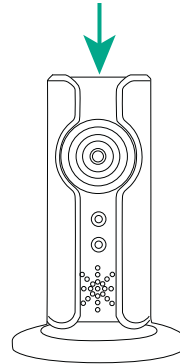

4 Plug one end of the micro USB cable into the Power jack on the rear of this camera and the other end into the Power Adapter. Plug the Power Adapter into an electrical outlet when ready to install App.

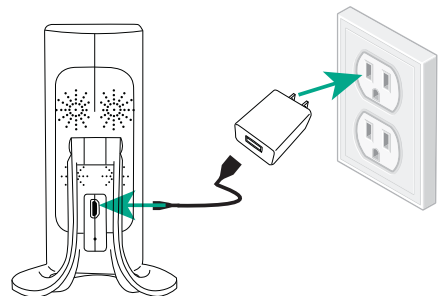

Overview

This camera allows you to view live video from an iPhone®, iPad®, iPod Touch® or Android™ smartphone or tablet. Free apps are available through the Apple App Store or the Android Market/Google Play.

Up to 3 remote users can access live video at the same time as long as they have the password.

IMPORTANT:

The number of remote viewers is determined by the amount of “available upload bandwidth” on your home network.

Requirements for Remote View

- iPhone®, • iPad®, • iPod Touch® (iOS 9.0 and above)
- Android™ smartphone or tablet (version 4.4X or above)

IMPORTANT:

Note: Not suitable for Windows mobile device or Blackberry smartphones.

SCREEN-SHOT NOTE:

The illustrations of the App in this manual are of the Apple. The Android device's App will look very similar and the operation will be the same, except where noted.

Connecting to the Internet

1

Download the ALC SightHD Lite App as follows:

APPLE DEVICE:

From your iPhone or iPad, go to the App Store and search for ALC SightHD Lite.



ANDROID DEVICE:

From your Android smartphone or tablet device, go to Google Play and search for ALC SightHD Lite.



SightHD Lite


2

TO CONNECT VIA WI-FI, see the following pages.


Connecting Via the App



- 1 Plug camera into an electrical outlet (allow the camera up to 60 seconds to boot up). When ready the status LED will blink and device will notify you it is in Default Configuration Mode and ready to be set up.

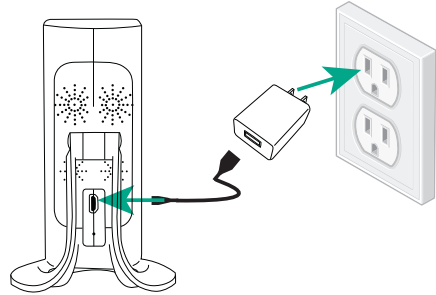


- 2 Tap Register Account. Enter a desired email address and password then click Confirm. You will then get an email that you need to verify the registration. Do so and then continue.

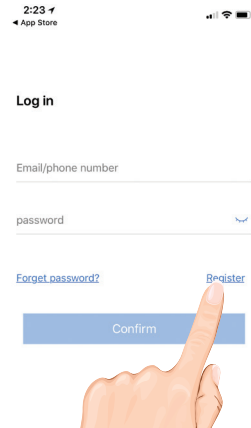

- 3 Log in using your new log-in info and tap **Confirm**.

ANDROID NOTE:


Android only: To connect the camera click "Allow to obtain permissions" if prompted.

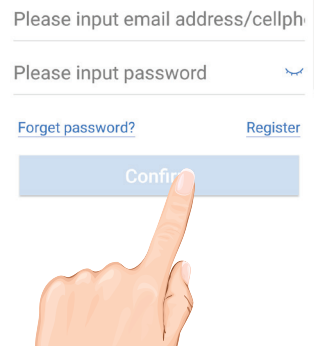


Connecting Via the App

**4**

In the App, tap + (top right), then tap **"Add"**.

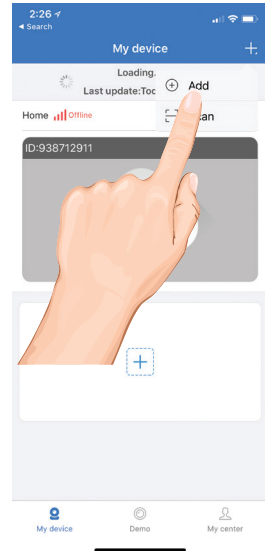**5**

Select WIFI Camera Tap **Next**.

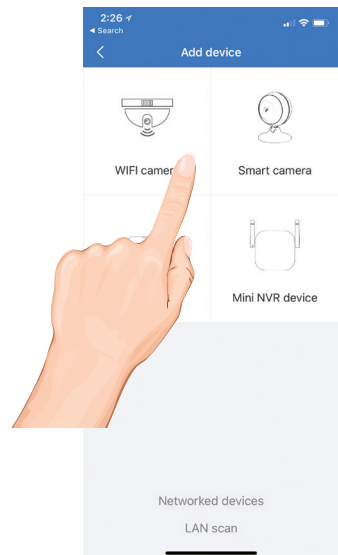

Connecting Via the App



6

Make sure the indicator on the device is blinking, then tap **Yes**.

Tap **Choose WiFi** on the next screen.



Does indicator light of the device blink?

No

Yes




Indicator light, please refer to the manual.

7

On your device, open the Settings App and tap Wi-Fi.

Android: Make sure the camera (IPCxxxxxx) appears in the Wi-Fi menu. Do not select it, just make sure it appears.


iOS Only: Select this camera (IPCxxxxxx) from the Wi-Fi menu. Enter the default password (11111111) and tap Join.

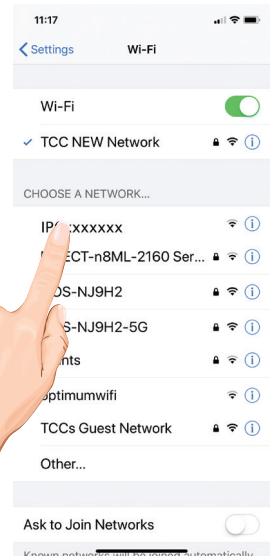

Connecting Via the App


8

Return to the app and your network should appear. Enter the network's password then tap **Next**.

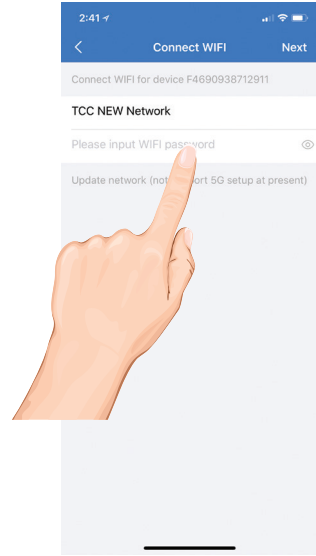

8


Enter a new security code and the Connecting screen will appear.

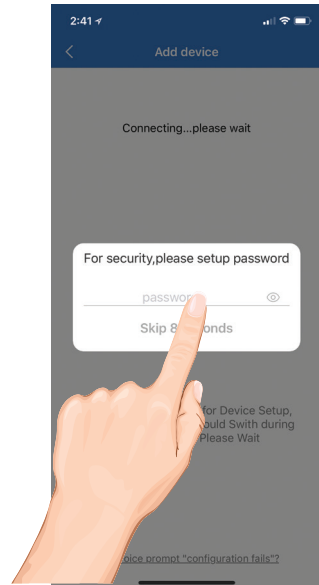


Connecting Via the App



- 9 Enter a camera name (or click on one of the default names) and tap **Done**.






Configuration has been done



- 10 Tap on the cloud (or still picture) and the Live screen will appear.


Go to page 17 for details on the icons and operation.



Connecting Via the App


Main Screen

Tap the Play icon to access the live video screen.

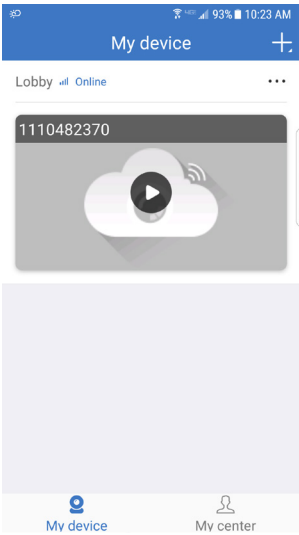






Live View Screen






The following appears when on the Live View Screen. See the next page for icon descriptions.

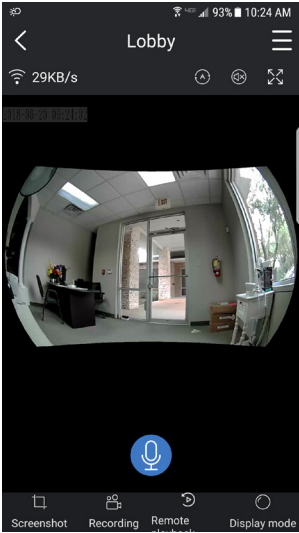

ALC SightHD Lite App Icons


Icon	
<p>Panning</p> 	<p>Tap so this icon will turn white and the video will stop panning. Tap so it turns blue and the video will continually pan to the left and right</p>
<p>Mute</p> 	<p>Tap to hear the sound of the camera's microphone through the SightHD Lite App. Tap again to mute the sound.</p>
<p>Full Screen</p> 	<p>Tap to view the full screen on your device. Tap again or rotate your device to return to the default view mode.</p>
<p>Voice</p> 	<p>Tap and hold, then speak into your device and the audio will be transmitted through the camera.</p>
<p>Screenshot</p> 	<p>Tap to take a screenshot. See page 23 to view images.</p>

ALC SightHD Lite App Icons

Icon	Icon Description
<div><div>Recording</div><div></div></div>	<p>With a MicroSD card inserted, tap to start recording. Tap again to stop recording. Recordings save to MicroSD card. See page 23 to view recordings.</p>
<div><div>Remove Playback</div><div></div></div>	<p>Tap to cycle between real time and remote play.</p>
<div><div>Display Mode</div><div></div></div>	<p>Tap and then select the desired screen (rounded or squared edges).</p>
<div><div>Return</div><div></div></div>	<p>Tap to return to the Main screen.</p>
<div><div>Setup</div><div></div></div>	<p>Tap to access the Setup screen, see page 27 for details.</p>

To Take Screenshots

- 1 From the Main screen, tap to remote view your camera system.

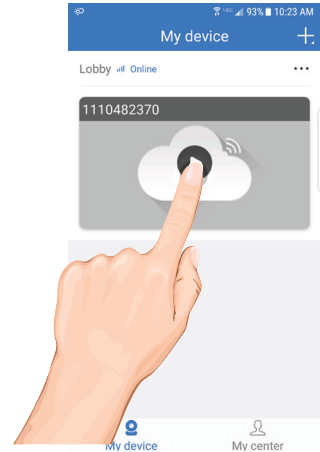

- 2 Tap the **SCREENSHOT** icon to take a snapshot of the current image; "Screen Succeeds" will appear briefly.

To view screenshots, see page 23.




To Take Screenshots

- 3 **PINCH AND ZOOM:** To zoom in or out, use the simple pinch and zoom gesture with this app.




To Take Videos

- 1 From the main screen, tap to remote view your camera system.

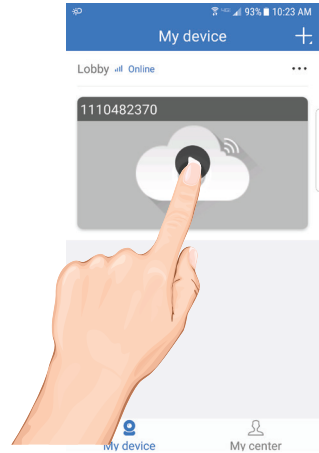

- 2 Tap the **Recording** icon to start recording (the recording icon will light blue). Tap the **Recording** icon to stop recording. See page 23 to playback videos.

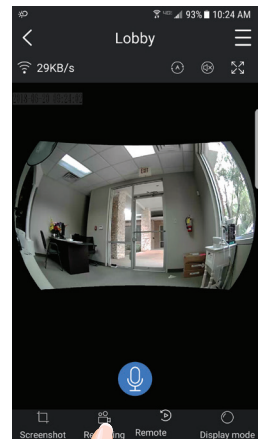

To Take Videos

3

PINCH AND ZOOM: To zoom in or out, use the simple pinch and zoom gesture with this app.




Time Axis

1


On the Live screen tap **Remote Playback** then select an older date and scroll through the time axis to view history. Tap Play icon to start playback. Tap **Real Time** to return to the Live feed.

Motion Detection must be set to On (see page 28) and microSD card must be inserted.

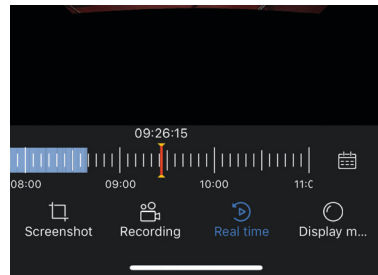


To View Screenshots/Play Videos

- 1 From the main screen, tap **My Center** icon.

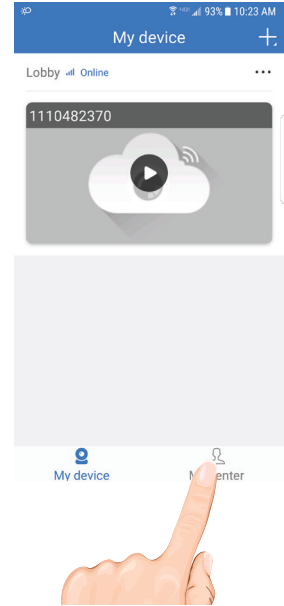


- 2 Tap the **Screenshot/Recording** icon; the screenshots will appear. Tap on a screenshot to view it.

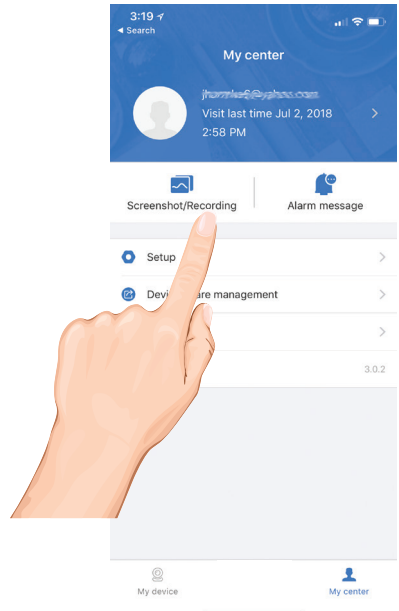

To View Screenshots/Play Videos

- 3 Tap a picture to view it or a video to view the recorded videos and it will play.

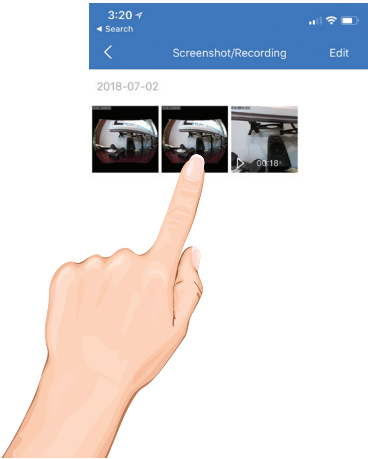

- 4 When playing back a video, tap Pause button to pause the video.




To Delete Screenshots/Videos

1


Access the Screenshots/Videos as shown on pages 21-22.

Tap the **Edit** button.

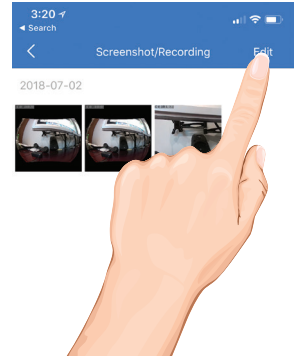

2


Select the file(s) you wish to delete (a check mark will appear in the circle to the right of the selected file) then tap the **Delete** (iTrash) icon to delete.



To Delete Screenshots/Videos


- 3 To delete all files, tap the **Choose All** button then tap the **Delete** (Trash) icon to delete.

If you tap **ALL** by accident, tap **ALL NOT** to deselect.

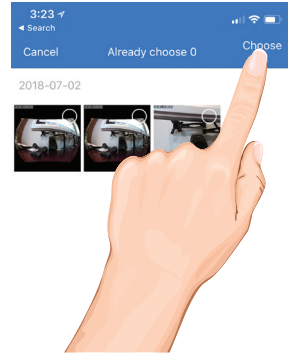

SETUP Screen

- 1 Access the Setup screen from the Main screen by tapping “...” and then tap **Device Setup**.

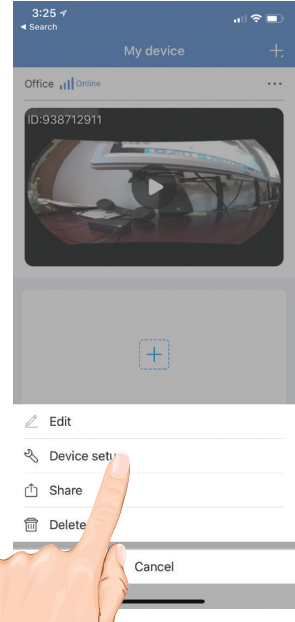

- 2 Access the Setup screen from the Live screen by tapping the three lines at the top right, then tap **Setup**.

Change settings as shown on the following page.



Advanced Settings

DEVICE ID: This is the device ID and cannot be changed.

AUDIO FREQUENCY: Please advise what this setting does. pls advise.

VOICE PROMPT Tap to turn the voice assistant On or Off. Voice assistant will announce certain commands and status notifications.

VOICE PROMPT LANGUAGE: Tap to select the desired language.

DEFINITION: Tap to set the desired Video definition. **Standard Definition** will be average quality but take up less memory. **High Definition** will be the better quality but take up more memory. **Super Definition** will be the best quality but take up the most memory. Select **Auto** to have the unit choose.

DEVICE MODE: Tap to set the desired mode: Auto, Daytime or Night time.

IMAGE STYLE: Tap to set the desired image quality. **Standard** will be average quality but take up less memory. **Brightness** will be the better quality but take up more memory. **Gorgeous** will be the best quality but take up the most memory.


TIME SYNC: Tap to turn on and the mobile device's time will be used for this device.

TIME ZONE: Tap to set the time zone.

MOTION DETECTION ALARM: Tap to turn Motion Detection Alarm On or Off.

MOTION DETECTION RECORDING: When turned on the unit will record when motion is detected.

TIME VIDEO: Please advise what this setting does. pls advise.

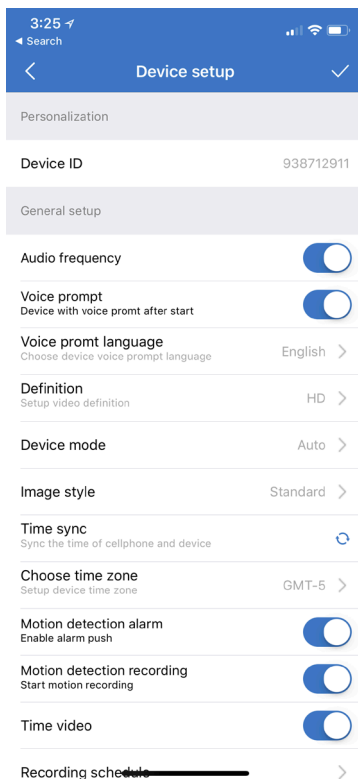

Advanced Settings

RECORDING SCHEDULE: Tap to set the time that the device will record when Moion Detection is turned on.


DEVICE INFORMATION: Tap to view the device information, including device type and version.

FIRMWARE UPDATE: Tap to update the firmware, if there is an update.

HELP: Tap to view the Help categories.

STORAGE: See the next page.

USERNAME and PASSWORD: Tap to change the username and password.

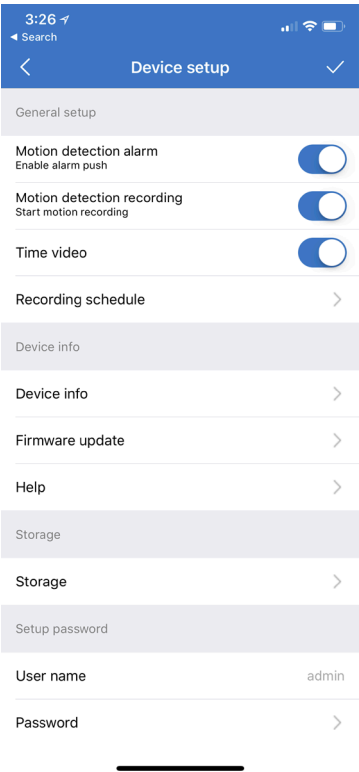


Advanced Settings

DEVICE STORAGE: Tap to change the following:

TF Card Status: View the status. This cannot be changed.

Capacity: View the storage space status. This cannot be changed.

Format: Tap to Format the microSD Card (if inserted). This will erase all recording/snapshots.

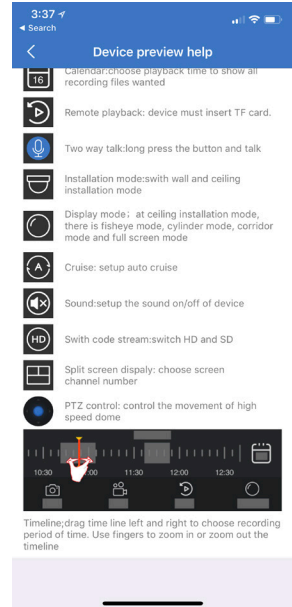

Viewing Camera on Multiple Devices

There are 2 ways to view the camera on another phone or tablet. You can log into the same account that was setup on the original phone and the camera (or cameras) will appear automatically on the new devices.

Another option is to “Share” the camera with other phones. Share the camera as shown below.

Have the new device download the app (see page 10) and set up a new account (see page 11)

- 1 From the main screen, tap the “...” icon at the top right.




- 2 Select **Share** from the menu.

- 3 The QR code will appear. Have the new device scan the QR code and follow the online instructions.

The original account holder has control. The Shared account can only view camera, cannot make any changes. Original can remove/delete access to any account that is shared.


To view Shared users, tap **Share List** to list Shared devices.

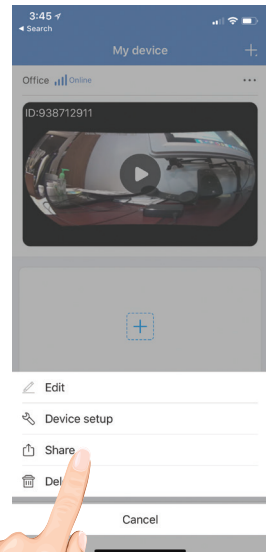


Push Notifications

You can set this device up so when motion is detected you will get a notification on your mobile device as follows:

- 1 From the main screen, tap **My Center** icon.

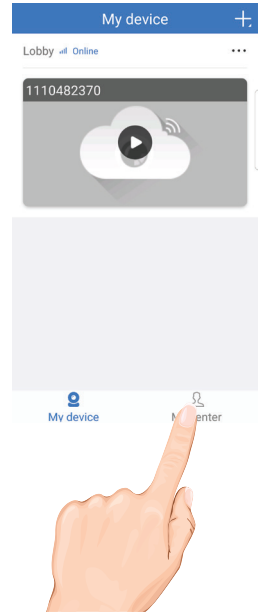


- 2 Tap **Alarm Message** and then tap the **Message Push** switch to activate.

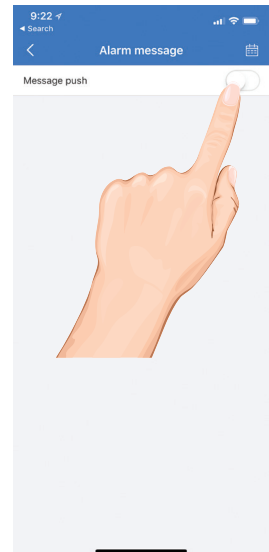


Main Help Menu

- 1 From the main screen, tap **My Center** icon.

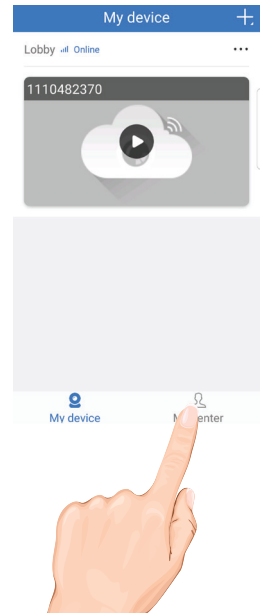


- 2 Tap **Help** to view the help topics. Tap on any of the topics to view.

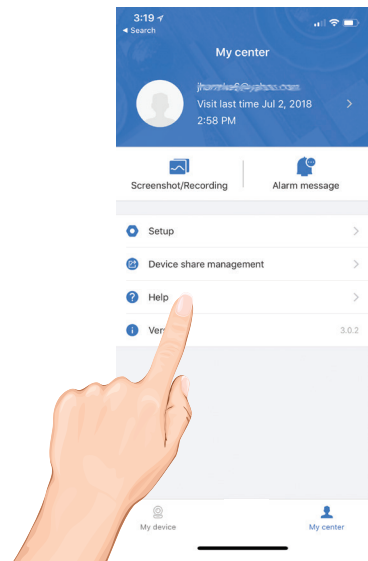


To Delete a Camera

- 1 Tap “...” icon at top right.

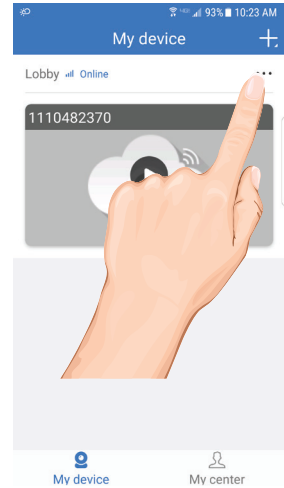

- 2 Tap **Delete** to delete a camera.

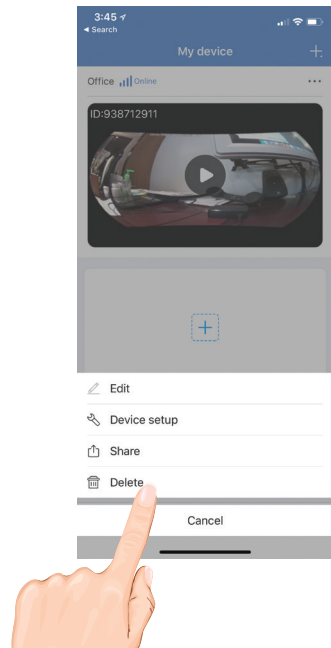


Cellular Data

1 To get a reminder when your cellular data xxxxxx (PLS ADVISE), tap **MY CENTER** and then tap **SETUP** icon.

Turn the **2G/3G/4G Network Reminder** option On or Off.


You can also view the current Cellular Data (or delete it) by tapping **Mobile Data Traffic Statistics**.

Tap Preview mode and select the desired preview, (**Fluency or Real Time**).

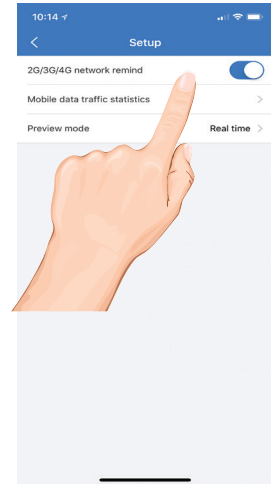

To Edit Device

1 To edit device name or password, tap “...” icon at top right and then tap **Edit**. Edit info as desired.

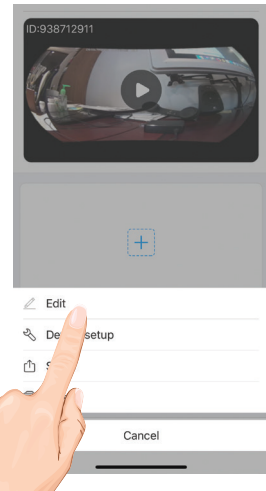

MAINTENANCE

Cameras

When dust and grime builds up on the camera lens and glass, it will affect the night vision capability. The infrared light reflects off of the dust and grime, limiting the camera's “vision.” Use a microfiber cloth to regularly clean the camera or when night vision video is cloudy or unclear.

If you have any trouble with your system, try these simple steps which should handle most common issues.

Problem	Possible Solution
The App cannot locate the camera.	<p>Make sure the camera's power is on.</p> <p>Make sure your network supports DHCP protocol.</p> <p>Make sure the camera and mobile device are on the same network or router.</p> <p>Use the Add Camera feature to manually add the camera.</p> <p>Make sure the home network is selected.</p>
No Image appears.	<p>Make sure the camera's power is on.</p> <p>Make sure the power adapter is not damaged or defective and plugged into an electrical outlet with power.</p> <p>Relocate the camera to obtain the best reception of wireless signal.</p> <p>Make sure the camera is properly configured in App.</p> <p>Make sure the mobile device is connected to 3G/4G/Wi-Fi properly.</p>
Poor picture quality.	<p>Clean the camera lens using a microfiber cloth.</p> <p>Select a different setting for video quality, see page 28.</p>
The motion sensor does not respond to movement.	<p>Ensure the MicroSD card is inserted into the camera.</p> <p>There might be no movement detected to trigger.</p> <p>Motion Detection not set to on, make sure to set to on.</p>
The App cannot record any video clips.	<p>Make sure the camera's power is on.</p> <p>Make sure the MicroSD card has been correctly inserted.</p> <p>Make sure the motion detection function has been enabled, see page 28.</p> <p>Format the MicroSD card when it is used for the first time.</p>
Push Notification is not working.	<p>Make sure you are using a Class 10 rated memory card.</p> <p>Make sure the Push Notification option is turned on.</p>

Problem	Possible Solution
A white image appears at night.	The camera's infrared LEDs shine invisible light that reflects off of surfaces such as glass and will cause white light. Place the camera on the other side of the window to improve the night vision or place it in a well-lit area (recommend to install a security lamp to improve lighting).
Memory card error.	Make sure the MicroSD card is correctly inserted in the camera and formatted. Make sure you are using Class 10 rated memory card.

Factory Default/Reset

Reset the camera by inserting a paper clip or similar object into the Reset hole for 5 seconds and the system will start the reset process. The system will restore to factory default settings and you may start the Wi-Fi setup.

Upgrading the Firmware

See page 29 to update the firmware.

Camera

Communication Range	300 ft in open space
Camera Resolution Single Camera	1280x720
Camera View Angle	180° Horizontal
Operating Temperature	14°F ~ 122°F (-10°C ~ 50°C)
Operating Voltage.....	DC 5V, 1A
Night Vision	35ft
Dimensions.....	2.6 x 1.8 x 5.2 in (66 x 46 x 132 mm)
MicroSD Card Time (8GB)	1,250 Events (HD/Better)

One-Year Limited Warranty

IMPORTANT: Evidence of original purchase is required for warranty service.

Atoms Labs LLC ("ALC") ELEMENTS OF WARRANTY: ALC warrants, if properly installed and used thereafter in strict accordance with the use and care guidelines provided in the instructions manual, the Product shall be free from manufacturing defects in material and workmanship for one (1) year from the documented date of purchase. The purchase date must be documented with either an original sales receipt from the first retailer selling the Product or by credit card receipts or statements. The warranty is non-transferrable.

LIMITED WARRANTY: The warranty terminates one year after the date of original retail sale. The warranty is invalid if the Product is (A) damaged or not maintained as reasonable or necessary, (B) modified, altered, or used as part of any conversion kits, subassemblies, or any configurations not sold by ALC, (C) improperly installed, (D) serviced or repaired by someone other than an authorized ALC service center for a defect or malfunction covered by this warranty, (E) used in any conjunction with equipment or parts or as part of any system not manufactured by ALC, or (F) installed or programmed by anyone other than as detailed by the owner's manual for this product.

THIS WARRANTY DOES NOT COVER DATA LOSS, OR COSTS RELATED TO DATA RECOVERY. ALC MAKES NO WARRANTY THAT ANY SOFTWARE PROVIDED WITH THE PRODUCT WILL FUNCTION WITHOUT INTERRUPTION OR OTHERWISE BE FREE OF ANOMALIES, ERRORS OR VIRUSES. THIS WARRANTY DOES NOT COVER ANY COSTS RELATING TO REMOVAL, REPLACEMENT, OR INSTALLATION OF ANY PRODUCT, REGARDLESS OF WHETHER THE PRODUCT IS FOUND BY ALC TO BE DEFECTIVE, OR SOFTWARE INSTALLED ON THE USER'S COMPUTER.

ALC DOES NOT MAKE ANY CLAIMS OR WARRANTIES OF ANY KIND WHATSOEVER REGARDING THE PRODUCT'S POTENTIAL, ABILITY OR EFFECTIVENESS TO PREVENT, MINIMIZE, OR IN ANY WAY AFFECT PERSONAL OR PROPERTY DAMAGE OR INJURY. ALC IS NOT RESPONSIBLE FOR ANY DAMAGE, LOSS OR THEFT RELATED TO THE PRODUCT OR TO ITS USE FOR ANY HARM, WHETHER PHYSICAL OR MENTAL RELATED THERETO. ANY AND ALL CLAIMS OR STATEMENTS, WHETHER WRITTEN OR VERBAL, BY SALESPeOPLE, RETAILERS, DEALERS OR DISTRIBUTORS TO THE CONTRARY ARE NOT AUTHORIZED BY ALC AND DO NOT AFFECT THIS PROVISION OF THIS WARRANTY. THE LIMITED WARRANTY IS THE SOLE AND ENTIRE WARRANTY PERTAINING TO THE PRODUCT AND IS IN LIEU OF AND EXCLUDES ALL OTHER WARRANTIES OF ANY NATURE WHATSOEVER, WHETHER EXPRESS, IMPLIED OR ARISING BY OPERATION OF LAW, INCLUDING, BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. THIS WARRANTY DOES NOT COVER OR PROVIDE FOR THE REIMBURSEMENT OR PAYMENT OF LOST REVENUE, PROFIT, OR DATA, OR FOR SPECIAL, INDIRECT, CONSEQUENTIAL, INCIDENTAL, OR PUNITIVE DAMAGES HOWEVER CAUSED AND REGARDLESS OF THE THEORY OF LIABILITY. Some states do not allow this exclusion or limitation of incidental or consequential damages so the above limitation or exclusion may not apply to you. Your damages will be limited to the total purchase price you paid for the Product.

Use of audio or video equipment for recording the image of a person without their knowledge and consent is prohibited in certain states or jurisdictions. The end-user assumes all liability for compliance with applicable state, local and federal laws. Atoms Labs has no responsibility or liability for how the end-user uses a product. Wireless cameras require a wired connection to AC power outlet. Network conditions and environmental factors can adversely affect wireless signal range. Actual night vision range and image clarity depends on installation location, viewing area and light reflection / absorption.

This Product may only be sold in the United States of America and Canada. There is no warranty whatsoever on the Product outside of the United States of America and Canada.

STATEMENT OF REMEDY: If the Product is under warranty, ALC will either, at its option, repair or replace the defective Product and return it to you without charge for parts, service, or any other cost. ALC, at its option, may replace the Product with a new or refurbished Product.

LEGAL REMEDIES: This limited warranty gives you specific legal rights, and you may also have other rights which vary from state to state. All parties irrevocably submit themselves to the exclusive venue and personal jurisdiction of the state and federal courts in Denton County, Texas with regard to any dispute relating to this Warranty or its enforcement. The parties also hereby waive any challenge to venue and personal jurisdiction they may have to a lawsuit filed in a state or federal court in Denton County, Texas, regarding a dispute between the parties relating to this Warranty or its enforcement. You agree that Atoms Labs is entitled to its reasonable and necessary attorney's fees if it is a prevailing party in litigation against you relating to this Warranty. If any provision of this Warranty is found to be invalid, illegal, or unenforceable, the validity, legality, and enforceability of any of the remaining provisions will not in any way be affected or impaired and a valid, legal, and enforceable provision of similar intent and economic impact will be substituted therefore.

PROCEDURE FOR OBTAINING PERFORMANCE OF WARRANTY: If, after following the instructions in the owner's manual you are certain that the Product is defective, pack the Product carefully (preferably in its original packaging). The Product should include all parts & accessories originally packaged with the Product. Include evidence of original purchase & a note describing the defect that has caused you to return it. The Product should be shipped freight prepaid, by traceable means, to warrantor at:

ATOMS LABS, LLC
2670 Firewheel Drive • Suite D
Flower Mound, TX 75028

CUSTOMER SUPPORT
1.844.767.8544

9:00am - 6:00pm (Central Time)
Monday - Friday

ALC reserves the right to make changes to its products without incurring any obligation to modify any product that has already been manufactured. This warranty does not cover any alteration or damage to any other software that may be or may become resident on the users system as a result of installing any software provided.

ALC appreciates your support and feedback! If you come across software bugs or ways we could improve our products, we would love to hear about them! Please email us at support@atomslabs.com and you will hear back from us.



FCC Compliance Statement: This device complies with Part 15 of the FCC rules. Operation is subjected to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.



Products with CE Marking comply with EMC Directive (2014/30/EU); Low Voltage Directive (2014/35/EU); RED: Directive 2014/53/EU; ROHS Directive (2011/65/EU) issued by the Commission of the European Community. Compliance with these directives implies conformity to the following European Norms: EMC: EN 301 489, LVD: EN 60950, Radio: EN 300328

IC Compliance Statement: This device complies with Industry Canada's licence-exempt RSSs. Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Cet appareil est conforme aux CNR exemptes de licence d'Industrie Canada. Son fonctionnement est soumis aux deux conditions suivantes : (1) Ce dispositif ne peut causer d'interférences ; et (2) Ce dispositif doit accepter toute interférence , y compris les interférences qui peuvent causer un mauvais fonctionnement de l'appareil.

Changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.

If the camera system no longer functions or can no longer be repaired, it must be disposed of according to the valid statutory regulations. Disposal of spent batteries/accumulators:



You are required by law (Battery Ordinance) to return all spent batteries and accumulators. Disposing of spent batteries/accumulators with common household waste is prohibited! Batteries/accumulators that contain hazardous substances are marked with the symbols on the side. These symbols indicate that it is prohibited to dispose of these batteries/accumulators in the household waste. The abbreviations for the respective heavy metals are: Cd=cadmium, Hg=mercury, Pb=lead. You can return spent batteries and accumulators that can no longer be charged to the designated collection points in your community, outlets or wherever batteries or accumulators are sold. Following these instructions will allow you to fulfill the legal requirements and contribute to the protection of our environment!



Please recycle. Facilities may not exist in your area.



© 2019 Atoms Labs LLC, All rights reserved. iPhone, iPad, iPod Touch, and App Store are registered trademarks of Apple, Inc. Chrome and Android are registered trademarks of Google, Inc. Certain other product names, brand names, and company names may be trademarks or designations of their respective owners.



ALCTM

Wireless Made Simple.

ALCWireless.com