

Modern Series

LCD Monitor

Modern MD272UPHG (3PB1) Modern MD272UPHW (3PB1)

User Guide

Contents

Getting Started	3
Package Contents	3
Installing the Monitor Stand	4
Adjusting the Monitor	5
Monitor Overview	6
Connecting the Monitor to PC	9
OSD Setup	10
Navi Key	10
Hot Key	10
OSD Menus	11
Professional	11
Image	13
Input Source	14
PIP/PBP	14
Navi Key	15
Settings	15
Specifications	17
Preset Display Modes	19
Troubleshooting	20
Safety Instructions	21
TÜV Rheinland Certification	23
ENERGY STAR Certification	23
Regulatory Notices	24

Revision

V1.0, 2024/12

Getting Started

This chapter provides you with the information on hardware setup procedures. While connecting devices, be careful in holding the devices and use a grounded wrist strap to avoid static electricity.

Package Contents

Monitor	Modern MD272UPHG Modern MD272UPHW	
Documentation	Quick Start Guide	
	Stand	
Accessories	Stand Base with Screw(s)	
Accessories	Screw(s) for Wall Mount Bracket(s)	
	Power Cord	
	USB Type-C Cable (Optional)	
Cables	USB Upstream Cable (Optional) (for USB Type-B Upstream Port)	
	Premium High Speed HDMI™ Cable (Optional)	




Important

- Contact your place of purchase or local distributor if any of the items is damaged or missing.
- Package contents may vary by country and model.
- The included power cord is exclusively for this monitor and should not be used with other products.

Installing the Monitor Stand

- 1. Leave the monitor in its protective packaging. Align and gently push the stand bracket towards the monitor groove until it locks in place.
- 2. Connect the base to the stand and tighten the screw to secure the base.
- 3. Make sure the stand assembly is properly installed before setting the monitor upright.

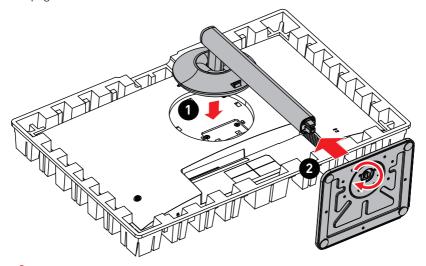

🚹 Ir

Important

- Place the monitor on a soft, protected surface to avoid scratching the display panel.
- Do not use any sharp objects on the panel.
- The groove for installing the stand bracket can also be used for wall mount. Please contact your dealer for proper wall mount kit.
- This product comes with NO protective film to be removed by the user! Any mechanical damages to the product including removal of the polarizing film may affect the warranty!




Adjusting the Monitor


This monitor is designed to maximize your viewing comfort with its adjustment capabilities.




Important


- Avoid touching the display panel when adjusting the monitor.
- The reserved pivot 5° is designed for adjusting the level imbalance of some tables.

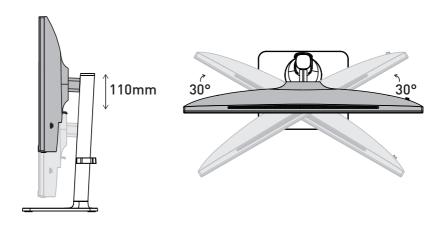

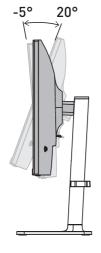



Monitor Overview

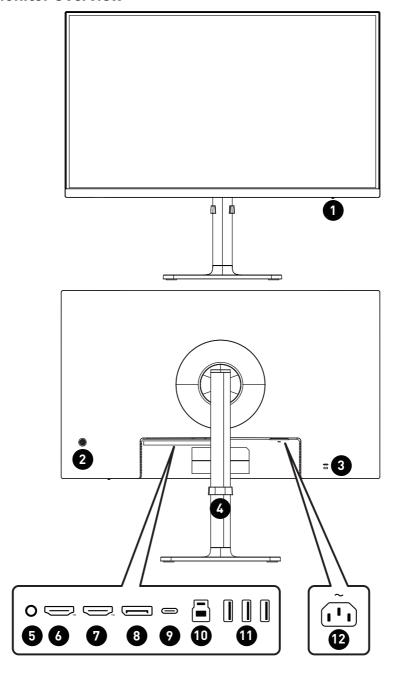

1 Power LED

Lit in white after the monitor is turned on. If no signal input, the LED will turn into orange. Lit in orange when the monitor is in Stand-by mode.

- Power Button & Navi Key
- 3 Kensington Lock
- 4 Cable Organizer
- 5 Headphone Jack
- HDMITM Connector HDMITM

Supports 3840x2160@60Hz as specified in HDMI[™] 2.0b.



Important

To ensure optimal performance and compatibility, please use only HDMI™ cables certified with the official HDMI™ logo when connecting this monitor. For more information, please visit https://www.hdmi.org/resource/cables.

7 HDMI™ Connector HDMI™

Supports HDMI[™] CEC, 3840x2160@60Hz as specified in HDMI[™] 2.0b.

<u>^</u>

Important

To ensure optimal performance and compatibility, please use only HDMI™ cables certified with the official HDMI™ logo when connecting this monitor. For more information, please visit https://www.hdmi.org/resource/cables.

BisplayPort
Supports 3840x2160@60Hz as specified in DisplayPort 1.4a.

O USB Type-C Port

This port supports DisplayPort Alternate (DP Alt) Mode and up to 20V/4.9A (98W) power delivery.

Important

Your USB-C signal source and cable must support DisplayPort Alternate Mode to enable video output to the monitor.

USB Type-C Power Delivery

5V / 3A (15W)

9V / 3A (27W)

12V / 3A (36W)

15V / 3A (45W)

20V / 4.9A (98W)




USB 3.2 Gen 1 Type-B Upstream Port

For USB Upstream Cable.



Important

Check the package for USB Upstream Cable and connect it to the PC and monitor. Once this cable is connected, the USB Type-A Downstream Ports on the monitor will be ready for use.





USB 3.2 Gen 1 Port


This connector is provided for USB peripheral devices. (Speed up to 5 Gbps)



Power Jack

Connecting the Monitor to PC

- 1. Turn off your computer.
- 2. Connect the video cable from the monitor to your computer.
- 3. Connect the power cord to the monitor power jack. (Figure A)
- 4. Plug the power cord into the electrical outlet. (Figure B)
- 5. Turn on the monitor. (Figure C)
- 6. Power on the computer and the monitor will auto detect the signal source.

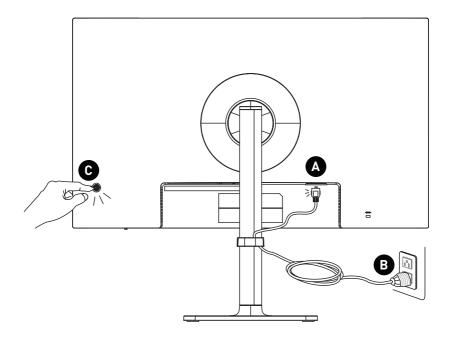

OSD Setup

This chapter provides you with essential information on OSD Setup.




Important

All information is subject to change without prior notice.

Navi Key

The monitor comes with a Navi Key, a multi-directional control that helps navigate the On-Screen Display (OSD) menu.

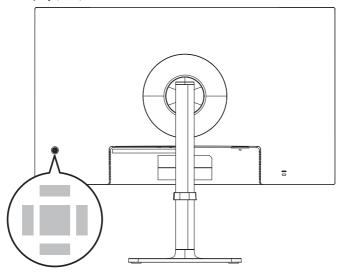

Up/ Down/ Left/ Right:

- selecting function menus and items
- adjusting function values
- entering into/exiting from function menus

Middle:

- launching the On-Screen Display (OSD)
- · entering submenus
- confirming a selection or setting

Hot Key

- Users may enter into preset function menus by moving the Navi Key up, down, left or right when the OSD menu is inactive.
- Users may customize their own Hot Keys to enter into different function menus.

OSD Menus





Important

The following settings will be grayed out when HDR signals are received:

- Low Blue Light
- HDCR
- Brightness
- Contrast

- Color Temperature
- sRGB
- PIP/PBP

Professional

1st Level Menu	2nd/3rd Level Menu	Description
Mode	Eco	Use Up or Down Button to select and preview
	User	mode effects. • Press the E Button to confirm and apply your
	sRGB	mode type.
	Display P3 • Activating sRGB will affect:	Activating sRGB will affect:
	Anti-Blue	Affected Function Function Status
	Movie	» Color Temperature
	Office	» Contrast Unable to select
	Black-White	» Low Blue Light
Response Time	Normal	Setting to Fastest will reach the shortest
	Fast	response time and help improve blurred images when playing very fast games.
	Fastest	

1st Level Menu	2nd/3rd Lev	el Menu	Description
Refresh Rate	Location	Left Top	Location is adjustable in OSD Menu. Press the E
		Right Top	Button to confirm and apply your Refresh Rate Location.
		Left Bottom	This monitor follows and works at the Operating
		Right Bottom	System's preset Screen Refresh Rate.
	OFF		
	ON		
Alarm Clock	Location	Left Top	After setting the time, press the E Button to
		Right Top	activate the timer.Users have to manually restore their preset
		Left Bottom	Alarm Clock after any AC power loss and
		Right Bottom	reconnection.
	OFF		
	15:00	00:01 ~ 99:59	
	30:00		
	45:00		
	60:00		
Eye-Q Check	OFF		Select OFF to disable Eye-Q Check.
	Amsler Grid		Select Amsler Grid to check your central vision field.
	Astigmatism		Select Astigmatism to check your blurred vision.
	Posture Correction		Select Posture Correction to improve your posture when sitting.
Screen Assistance	None		Users can adjust Screen Assistance in any mode.
	[+] [+] - - Ham Ham >: >: >: 2-3 2-3 (
KVM	Auto		Auto allows the monitor to automatically switch between USB input sources, such as keyboards,
	Upstream		mice or other USB devices.
	Туре С		Users can also designate Upstream port or USB Type-C as the only USB signal source.

1st Level Menu	2nd/3rd Level Menu	Description
Screen Size	Auto	Users can adjust Screen Size in any mode, any
	4:3	resolution and any screen refresh rate.
	16:9	Activating Screen Size 1:1 will affect: Affected Function Function Status
	1:1	» Adaptive-Sync » PIP/PBP Set to OFF
Adaptive-Sync	OFF • Adaptive-Sync prevents screen tearin • When Adaptive-Sync is set to ON, it is to enable HDMI™ VRR. • Activating Adaptive-Sync will affect:	
		Affected Function Function Status
		» PIP/PBP Set to OFF

Image

1st Level Menu	2nd/3rd Level Menu		Description	
Brightness	0-100		Properly adjust Brightness according to the surrounding lighting.	
Contrast	0-100		Properly adjust Contra	ast to relax your eyes.
Sharpness	0-5		Sharpness improves clarity and details of images.	
Image Enhancement	OFF		Image Enhancement	
	Weak		to improve their acuta	ance.
	Medium			
	Strong			
	Strongest			
Low Blue Light	OFF	Low Blue Light protects your eyes ag.		
	ON		blue light. When enabled, Low Blue Light adjusts the screen color temperature to a more yellow glow.	
HDCR	OFF ON		HDCR enhances image	
			the contrast of images.Activating HDCR will affect:	
			Affected Function	Function Status
			» Brightness	Unable to select
C T	6 1			
Color Temperature	Cool Normal Warm		Use Up or Down Button to select and preview mode effects. Press the E Button to confirm and apply you mode type.	
	Customization	R (0-100)	 Users can adjust Colo Customization mode. 	r Temperature in
		G (0-100)	Sastonnization mode.	
		B (0-100)		

Input Source

1st Level Menu	2nd Level Menu	Description
HDMI™1		Users can adjust Input Source in any mode.
HDMI™2		
DP		
Type C		
Auto Scan	OFF	Users can use the Navi Key to select Input Source at
	ON	below status: While "Auto Scan" is set to "OFF" with the monitor at power saving mode; While "No Signal" message box is shown on the monitor.

PIP/PBP

1st Level Menu	2nd/3rd Level Menu		Description	
OFF		PIP (Picture in Picture) allows users to		
PIP	Source	HDMI™1	simultaneously display multiple video sou on one screen. One program is displayed o	
		HDMI™2	the full screen at the same time as one or mor other programs are displayed in inset window	ame time as one or more
		DP		e) is a similar feature that
		Type C		urces side-by-side on the
	PIP Size	Small		users to switch between
		Medium	primary and secondar	•
		Large	 If there is only one sign Switch and Audio Swit 	
	Location	Left Top	Activating PIP/PBP wil	l affect:
		Right Top	Affected Function	Function Status
		Left Bottom	» Response Time	Unable to select
		Right Bottom	» Adaptive-Sync	Set to OFF
	Display Swit		» HDMI™ CEC	Set to OFF & unable to select
	Audio Switch		» PIP: Screen Size 1:1	Set to Auto & unable
PBP	Source 1	HDMI™1	» PBP: Screen Size	to select
		HDMI™2		
		DP	-	
		Type C	-	
	Source 2	HDMI™1		
		HDMI™2		
		DP	1	
		Type C	1	
	Display Switch		1	
	Audio Switc	h	1	
1/				

Navi Key

1st Level Menu	2nd Level Menu	Description
Up	OFF	All Navi Key items can be
Down	Brightness	adjusted via OSD Menus.
Left Right	Mode	
Night	Alarm Clock	
	Input Source	
	PIP/PBP Mode	
	Refresh Rate	
	Info. On Screen	
	Audio Volume	
	KVM	

Settings

1st Level Menu	2nd/3rd Level Menu	Description
Language	繁體中文	Users have to press the E Button to confirm and apply
	English	the Language setting. • Language is an independent setting. Users' own
	Français	language setting will override the factory. When users
	Deutsch	set Reset to Yes, Language will not be changed.
	Italiano	
	Español	
	한국어	
	日本語	
	Русский	
	Português	
	简体中文	
	Bahasa Indonesia	
	Türkçe	
	(More languages coming soon)	
Transparency	0~5	Users can adjust Transparency in any mode.
OSD Time Out	5~30s	Users can adjust OSD Time Out in any mode.
Power Button	OFF	When set to OFF, users can press the power button to turn off the monitor.
	Standby	When set to Standby, users can press the power button to turn off the panel and backlight.

1st Level Menu	2nd/3rd Level Menu	Description
HDMI™ CEC	OFF ON	HDMI™ CEC (Consumer Electronics Control) supports Sony PlayStation®, Nintendo® Switch™, Xbox Series X S consoles and various audio-visual devices that are CEC-capable. If HDMI™ CEC is set to ON: The monitor will automatically power on when the CEC device is turned on. The CEC device will enter power saving mode when the monitor is turned off. When Sony PlayStation®, Nintendo® Switch™, or
		Xbox Series X S console is connected, Mode will be automatically set to default modes and can be adjusted to users' preferred modes later.
Info. On Screen	OFF	The information of the monitor status will be shown
	ON	on the right side of the screen.
Type C PD Charge	OFF	Type C PD Charge enables users to charge their devices through a USB Type-C connector, which can
	ON	deliver up to 98W (20V/4.9A).
USB C Hub Signal	2.0	When the "Type C" input source is selected, users can
	3.0	switch the USB signal between 2.0 (480 Mbps) and 3.0 (5 Gbps).
Audio Volume	0-100	Users can adjust Audio Volume in any mode.
Reset	YES	Users can Reset and restore settings to original OSD
	NO	Default in any mode.

Specifications

Monitor	Modern MD272UPHG Modern MD272UPHW	
Size	27 inch	
Curvature	Flat	
Panel Type	IPS	
Resolution	3840x2160 (UHD)	
Aspect Ratio	16:9	
Brightness	400 nits (typ.)	
Contrast Ratio	1000:1	
Refresh Rate	60Hz	
	2 x HDMI [™] Connector	
	• 1 x DisplayPort	
1/0	• 3 x USB 3.2 Gen 1 Port	
.,, 0	• 1 x USB 3.2 Gen 1 Type-B Upstream Port	
	• 1 x USB Type-C Port	
	• 1 x Headphone Jack	
View Angles	178°(H), 178°(V)	
DCI-P3*/ sRGB	97% / 124%	
Surface Treatment	Anti-glare	
Display Colors	1.07B (8bits + FRC)	
Speaker	3W x2	
Monitor Power Options	100~240Vac, 50/60Hz, 3A	
	Power On < 180W	
Power Consumption (Typical)	Standby < 0.5W	
(Typicat)	Power Off < 0.3W	
Adjustment (Height)	0 ~ 110mm	
Adjustment (Tilt)	-5° ~ 20°	
Adjustment (Swivel)	-30° ~ 30°	
Adjustment (Pivot)	-90° ~ 90°	
Kensington Lock	Yes	
VESA Mounting	Plate Type: 75 x 75 mm	
VESA Mounting	Screw Type: M4 x 10 mm	
Dimension (W x H x D)	613.5 x 413.4 x 201.8 mm	

Monitor		Modern MD272UPHG Modern MD272UPHW		
Waight	Net	6.55 kg		
Weight	Gross	9.75 kg		
	Operating	Temperature: 0°C to 40°C		
Environment		Humidity: 20% to 90%, non-condensing		
		• Altitude: 0 ~ 5000m		
	Storage	Temperature: -20°C to 60°C		
		Humidity: 10% to 90%, non-condensing		

^{*} Based on CIE1976 test standards.

^{**} External Power Supply may vary by country.

Preset Display Modes



All information is subject to change without prior notice.

Standard	Resolution		Standard Default Mode		
			HDMI™	DP	USB-C
FHD	1920x1080	@60Hz	V	V	V
QHD	2560x1440	@60Hz	V	٧	٧
UHD	3840x2160	@60Hz	V	V	V
	720P		V	٧	٧
	1080P		V	٧	٧
	2160P	@50Hz	V	V	V
		@60Hz	V	٧	٧
HDMI™ VRR*	, and the second		V	٧	

^{*} HDMITM VRR (Variable Refresh Rate) synchronizes with Adaptive-Sync (ON/ OFF). For VRR ON/OFF status, please check Adaptive-Sync.

Standard	Resolution		PIP Mode (Not Support HDR)		
	Resolution		HDMI™	DP	USB-C
FHD	1920x1080	@60Hz	V	V	V
QHD	2560x1440	@60Hz	V	V	V
UHD	3840x2160	@60Hz	V	V	V
	720P		V	V	V
	1080P		V	V	V
	2160P	@50Hz	V	V	V
		@60Hz	V	V	V

Standard	Resolution		PBP Mode (Not Support HDR)		
			HDMI™	DP	USB-C
PBP Mode	1920x2160	@60Hz	V	V	V

Troubleshooting

The power LED is off.

- Press the monitor power button again.
- Check if the monitor power cable is properly connected.

No image.

- Check if the computer graphics card is properly installed.
- Check if the computer and monitor are connected to electrical outlets and are turned on.
- Check if the monitor signal cable is properly connected.
- The computer may be in Standby mode. Press any key to activate the monitor.

The screen image is not properly sized or centered.

 Refer to Preset Display Modes to set the computer to a setting suitable for the monitor to display.

No Plug & Play.

- Check if the monitor power cable is properly connected.
- Check if the monitor signal cable is properly connected.
- Check if the computer and graphics card are Plug & Play compatible.

The icons, font or screen are fuzzy, blurry or have color problems.

- Avoid using any video extension cables.
- Adjust brightness and contrast.
- Adjust RGB color or tune color temperature.
- Check if the monitor signal cable is properly connected.
- Check for bent pins on the signal cable connector.

The monitor starts flickering or shows waves.

- Change the refresh rate to match the capabilities of your monitor.
- Update your graphics card drivers.
- Keep the monitor away from electrical devices that may cause electromagnetic interference (EMI).

Safety Instructions

- Read the safety instructions carefully and thoroughly.
- All cautions and warnings on the device or User Guide should be noted.
- Refer servicing to qualified personnel only.

Power

- Make sure that the power voltage is within its safety range and has been adjusted properly to the value of 100~240V before connecting the device to the power outlet.
- If the power cord comes with a 3-pin plug, do not disable the protective earth pin from the plug. The device must be connected to an earthed mains socket-outlet.
- Please confirm the power distribution system in the installation site shall provide the circuit breaker rated 120/240V, 20A (maximum).
- Always disconnect the power cord or switch the wall socket off if the device would be left unused for a certain time to achieve zero energy consumption.
- Place the power cord in a way that people are unlikely to step on it. Do not place anything on the power cord.
- If this device comes with an adapter, use only the MSI provided AC adapter approved for use with this device.

Environment

- To reduce the possibility of heat-related injuries or of overheating the device, do not place the device on a soft, unsteady surface or obstruct its air ventilators.
- Use this device only on a hard, flat and steady surface.
- To prevent the device from tipping over, secure the device to a desk, wall or fixed
 object with an anti-tip fastener that helps to properly support the device and keep it
 safe in place.
- To prevent fire or shock hazard, keep this device away from humidity and high temperature.
- Do not leave the device in an unconditioned environment with a storage temperature above 60°C or below -20°C, which may damage the device.
- The maximum operating temperature is around 40°C.
- When cleaning the device, be sure to remove the power plug. Use a piece of soft cloth rather than industrial chemical to clean the device. Never pour any liquid into the opening; that could damage the device or cause electric shock.
- Always keep strong magnetic or electrical objects away from the device.

- If any of the following situations arises, get the device checked by service personnel:
 - The power cord or plug is damaged.
 - Liquid has penetrated into the device.
 - The device has been exposed to moisture.
 - The device does not work well or you can not get it working according to the User Guide.
 - The device has dropped and damaged.
 - The device has obvious sign of breakage.

TÜV Rheinland Certification

TÜV Rheinland Low Blue Light Certification

Blue light has been shown to cause eye fatigue and discomfort. MSI now offers monitors with TÜV Rheinland Low Blue Light certification to ensure users' eye comfort and well-being. Please follow the instructions below to reduce the symptoms from extended exposure to the screen and blue light.



- Place the screen 20 28 inches (50 70 cm) away from your eyes and a little below eye level.
- Consciously blinking the eyes every now and then will help to reduce eye strain after extended screen time.
- Take breaks for 20 minutes every 2 hours.
- Look away from the screen and gaze at a distant object for at least 20 seconds during breaks.
- Make stretches to relieve body fatigue or pain during breaks.
- Turn on the optional Low Blue Light function.

TÜV Rheinland Flicker Free Certification

 TÜV Rheinland has tested this product to ascertain whether the display produces visible and invisible flicker for the human eye and therefore strains the eyes of users.



- TÜV Rheinland has defined a catalogue of tests, which sets out minimum standards at various frequency ranges. The test catalogue is based on internationally applicable standards or standards common within the industry and exceeds these requirements.
- The product has been tested in the laboratory according to these criteria.
- The keyword "Flicker Free" confirms that the device has no visible and invisible flicker defined in this standard within the range of 0 - 3000 Hz under various brightness settings.
- The display will not support Flicker Free when Anti Motion Blur/MPRT is enabled. (The availability of Anti Motion Blur/MPRT varies by products.)

ENERGY STAR Certification

ENERGY STAR is a program run by the U.S. Environmental Protection Agency (EPA) and U.S. Department of Energy (DOE) to promote energy efficiency. This product qualifies for ENERGY STAR in the "factory default" settings through which power savings will be achieved. Changing the factory default picture settings or enabling other features will increase power consumption, which could exceed the limits necessary to qualify for ENERGY STAR rating.



For more information on ENERGY STAR, refer to https://www.energystar.gov/.

Regulatory Notices

CE Conformity

This device complies with the requirements set out in the Council Directive on the Approximation of the Laws of the Member States relating to Electromagnetic Compatibility (2014/30/EU), Low-voltage Directive (2014/35/EU), ErP Directive (2009/125/EC) and RoHS directive (2011/65/EU). This product has been tested and found to comply with the harmonized standards for Information Technology Equipment published under Directives of Official Journal of the European Union.

FCC-B Radio Frequency Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the measures listed below:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/television technician for help.

Notice 1

The changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Notice 2

Shielded interface cables and AC power cord, if any, must be used in order to comply with the emission limits.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- 1. This device may not cause harmful interference, and
- 2. This device must accept any interference received, including interference that may cause undesired operation.

MSI Computer Corp.

901 Canada Court, City of Industry, CA 91748, USA (626) 913-0828 www.msi.com

WEEE Statement

Under the European Union ("EU") Directive on Waste Electrical and Electronic Equipment, Directive 2012/19/EU, products of "electrical and electronic equipment" cannot be discarded as municipal waste anymore and manufacturers of covered electronic equipment will be obligated to take back such products at the end of their useful life.



Chemical Substances Information

In compliance with chemical substances regulations, such as the EU REACH Regulation (Regulation EC No. 1907/2006 of the European Parliament and the Council), MSI provides the information of chemical substances in products at: https://csr.msi.com/global/index

RoHS Statement

Japan JIS C 0950 Material Declaration

A Japanese regulatory requirement, defined by specification JIS C 0950, mandates that manufacturers provide material declarations for certain categories of electronic products offered for sale after July 1, 2006.

https://csr.msi.com/global/Japan-JIS-C-0950-Material-Declarations

India RoHS

This product complies with the "India E-waste (Management and Handling) Rule 2016" and prohibits use of lead, mercury, hexavalent chromium, polybrominated biphenyls or polybrominated diphenyl ethers in concentrations exceeding 0.1 weight % and 0.01 weight % for cadmium, except for the exemptions set in Schedule 2 of the Rule.

Turkey EEE Regulation

Conforms to the EEE Regulations of the Republic Of Turkey

Ukraine Restriction of Hazardous Substances

The equipment complies with requirements of the Technical Regulation, approved by the Resolution of Cabinet of Ministry of Ukraine as of 10 March 2017, № 139, in terms of restrictions for the use of certain dangerous substances in electrical and electronic equipment.

Vietnam RoHS

As from December 1, 2012, all products manufactured by MSI comply with Circular 30/2011/TT-BCT temporarily regulating the permitted limits for a number of hazardous substances in electronic and electric products.

Green Product Features

- Reduced energy consumption during use and stand-by
- Limited use of substances harmful to the environment and health
- Easily dismantled and recycled
- Reduced use of natural resources by encouraging recycling
- Extended product lifetime through easy upgrades
- Reduced solid waste production through take-back policy

Environmental Policy

- The product has been designed to enable proper reuse of parts and recycling and should not be thrown away at its end of life.
- Users should contact the local authorized point of collection for recycling and disposing of their end-of-life products.



- Visit the MSI website and locate a nearby distributor for further recycling information.
- Users may also reach us at gpcontdev@msi.com for information regarding proper disposal, take-back, recycling, and disassembly of MSI products.

Warning!

Overuse of screens is likely to affect eyesight.

Recommendations:

- 1. Take a 10-minute break for every 30 minutes of screen time.
- 2. Children under 2 years of age should have no screen time. For children aged 2 years and over, screen time should be limited to less than one hour per day.

Copyright and Trademarks Notice

msi Msi 微星





Copyright © Micro-Star Int' I Co., Ltd. All rights reserved. The MSI logo used is a registered trademark of Micro-Star Int' I Co., Ltd. All other marks and names mentioned may be trademarks of their respective owners. No warranty as to accuracy or completeness is expressed or implied. MSI reserves the right to make changes to this document without prior notice.



The terms HDMI™, HDMI™ High-Definition Multimedia Interface, HDMI™ Trade dress and the HDMI™ Logos are trademarks or registered trademarks of HDMI™ Licensing Administrator, Inc.

Technical Support

If a problem arises with your product and no solution can be obtained from the user's manual, please contact your place of purchase or local distributor. Alternatively, please visit https://www.msi.com/support/ for further guidance.