

# **MPG Series**

**LCD Monitor** 

MPG 346CQRF X24 (3DD9)

User Guide

# **Contents**

Getting Started	3
Package Contents	3
Installing the Monitor Stand	4
Adjusting the Monitor	5
Monitor Overview	6
Connecting the Monitor to PC	9
OSD Setup	10
Navi Key	10
Hot Key	10
OSD Menus	11
G.I	12
Gaming	13
Professional	15
Image	16
Input Source	16
PIP/PBP	17
Navi Key	18
Settings	18
Specifications	20
Preset Display Modes	22
Troubleshooting	26
Safety Instructions	27
TÜV Rheinland Certification	29
Regulatory Notices	30

#### Revision

V1.0, 2025/07

# **Getting Started**

This chapter provides you with the information on hardware setup procedures. While connecting devices, be careful in holding the devices and use a grounded wrist strap to avoid static electricity.

## **Package Contents**

Monitor	MPG 346CQRF X24
Documentation	Quick Start Guide
Accessories	Stand with Screw(s)
	Stand Base with Screw(s)
	USB Upstream Cable (for USB Type-B Upstream Port)
	Power Cord
Cables	DisplayPort Cable (Optional)
	Ultra High Speed HDMI™ Cable (Optional)
	USB Type-C Cable (Optional)




# 掛 Important

- Contact your place of purchase or local distributor if any of the items is damaged or missing.
- Package contents may vary by country and model.
- The included power cord is exclusively for this monitor and should not be used with other products.

### **Installing the Monitor Stand**

- 1. Leave the monitor in its protective packaging. Align the stand bracket to the monitor groove.
- 2. Tighten the stand bracket with screws.
- 3. Connect the base to the stand and tighten the base screw to secure the base.
- 4. Make sure the stand assembly is properly installed before setting the monitor upright.

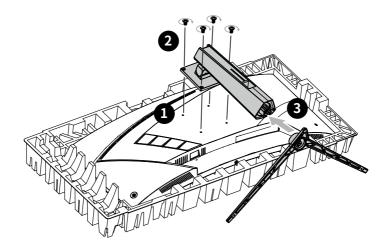



### **Important**

- Place the monitor on a soft, protected surface to avoid scratching the display panel.
- Do not use any sharp objects on the panel.
- The groove for installing the stand bracket can also be used for wall mount. Please contact your dealer for proper wall mount kit.


# **Adjusting the Monitor**


This monitor is designed to maximize your viewing comfort with its adjustment capabilities.




# Important

Avoid touching the display panel when adjusting the monitor.

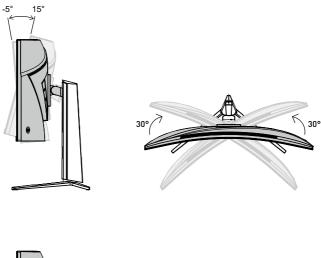



### **Monitor Overview**

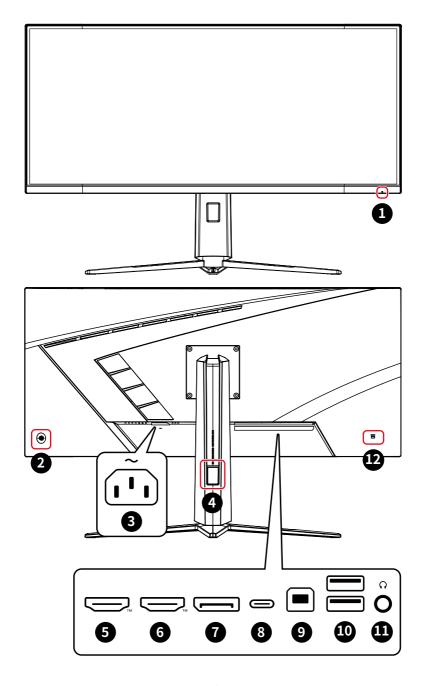

Power LED 1

Lit in white after the monitor is turned on. If no signal input, the LED will turn into orange. Lit in orange when the monitor is in Stand-by mode.

- **Power Button & Navi Key**
- 3 **Power Jack**
- 4 **Cable Routing Hole**
- HDMI<sup>™</sup> Connector 5

Supports HDMI<sup>™</sup> CEC, 3440x1440@240Hz as specified in HDMI<sup>™</sup> 2.1 (FRL 10G).



# /!\ Important

To ensure optimal performance and compatibility, please use only HDMI™ cables certified with the official HDMI™ logo when connecting this monitor. For more information, please visit https://www.hdmi.org/resource/cables.

HDMI 6 **HDMI™** Connector

Supports 3440x1440@240Hz as specified in HDMI<sup>™</sup> 2.1 (FRL 10G).



### /!\ Important

To ensure optimal performance and compatibility, please use only HDMI™ cables certified with the official HDMI<sup>™</sup> logo when connecting this monitor. For more information, please visit <a href="https://www.hdmi.org/resource/cables.">https://www.hdmi.org/resource/cables.</a>

**DisplayPort** 7 Supports 3440x1440@240Hz as specified in DisplayPort 1.4a.

**USB Type-C Port** 8

> This port supports DisplayPort Alternate (DP Alt) Mode and up to 20V/4.9A (98W) power delivery.




#### **Important**

Your USB-C signal source and cable must support DisplayPort Alternate Mode to enable video output to the monitor.


5V / 3A (15W) 9V / 3A (27W) 12V / 3A (36W) 15V / 3A (45W) 20V / 3.25A (65W) 20V / 4.5A (90W) 20V / 4.9A (98W)

USB Type-C **Power Delivery** 

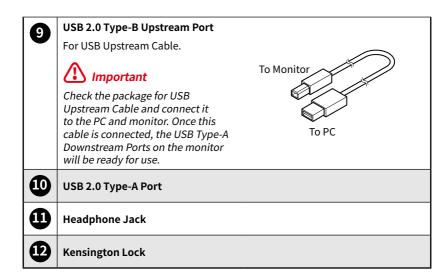


### **Connecting the Monitor to PC**

- 1. Turn off your computer.
- 2. Connect the video cable from the monitor to your computer.
- 3. Connect the power cord to the monitor power jack. (Figure A)
- 4. Plug the power cord into the electrical outlet. (Figure B)
- 5. Turn on the monitor. (Figure C)
- 6. Power on the computer and the monitor will auto detect the signal source.

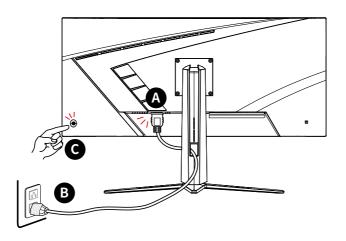



To optimize performance, please remove the protective film from the display panel before use.

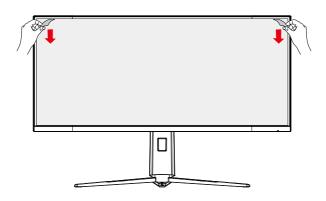

# **OSD Setup**

This chapter provides you with essential information on OSD Setup.




### 

All information is subject to change without prior notice.

### **Navi Key**

The monitor comes with a Navi Key, a multi-directional control that helps navigate the On-Screen Display (OSD) menu.

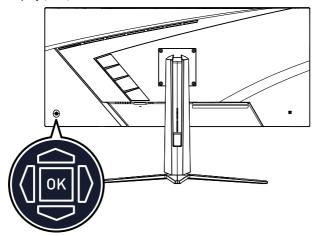

#### Up/Down/Left/Right:

- selecting function menus and items
- adjusting function values
- entering into/exiting from function menus


#### Press (OK):

- launching the On-Screen Display (OSD)
- · entering submenus
- · confirming a selection or setting

### **Hot Key**

- Users may enter into preset function menus by moving the Navi Key up, down, left or right when the OSD menu is inactive.
- Users may customize their own Hot Keys to enter into different function menus.

# **OSD Menus**

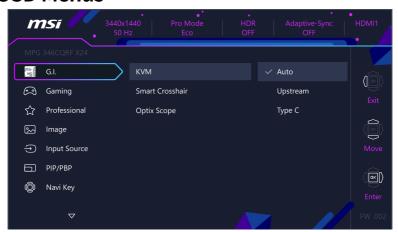



The following settings will be grayed out when HDR signals are received:

- Night Vision
- MPRT Sync
- Low Blue Light
- HDCR
- Brightness
- Contrast

- Color Temperature
- PIP/PBP
- Al Vision
- sRGB
- Optix Scope

# G.I.

1st Level Menu	2nd/3rd Level	Menu	Description
KVM	Auto Upstream Type C		Auto allows the monitor to automatically switch between USB input sources, such as keyboards, mice or other USB devices.      Users can also designate Upstream port or USB Type-C as the only USB signal source.
Smart Crosshair	Color	None  L+  -i-  if  v.  2.  White  Red  Auto	<ul> <li>Through AI algorithm, this function enhances the visibility of in-game crosshair.</li> <li>Users can select the color and position of the crosshair.</li> </ul>
	Position		
	Reset	,	
Optix Scope	Scope Size	Small Medium	The center point will zoom in when Optix Scope is enabled, user can adjust the details through the "Scope Size" and "Scope Ratio"
	Scope Ratio	x1.5 x2	settings.     Smart Crosshair and Optix Scope can be enabled at the same time.
		х3	Activating Optix Scope will affect:
	OFF		Affected Function Function Status
			» MPRT Sync » Adaptive-Sync Set to OFF » PIP/PBP
			» Screen Size 1:1 Set to Auto

# Gaming

1st Level Menu	2nd/3rd Level Menu	Description
Game Mode	User FPS Racing RTS RPG	Use Up or Down Button to select and preview mode effects.  Press the OK Button to confirm and apply your mode type.  Game Mode defaults to User in both SDR and HDR modes.
Night Vision	OFF Normal Strong Strongest A.I.	This function optimizes background brightness and is recommended for FPS games.
Al Vision	OFF ON	Al Vision enhances image quality by optimizing the contrast of images and background brightness.     Activating Al Vision will affect:      Affected Function Function Status     MPRT Sync Set to OFF     HDCR     Brightness Unable to select     Night Vision
Response Time	Normal Fast Fastest	Setting to Fastest will reach the shortest response time and help improve blurred images when playing very fast games.
MPRT Sync	OFF ON	MPRT Sync is available when the refresh rate is over 85Hz.      Activating MPRT Sync will affect:      Affected Function Function Status     Response Time     Brightness  Unable to select
		» HDCR » PIP/PBP » AI Vision » Optix Scope » Screen Size 1:1 Set to Auto

1st Level Menu	2nd/3rd Lev	el Menu	D	escription		
Refresh Rate	Location	Left Top Right Top Left Bottom		Button to confirm an Location.	d ap	OSD Menu. Press the OK oply your Refresh Rate
		Right Bottom Customize	•	System's preset Scre		l works at the Operating Refresh Rate.
	OFF ON					
Alarm Clock	OFF 15:00 30:00 45:00 60:00	Left Top Right Top Left Bottom Right Bottom Customize  00:01 ~ 99:59			lly r	ess the OK Button to estore their preset Alarm r loss and reconnection.
Adaptive-Sync	OFF		ļ	Adaptive-Sync prevet Activating Adaptive-S Affected Function  » PIP/PBP  » Optix Scope  » Screen Size 1:1		ŭ
DSC	OFF ON		•	Users can toggle DSC Compression) on/off. For more DSC timing Preset Display Modes tables. Activating DSC will at Affected Function » PIP/PBP	info	ormation, please check DSC ON/OFF timing
HDMI™ 2.1	Console PC			The Console mode of with more console do Activating HDMI™ 2.1	evic	
				» PIP/PBP	-	tto OFF

### **Professional**

1st Level Menu	2nd Level Menu	Description							
Pro Mode	Eco	Use Up or Down Button to select and preview mode effects.							
	User	Press the OK Button to confirm and apply your mode type.      Pro Mode defaults to Eco for SDR mode and User for							
	Anti-Blue								
	Movie	HDR mode.							
		Activating sRGB will affect:							
	Office	Affected Function Function Status							
	sRGB	» Low Blue Light » Color Temperature							
Low Blue Light	OFF	Low Blue Light protects your eyes against blue light.							
	ON	<ul> <li>When enabled, Low Blue Light adjusts the screen color temperature to a more yellow glow.</li> </ul>							
		When Pro Mode is set to Anti-Blue, it is mandatory to enable Low Blue Light.							
HDCR	OFF	HDCR enhances image quality by increasing the contrast							
	ON	of images.  • Activating HDCR will affect:							
		Affected Function Function Status							
		» MPRT Sync Set to OFF							
		» Brightness Unable to select							
MPRT Sync	OFF	MPRT Sync is available when the refresh rate is over							
	ON	85Hz.     Activating MPRT Sync will affect:							
		Affected Function Function Status							
		» Response Time  » Brightness  Unable to select							
		» HDCR » PIP/PBP » Al Vision » Optix Scope							
		» Screen Size 1:1 Set to Auto							
Image Enhancement	OFF	Image Enhancement enhances image edges to improve							
	Weak	their acutance.							
	Medium								
	Strong								
	Strongest								

# **Image**

1st Level Menu	2nd/3rd Level M	enu	Description			
Brightness	0-100		Properly adjust Brightness according to the surrounding lighting.			
Contrast	0-100		• F	Properly adjust Contr	ast to relax your eyes.	
Sharpness	0-5		Sharpness improves clarity and details of in		clarity and details of images.	
Color Temperature	Cool	,			on to select and preview	
	Normal			node effects.		
	Warm		Press the OK Button to confirm and apply your mode type.      Users can adjust Color Temperature in			
	Customization	R (0-100)				
		G (0-100)		Customization mode.		
		B (0-100)				
Screen Size	Auto	•	Users can adjust Screen Size in any mode, any			
	4:3		resolution and any screen refresh rate.			
	16:9			Activating Screen Size		
	21.0		ł	Affected Function	Function Status	
	21:9		» Optix Scope Set to OFF	Set to OFF		
	1:1		<u>(</u>	Important		
			its	original resolution.	to displaying content at . This option is disabled et to its native resolution.	

# **Input Source**

1st Level Menu	2nd Level Menu	Description
HDMI™ 1		Users can adjust Input Source in any mode.
HDMI™ 2		
DP		
Type C		
Auto Scan	OFF	Users can use the Navi Key to select Input Source at
	ON	below status:  While "Auto Scan" is set to "OFF" with the monitor at power saving mode;  While "No Signal" message box is shown on the monitor.

# PIP/PBP

1st Level Menu	2nd/3rd Leve	l Menu	De	scription		
OFF				PIP (Picture in Picture) al		
PIP	Source	HDMI™1	simultaneously display multiple video sour on one screen. One program is displayed or			
		HDMI™2		full screen at the same ti programs are displayed i	me as one or more other	
		DP		PBP (Picture by Picture)		
		Type C		displays two input sourc		
	PIP Size	Small		screen. Display Switch allows us	ers to switch hetween	
		Medium		primary and secondary i		
		Large		If there is only one signal Switch and Audio Switch		
	Location	Left Top		Users can adjust the ratio	0 ,	
		Right Top		switching mode 1/2.	. cac a	
		Left Bottom	•	Activating PIP/PBP will a	ffect:	
		Right Bottom		Affected Function	Function Status	
		Customize		» Response Time	Unable to select	
	Display Switch	h		» Adaptive-Sync Set to OFF	Set to OFF	
	Audio Switch			» Optix Scope		
PBP	Mode 1			» MPRT Sync » HDMI™ 2.1	Set to OFF & unable to select	
	Mode 2	,			» PIP: Screen Size 1:1	Set to Auto &
	Customize	T.		» PBP: Screen Size	unable to select	
	Source 1	HDMI™1				
		HDMI™2				
		DP				
		Type C				
	Source 2	HDMI™1				
		HDMI™2				
		DP				
		Type C				
	Display Switch					
	Audio Switch					

# Navi Key

1st Level Menu	2nd Level Menu	Description
Up	OFF	All Navi Key items can be adjusted via OSD Menus.
Down	Brightness	
Left	Game Mode	
Right	Smart Crosshair	
	Alarm Clock	
	Input Source	
	PIP/PBP Mode	
	Refresh Rate	
	Info. On Screen	
	Night Vision	
	Optix Scope	
	KVM	

# Settings

1st Level Menu	2nd Level Menu	Description
Language	繁體中文	Users have to press the OK Button to confirm and
	English	apply the Language setting.
	Français	Language is an independent setting. Users' own language setting will override the factory default.
	Deutsch	When users set Reset to Yes, Language will not be
	Italiano	changed.
	Español	
	한국어	
	日本語	
	Русский	
	Português	
	简体中文	
	Bahasa Indonesia	
	Türkçe	
	(More languages coming soon)	
Transparency	0~5	Users can adjust Transparency in any mode.
OSD Time Out	5~30s	Users can adjust OSD Time Out in any mode.
RGB LED	OFF	Users can adjust RGB LED to ON or OFF.
	ON	
Power Button	OFF	When set to OFF, users can press the power button to turn off the monitor.
	Standby	When set to Standby, users can press the power button to turn off the panel and backlight.

1st Level Menu	2nd Level Menu	Description
Info. On Screen	OFF	The information of the monitor status will be shown
	ON	on the right side of the screen.
HDMI™ CEC	OFF	<ul> <li>HDMI<sup>™</sup> CEC (Consumer Electronics Control) supports Sony PlayStation®, Nintendo® Switch™, Xbox Series</li> </ul>
	ON	X S consoles and various audio-visual devices that are CEC-capable.
		If HDMI™ CEC is set to ON:
		The monitor will automatically power on when the CEC device is turned on.
		<ul> <li>The CEC device will enter power saving mode when the monitor is turned off.</li> </ul>
		<ul> <li>When Sony PlayStation®, Nintendo® Switch™, or Xbox Series X S console is connected, Game Mode and Pro Mode will be automatically set to default mode and can be adjusted to users' preferred modes later.</li> </ul>
Type C PD Charge	OFF	This function enables users to charge their devices through a USB Type-C connector.
	ON	Type C PD Charge enables users to charge their devices through a USB Type-C connector, which can deliver up to 98W (20V/4.9A).
Reset	YES	Users can Reset and restore settings to original OSD
	NO	Default in any mode.

# Specifications\*

Monitor	MPG 346CQRF X24
Size	34 inch
Curvature	Curve 1500R
Panel Type	Rapid VA
Resolution	3440 x 1440 (UWQHD)
Aspect Ratio	21:9
Brightness	Typical SDR: 400 nits
	Peak HDR: 400 nits
Contrast Ratio	4000:1
Refresh Rate	240 Hz
Response Time	• 1ms (MPRT)
	• 0.5ms (GtG)
I/O	2 x HDMI <sup>™</sup> Connector
	• 1 x DisplayPort
	• 1 x USB Type-C Port
	• 1 x USB 2.0 Type-B Upstream Port
	• 2 x USB 2.0 Type-A Port
	• 1 x Headphone Jack
View Angles	178°(H), 178°(V)
DCI-P3**/ sRGB	85%/ 110%
Surface Treatment	Anti-glare
Display Colors	1.07B, 10bits (8bits + FRC)
Monitor Power Options	100-240V~, 50/60Hz 2.0A
Power Consumption (Typical)	Power On < 205W
	Standby < 0.5W
	Power Off < 0.3W
Adjustment (Tilt)	-5° ~ 15°
Adjustment (Swivel)	-30° ~ 30°
Adjustment (Height)	0 ~ 100mm
Kensington Lock	Yes

Monitor		MPG 346CQRF X24		
VESA Mounting		• Plate Type: 100 x 100 mm		
		• Screw Type: M4 x 10 mm		
		Thread Diameter: 4 mm		
		Thread Pitch: 0.7 mm		
Dimension (W x D	x H)	808.0 x 278.3 x 537.9 mm		
Weight	Net	7.90 kg		
Weight	Gross	12.22 kg		
Operating Enviro	nment	Temperature: 0°C to 40°C		
		Humidity: 20% to 90%, non-condensing		
		• Altitude: 0 ~ 5000m		
Storage Environment		Temperature: -20°C to 60°C		
		• Humidity: 10% to 90%, non-condensing		

<sup>\*</sup> Some technical specifications of the device may be subject to change by the manufacturer. Please verify the specifications with the seller or the manufacturer's representative.

<sup>\*\*</sup> Based on CIE1976 test standards.

# **Preset Display Modes**



# Important

- All information is subject to change without prior notice.
- HDMI™ VRR (Variable Refresh Rate) synchronizes with Adaptive-Sync (ON/ OFF). For VRR ON/OFF status, please check Adaptive-Sync.
- To display the preferred timing and frequency, make sure to use the graphics card that supports DSC (Display Stream Compression).

### HDMI<sup>™</sup> 2.1 - PC, DSC ON

Standard	Resolution		HDMI™	DP	USB-C
QHD	2560x1440	@60Hz	V	V	V
		@120Hz	V	V	V
WQHD	3440x1440	@50Hz	V		
		@60Hz	V	V	V
		@100Hz	V	V	V
		@120Hz	V	V	V
		@165Hz	V	V	V
		@240Hz	V	V	V
Video Timing	720p		V	V	V
Resolution	1080p	@60Hz	V	V	V
		@120Hz	V	V	V
	2560x1080p	@60Hz	V		
		@120Hz	V		
HDMI™ VRR			V		

HDMI<sup>™</sup> 2.1 - PC, DSC OFF

Standard	Resolution		HDMI™	DP	USB-C
QHD	2560x1440	@60Hz	V	V	V
		@120Hz	V	V	V
WQHD	3440x1440	@50Hz	V		
		@60Hz	V	V	V
		@100Hz	V	V	V
		@120Hz	V	٧	V
		@165Hz	V	٧	V
		@240Hz	V		
Video Timing	720P		V	V	V
Resolution	1080P	@60Hz	V	V	V
		@120Hz	V	V	V
	2560x1080p	@60Hz	V		
		@120Hz	V		
HDMI™ VRR			V		

# $\mathsf{HDMI}^\mathsf{TM}\,2.1$ - Console, DSC ON

Standard	Resolution		HDMI™	DP	USB-C
QHD	2560x1440	@60Hz	V	V	V
		@120Hz	V	V	V
WQHD	3440x1440	@50Hz	V		
		@60Hz	V	V	V
		@100Hz	V	V	V
		@120Hz	V	V	V
		@165Hz	V	V	V
		@240Hz	V	V	V
Video Timing	720p		V	V	V
Resolution	1080p	@60Hz	V	V	V
		@120Hz	V	V	V
	2160p	@30Hz	V		
		@60Hz	V		
		@120Hz	V		
	2560x1080p	@60Hz	V		
		@120Hz	V		
HDMI™ VRR			V		

HDMI™ 2.1 - Console, DSC OFF

Standard	Resolution		HDMI™	DP	USB-C
QHD	2560x1440	@60Hz	V	V	V
		@120Hz	V	V	V
WQHD	3440x1440	@50Hz	V		
		@60Hz	V	V	V
		@100Hz	V	V	V
		@120Hz	V	V	V
		@165Hz	V	V	V
		@240Hz	V		
Video Timing	720p		V	V	V
Resolution	1080p	@60Hz	V	V	V
		@120Hz	V	V	V
	2160p	@30Hz	V		
		@60Hz	V		
		@120Hz	V		
	2560x1080p	@60Hz	V		
		@120Hz	V		
HDMI™ VRR			V		

# PIP Mode (Not Support HDR)

Standard	Resolution		HDMI™	DP	USB-C
Full HD	1920x1080	@60Hz	٧	V	٧
QHD	2560x1440	@60Hz	V	V	V
		@120Hz	٧	V	٧
WQHD	3440x1440	@50Hz	٧		
		@60Hz	٧	V	٧
Video Timing	720p		٧	V	٧
Resolution 1080p	1080p	@60Hz	V	V	V
		@120Hz	٧	V	٧
	2160p	@30Hz	٧		
		@50Hz	V		
		@60Hz	V		

## PBP Mode 1 (Not Support HDR)

Standard	Resolution		HDMI™	DP	USB-C
Video Timing Resolution	720p		V	V	V
Used for PBP	880x1440	@60Hz	٧	٧	٧
Full Screen	2560x1440	@60Hz	٧	٧	٧

# PBP Mode 2/Customize (Not Support HDR)

Standard	Resolution		HDMI™	DP	USB-C
Video Timing Resolution	720p		V	V	V
Used for PBP Full Screen	1720x1440	@60Hz	V	V	V

# **Troubleshooting**

#### The power LED is off.

- Press the monitor power button again.
- Check if the monitor power cable is properly connected.

#### No image.

- Check if the computer graphics card is properly installed.
- Check if the computer and monitor are connected to electrical outlets and are turned on.
- Check if the monitor signal cable is properly connected.
- The computer may be in Standby mode. Press any key to activate the monitor.

#### The screen image is not properly sized or centered.

 Refer to Preset Display Modes to set the computer to a setting suitable for the monitor to display.

#### No Plug & Play.

- Check if the monitor power cable is properly connected.
- Check if the monitor signal cable is properly connected.
- Check if the computer and graphics card are Plug & Play compatible.

### The icons, font or screen are fuzzy, blurry or have color problems.

- Avoid using any video extension cables.
- Adjust brightness and contrast.
- Adjust RGB color or tune color temperature.
- Check if the monitor signal cable is properly connected.
- Check for bent pins on the signal cable connector.

### The monitor starts flickering or shows waves.

- Change the refresh rate to match the capabilities of your monitor.
- Update your graphics card drivers.
- Keep the monitor away from electrical devices that may cause electromagnetic interference (EMI).

# **Safety Instructions**

- Read the safety instructions carefully and thoroughly.
- All cautions and warnings on the device or User Guide should be noted.
- Refer servicing to qualified personnel only.

#### **Power**

- Make sure that the power voltage is within its safety range and has been adjusted properly to the value of 100~240V before connecting the device to the power outlet.
- If the power cord comes with a 3-pin plug, do not disable the protective earth pin from the plug. The device must be connected to an earthed mains socket-outlet.
- Please confirm the power distribution system in the installation site shall provide the circuit breaker rated 120/240V, 20A (maximum).
- Always disconnect the power cord or switch the wall socket off if the device would be left unused for a certain time to achieve zero energy consumption.
- Place the power cord in a way that people are unlikely to step on it. Do not place anything on the power cord.
- If this device comes with an adapter, use only the MSI provided AC adapter approved for use with this device.

#### **Environment**

- To reduce the possibility of heat-related injuries or of overheating the device, do not place the device on a soft, unsteady surface or obstruct its air ventilators.
- Use this device only on a hard, flat and steady surface.
- To prevent the device from tipping over, secure the device to a desk, wall or fixed object with an anti-tip fastener that helps to properly support the device and keep it safe in place.
- To prevent fire or shock hazard, keep this device away from humidity and high temperature.
- Do not leave the device in an unconditioned environment with a storage temperature above 60°C or below -20°C, which may damage the device.
- The maximum operating temperature is around 40°C.
- When cleaning the device, be sure to remove the power plug. Use a piece of soft cloth rather than industrial chemical to clean the device. Never pour any liquid into the opening; that could damage the device or cause electric shock.
- Always keep strong magnetic or electrical objects away from the device.

- If any of the following situations arises, get the device checked by service personnel:
  - The power cord or plug is damaged.
  - Liquid has penetrated into the device.
  - The device has been exposed to moisture.
  - The device does not work well or you can not get it working according to the User Guide.
  - The device has dropped and damaged.
  - The device has obvious sign of breakage.

# **TÜV Rheinland Certification**

## TÜV Rheinland Low Blue Light Certification

Blue light has been shown to cause eye fatigue and discomfort. MSI now offers monitors with TÜV Rheinland Low Blue Light certification to ensure users' eye comfort and well-being. Please follow the instructions below to reduce the symptoms from extended exposure to the screen and blue light.



- Place the screen 20 28 inches (50 70 cm) away from your eyes and a little below eye level.
- Consciously blinking the eyes every now and then will help to reduce eye strain after extended screen time.
- Take breaks for 20 minutes every 2 hours.
- Look away from the screen and gaze at a distant object for at least 20 seconds during breaks.
- Make stretches to relieve body fatigue or pain during breaks.
- Turn on the optional Low Blue Light function.

### TÜV Rheinland Flicker Free Certification

- TÜV Rheinland has tested this product to ascertain whether the display produces visible and invisible flicker for the human eye and therefore strains the eyes of users.
- TÜV Rheinland has defined a catalogue of tests, which sets out minimum standards at various frequency ranges. The test catalogue is based on internationally applicable standards or standards common within the industry and exceeds these requirements.
- The product has been tested in the laboratory according to these criteria.
- The keyword "Flicker Free" confirms that the device has no visible and invisible flicker defined in this standard within the range of 0 - 3000 Hz under various brightness settings.
- The display will not support Flicker Free when Anti Motion Blur/MPRT is enabled. (The availability of Anti Motion Blur/MPRT varies by products.)

# **Regulatory Notices**

### **CE Conformity**

This product has been tested and found to comply with the harmonized standards for Information Technology Equipment published under Directives of Official Journal of the European Union.



### **FCC-B Radio Frequency Interference Statement**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may



cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the measures listed below:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/television technician for help.

#### Notice 1

The changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

#### Notice 2

Shielded interface cables and AC power cord, if any, must be used in order to comply with the emission limits.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- 1. This device may not cause harmful interference, and
- 2. This device must accept any interference received, including interference that may cause undesired operation.

#### MSI Computer Corp.

901 Canada Court, City of Industry, CA 91748, USA (626) 913-0828 www.msi.com

#### **WEEE Statement**

Under the European Union ("EU") Directive on Waste Electrical and Electronic Equipment, Directive 2012/19/EU, products of "electrical and electronic equipment" cannot be discarded as municipal waste anymore and manufacturers of covered electronic equipment will be obligated to take back such products at the end of their useful life.



#### **Chemical Substances Information**

In compliance with chemical substances regulations, such as the EU REACH Regulation (Regulation EC No. 1907/2006 of the European Parliament and the Council), MSI provides the information of chemical substances in products at: https://csr.msi.com/global/index

#### RoHS Statement

#### Japan JIS C 0950 Material Declaration

A Japanese regulatory requirement, defined by specification JIS C 0950, mandates that manufacturers provide material declarations for certain categories of electronic products offered for sale after July 1, 2006.

https://csr.msi.com/global/Japan-JIS-C-0950-Material-Declarations

#### **India RoHS**

This product complies with the "India E-waste (Management and Handling) Rule 2016" and prohibits use of lead, mercury, hexavalent chromium, polybrominated biphenyls or polybrominated diphenyl ethers in concentrations exceeding 0.1 weight % and 0.01 weight % for cadmium, except for the exemptions set in Schedule 2 of the Rule.

### **Turkey EEE Regulation**

Conforms to the EEE Regulations of the Republic Of Turkey

#### **Ukraine Restriction of Hazardous Substances**

The equipment complies with requirements of the Technical Regulation, approved by the Resolution of Cabinet of Ministry of Ukraine as of 10 March 2017, № 139, in terms of restrictions for the use of certain dangerous substances in electrical and electronic equipment.

#### Vietnam RoHS

As from December 1, 2012, all products manufactured by MSI comply with Circular 30/2011/TT-BCT temporarily regulating the permitted limits for a number of hazardous substances in electronic and electric products.

#### **Green Product Features**

- Reduced energy consumption during use and stand-by
- Limited use of substances harmful to the environment and health
- Easily dismantled and recycled
- Reduced use of natural resources by encouraging recycling
- Extended product lifetime through easy upgrades
- Reduced solid waste production through take-back policy

### **Environmental Policy**

- The product has been designed to enable proper reuse of parts and recycling and should not be thrown away at its end of life.
- Users should contact the local authorized point of collection for recycling and disposing of their end-of-life products.



- Visit the MSI website <a href="https://csr.msi.com/global/pevn\_ewaste">https://csr.msi.com/global/pevn\_ewaste</a> and locate a nearby distributor for further recycling information.
- Please visit <a href="https://us.msi.com/page/recycling">https://us.msi.com/page/recycling</a> for information regarding the recycling of your product in the US.

### Warning!

Overuse of screens is likely to affect eyesight.

#### Recommendations:

- 1. Take a 10-minute break for every 30 minutes of screen time.
- 2. Children under 2 years of age should have no screen time. For children aged 2 years and over, screen time should be limited to less than one hour per day.

### **Copyright and Trademarks Notice**

# **MSI** 微星





Copyright © Micro-Star Int' I Co., Ltd. All rights reserved. The MSI logo used is a registered trademark of Micro-Star Int' I Co., Ltd. All other marks and names mentioned may be trademarks of their respective owners. No warranty as to accuracy or completeness is expressed or implied. MSI reserves the right to make changes to this document without prior notice.



The terms HDMI™, HDMI™ High-Definition Multimedia Interface, HDMI™ Trade dress and the HDMI™ Logos are trademarks or registered trademarks of HDMI™ Licensing Administrator, Inc.

### **Technical Support**

If a problem arises with your product and no solution can be obtained from the user's manual, please contact your place of purchase or local distributor. Alternatively, please visit https://www.msi.com/support/ for further guidance.