

MAG Series

LCD Monitor

MAG 275UPD E14 (3CE8)

User Guide

Contents

Getting Started	3
Package Contents	3
Installing the Monitor Stand	4
Adjusting the Monitor	5
Connecting the Monitor to PC	8
OSD Setup	9
Navi Key	9
Hot Key	9
OSD Menus1	0
G.I	.1
Gaming1	.2
Professional	.4
Image	.5
Input Source	.5
PIP/PBP1	.6
Navi Key 1	.7
Settings	.7
Specifications*1	9
Preset Display Modes2	1
Troubleshooting3	0
Safety Instructions3	1
TÜV Rheinland Certification3	3
Regulatory Notices	24

Revision

V1.0, 2025/05

Getting Started

This chapter provides you with the information on hardware setup procedures. While connecting devices, be careful in holding the devices and use a grounded wrist strap to avoid static electricity.

Package Contents

Monitor	MAG 275UPD E14
Documentation	Quick Start Guide
Accessories	Stand with Screw(s)
	Stand Base with Screw(s)
	Power Cord
Cables	DisplayPort Cable (Optional)




/ Important

- Contact your place of purchase or local distributor if any of the items is damaged or missing.
- Package contents may vary by country and model.
- The included power cord is exclusively for this monitor and should not be used with other products.

Installing the Monitor Stand

- 1. Leave the monitor in its protective packaging. Align the stand bracket to the monitor groove.
- 2. Tighten the stand bracket with screws.
- 3. Connect the base to the stand and tighten the base screw to secure the base.
- 4. Make sure the stand assembly is properly installed before setting the monitor upright.

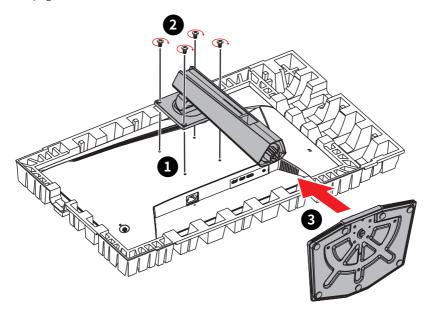

⚠

Important

- Place the monitor on a soft, protected surface to avoid scratching the display panel.
- Do not use any sharp objects on the panel.
- The groove for installing the stand bracket can also be used for wall mount. Please contact your dealer for proper wall mount kit.
- This product comes with NO protective film to be removed by the user! Any
 mechanical damages to the product including removal of the polarizing film may
 affect the warranty!



Adjusting the Monitor


This monitor is designed to maximize your viewing comfort with its adjustment capabilities.





Important

- Please slightly tilt the monitor backwards before pivoting it.
- Avoid touching the display panel when adjusting the monitor.




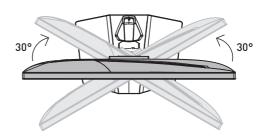





Monitor Overview

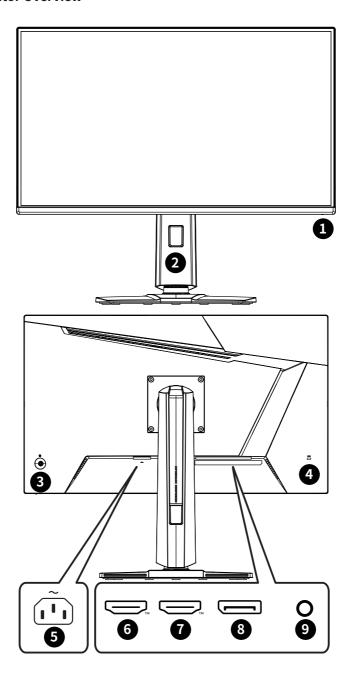

Power LED 1 Lit in white after the monitor is turned on. If no signal input, the LED will turn into orange. Lit in orange when the monitor is in Stand-by mode. 2 **Cable Routing Hole** 3 Power Button & Navi Key **Kensington Lock** 5 Power Jack HDMI™ Connector HDMI™ 6 Supports HDMI[™] CEC, UHD 3840x2160@144Hz/ FHD 1920x1080@288Hz as specified in HDMI[™] 2.1. /!\ Important To ensure optimal performance and compatibility, please use only HDMI™ cables certified with the official HDMI[™] logo when connecting this monitor. For more information, please visit https://www.hdmi.org/resource/cables. HDMI™ Connector **H**□**I**III 7 Supports UHD 3840x2160@144Hz/ FHD 1920x1080@288Hz as specified in HDMI™ 2.1. **Important** To ensure optimal performance and compatibility, please use only HDMI™ cables certified with the official HDMI[™] logo when connecting this monitor. For more information, please visit https://www.hdmi.org/resource/cables. **DisplayPort**

8

9


DisplayPort 1.4a.

Headphone Jack

Supports UHD 3840x2160@144Hz/ FHD 1920x1080@288Hz as specified in

Connecting the Monitor to PC

- 1. Turn off your computer.
- 2. Connect the video cable from the monitor to your computer.
- 3. Connect the power cord to the monitor power jack. (Figure A)
- 4. Plug the power cord into the electrical outlet. (Figure B)
- 5. Turn on the monitor. (Figure C)
- 6. Power on the computer and the monitor will auto detect the signal source.

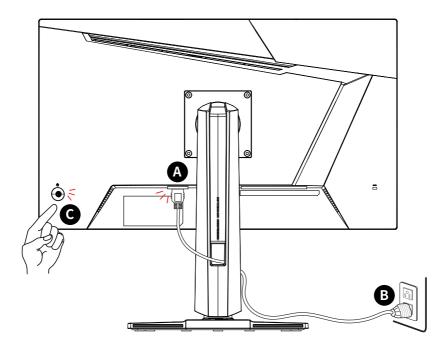

OSD Setup

This chapter provides you with essential information on OSD Setup.




/ Important

All information is subject to change without prior notice.

Navi Key

The monitor comes with a Navi Key, a multi-directional control that helps navigate the On-Screen Display (OSD) menu.

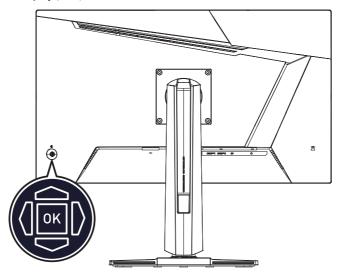

Up/Down/Left/Right:

- selecting function menus and items
- adjusting function values
- entering into/exiting from function menus


Press (OK):

- launching the On-Screen Display (OSD)
- entering submenus
- confirming a selection or setting

Hot Key

- Users may enter into preset function menus by moving the Navi Key up, down, left or right when the OSD menu is inactive.
- Users may customize their own Hot Keys to enter into different function menus.

OSD Menus

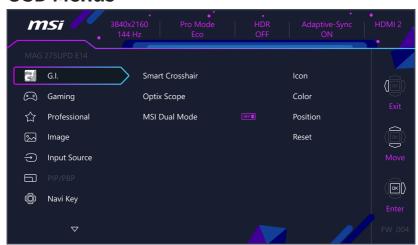



The following settings will be grayed out when HDR signals are received:

- Night Vision
- MPRT Sync
- Low Blue Light
- HDCR
- Brightness

- Contrast
- Color Temperature
- Optix Scope
- PIP/PBP
- Al Vision
- sRGB

G.I.

1st Level Menu	2nd/3rd Level	Menu	Description	
Smart Crosshair	Icon	None	Through AI algorith enhances the visibil Users can select the the crosshair.	ity of in-game crosshair.
	Color	White		
		Red		
		Auto		
	Position			
	Reset			
Optix Scope	Scope Size	Small	The center point will Scand is analysed as	ll zoom in when Optix ser can adjust the details
		Medium	through the "Scope	Size" and "Scope Ratio"
		Large	settings.	l Outin Coons on he
	Scope Ratio	x1.5	 Smart Crosshair and enabled at the same 	
		x2	Activating Optix Sco	pe will affect:
		х3	Affected Function	Function Status
	OFF		» MPRT Sync	0.11.055
	ON		» Adaptive-Sync Set to OFF » PIP/PBP	Set to UFF
			» Screen Size 1:1	Set to Auto
MSI Dual Mode	OFF			ports switching between lz and 1080p at up to
	ON		288Hz.	z and 1000p at up to

Gaming

1st Level Menu	2nd/3rd Level Menu	Description	
Game Mode	User FPS	Use Up or Down Butto mode effects. Press the OK Button to	on to select and preview
	Racing	mode type.	o commin and apply your
	RTS	Game Mode defaults t HDR modes.	o User in both SDR and
	RPG	Tibit modes.	
Night Vision	OFF		es background brightness
	Normal	and is recommended	for FPS games.
	Strong		
	Strongest		
	A.I.		
Al Vision	OFF	Al Vision enhances im	age quality by optimizing
	ON	the contrast of images brightness.	s and background
		Activating Al Vision wi	ll affect:
		Affected Function	Function Status
		» MPRT Sync	Set to OFF
		» HDCR » Brightness » Night Vision	Unable to select
Response Time	Normal		reach the shortest response
	Fast	time and help improv playing very fast game	e blurred images when es.
	Fastest		
MPRT Sync	OFF	MPRT Sync is available over 85Hz.	e when the refresh rate is
	ON	Activating MPRT Sync	will affect:
		Affected Function	Function Status
		» Response Time » Brightness	Unable to select
		» HDCR » PIP/PBP » Optix Scope » Al Vision	Set to OFF
		» Screen Size 1:1	Set to Auto

1st Level Menu	2nd/3rd Lev	vel Menu	Description	
Refresh Rate	Location	Left Top		in OSD Menu. Press the OK
		Right Top	Button to confirm and Location.	apply your Refresh Rate
		Left Bottom		nd works at the Operating
		Right Bottom	System's preset Scree	n Refresh Rate.
		Customize		
	OFF			
	ON			
Alarm Clock	Location	Left Top	After setting the time,	press the OK Button to
		Right Top	activate the timer.	y restore their preset Alarm
		Left Bottom		ver loss and reconnection.
		Right Bottom		
		Customize		
	OFF			
	15:00	00:01 ~ 99:59		
	30:00			
	45:00			
	60:00			
Adaptive-Sync	OFF		Adaptive-Sync prevent	ts screen tearing.
	ON			Refresh Rate) synchronizes N/ OFF) and is disabled 0 is set to ON
			Activating Adaptive-Sy	
			Affected Function	Function Status
			» PIP/PBP	Set to OFF
			» Optix Scope » Screen Size 1:1	Set to Auto
DSC	OFF		 Users can toggle DSC (Compression) on/off. 	Display Stream
	ON		For more DSC timing in	nformation, please check
			Preset Display Modes tables.	for DSC On/Off timing
			Activating DSC will affer	ect:
			Affected Function	Function Status
			» Screen Size 16:10	
			» PIP/PBP » 24.5"	Unable to select
			× 24.5	

Professional

1st Level Menu	2nd Level Menu	Description		
Pro Mode	Eco	Use Up or Down Button to select and preview more effects.		
	User		o confirm and apply your mode	
	Anti-Blue	type. • Pro Mode defaults to l	Eco for SDR mode and User for	
	Movie	HDR mode.		
	Office			
	sRGB			
Low Blue Light	OFF		ts your eyes against blue light.	
	ON	temperature to a mor	lue Light adjusts the screen colo e yellow glow.	or
		When Pro Mode is set enable Low Blue Light	to Anti-Blue, it is mandatory to t.	
HDCR	OFF		e quality by increasing the	
	ON	contrast of images.Activating HDCR will affect:		
		Affected Function	Function Status	
		» MPRT Sync	Set to OFF	
		» Brightness	Unable to select	
MPRT Sync	OFF	MPRT Sync is available 85Hz.	e when the refresh rate is over	
	ON	Activating MPRT Sync	will affect:	
		Affected Function	Function Status	
		» Response Time » Brightness	Unable to select	
		» HDCR » PIP/PBP » Optix Scope » Al Vision	Set to OFF	
		» Screen Size 1:1	Set to Auto	
Image Enhancement	OFF	Image Enhancement enhances image edges to implement acutance.		ve
	Weak			
	Medium			
	Strong			
	Strongest			

Image

1st Level Menu	2nd/3rd Level Me	enu	Description	
Brightness	0-100		Properly adjust Brig surrounding lightin	ghtness according to the g.
Contrast	0-100		Properly adjust Cor	ntrast to relax your eyes.
Sharpness	0-5		Sharpness improve images.	s clarity and details of
Color Temperature	Cool			tton to select and preview
	Normal		mode effects. • Press the OK Button	n to confirm and apply your
	Warm		mode type.	i to commit and apply your
	Customization	R (0-100)	Users can adjust Co Customization mod	
		G (0-100)	Customization mod	ic.
		B (0-100)]	
Screen Size	Auto	,	Users can adjust Screen Size in any mode, any resolution and any screen refresh rate. Activating Screen Size 1:1/24.5" will affect:	
	4:3			
	16:9		Affected Function	Function Status
	16:10		» MPRT Sync	Function Status
	1:1		» Adaptive-Sync	
	24.5"		» PIP/PBP	Set to OFF
			» Optix Scope	
			at its original resolu	rs to displaying content ution. This option is monitor is set to its native

Input Source

1st Level Menu	2nd Level Menu	Description
HDMI™ 1		Users can adjust Input Source in any mode.
HDMI™ 2		
DP		
Auto Scan	OFF	Users can use the Navi Key to select Input Source at
	ON	 below status: While "Auto Scan" is set to "OFF" with the monitor at power saving mode;
		While "No Signal" message box is shown on the monitor.

PIP/PBP

1st Level Menu	2nd/3rd Level Menu		Description			
OFF			PIP (Picture in Picture) allows users to			
PIP	Source	HDMI™1	simultaneously display multiple video sources on one screen. One program is displayed on			
I I I I I I I I I I I I I I I I I I I		me time as one or more played in inset windows.				
		DP	PBP (Picture by Picture)	•		
	PIP Size	Small	displays two input sour screen.	ces side-by-side on the		
		Medium	Display Switch allows u	sers to switch between		
		Large	primary and secondary	•		
	Location	Left Top	 If there is only one sign. Switch and Audio Switch 			
		Right Top	Activating PIP/PBP will	affect:		
Left Bottom	Affected Function	Function Status				
		Right Bottom	» Response Time	Unable to select		
		Customize	» DSC » MPRT Sync			
	Display Switc	h	» Adaptive-Sync	Set to OFF		
	Audio Switch		» Optix Scope			
PBP	Customize		» HDMI™ CEC	Set to OFF & unable to select		
	Source 1	HDMI™1	» PIP: Screen Size 1:1	Set to Auto &		
		HDMI™2	» PBP: Screen Size	unable to select		
		DP				
	Source 2	HDMI™1				
		HDMI™2				
		DP				
	Display Switch					
	Audio Switch					

Navi Key

1st Level Menu	2nd Level Menu	Description
Up	OFF	All Navi Key items can be adjusted via OSD Menus.
Down	Brightness	
Left Right	Game Mode	
Nigitt	Smart Crosshair	
	Alarm Clock	
	Input Source	
	PIP/PBP Mode	
	Refresh Rate	
	Info. On Screen	
	Night Vision	
	Optix Scope	
	MSI Dual Mode	

Settings

1st Level Menu	2nd Level Menu	Description
Language	繁體中文	Users have to press the OK Button to confirm and
	English	apply the Language setting. • Language is an independent setting. Users' own
	Français	language setting will override the factory default.
	Deutsch	When users set Reset to Yes, Language will not be changed.
	Italiano	
	Español	
	한국어	
	日本語	
	Русский	
	Português	
	简体中文	
	Bahasa Indonesia	
	Türkçe	
	(More languages coming soon)	
Transparency	0~5	Users can adjust Transparency in any mode.
OSD Time Out	5~30s	Users can adjust OSD Time Out in any mode.

1st Level Menu	2nd Level Menu	Description
Power Button	OFF	When set to OFF, users can press the power button to turn off the monitor.
	Standby	When set to Standby, users can press the power button to turn off the panel and backlight.
Info. On Screen	OFF	The information of the monitor status will be shown
	ON	on the right side of the screen.
HDMI™ CEC	OFF	HDMI™ CEC (Consumer Electronics Control) supports Sony PlayStation®, Nintendo® Switch™, Xbox Series
	ON	X S consoles and various audio-visual devices that are CEC-capable.
		If HDMI™ CEC is set to ON:
		The monitor will automatically power on when the CEC device is turned on.
		The CEC device will enter power saving mode when the monitor is turned off.
		 When Sony PlayStation®, Nintendo® Switch™, or Xbox Series X S console is connected, Game Mode and Pro Mode will be automatically set to default mode and can be adjusted to users¹ preferred modes later.
Audio Volume	0-100	Users can adjust Audio Volume in any mode.
Reset	YES	Users can Reset and restore settings to original OSD
	NO	Default in any mode.

Specifications*

Monitor	MAG 275UPD E14		
Size	27 inch		
Curvature	Flat		
Panel Type	IPS		
Resolution	3840x2160 (UHD)		
Aspect Ratio	16:9		
Brightness	Typical SDR: 250 nits		
	HDR Ready		
Contrast Ratio	1500:1		
Refresh Rate	UHD: 144Hz		
	FHD: 288Hz		
Response Time	• 1ms (MPRT)		
	• 4ms (GTG)		
I/O	• 1 x DisplayPort		
	2 x HDMI™ Connector		
	• 1 x Headphone Jack		
View Angles	178°(H), 178°(V)		
DCI-P3**/ sRGB	90%/ 130%		
Surface Treatment	Anti-glare		
Display Colors	1.07B, 10bits (8bits + FRC)		
Monitor Power Options	100~240Vac, 50/60Hz, 1.5A		
Power Consumption	Power On < 54W		
(Typical)	Standby < 0.5W		
	Power Off < 0.3W		
Adjustment (Height)	0 ~ 130mm		
Adjustment (Tilt)	-5° ~ 20°		
Adjustment (Swivel)	-30° ~ 30°		
Adjustment (Pivot)	-90° ~ 90°		
Kensington Lock	Yes		

Monitor		MAG 275UPD E14		
VESA Mountin	g	• Plate Type: 100 x 100 mm		
		Screw Type: M4 x 10 mm		
		Thread Diameter: 4 mm		
		Thread Pitch: 0.7 mm		
		Thread Length: 10 mm		
		VESA Screw Type:		
		• Male Thread: M4 x 8 mm		
		Female Thread: M4		
		• Screw Length: 21 mm + 8 mm (Male Thread)		
Dimension (W	x D x H)	613.3 x 227.9 x 534.2 mm		
Woight	Net	6.06 kg		
Weight	Gross	8.89 kg		
Operating Env	vironment	Temperature: 0°C to 40°C		
		Humidity: 20% to 90%, non-condensing		
		• Altitude: 0 ~ 5000m		
Storage Enviro	onment	Temperature: -20°C to 60°C		
		Humidity: 10% to 90%, non-condensing		

^{*} Some technical specifications of the device may be subject to change by the manufacturer. Please verify the specifications with the seller or the manufacturer's representative.

^{**} Based on CIE1976 test standards.

Preset Display Modes



1mportant

- All information is subject to change without prior notice.
- HDMI™ VRR (Variable Refresh Rate) synchronizes with Adaptive-Sync (ON/ OFF). For VRR ON/OFF status, please check Adaptive-Sync.
- To display the preferred timing and frequency, make sure to use the graphics card that supports DSC (Display Stream Compression).

Standard Mode (DSC On)				
Standard	Resolution		HDMI™	DP
VGA	640x480	@60Hz	V	V
		@67Hz	V	V
		@72Hz	V	V
		@75Hz	V	V
SVGA	800x600	@56Hz	V	V
		@60Hz	V	V
		@72Hz	V	V
		@75Hz	V	V
XGA	1024x768	@60Hz	V	V
		@70Hz	V	V
		@75Hz	V	V
SXGA	1280x1024	@60Hz	V	V
		@75Hz	V	V
WXGA+	1440x900	@60Hz	V	V
WSXGA+	1680x1050	@60Hz	V	V
Full HD	1920x1080	@60Hz	V	V
QHD	2560x1440	@60Hz	V	V
		@120Hz	V	V
UHD	3840x2160	@60Hz	V	V
		@144Hz	V	V

Standard Mode (DSC On)					
Standard	Resolution		HDMI™	DP	
Video Timing	480P		V	V	
Resolution	576P	576P		V	
	720P		٧	V	
	720P	@120Hz	V	V	
	1080P	@60Hz	V	V	
		@120Hz	٧	V	
	2160P	@50Hz	V	V	
		@60Hz	٧	V	
		@120Hz	V	V	
HDMI™ VRR* Func	tion		V		

Standard Mode (DSC Off)				
Standard	Resolution		HDMI™	DP
VGA	640x480	@60Hz	V	V
		@67Hz	V	V
		@72Hz	V	V
		@75Hz	V	V
SVGA	800x600	@56Hz	V	V
		@60Hz	V	V
		@72Hz	V	V
		@75Hz	V	V
XGA	1024x768	@60Hz	V	V
		@70Hz	V	V
		@75Hz	V	V
SXGA	1280x1024	@60Hz	V	V
		@75Hz	V	V
WXGA+	1440x900	@60Hz	V	V
WSXGA+	1680x1050	@60Hz	V	V
Full HD	1920x1080	@60Hz	V	V
QHD	2560x1440	@60Hz	V	V
		@120Hz	V	V

Standard Mode (DSC Off)					
Standard	Resolution		HDMI™	DP	
UHD	3840x2160	@60Hz	V	V	
		@120Hz		V	
		@144Hz	V		
Video Timing	480P	480P			
Resolution	576P				
	720P		V	V	
	720P	@120Hz	V	V	
	1080P	@60Hz	V	V	
		@120Hz	V	V	
	2160P	@60Hz	V	V	
		@120Hz	V		
HDMI™ VRR* Fund	tion		V		

Dual Mode (Non-4K Timing Usage)				
Standard	Resolution		HDMI™	DP
VGA	640x480	@60Hz	V	V
		@67Hz	V	V
		@72Hz	V	V
		@75Hz	V	V
SVGA	800x600	@56Hz	V	V
		@60Hz	V	V
		@72Hz	V	V
		@75Hz	V	V
XGA	1024x768	@60Hz	V	V
		@70Hz	V	V
		@75Hz	V	V
SXGA	1280x1024	@60Hz	V	V
		@75Hz	V	V
WXGA+	1440x900	@60Hz	V	V
WSXGA+	1680x1050	@60Hz	V	V

Dual Mode (Non-4K Timing Usage)					
Standard	Resolution		HDMI™	DP	
Full HD	1920x1080	@60Hz	V	V	
		@85Hz	V	V	
		@120Hz	V	V	
		@165Hz	V	V	
		@240Hz	V	V	
		@288Hz	V	V	
Video Timing	480P		V	V	
Resolution	576P	576P		V	
	720P		V	V	
	1080P	@60Hz	V	V	
		@120Hz	V	V	
HDMI™ VRR* Fun	HDMI™ VRR* Function				

Dual Mode (Used when Dual Mode is enabled at 4K 60Hz)				
Standard	Resolution		HDMI™	DP
VGA	640x480	@60Hz	V	V
		@67Hz	V	V
		@72Hz	V	V
		@75Hz	V	V
SVGA	800x600	@56Hz	V	V
		@60Hz	V	V
		@72Hz	V	V
		@75Hz	V	V
XGA	1024x768	@60Hz	V	V
		@70Hz	V	V
		@75Hz	V	V
SXGA	1280x1024	@60Hz	V	V
		@75Hz	V	V
WXGA+	1440x900	@60Hz	V	V
WSXGA+	1680x1050	@60Hz	V	V
Full HD	1920x1080	@60Hz	V	V
		@120Hz	V	V

Dual Mode (Used when Dual Mode is enabled at 4K 60Hz)					
Standard	Resolution		HDMI™	DP	
Video Timing	480P	480P		٧	
Resolution	576P		V	٧	
	720P		V	V	
	1080P	@60Hz	V	V	
		@120Hz	V	٧	
HDMI™ VRR* Function			V		

Dual Mode (Used when Dual Mode is enabled at 4K 120Hz)					
Standard	Resolution		HDMI™	DP	
VGA	640x480	@60Hz	V	V	
		@67Hz	V	V	
		@72Hz	V	V	
		@75Hz	V	V	
SVGA	800x600	@56Hz	V	V	
		@60Hz	V	V	
		@72Hz	V	V	
		@75Hz	V	V	
XGA	1024x768	@60Hz	V	V	
		@70Hz	V	V	
		@75Hz	V	V	
SXGA	1280x1024	@60Hz	V	V	
		@75Hz	V	V	
WXGA+	1440x900	@60Hz	V	V	
WSXGA+	1680x1050	@60Hz	V	V	
Full HD	1920x1080	@60Hz	V	V	
		@240Hz	V	V	
Video Timing	480P		V	V	
Resolution	576P	576P		V	
	720P		V	V	
	1080P	@60Hz	V	V	
		@120Hz	V	V	
HDMI™ VRR* Fun	nction		V		

Dual Mode (Used when Dual Mode is enabled at 4K 144Hz)				
Standard	Resolution		HDMI™	DP
VGA	640x480	@60Hz	V	V
		@67Hz	V	V
		@72Hz	V	V
		@75Hz	V	V
SVGA	800x600	@56Hz	V	V
		@60Hz	V	V
		@72Hz	V	V
		@75Hz	V	V
XGA	1024x768	@60Hz	V	V
		@70Hz	V	V
		@75Hz	V	V
SXGA	1280x1024	@60Hz	V	V
		@75Hz	V	V
WXGA+	1440x900	@60Hz	V	V
WSXGA+	1680x1050	@60Hz	V	V
Full HD	1920x1080	@60Hz	V	V
		@288Hz	V	V
Video Timing	480P		V	V
Resolution	576P		V	V
	720P		V	V
	1080P	@60Hz	V	V
		@120Hz	V	V
HDMI™ VRR* Fund	ction		V	

PIP Mode - Main/ Sub (Not Support HDR)					
Standard	Resolution		HDMI™	DP	
VGA	640x480	@60Hz	V	V	
		@67Hz	V	V	
		@72Hz	٧	V	
		@75Hz	٧	V	

PIP Mode - Main/ Sub (Not Support HDR)				
Standard	Resolution		HDMI™	DP
SVGA	800x600	@56Hz	٧	V
		@60Hz	V	V
		@72Hz	V	V
		@75Hz	V	V
XGA	1024x768	@60Hz	V	V
		@70Hz	V	V
		@75Hz	V	V
SXGA	1280x1024	@60Hz	٧	V
		@75Hz	V	V
WXGA+	1440x900	@60Hz	٧	V
WSXGA+	1680x1050	@60Hz	٧	V
Full HD	1920x1080	@60Hz	V	V
QHD	2560x1440	@60Hz	V	V
UHD	3840x2160	@60Hz	٧	V
Video Timing Resolution	480P		٧	V
	576P		V	V
	720P		٧	V
	1080P	@60Hz	٧	V
	2160P	@50Hz	٧	V
		@60Hz	٧	V

PBP Customize (Not Support HDR)				
Standard	Resolution		HDMI™	DP
VGA	640x480	@60Hz	V	V
		@67Hz	V	V
		@72Hz	V	V
		@75Hz	V	V
SVGA	800x600	@56Hz	V	V
		@60Hz	V	V
		@72Hz	V	V
		@75Hz	V	V

PBP Customize (Not Support HDR)					
Standard	Resolution		HDMI™	DP	
XGA	1024x768	@60Hz	V	V	
		@70Hz	V	V	
		@75Hz	V	V	
SXGA	1280x1024	@60Hz	V	V	
		@75Hz	V	V	
WXGA+	1440x900	@60Hz	V	V	
WSXGA+	1680x1050	@60Hz	V	V	
Video Timing Resolution	720P		V	V	
Used for PBP Full Screen			V	V	

Screen Size 16:10 (Not Support HDR)				
Standard	Resolution		HDMI™	DP
VGA	640x480	@60Hz	V	٧
		@67Hz	٧	V
		@72Hz	V	٧
		@75Hz	V	٧
SVGA	800x600	@56Hz	٧	V
		@60Hz	V	٧
		@72Hz	V	٧
		@75Hz	V	٧
XGA	1024x768	@60Hz	V	٧
		@70Hz	V	V
		@75Hz	V	٧
SXGA	1280x1024	@60Hz	V	V
		@75Hz	V	٧
WXGA+	1440x900	@60Hz	V	٧
WSXGA+	1680x1050	@60Hz	V	V
QHD	2560x1600	@60Hz	V	٧
		@120Hz	V	٧
		@144Hz	V	V

Screen Size 16:10 (Not Support HDR)				
Standard	Resolution		HDMI™	DP
Video Timing Resolution	720P		V	V
	1080P	@60Hz	V	V

^{*} Users have to set HDMI[™] 2.1 to 4K 144Hz - PC.

^{*} HDMI™ VRR (Variable Refresh Rate) synchronizes with Adaptive-Sync (ON/ OFF).

Troubleshooting

The power LED is off.

- Press the monitor power button again.
- Check if the monitor power cable is properly connected.

No image.

- Check if the computer graphics card is properly installed.
- Check if the computer and monitor are connected to electrical outlets and are turned on.
- Check if the monitor signal cable is properly connected.
- The computer may be in Standby mode. Press any key to activate the monitor.

The screen image is not properly sized or centered.

 Refer to Preset Display Modes to set the computer to a setting suitable for the monitor to display.

No Plug & Play.

- Check if the monitor power cable is properly connected.
- Check if the monitor signal cable is properly connected.
- Check if the computer and graphics card are Plug & Play compatible.

The icons, font or screen are fuzzy, blurry or have color problems.

- Avoid using any video extension cables.
- · Adjust brightness and contrast.
- Adjust RGB color or tune color temperature.
- Check if the monitor signal cable is properly connected.
- Check for bent pins on the signal cable connector.

The monitor starts flickering or shows waves.

- Change the refresh rate to match the capabilities of your monitor.
- Update your graphics card drivers.
- Keep the monitor away from electrical devices that may cause electromagnetic interference (EMI).

Safety Instructions

- Read the safety instructions carefully and thoroughly.
- All cautions and warnings on the device or User Guide should be noted.
- Refer servicing to qualified personnel only.

Power

- Make sure that the power voltage is within its safety range and has been adjusted properly to the value of 100~240V before connecting the device to the power outlet.
- If the power cord comes with a 3-pin plug, do not disable the protective earth pin from the plug. The device must be connected to an earthed mains socket-outlet.
- Please confirm the power distribution system in the installation site shall provide the circuit breaker rated 120/240V, 20A (maximum).
- Always disconnect the power cord or switch the wall socket off if the device would be left unused for a certain time to achieve zero energy consumption.
- Place the power cord in a way that people are unlikely to step on it. Do not place anything on the power cord.
- If this device comes with an adapter, use only the MSI provided AC adapter approved for use with this device.

Environment

- To reduce the possibility of heat-related injuries or of overheating the device, do not place the device on a soft, unsteady surface or obstruct its air ventilators.
- Use this device only on a hard, flat and steady surface.
- To prevent the device from tipping over, secure the device to a desk, wall or fixed object with an anti-tip fastener that helps to properly support the device and keep it safe in place.
- To prevent fire or shock hazard, keep this device away from humidity and high temperature.
- Do not leave the device in an unconditioned environment with a storage temperature above 60°C or below -20°C, which may damage the device.
- The maximum operating temperature is around 40°C.
- When cleaning the device, be sure to remove the power plug. Use a piece of soft cloth rather than industrial chemical to clean the device. Never pour any liquid into the opening; that could damage the device or cause electric shock.
- Always keep strong magnetic or electrical objects away from the device.

- If any of the following situations arises, get the device checked by service personnel:
 - The power cord or plug is damaged.
 - Liquid has penetrated into the device.
 - The device has been exposed to moisture.
 - The device does not work well or you can not get it working according to the User Guide.
 - The device has dropped and damaged.
 - The device has obvious sign of breakage.

TÜV Rheinland Certification

TÜV Rheinland Low Blue Light Certification

Blue light has been shown to cause eye fatigue and discomfort. MSI now offers monitors with TÜV Rheinland Low Blue Light certification to ensure users' eye comfort and well-being. Please follow the instructions below to reduce the symptoms from extended exposure to the screen and blue light.



- Place the screen 20 28 inches (50 70 cm) away from your eyes and a little below eye level.
- Consciously blinking the eyes every now and then will help to reduce eye strain after extended screen time.
- Take breaks for 20 minutes every 2 hours.
- Look away from the screen and gaze at a distant object for at least 20 seconds during breaks.
- Make stretches to relieve body fatigue or pain during breaks.
- Turn on the optional Low Blue Light function.

TÜV Rheinland Flicker Free Certification

 TÜV Rheinland has tested this product to ascertain whether the display produces visible and invisible flicker for the human eye and therefore strains the eyes of users.



- TÜV Rheinland has defined a catalogue of tests, which sets out minimum standards at various frequency ranges. The test catalogue is based on internationally applicable standards or standards common within the industry and exceeds these requirements.
- The product has been tested in the laboratory according to these criteria.
- The keyword "Flicker Free" confirms that the device has no visible and invisible flicker defined in this standard within the range of 0 - 3000 Hz under various brightness settings.
- The display will not support Flicker Free when Anti Motion Blur/MPRT is enabled. (The availability of Anti Motion Blur/MPRT varies by products.)

Regulatory Notices

CE Conformity

This product has been tested and found to comply with the harmonized standards for Information Technology Equipment published under Directives of Official Journal of the European Union.



FCC-B Radio Frequency Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may



cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the measures listed below:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/television technician for help.

Notice 1

The changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Notice 2

Shielded interface cables and AC power cord, if any, must be used in order to comply with the emission limits

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- 1. This device may not cause harmful interference, and
- 2. This device must accept any interference received, including interference that may cause undesired operation.

MSI Computer Corp.

901 Canada Court, City of Industry, CA 91748, USA (626) 913-0828 www.msi.com

WEEE Statement

Under the European Union ("EU") Directive on Waste Electrical and Electronic Equipment, Directive 2012/19/EU, products of "electrical and electronic equipment" cannot be discarded as municipal waste anymore and manufacturers of covered electronic equipment will be obligated to take back such products at the end of their useful life.



Chemical Substances Information

In compliance with chemical substances regulations, such as the EU REACH Regulation (Regulation EC No. 1907/2006 of the European Parliament and the Council), MSI provides the information of chemical substances in products at: https://csr.msi.com/global/index

RoHS Statement

Japan JIS C 0950 Material Declaration

A Japanese regulatory requirement, defined by specification JIS C 0950, mandates that manufacturers provide material declarations for certain categories of electronic products offered for sale after July 1, 2006.

https://csr.msi.com/global/Japan-JIS-C-0950-Material-Declarations

India RoHS

This product complies with the "India E-waste (Management and Handling) Rule 2016" and prohibits use of lead, mercury, hexavalent chromium, polybrominated biphenyls or polybrominated diphenyl ethers in concentrations exceeding 0.1 weight % and 0.01 weight % for cadmium, except for the exemptions set in Schedule 2 of the Rule.

Turkey EEE Regulation

Conforms to the EEE Regulations of the Republic Of Turkey

Ukraine Restriction of Hazardous Substances

The equipment complies with requirements of the Technical Regulation, approved by the Resolution of Cabinet of Ministry of Ukraine as of 10 March 2017, № 139, in terms of restrictions for the use of certain dangerous substances in electrical and electronic equipment.

Vietnam RoHS

As from December 1, 2012, all products manufactured by MSI comply with Circular 30/2011/TT-BCT temporarily regulating the permitted limits for a number of hazardous substances in electronic and electric products.

Green Product Features

- Reduced energy consumption during use and stand-by
- Limited use of substances harmful to the environment and health
- Easily dismantled and recycled
- Reduced use of natural resources by encouraging recycling
- Extended product lifetime through easy upgrades
- Reduced solid waste production through take-back policy

Environmental Policy

- The product has been designed to enable proper reuse of parts and recycling and should not be thrown away at its end of life.
- Users should contact the local authorized point of collection for recycling and disposing of their end-of-life products.



- Visit the MSI website and locate a nearby distributor for further recycling information.
- Users may also reach us at gpcontdev@msi.com for information regarding proper disposal, take-back, recycling, and disassembly of MSI products.
- Please visit <https://us.msi.com/page/recycling for information regarding the recycling of your product in the US.

Warning!

Overuse of screens is likely to affect eyesight.

Recommendations:

- 1. Take a 10-minute break for every 30 minutes of screen time.
- 2. Children under 2 years of age should have no screen time. For children aged 2 years and over, screen time should be limited to less than one hour per day.

Copyright and Trademarks Notice







Copyright © Micro-Star Int' I Co., Ltd. All rights reserved. The MSI logo used is a registered trademark of Micro-Star Int' I Co., Ltd. All other marks and names mentioned may be trademarks of their respective owners. No warranty as to accuracy or completeness is expressed or implied. MSI reserves the right to make changes to this document without prior notice.



The terms HDMI™, HDMI™ High-Definition Multimedia Interface, HDMI™ Trade dress and the HDMI™ Logos are trademarks or registered trademarks of HDMI™ Licensing Administrator, Inc.

Technical Support

If a problem arises with your product and no solution can be obtained from the user's manual, please contact your place of purchase or local distributor. Alternatively, please visit https://www.msi.com/support/ for further guidance.