

# **MPG Series**

**LCD Monitor** 

MPG 274URDFW E16M (3CF0)

User Guide

# **Contents**

Getting Started	3
Package Contents	3
Installing the Monitor Stand	4
Adjusting the Monitor	5
Monitor Overview	ε
Connecting the Monitor to PC	g
OSD Setup	10
Navi Key	10
Hot Key	11
OSD Menus	12
G.I	13
Gaming	14
Professional	16
Image	17
Input Source	18
PIP/PBP	19
Navi Key	20
Settings	20
Specifications	22
Preset Display Modes	24
Troubleshooting	27
Safety Instructions	28
TÜV Rheinland Certification	30
Regulatory Notices	31

#### Revision

V1.0, 2025/05

# **Getting Started**

This chapter provides you with the information on hardware setup procedures. While connecting devices, be careful in holding the devices and use a grounded wrist strap to avoid static electricity.

## **Package Contents**

Monitor	MPG 274URDFW E16M	
Documentation	Quick Start Guide	
Accessories	Stand	
	Stand Base	
	Screw(s) for Wall Mount Bracket(s)	
	External Power Supply	
	Power Cord	
Cables	Ultra High Speed HDMI™ Cable (Optional)	
	DisplayPort Cable (Optional)	
	USB Type-C Cable (Optional)	
	USB Upstream Cable (Optional)	
	(for USB Type-B Upstream Port)	




# Important

- Contact your place of purchase or local distributor if any of the items is damaged or missing.
- Package contents may vary by country and model.
- The included power cord is exclusively for this monitor and should not be used with other products.

### **Installing the Monitor Stand**

- 1. Leave the monitor in its protective packaging. Align and gently push the stand bracket towards the monitor groove until it locks in place.
- 2. Align and gently push the base towards the stand until it locks in place.
- 3. Make sure the stand assembly is properly installed before setting the monitor upright.

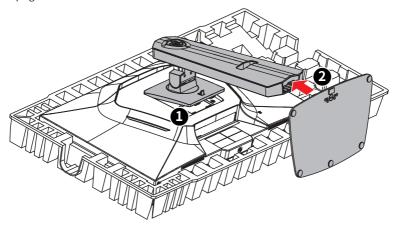



#### **Important**

- Place the monitor on a soft, protected surface to avoid scratching the display panel.
- Do not use any sharp objects on the panel.
- The groove for installing the stand bracket can also be used for wall mount. Please contact your dealer for proper wall mount kit.
- This product comes with NO protective film to be removed by the user! Any
  mechanical damages to the product including removal of the polarizing film may
  affect the warranty!




## **Adjusting the Monitor**


This monitor is designed to maximize your viewing comfort with its adjustment capabilities.





# Important

- Avoid touching the display panel when adjusting the monitor.
- Please slightly tilt the monitor backwards before pivoting it.

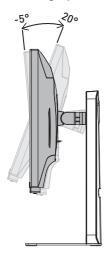








## **Monitor Overview**

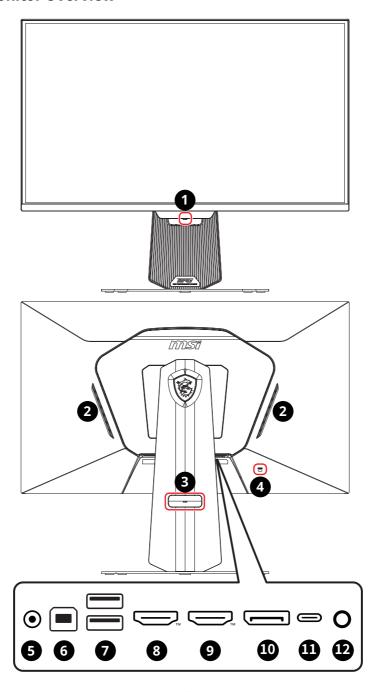

Navi Key, Power Button & Power LED

Lit in white after the monitor is turned on. If no signal input, the LED will turn into orange. Lit in orange when the monitor is in Stand-by mode.

Ventilator

The ventilator on the enclosure is used for air convection and to prevent the equipment from overheating. Do not cover the ventilator.

3 Cable Routing Hole

4 Kensington Lock


5 Power Jack

6 USB 2.0 Type-B Upstream Port

For USB Upstream Cable.

### // Important

Check the package for USB Upstream Cable and connect it to the PC and monitor. Once this cable is connected, the USB Type-A Downstream Ports on the monitor will be ready for use.



USB 2.0 Type-A Port

8 HDMI™ Connector HGH-DEFINITION MULTIMEDIA NYERFACE

Supports HDMI<sup>™</sup> CEC, 3840x2160@160Hz as specified in HDMI<sup>™</sup> 2.1.



To ensure optimal performance and compatibility, please use only HDMI™ cables certified with the official HDMI™ logo when connecting this monitor. For more information, please visit <a href="https://www.hdmi.org/resource/cables">https://www.hdmi.org/resource/cables</a>.

9 HDMI™ Connector HISTORE WALTIMEDIA RITERIAGE
Supports 3840x2160@160Hz as specified in HDMI™ 2.1.

/ Important

To ensure optimal performance and compatibility, please use only HDMI™ cables certified with the official HDMI™ logo when connecting this monitor. For more information, please visit <a href="https://www.hdmi.org/resource/cables">https://www.hdmi.org/resource/cables</a>.



#### **DisplayPort**

Supports 3840x2160@160Hz as specified in DisplayPort 1.4a.



#### **USB Type-C Port**

This port supports DisplayPort Alternate (DP Alt) Mode and up to 20V/4.9A (98W) power delivery.



# Important

- Your USB-C signal source and cable must support DisplayPort Alternate Mode to enable video output to the monitor.
- This USB-C port supports power output exceeding 100W. For safety, it is recommended to connect only devices that meet USB PD 3.0 standards, support 20V input, and feature a flame-retardant enclosure.

USB Type-C Power Delivery
5V / 3A (15W)

9V / 3A (27W) 12V / 3A (36W) 15V / 3A (45W)


20V / 4.9A (98W)



#### Headphone Jack

### **Connecting the Monitor to PC**

- 1. Turn off your computer.
- 2. Connect the video cable from the monitor to your computer.
- 3. Assemble the external power supply & power cord. (Figure A)
- 4. Connect the external power supply to the monitor power jack. (Figure B)
- 5. Plug the power cord into the electrical outlet. (Figure C)
- 6. Turn on the monitor. (Figure D)
- 7. Power on the computer and the monitor will auto detect the signal source.

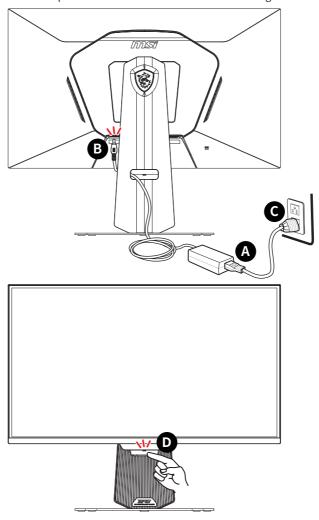

## **OSD Setup**

This chapter provides you with essential information on OSD Setup.




## / Important

All information is subject to change without prior notice.

### **Navi Key**

The monitor comes with a Navi Key, a multi-directional control that helps navigate the On-Screen Display (OSD) menu.

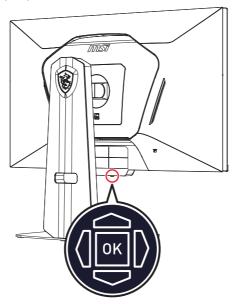

#### Up/Down/Left/Right:

- selecting function menus and items
- adjusting function values
- entering into/exiting from function menus


#### Press (OK):

- launching the On-Screen Display (OSD)
- entering submenus
- confirming a selection or setting

### **Hot Key**

- Users may enter into preset function menus by moving the Navi Key up, down, left or right when the OSD menu is inactive.
- Users may customize their own Hot Keys to enter into different function menus.

## **OSD Menus**

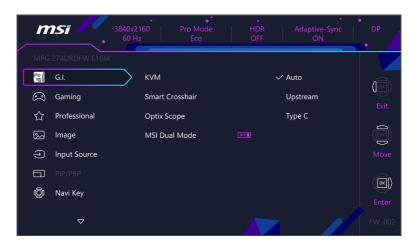



# Important

The following settings will be grayed out when HDR signals are received:

- Night Vision
- MPRT
- Low Blue Light
- HDCR
- Brightness
- Contrast

- Color Temperature
- Optix Scope
- PIP/PBP
- Al Vision
- sRGB, Adobe RGB, Display P3

## G.I.

1st Level Menu	2nd/3rd Level Menu		De	scription	
KVM	Auto Upstream			Auto allows the monito	
			switch between USB input sources, such as keyboards, mice or other USB devices.		
	Туре С			Users can also designat Type-C as the only USB	e Upstream port or USB signal source.
Smart Crosshair	Icon	None		Through AI algorithm, t the visibility of in-game	
				Users can select the col crosshair.	or and position of the
	Color	White			
		Red			
		Auto			
	Position				
	Reset				
Optix Scope	Scope Size	Small	•	The center point will zo	om in when Optix Scope
		Medium		is enabled, user can adj the "Scope Size" and "S	Scope Ratio" settings.
		Large		Smart Crosshair and Op	
	Scope Ratio	x1.5		Activating Optix Scope	
		x2		Affected Function	Function Status
		x4		» MPRT	
	OFF		» Adaptive-Sync Set to O » PIP/PBP		Set to OFF
	ON			» Screen Size 1:1/ 24.5"	Set to Auto
MSI Dual Mode	OFF ON			MSI Dual Mode support	
				2160p at up to 160Hz ar	nd 1080p at up to 320Hz.

# Gaming

1st Level Menu	2nd/3rd Level Menu	Description
Game Mode	Premium Color	Use Up or Down Button to select and preview
	User	mode effects.  • Press the OK Button to confirm and apply your
	FPS	mode type.
	Racing	
	RTS	
	RPG	
Night Vision	OFF	This function optimizes background brightness
	Normal	and is recommended for FPS games.
	Strong	
	Strongest	
	A.I.	
Al Vision	OFF	Al Vision enhances image quality by optimizing
	ON	the contrast of images and background brightness.
		Activating AI Vision will affect:
		Affected Function Function Status
		» MPRT Set to OFF
		» HDCR
		» Brightness Unable to select » Night Vision
Response Time	Normal	Setting to Fastest will reach the shortest
kesponse rime	Fast	response time and help improve blurred
	Fastest	images when playing very fast games.
MPRT	OFF	MPRT is available when the refresh rate is over
MPRI		85Hz.
	ON	Activating MPRT will affect:
		Affected Function Function Status
		» Response Time  » Brightness  Unable to select
		» Adaptive-Sync
		» HDCR
		» PIP/PBP Set to OFF  » Optix Scope
		» Al Vision
		» Screen Size 1:1/ 24.5" Set to Auto

1st Level Menu	2nd/3rd Lev	rel Menu	Description
Refresh Rate	Location	Left Top	Location is adjustable in OSD Menu. Press the
		Right Top	OK Button to confirm and apply your Refresh Rate Location.
		Left Bottom	This monitor follows and works at the Operating System's preset Screen Refresh Rate.
		Right Bottom	Operating System's preset Screen Refresh Rate.
		Customize	
	OFF		
	ON		
Alarm Clock	Location	Left Top	After setting the time, press the OK Button to
		Right Top	activate the timer.  • Users have to manually restore their preset
		Left Bottom	Alarm Clock after any AC power loss and
		Right Bottom	reconnection.
		Customize	
	OFF		
	15:00	00:01 ~ 99:59	
	30:00		
	45:00		
	60:00		
Adaptive-Sync	OFF		Adaptive-Sync prevents screen tearing.
	ON		HDMI <sup>™</sup> VRR (Variable Refresh Rate) synchronizes with Adaptive-Sync (ON/ OFF) and is disabled when Screen Size 16:10 is set to ON.
			Activating Adaptive-Sync will affect:
			Affected Function Function Status
			» MPRT » PIP/PBP Set to OFF » Optix Scope
			» Screen Size 1:1/ 24.5" Set to Auto
DSC	OFF		Users can toggle DSC (Display Stream Compression) on/off.
	ON		For more DSC timing information, please check Preset Display Modes for DSC On/Off timing tables.  Activating DSC will affect:
			Affected Function Function Status
			» Screen Size 16:10 » PIP/PBP Unable to select

### **Professional**

1st Level Menu	2nd Level Menu	Description						
Pro Mode	Eco	Use Up or Down Button to select and preview mode effects.						
	User	Press the OK Button to confirm and apply your mode						
	Anti-Blue	type.						
	Movie	Pro Mode defaults to Eco for SDR mode and User for HDR mode.						
	Office	Activating sRGB, Adobe RGB, and Display P3 will affect:						
	sRGB	Affected Function Function Status						
	Adobe RGB	» Color Temperature						
	Display P3	» Low Blue Light Unable to select » Contrast						
Low Blue Light	OFF	Low Blue Light protects your eyes against blue light.						
	ON	When enabled, Low Blue Light adjusts the screen color temperature to a more yellow glow.						
		When Pro Mode is set to Anti-Blue, it is mandatory to enable Low Blue Light.						
HDCR	OFF	HDCR enhances image quality by increasing the						
	ON	contrast of images.  • Activating HDCR will affect:						
		Affected Function Function Status						
		» MPRT Set to OFF						
		» Brightness Unable to select						
MPRT	OFF	MPRT is available when the refresh rate is over 85Hz.						
	ON	Activating MPRT will affect:						
		Affected Function Function Status						
		» Response Time Unable to select						
		» Brightness  » Adaptive-Sync						
		» HDCR						
		» PIP/PBP Set to OFF						
		» Optix Scope						
		» Al Vision  » Screen Size 1:1/24.5" Set to Auto						
Image Enhancement	OFF	Image Enhancement enhances image edges to improve their acutance.						
	Weak							
	Medium							
	Strong							
	Strongest							

## **Image**

1st Level Menu	2nd/3rd Level Menu		De	scription	
Brightness	0-100		Properly adjust Brightness according to the surrounding lighting.		
Contrast	0-100		• [	Properly adjust Contras	t to relax your eyes.
Sharpness	0-5			Sharpness improves cla images.	rity and details of
Color Temperature	Cool		Use Up or Down Button to select and preview mode effects.      Press the OK Button to confirm and apply your		
	Normal				
	Warm		1	mode type.	,
	Customization	R (0-100)		Users can adjust Color T Customization mode.	Temperature in
		G (0-100)			
		B (0-100)			
Screen Size	Auto			Users can adjust Screen	
	4:3			resolution and any scre Activating Screen Size 1	
	16:9		] [	Affected Function	Function Status
	16:10		1	» MPRT	Tunction Status
	1:1		» Adaptive-Sync » PIP/PBP Set to OFF	Cat to OFF	
	24.5"			Set to OFF	
			» Optix Scope		
			at dis	Important reen Size 1:1 refers to its original resolutior sabled when the mon solution.	
DisplayHDR	400 nits		The DisplayHDR function enhances visuals with		
	1000 nits			customizable settings fo and contrast.	or optimized brightness
Local Dimming	OFF			This setting helps enhar	
	Level 1			quality of dark scenes b zones to improve the co	
	Level 2		scenes.  • Enabling Local Dimming will affect of mini OSD, such as Info. On Scree Rate, Alarm Clock, Smart Crosshair		
	Level 3				o. On Screen, Refresh
Halo Dimming	0-100			This option is available enabled, helping reduce contrast, and minimize	
Brightness	OFF			This setting reduces mo	
Uniformity	ON		t	ensuring uniform bright the screen edges from a the center.	tness and preventing appearing dimmer than

# **Input Source**

1st Level Menu	2nd Level Menu	Description
HDMI™ 1		Users can adjust Input Source in any mode.
HDMI™ 2		
DP		
Type C		
Auto Scan	OFF	Users can use the Navi Key to select Input Source at
	ON	<ul> <li>below status:</li> <li>While "Auto Scan" is set to "OFF" with the monitor at power saving mode;</li> </ul>
		While "No Signal" message box is shown on the monitor.

## PIP/PBP

1st Level Menu	2nd/3rd Lev	vel Menu	De	escription		
OFF				PIP (Picture in Picture)		
PIP	Source	HDMI™1	simultaneously display multiple video sour on one screen. One program is displayed or the full screen at the same time as one or n other programs are displayed in inset wind			
		HDMI™2				
		DP	PBP (Picture by Picture) is a similar feature displays two input sources side-by-side on screen.			
		Туре С				
	PIP Size	Small		Display Switch allows uprimary and secondary		
		Medium		If there is only one sign	al input, the Display	
		Large		Switch and Audio Switch		
	Location	Left Top		users can adjust the rat switching Mode 1/2/Cu	io of window division by ustomize.	
		Right Top	•	Activating PIP/PBP will	affect:	
		Left Bottom		Affected Function	Function Status	
		Right Bottom		» Response Time » DSC	Unable to select	
		Customize	» MSI Dual Mode	Offable to select		
	Display Switch Audio Switch		» MPRT » Adaptive-Sync Set to OFF			
				Set to OFF		
PBP	Mode 1		» Optix Scope	Set to OFF &		
	Mode 2			I » HDMI™ CEC I ****	unable to select	
	Customize			» PIP: Screen Size 1:1/ 16:10/ 24.5"	Set to Auto &	
	Source 1	HDMI™1		» PBP: Screen Size	unable to select	
		HDMI™2				
		DP				
		Type C				
	Source 2	HDMI™1				
		HDMI™2				
		DP				
		Type C				
	Display Switch					
	Audio Switc	h 				

# Navi Key

1st Level Menu	2nd Level Menu	Description
Up	OFF	All Navi Key items can be adjusted via OSD Menus.
Down	Brightness	
Left Right	Game Mode	
	Smart Crosshair	
	Alarm Clock	
	Input Source	
	PIP/PBP Mode	
	Refresh Rate	
	Info. On Screen	
	Night Vision	
	Optix Scope	
	KVM	
	MSI Dual Mode	

# **Settings**

1st Level Menu	2nd Level Menu	Description
Language	繁體中文	Users have to press the OK Button to confirm and apply
	English	the Language setting.  • Language is an independent setting. Users' own
	Français	language setting will override the factory default. When
	Deutsch	users set Reset to Yes, Language will not be changed.
	Italiano	
	Español	
	한국어	
	日本語	
	Русский	
	Português	
	简体中文	
	Bahasa Indonesia	
	Türkçe	
	(More languages coming soon)	
Transparency	0~5	Users can adjust Transparency in any mode.

1st Level Menu	2nd Level Menu	Description
OSD Time Out	5~30s	Users can adjust OSD Time Out in any mode.
RGB LED	OFF	Users can turn the RGB LED on or off.
	MSI - Mystic Light	
	RGB Brightness	
Power Button	OFF	When set to OFF, users can press the power button to turn off the monitor.
	Standby	When set to Standby, users can press the power button to turn off the panel and backlight.
Info. On Screen	OFF	The information of the monitor status will be shown on
	ON	the right side of the screen.
HDMI™ CEC	OFF	HDMI <sup>™</sup> CEC (Consumer Electronics Control) supports
	ON	Sony PlayStation®, Nintendo® Switch™, Xbox Series X S consoles and various audio-visual devices that are CEC-capable.
		If HDMI™ CEC is set to ON:
		<ul> <li>The monitor will automatically power on when the CEC device is turned on.</li> </ul>
		<ul> <li>The CEC device will enter power saving mode when the monitor is turned off.</li> </ul>
		<ul> <li>When Sony PlayStation®, Nintendo® Switch™, or Xbox Series X S console is connected, Game Mode and Pro Mode will be automatically set to default mode and can be adjusted to users' preferred modes later.</li> </ul>
Type C PD Charge	OFF	This function enables users to charge their devices
	ON	through a USB Type-C connector.
Reset	YES	Users can Reset and restore settings to original OSD
	NO	Default in any mode.

# Specifications\*

Monitor	MPG 274URDFW E16M
Size	27 inch
Curvature	Flat
Panel Type	Rapid IPS
Backlight Type	1152-Zone FALD Mini-LED
Resolution	3840x2160 (UHD)
Aspect Ratio	16:9
Brightness	Typical SDR: 400 nits
	Peak HDR: 1000 nits
Contrast Ratio	1000:1
Refresh Rate	Normal (UHD): 160Hz
	Dual (FHD): 320Hz
Response Time	• GTG: 0.5ms (Min.)
	MPRT: 1ms
I/O	2 x HDMI™ Connector
	• 1 x DisplayPort
	• 1 x USB Type-C Port
	• 2 x USB 2.0 Type-A Port
	• 1 x USB 2.0 Type-B Upstream Port
	• 1 x Headphone Jack
View Angles	178°(H), 178°(V)
DCI-P3** / sRGB	98% / 140%
Surface Treatment	Anti-glare
Display Colors	1.07B, 10 bits (8 bits + FRC)
Monitor Power Options	24V === 11A
External Power Supply***	264W, 24V
Power Input	• 100-125V~, 50/60Hz, 3.5A Max
	• 200-240V~, 50/60Hz, 2.5A Max (China only)
Power Output	24V === 11A

Monitor		MPG 274URDFW E16M		
Adjustment (He	ight)	0 ~ 110mm		
Adjustment (Til	t)	-5° ~ 20°		
Adjustment (Swiv	rel)	-30° ~ 30°		
Adjustment (Pivo	t)	-90° ~ 90°		
Kensington Loc	k	Yes		
VESA Mounting		• Plate Type: 100 x 100 mm		
		Screw Type: M4 x 10 mm		
		Thread Diameter: 4 mm		
		Thread Pitch: 0.7 mm		
		Thread Length: 10 mm		
Dimension (W x	H x D)	613.1 x 510.85 x 197.38 mm		
Weight	Net	8.2 kg		
	Gross	12.4 kg		
Operating Envir	onment	• Temperature: 0°C to 40°C		
		Humidity: 20% to 90%, non-condensing		
		• Altitude: 0 ~ 5000m		
Storage Environ	ment	Temperature: -20°C to 60°C		
		Humidity: 10% to 90%, non-condensing		

<sup>\*</sup> Some technical specifications of the device may be subject to change by the manufacturer. Please verify the specifications with the seller or the manufacturer's representative.

<sup>\*\*</sup> Based on CIE1976 test standards.

<sup>\*\*\*</sup> The type of power adapter provided may differ by region and is subject to change by the manufacturer without notice.

# **Preset Display Modes**



## **Important**

- All information is subject to change without prior notice.
- HDMI™ VRR (Variable Refresh Rate) synchronizes with Adaptive-Sync (ON/ OFF). For VRR ON/OFF status, please check Adaptive-Sync.
- To activate DSC-specific timing and frequency, ensure your graphics card supports DSC (Display Stream Compression).

#### Standard Mode (DSC On)

Standard	Resolution		HDMI™	DP	USB-C
Full HD	1920x1080	@60Hz		V	V
QHD	2560x1440	@60Hz	V	V	V
		@120Hz	V	V	V
UHD	3840x2160	@60Hz	V	V	V
		@144Hz	V	V	V
		@160Hz	V	V	V
Video Timing	720P		V	V	V
Resolution	720P@120Hz		V	V	V
	1080P	@60Hz	V	V	V
		@120Hz	V	V	V
	2160P	@60Hz	V	V	V
		@120Hz	V	V	V
HDMI™ VRR			V		

### Standard Mode (DSC Off)

Standard	Resolution		HDMI™	DP	USB-C
Full HD	1920x1080	@60Hz	V	V	V
QHD	2560x1440	@60Hz	V	V	V
		@120Hz	V	V	V
UHD	3840x2160	@60Hz	V	V	V
		@144Hz			
		@160Hz			
Video Timing	720P		V	V	V
Resolution	720P@120Hz		V	V	V
	1080P	@60Hz	V	V	V
		@120Hz	V	V	V
	2160P	@60Hz	V	V	V
		@120Hz	V		
HDMI™ VRR			V		

### Dual Mode (Enabled at Resolutions Other Than 4K)

Standard	Resolution		HDMI™	DP	USB-C
Full HD	1920x1080	@60Hz		V	V
		@85Hz	V	V	V
		@120Hz		V	V
		@165Hz	V	V	V
		@240Hz	V	V	V
		@320Hz	V	V	V
Video Timing	720P		V	V	V
Resolution	1080P	@60Hz	V		
		@120Hz	V		
HDMI™ VRR			V		

#### Dual Mode (Enabled at 4K@60Hz)

Standard	Resolution		HDMI™	DP	USB-C
Full HD	1920x1080	@60Hz	V	V	V
		@120Hz	V	V	V
Video Timing Resolution	1080P	@60Hz	V	V	V
		@120Hz	V	٧	٧
HDMI™ VRR			V		

#### Dual Mode (Enabled at 4K@120Hz)

Standard	Resolution		HDMI™	DP	USB-C
Full HD	1920x1080	@60Hz	V	V	V
		@240Hz	V	V	V
Video Timing Resolution	1080P	@60Hz	V	V	V
HDMI™VRR			V		

## Dual Mode (Enabled at 4K@160Hz)

Standard	Resolution		HDMI™	DP	USB-C
Full HD	1920x1080	@60Hz	V	V	V
		@320Hz	V	V	V
Video Timing Resolution	1080P	@60Hz	V	V	V
HDMI™ VRR			٧		

### PIP Mode (Not Support HDR)

Standard	Resolution		HDMI™	DP	USB-C
Full HD	1920x1080	@60Hz	V	V	V
QHD	2560x1440	@60Hz	V	V	V
		@120Hz	V	V	V
UHD	3840x2160	@60Hz	V	V	V
Video Timing	720P		V	V	V
Resolution	1080P	@60Hz	V	V	V
	2160P	@60Hz	V	V	V

### PBP Mode 1 (Not Support HDR)

Standard	Resolution		HDMI™	DP	USB-C
Video Timing Resolution	720P		V	V	V
Used for PBP Full 960x2 Screen 2880x	960x2160	@60Hz	V	V	V
	2880x2160	@60Hz	V	V	V

### PBP Mode 2/Customize (Not Support HDR)

Standard	Resolution		HDMI™	DP	USB-C
Video Timing Resolution	720P		V	V	V
Used for PBP Full Screen	1920x2160	@60Hz	V	V	V

### **Screen Size 16:10 (Not Support HDR)**

Standard	Resolution		HDMI™	DP	USB-C
QHD+	2560x1600	@60Hz	V	V	V
		@120Hz	V	V	V
		@144Hz	V	V	V

# **Troubleshooting**

#### The power LED is off.

- Press the monitor power button again.
- Check if the monitor power cable is properly connected.

#### No image.

- Check if the computer graphics card is properly installed.
- Check if the computer and monitor are connected to electrical outlets and are turned on.
- Check if the monitor signal cable is properly connected.
- The computer may be in Standby mode. Press any key to activate the monitor.

#### The screen image is not properly sized or centered.

 Refer to Preset Display Modes to set the computer to a setting suitable for the monitor to display.

#### No Plug & Play.

- Check if the monitor power cable is properly connected.
- Check if the monitor signal cable is properly connected.
- Check if the computer and graphics card are Plug & Play compatible.

#### The icons, font or screen are fuzzy, blurry or have color problems.

- Avoid using any video extension cables.
- · Adjust brightness and contrast.
- Adjust RGB color or tune color temperature.
- Check if the monitor signal cable is properly connected.
- Check for bent pins on the signal cable connector.

#### The monitor starts flickering or shows waves.

- Change the refresh rate to match the capabilities of your monitor.
- Update your graphics card drivers.
- Keep the monitor away from electrical devices that may cause electromagnetic interference (EMI).

## **Safety Instructions**

- Read the safety instructions carefully and thoroughly.
- All cautions and warnings on the device or User Guide should be noted.
- Refer servicing to qualified personnel only.

#### **Power**

- Make sure that the power voltage is within its safety range and has been adjusted properly to the value of 100~240V before connecting the device to the power outlet.
- If the power cord comes with a 3-pin plug, do not disable the protective earth pin from the plug. The device must be connected to an earthed mains socket-outlet.
- Please confirm the power distribution system in the installation site shall provide the circuit breaker rated 120/240V, 20A (maximum).
- Always disconnect the power cord or switch the wall socket off if the device would be left unused for a certain time to achieve zero energy consumption.
- Place the power cord in a way that people are unlikely to step on it. Do not place anything on the power cord.
- If this device comes with an adapter, use only the MSI provided AC adapter approved for use with this device.

#### **Environment**

- To reduce the possibility of heat-related injuries or of overheating the device, do not place the device on a soft, unsteady surface or obstruct its air ventilators.
- Use this device only on a hard, flat and steady surface.
- To prevent the device from tipping over, secure the device to a desk, wall or fixed object with an anti-tip fastener that helps to properly support the device and keep it safe in place.
- To prevent fire or shock hazard, keep this device away from humidity and high temperature.
- Do not leave the device in an unconditioned environment with a storage temperature above 60°C or below -20°C, which may damage the device.
- The maximum operating temperature is around 40°C.
- When cleaning the device, be sure to remove the power plug. Use a piece of soft cloth rather than industrial chemical to clean the device. Never pour any liquid into the opening; that could damage the device or cause electric shock.
- Always keep strong magnetic or electrical objects away from the device.

- If any of the following situations arises, get the device checked by service personnel:
  - The power cord or plug is damaged.
  - Liquid has penetrated into the device.
  - The device has been exposed to moisture.
  - The device does not work well or you can not get it working according to the User Guide.
  - The device has dropped and damaged.
  - The device has obvious sign of breakage.

## **TÜV Rheinland Certification**

## **TÜV Rheinland Low Blue Light Certification**

Blue light has been shown to cause eye fatigue and discomfort. MSI now offers monitors with TÜV Rheinland Low Blue Light certification to ensure users' eye comfort and well-being. Please follow the instructions below to reduce the symptoms from extended exposure to the screen and blue light.



Flicker Free

- Place the screen 20 28 inches (50 70 cm) away from your eyes and a little below eye level.
- Consciously blinking the eyes every now and then will help to reduce eye strain after extended screen time.
- Take breaks for 20 minutes every 2 hours.
- Look away from the screen and gaze at a distant object for at least 20 seconds during breaks.
- Make stretches to relieve body fatigue or pain during breaks.
- Turn on the optional Low Blue Light function.

#### **TÜV Rheinland Flicker Free Certification**

- TÜV Rheinland has tested this product to ascertain whether the display produces visible and invisible flicker for the human eye and therefore strains the eyes of users.
- TÜV Rheinland has defined a catalogue of tests, which sets out minimum standards at various frequency ranges. The test catalogue is based on internationally applicable standards or standards common within the industry and exceeds these requirements.
- The product has been tested in the laboratory according to these criteria.
- The keyword "Flicker Free" confirms that the device has no visible and invisible flicker defined in this standard within the range of 0 - 3000 Hz under various brightness settings.
- The display will not support Flicker Free when Anti Motion Blur/MPRT is enabled. (The availability of Anti Motion Blur/MPRT varies by products.)

# **Regulatory Notices**

### **CE Conformity**

This product has been tested and found to comply with the harmonized standards for Information Technology Equipment published under Directives of Official Journal of the European Union.



### **FCC-B Radio Frequency Interference Statement**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may



cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the measures listed below:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/television technician for help.

#### Notice 1

The changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

#### Notice 2

Shielded interface cables and AC power cord, if any, must be used in order to comply with the emission limits

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- 1. This device may not cause harmful interference, and
- 2. This device must accept any interference received, including interference that may cause undesired operation.

#### MSI Computer Corp.

901 Canada Court, City of Industry, CA 91748, USA (626) 913-0828

www.msi.com

#### **WEEE Statement**

Under the European Union ("EU") Directive on Waste Electrical and Electronic Equipment, Directive 2012/19/EU, products of "electrical and electronic equipment" cannot be discarded as municipal waste anymore and manufacturers of covered electronic equipment will be obligated to take back such products at the end of their useful life.



#### **Chemical Substances Information**

In compliance with chemical substances regulations, such as the EU REACH Regulation (Regulation EC No. 1907/2006 of the European Parliament and the Council), MSI provides the information of chemical substances in products at: https://csr.msi.com/global/index

#### **RoHS Statement**

#### Japan JIS C 0950 Material Declaration

A Japanese regulatory requirement, defined by specification JIS C 0950, mandates that manufacturers provide material declarations for certain categories of electronic products offered for sale after July 1, 2006.

https://csr.msi.com/global/Japan-JIS-C-0950-Material-Declarations

#### **India RoHS**

This product complies with the "India E-waste (Management and Handling) Rule 2016" and prohibits use of lead, mercury, hexavalent chromium, polybrominated biphenyls or polybrominated diphenyl ethers in concentrations exceeding 0.1 weight % and 0.01 weight % for cadmium, except for the exemptions set in Schedule 2 of the Rule.

#### **Turkey EEE Regulation**

Conforms to the EEE Regulations of the Republic Of Turkey

#### Ukraine Restriction of Hazardous Substances

The equipment complies with requirements of the Technical Regulation, approved by the Resolution of Cabinet of Ministry of Ukraine as of 10 March 2017, № 139, in terms of restrictions for the use of certain dangerous substances in electrical and electronic equipment.

#### Vietnam RoHS

As from December 1, 2012, all products manufactured by MSI comply with Circular 30/2011/TT-BCT temporarily regulating the permitted limits for a number of hazardous substances in electronic and electric products.

#### **Green Product Features**

- Reduced energy consumption during use and stand-by
- Limited use of substances harmful to the environment and health
- Easily dismantled and recycled
- Reduced use of natural resources by encouraging recycling
- Extended product lifetime through easy upgrades
- Reduced solid waste production through take-back policy

#### **Environmental Policy**

- The product has been designed to enable proper reuse of parts and recycling and should not be thrown away at its end of life.
- Users should contact the local authorized point of collection for recycling and disposing of their end-of-life products.



- Visit the MSI website and locate a nearby distributor for further recycling information.
- Users may also reach us at gpcontdev@msi.com for information regarding proper disposal, take-back, recycling, and disassembly of MSI products.
- Please visit <<a href="https://us.msi.com/page/recycling">https://us.msi.com/page/recycling</a> for information regarding the recycling of your product in the US.

### Warning!

Overuse of screens is likely to affect eyesight.

#### Recommendations:

- 1. Take a 10-minute break for every 30 minutes of screen time.
- 2. Children under 2 years of age should have no screen time. For children aged 2 years and over, screen time should be limited to less than one hour per day.

### **Copyright and Trademarks Notice**







Copyright © Micro-Star Int' I Co., Ltd. All rights reserved. The MSI logo used is a registered trademark of Micro-Star Int' I Co., Ltd. All other marks and names mentioned may be trademarks of their respective owners. No warranty as to accuracy or completeness is expressed or implied. MSI reserves the right to make changes to this document without prior notice.



The terms HDMI<sup>™</sup>, HDMI<sup>™</sup> High-Definition Multimedia Interface, HDMI<sup>™</sup> Trade dress and the HDMI<sup>™</sup> Logos are trademarks or registered trademarks of HDMI<sup>™</sup> Licensing Administrator, Inc.

## **Technical Support**

If a problem arises with your product and no solution can be obtained from the user's manual, please contact your place of purchase or local distributor. Alternatively, please visit https://www.msi.com/support/ for further guidance.