

Dell Pro 5 Micro

P5M1260

Setup and Specifications

Notes, cautions, and warnings

 **NOTE:** A NOTE indicates important information that helps you make better use of your product.

 **CAUTION:** A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.

 **WARNING:** A WARNING indicates a potential for property damage, personal injury, or death.

Contents

Chapter 1: Views of Dell Pro 5 Micro P5M1260	4
Front view	4
Back view	5
Locate the Service Tag or Express Service Code label of your computer	6
Chapter 2: Set up your computer	8
Chapter 3: Specifications of Dell Pro 5 Micro P5M1260	13
Dimensions and weight	13
Processor	13
Chipset	14
Operating system	14
Memory	14
Memory matrix	15
External ports and slots	16
Internal slots	16
Ethernet	17
Wireless module	17
Audio	17
Storage	18
Power adapter	18
GPU—Integrated	19
Video port resolution (GPU—Integrated)	19
External display support (GPU—Integrated)	20
Hardware security	20
Environmental	20
Regulatory compliance	21
Operating and storage environment	21
Dell Optimizer	21
Dell support policy	21
Chapter 4: Getting help and contacting Dell	22
Chapter 5: Revision history	23

Views of Dell Pro 5 Micro P5M1260

Front view

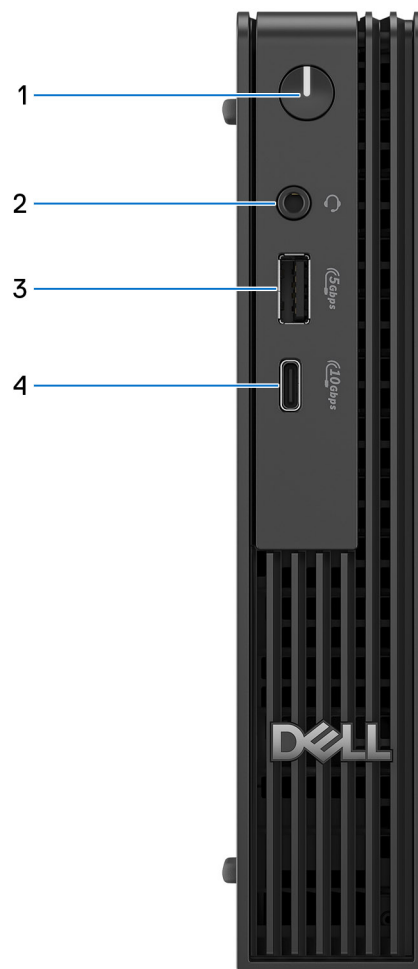


Figure 1. Front view

1. Power button

Press to turn on the computer when the computer is turned off, in sleep state, or in hibernate state.

When the computer is turned on, press the power button to put the computer into a sleep state. Press and hold the power button for 10 seconds to force shut-down the computer.

NOTE: The power-button behavior can be customized in the operating system.

2. Headset (headphone and microphone combo) port

Supports connection of headphones or combo headsets with integrated microphone for audio input and output.

3. USB 3.2 Gen 1 (5 Gbps) port

Connect devices such as external storage devices and printers. Provides a data transfer speed of up to 5 Gbps.

4. USB 3.2 Gen 2 (10 Gbps) Type-C port

Connect devices such as external storage devices and printers. Provides a data transfer speed of up to 10 Gbps.

Back view

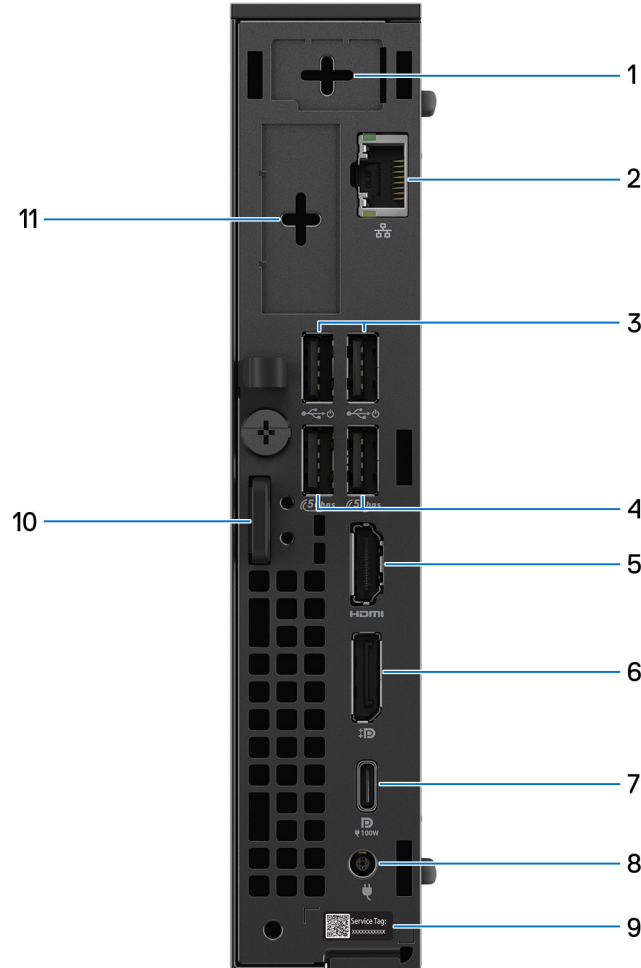


Figure 2. Back view

1. Optional external antenna port

Supports an optional external antenna module.

2. RJ45 Ethernet port (1 Gbps)

Connect an Ethernet (RJ45) cable from a router or a broadband modem for network or Internet access, with a transfer rate of 10/100/1000 Mbps (maximum 1 Gbps).

3. Two USB 2.0 (480 Mbps) ports with Smart Power On

Connect devices such as external storage devices and printers. Provides data transfer speeds of up to 480 Mbps.

4. Two USB 3.2 Gen 1 (5 Gbps) ports

Connect devices such as external storage devices and printers. Provides data transfer speeds of up to 5 Gbps.

5. HDMI 2.1 (TMDS) port

Connect a gaming console, Blu-ray player, or other HDMI-out enabled device.

6. DisplayPort 1.4a (HBR3) port

Connect an external display or a projector. Can support video output of up to 5K (5120x3200) at 60 Hz.

7. **USB 3.2 Gen 2x2 (20 Gbps) Type-C with DisplayPort 1.4a HBR3 Alt mode with up to 100 W Power In**

Connect an external display or a projector. Provides a data transfer speed of up to 20 Gbps. Alternatively, connect 100 W USB Type-C power adapter.

8. **Power adapter port**

Connect a power adapter to provide power to your computer.

9. **Service Tag label**

The Service Tag is a unique alphanumeric identifier that enables Dell service technicians to identify the hardware components in your computer and access warranty information.


10. **Kensington security-cable slot and padlock ring**

Connect a security cable to prevent unauthorized movement of your computer and install a standard padlock to prevent unauthorized access to the interior of your computer.


11. **Optional I/O module port**

Supports an optional I/O module with one of the following ports:

- USB 3.2 Gen 2 (10 Gbps) Type-C with DisplayPort 1.4a HBR3 Alt Mode
- DisplayPort 2.1 (UHBR20) port
- HDMI 2.1 FRL port
- VGA port
- Two USB-A 3.2 Gen 2 (10 Gbps) port
- PS/2 and Serial ports
- Serial port
- Fiber optic port (1 Gbps)

 **NOTE:** Actual speed via network depends on equipment compatibility, requiring both transceiver and switch at the same maximum speed.

- Two DisplayPorts (DP1.4a HBR2) Video Expansion Module

 **NOTE:** Always use Dell recommended fan-out cable.

Locate the Service Tag or Express Service Code label of your computer

The service tag is a unique alphanumeric identifier that allows Dell service technicians to identify the hardware components in your computer and access warranty information. The Express Service Code is a numeric version of the Service Tag.

For more information about how to find the Service Tag of your computer, search in the Knowledge Base Resource at the [Dell Support Site](#).



Figure 3. Service Tag/Express Service Code location

Set up your computer

Steps

1. Connect the keyboard and mouse.

NOTE: For setup instructions, see the documentation that is shipped with the keyboard and mouse.

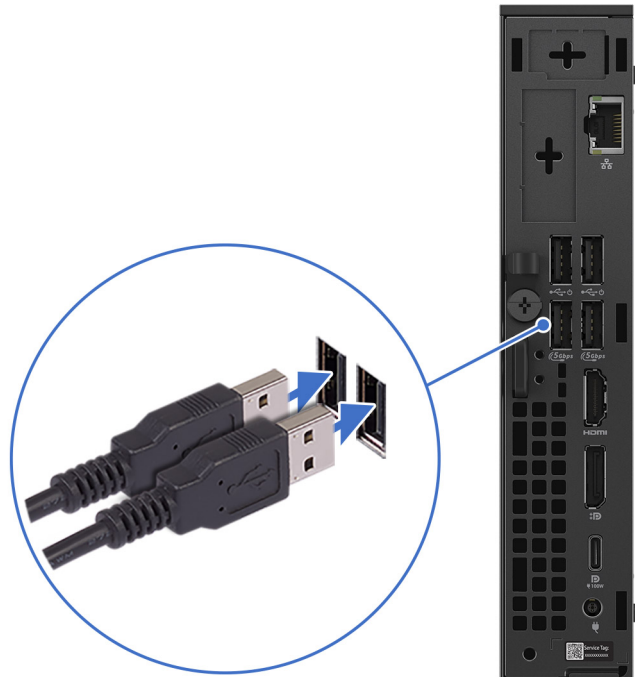


Figure 4. Connecting the keyboard and mouse

2. Connect to your network using a cable, or connect to a wireless network.

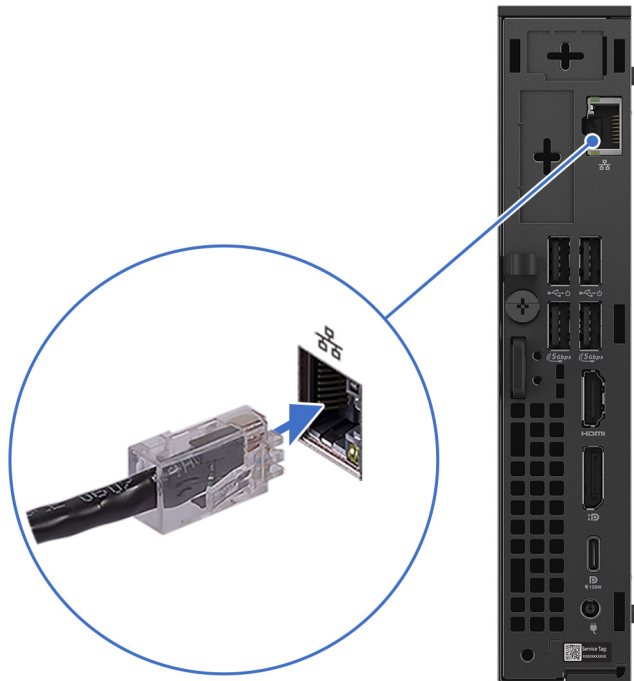


Figure 5. Connecting the network cable

3. Connect the display.

i **NOTE:** For improved graphical performance, connect the display to the display ports on the discrete graphics processing unit.



Figure 6. Connecting the display

4. Connect the power cable.

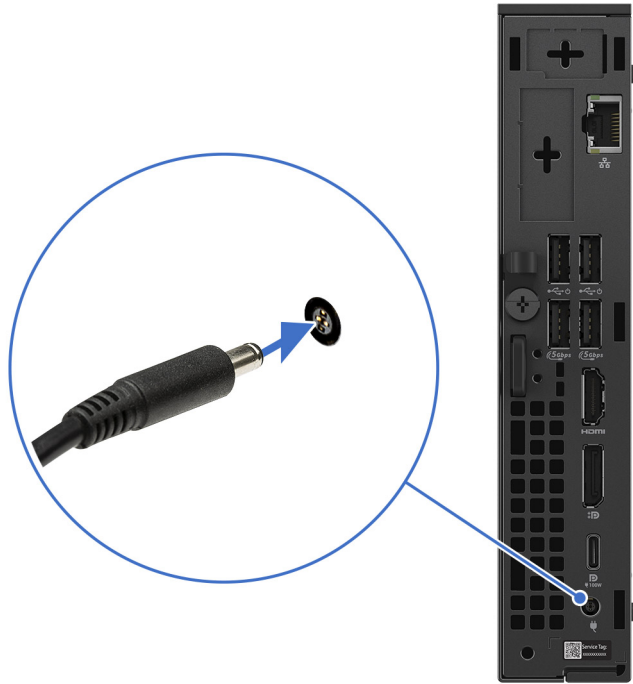


Figure 7. Connecting the power cable

5. Press the power button.



Figure 8. Pressing the power button

6. Finish the operating system setup.

For Ubuntu:

Follow the on-screen instructions to complete the setup. For more information about installing and configuring Ubuntu, search in the Knowledge Base Resource at [Dell Support Site](#).

For Windows:

Follow the on-screen instructions to complete the setup. When setting up, Dell Technologies recommends that you:






- Connect to a network for Windows updates.

NOTE: If connecting to a secured wireless network, enter the password for the wireless network access when prompted.

- If connected to the Internet, sign-in with or create a Microsoft account. If not connected to the Internet, create an offline account.
- On the **Support and Protection** screen, enter your contact details.

7. Locate and use Dell apps from the Windows Start menu—Recommended.

Table 1. Locate Dell apps


Resources	Description
	<p>Dell Optimizer is an application that is designed to enhance computer performance and productivity by optimizing settings for power, battery, display, collaboration touchpad, and presence detection. It also provides access to applications purchased with your new computer.</p> <p>For more information, see Dell Optimizer User's Guide at Dell Support Site.</p>
	<p>Dell Product Registration</p> <p>Register your computer with Dell.</p>
	<p>Dell Help & Support</p> <p>Access help and support for your computer.</p>
	<p>SupportAssist</p> <p>SupportAssist is a proactive and predictive technology that offers automated technical support for Dell computers. It proactively monitors both hardware and software, addressing performance issues, preventing security threats, and automating engagement with Dell Technical Support.</p> <p>For more information, see SupportAssist documentation at Dell Support Site.</p> <p> NOTE: In SupportAssist, click the warranty expiry date to renew or upgrade your warranty.</p>

Specifications of Dell Pro 5 Micro P5M1260

Dimensions and weight

The following table lists the height, width, depth, and weight of your Dell Pro 5 Micro P5M1260.

Table 2. Dimensions and weight

Description	Values
Height	182.00 mm (7.17 in.)
Width	36.00 mm (1.42 in.)
Depth	178.00 mm (7.01 in.)
Weight  NOTE: The weight of your computer depends on the configuration ordered and manufacturing variability.	<ul style="list-style-type: none"> • Minimum: 1.10 Kg (2.42 lbs) • Maximum: 1.32 Kg (2.92 lbs)

Processor

The following table lists the details of the processors that are supported on your Dell Pro 5 Micro P5M1260.

Table 3. Processor




Description	Option one	Option two
Type	Intel Core Ultra 7 366H vPro	Intel Core Ultra 5 335 vPro
Wattage	25 W	25 W
Total cores	16	8
Number of Performance-cores	4	4
Number of Efficient-cores	8	0
Total threads  NOTE: Intel Hyper-Threading Technology is only available on Performance-cores.	16	8
Speed	up to 4.80 GHz	up to 4.60 GHz
Performance-core frequency		
Base frequency	2.00 GHz	2.20 GHz
Maximum turbo frequency	4.80 GHz	4.60 GHz
Efficient-core frequency		
Base frequency	1.60 GHz	1.60 GHz
Maximum turbo frequency	3.60 GHz	Not applicable
 NOTE: Processor clock speeds and thermal design power differ according to the thermal mode selected in the Dell Optimizer app on your computer.		

Table 3. Processor (continued)

Description	Option one	Option two
Cache	18 MB	12 MB
Integrated graphics	Intel Graphics	Intel Graphics
Neural Processing Unit (NPU) performance	50 TOPS	47 TOPS
 NOTE: Tera Operations Per Second (TOPS) is an AI performance metric that measures how many trillions of operations per second an AI processor can perform.		

Chipset

The following table lists the details of the chipset that is supported by your Dell Pro 5 Micro P5M1260.

Table 4. Chipset

Description	Values
Chipset	Integrated on the processor
Processor	Intel Core Ultra 7 366H vPro/Ultra 5 335 vPro
DRAM bus width	128-bit
Flash EPROM	32 MB + 32 MB
PCIe bus	Up to Gen4

Operating system

Your Dell Pro 5 Micro P5M1260 supports the following operating systems:

- Windows 11 Home
- Windows 11 Pro
- Ubuntu Linux 24.04 LTS, 64-bit
- No OS

Memory

The following table lists the memory specifications that are supported by your Dell Pro 5 Micro P5M1260.

Table 5. Memory specifications

Description	Values
Memory slots	Two SODIMM slots
Memory type	Dual-channel DDR5
Memory speed	<ul style="list-style-type: none"> • For computers shipped with Intel Core Ultra 7 366H vPro processors: 5600 MT/s, 6400 MT/s, 7200 MT/s • For computers shipped with Intel Core Ultra 5 335 vPro processors: 5600 MT/s, 6400 MT/s
Maximum memory configuration	64 GB

Table 5. Memory specifications (continued)

Description	Values
Minimum memory configuration	16 GB
Memory size per slot	8 GB, 16 GB, 32 GB
Memory configurations supported	<ul style="list-style-type: none"> • For computers shipped with Intel Core Ultra 7 366H vPro processors: <ul style="list-style-type: none"> ○ 16 GB: 1 x 16 GB, DDR5, 5600 MT/s, single-channel ○ 16 GB: 2 x 8 GB, DDR5, 5600 MT/s, dual-channel ○ 32 GB: 1 x 32 GB, DDR5, 5600 MT/s, single-channel ○ 32 GB: 2 x 16 GB, DDR5, 5600 MT/s, dual-channel ○ 16 GB: 1 x 16 GB, DDR5, 7200 MT/s, single-channel ○ 16 GB: 2 x 8 GB, DDR5, 7200 MT/s, dual-channel ○ 32 GB: 1 x 32 GB, DDR5, 7200 MT/s, single-channel ○ 32 GB: 2 x 16 GB, DDR5, 7200 MT/s, dual-channel ○ 64 GB: 2 x 32 GB, DDR5, 5600 MT/s, dual-channel ○ 64 GB: 2 x 32 GB, DDR5, 6400 MT/s, dual-channel • For computers shipped with Intel Core Ultra 5 335 vPro processors: <ul style="list-style-type: none"> ○ 16 GB: 1 x 16 GB, DDR5, 5600 MT/s, single-channel ○ 16 GB: 2 x 8 GB, DDR5, 5600 MT/s, dual-channel ○ 16 GB: 1 x 16 GB, DDR5, 6400 MT/s, single-channel ○ 16 GB: 2 x 8 GB, DDR5, 6400 MT/s, dual-channel ○ 32 GB: 1 x 32 GB, DDR5, 5600 MT/s, single-channel ○ 32 GB: 1 x 32 GB, DDR5, 6400 MT/s, single-channel ○ 32 GB: 2 x 16 GB, DDR5, 5600 MT/s, dual-channel ○ 32 GB: 2 x 16 GB, DDR5, 6400 MT/s, dual-channel ○ 64 GB: 2 x 32 GB, DDR5, 5600 MT/s, dual-channel ○ 64 GB: 2 x 32 GB, DDR5, 6400 MT/s, dual-channel

Memory matrix

The following table lists the memory configurations that are supported on your Dell Pro 5 Micro P5M1260.


Table 6. Memory matrix

Configuration	Slot	
	DIMM1	DIMM2
16 GB DDR5	16 GB	Not used
16 GB DDR5	8 GB	8 GB
32 GB DDR5	32 GB	Not used
32 GB DDR5	16 GB	16 GB
64 GB DDR5	32 GB	32 GB

External ports and slots

The following table lists the external ports and slots on your Dell Pro 5 Micro P5M1260.


Table 7. External ports and slots

Description	Values
Network port	One RJ45 ethernet port (1 Gbps)
USB ports	<ul style="list-style-type: none"> • One USB 3.2 Gen 2 (10 Gbps) Type-C port • Three USB 3.2 Gen 1 (5 Gbps) ports • Two USB 2.0 (480 Mbps) ports with SmartPower On • One USB 3.2 Gen 2x2 (20 Gbps) Type-C port with DisplayPort 1.4a HBR3 Alt mode/Power in up to 100 W
Audio port	One headset (headphone and microphone combo) port
Video port(s)	<ul style="list-style-type: none"> • One DisplayPort 1.4a HBR3 • One HDMI 2.1 TMDS port
Media-card reader slot	Not supported
Power adapter port	<ul style="list-style-type: none"> • One 4.50 mm DC-in port • One USB Type-C port
Security-cable slot	One security-cable slot (for Kensington locks)
Optional port(s)	<p>One optional module port</p> <ul style="list-style-type: none"> • One USB 3.2 Gen 2 Type-C with DisplayPort 1.4a HBR3 Alt Mode • One DisplayPort 2.1 (UHBR20) • One HDMI 2.1 FRL port • One VGA port • Two USB-A 3.2 Gen 2 ports • One PS/2 and Serial port • One Serial port • One GbE Fiber Optic port • Two DisplayPort 1.4a HBR2 Video Expansion Modules <p> NOTE: Always use Dell recommended fan-out cable.</p>

Internal slots

The following table lists the internal slots of your Dell Pro 5 Micro P5M1260.

Table 8. Internal slots

Description	Values
M.2	<ul style="list-style-type: none"> • One M.2 2230 slot for Wi-Fi and Bluetooth combo card • Two M.2 2230/2280 slots for solid state drive <p> NOTE: To learn more about the features of different types of M.2 cards, search Dell Support Site.</p>

Ethernet

The following table lists the wired ethernet Local Area Network (LAN) specifications of your Dell Pro 5 Micro P5M1260.


Table 9. Ethernet specifications

Description	Values
Model	Intel i219-LM
Transfer rate	10/100/1000 Mbps

Wireless module

The following table lists the Wireless Local Area Network (WLAN) module specifications of your Dell Pro 5 Micro P5M1260.

Table 10. Wireless module specifications

Description	Option one	Option two	Option three
Model number	Intel Wi-Fi 7 BE211	Intel Wi-Fi 7 BE213	MediaTek Wi-Fi 6E MT7922
Transfer rate	Up to 5760 Mbps	Up to 2880 Mbps	Up to 2400 Mbps
Frequency bands supported	2.4 GHz/5 GHz/6 GHz	2.4 GHz/5 GHz/6 GHz	2.4 GHz/5 GHz/6 GHz
Wireless standards	<ul style="list-style-type: none"> • Wi-Fi 802.11a/b/g • Wi-Fi 4 (Wi-Fi 802.11n) • Wi-Fi 5 (Wi-Fi 802.11ac) • Wi-Fi 6 (Wi-Fi 802.11ax) • Wi-Fi 7 (Wi-Fi 802.11be) 	<ul style="list-style-type: none"> • Wi-Fi 802.11a/b/g • Wi-Fi 4 (Wi-Fi 802.11n) • Wi-Fi 5 (Wi-Fi 802.11ac) • Wi-Fi 6 (Wi-Fi 802.11ax) • Wi-Fi 7 (Wi-Fi 802.11be) 	<ul style="list-style-type: none"> • Wi-Fi 802.11a/b/g • Wi-Fi 4 (Wi-Fi 802.11n) • Wi-Fi 5 (Wi-Fi 802.11ac) • Wi-Fi 6E (Wi-Fi 802.11ax)
Encryption	<ul style="list-style-type: none"> • 64-bit/128-bit WEP • AES-CCMP • TKIP 	<ul style="list-style-type: none"> • 64-bit/128-bit WEP • AES-CCMP • TKIP 	<ul style="list-style-type: none"> • 64-bit/128-bit WEP • AES-CCMP • TKIP
Bluetooth wireless card  NOTE: The functionality of the Bluetooth wireless card may vary based on the operating system.	Bluetooth 6.0	Bluetooth 6.0	Bluetooth 5.3

Audio

The following table lists the audio specifications of your Dell Pro 5 Micro P5M1260.

Table 11. Audio specifications

Description	Values
Audio type	4 Channel High-Definition Audio
Audio controller	Realtek ALC3204 Codec
Internal audio interface	Intel HDA (High-Definition Audio)
External audio interface	One headset (headphone and microphone combo)
Stereo conversion	Supported

Table 11. Audio specifications (continued)

Description	Values
Speakers	Waves MaxxAudio 14.0, Internal speakers
Internal speaker amplifier	Codec built-in amp
External volume controls	No hardware volume buttons
Speaker output:	
Average (W)	2 W
Peak (W)	2.5 W
Subwoofer output	Not supported
Microphone	Not supported

Storage

This section lists the storage options on your Dell Pro 5 Micro P5M1260.

Your Dell Pro 5 Micro P5M1260 supports:

- Two M.2 2230/2280 solid state drive

The primary drive of your Dell Pro 5 Micro P5M1260 is the M.2 drive.

Table 12. Storage specifications

Storage type	Interface type	Capacity
M.2 2230 solid state drive	QLC Gen4 PCIe NVMe, Class 25	512 GB, 1 TB
M.2 2230 solid state drive	TLC Gen4 PCIe NVMe, Class 35	256 GB, 512 GB
M.2 2230 solid state drive	TLC Gen5 PCIe NVMe, Class 40, Self-Encrypting Opal 2.0	512 GB
M.2 2280 solid state drive	TLC Gen5 PCIe NVMe, Class 40, Self-Encrypting Opal 2.0	1 TB


Power adapter

The following table lists the power adapter specifications of your Dell Pro 5 Micro P5M1260.

Table 13. Power adapter specifications

Description	Option one	Option two
Type	4.50 mm barrel, 90 W	USB Type-C, 100 W
Power adapter dimensions:		
Height	32.00 mm	26.50 mm
Width	52.00 mm	60.00 mm
Depth	128.00 mm	122.00 mm
Input voltage	100 VAC–240 VAC	100 VAC–240 VAC
Input frequency	50 Hz–60 Hz	50 Hz–60 Hz
Input current (maximum)	1.50 A	1.70 A
Output current (continuous)	4.62 A	<ul style="list-style-type: none"> • 5 V, 9 V, 15 V: 3.00 A

Table 13. Power adapter specifications (continued)

Description	Option one	Option two
		<ul style="list-style-type: none"> 20 V: 5.00 A
Rated output voltage	19.50 V	<ul style="list-style-type: none"> 5 V 9 V 15 V 20 V
Temperature range:		
Operating	0°C to 40°C (32°F to 104°F)	0°C to 40°C (32°F to 104°F)
Storage	-40°C to 70°C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)
 CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.		

GPU—Integrated

The following table lists the specifications of the integrated Graphics Processing Unit (GPU) supported by your Dell Pro 5 Micro P5M1260.

Table 14. GPU—Integrated

Controller	Memory size	Processor
Intel Graphics	Shared system memory	Intel Core Ultra 7 366H vPro/Ultra 5 335 vPro

Video port resolution (GPU—Integrated)

Table 15. Video port resolution (GPU—Integrated)

Graphics	Video ports	Maximum supported resolution
Intel Graphics	One DisplayPort 1.4a HBR3 port	5120 x 3200 at 60 Hz
	One HDMI 2.1 TMDS port	4096 x 2160 at 60 Hz
	One USB 3.2 Gen 2x2 (20 Gbps) Type-C with DisplayPort 1.4a HBR3 Alt mode/Power in up to 100 W	5120 x 3200 at 60 Hz
	One optional port slot which can be configured with one of the following options: <ul style="list-style-type: none"> HDMI 2.1 FRL port DisplayPort 2.1 (UHB20) port VGA port USB 3.2 Gen 2 Type-C with DisplayPort 1.4a HBR3 Alt Mode 	<ul style="list-style-type: none"> 5120 x 3200 at 60 Hz 7680 x 4320 at 60 Hz 1920 x 1200 at 60 Hz 5120 x 3200 at 60 Hz

External display support (GPU—Integrated)

Table 16. Display support specifications

Graphics	Supported external displays
Intel Graphics	<ul style="list-style-type: none"> • With MST- 4 • Without MST- 3
Intel Graphics + optional USB 3.2 Gen 2 Type-C with DP Alt Mode, DisplayPort, HDMI, or VGA	<ul style="list-style-type: none"> • With MST- 4 • Without MST- 4
Intel Graphics + optional Two DisplayPorts (DP1.4a HBR2) Video Expansion Module	<ul style="list-style-type: none"> • With MST- 6 • Without MST- 5

 **NOTE:** MST (Multi-Stream Transport)/daisy-chaining supports four displays.

Hardware security

The following table lists the hardware security of your Dell Pro 5 Micro P5M1260.

Table 17. Hardware security


Hardware security
Security-cable slot (Kensington lock)
Padlock ring
Trusted Platform Module (TPM) 2.0
Self-Encrypting Drives (SED)

Environmental

The following table lists the environmental specifications of your Dell Pro 5 Micro P5M1260.

Table 18. Environmental

Feature	Values
Recyclable packaging	Yes
BFR/PVC-free chassis	Yes
Vertical orientation packaging support	Yes
Multi-Pack packaging	No
Energy-efficient power supply	Yes
ENV0424 compliant	Yes

 **NOTE:** As per the anticipated required criteria for EPEAT 2018/2025, wood-based fiber packaging contains a minimum of 35% recycled content by total weight of wood-based fiber.

Regulatory compliance

The following table lists the regulatory compliance of your Dell Pro 5 Micro P5M1260.

Table 19. Regulatory compliance


Regulatory compliance
Product Safety, EMC and Environmental Datasheets
Dell Regulatory Compliance Home page
Responsible Business Alliance policy

Operating and storage environment

This table lists the operating and storage specifications of your Dell Pro 5 Micro P5M1260.

Airborne contaminant level: G1 as defined by ISA-S71.04-1985

Table 20. Computer environment

Description	Operating	Storage
Temperature range	0°C to 35°C (32 °F to 95°F)	-40°C to 65°C (-40°F to 149°F)
Relative humidity (maximum)	10% to 90% (non-condensing)	0% to 95% (non-condensing)
Vibration (maximum)*	0.66 GRMS	1.30 GRMS
Shock (maximum)	110 G†	160 G†
Altitude range	-15.2 m to 3048 m (-49.87 ft to 10,000 ft)	-15.2 m to 10,668 m (-49.87 ft to 35,000 ft)
 CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.		

* Measured using a random vibration spectrum that simulates the user environment.

† Measured using a 2 ms half-sine pulse.

Dell Optimizer

Dell Optimizer is an AI-based software application that allows you to customize your computer settings for power and battery, and more.

For Dell Pro 5 Micro P5M1260 with Dell Optimizer, you can:

- Tune the performance, power consumption, cooling, and fan noise with selectable thermal modes.
- Access and secure your computer depending on your physical presence.
- Download and redeem the apps that are purchased with your computer.

For more information about configuring and using these features, search for *Dell Optimizer* at the [Dell Support Site](#).

Dell support policy

For information about Dell support policy, search [Dell Support Site](#).

Getting help and contacting Dell

Self-help resources


You can get information and help on Dell products and services using these self-help resources:


Table 21. Self-help resources

Self-help resources	Resource location
Information about Dell products and services	Dell Site
Contact Support	In Windows search, type <code>Contact Support</code> , and press Enter.
Online help for operating system	Windows Support Site Linux Support Site
Access top solutions, diagnostics, drivers and downloads, and learn more about your computer through videos, manuals, and documents.	Your Dell computer is uniquely identified using a Service Tag or Express Service Code. To view relevant support resources for your Dell computer, enter the Service Tag or Express Service Code at Dell Support Site . For more information about how to find the Service Tag for your computer, see Locate the Service Tag on your computer .
Dell knowledge base articles	<ol style="list-style-type: none"> 1. Go to Dell Support Site. 2. On the menu bar at the top of the Support page, select Support > Support Library. 3. In the Search field on the Support Library page, type the keyword, topic, or model number, and then click or tap the search icon to view the related articles.

Contacting Dell

To contact Dell for sales, technical support, or customer service issues, see [Contact Support at Dell Support Site](#).

 **NOTE:** Availability of the services may vary depending on the country or region, and product.

 **NOTE:** If you do not have an active Internet connection, you can find contact information in your purchase invoice, packing slip, bill, or Dell product catalog.

Revision history

Tracks all updates that are made to the document. It typically includes the date of change, version number, and a brief description of the modification. This log helps maintain transparency, accountability, and a clear timeline of progress.

Table 22. Revision history

Revision	Date	Description
A00	03-2026	Original publish date.