


# QuickNet™ Copper Cabling System

The QuickNet™ Copper Cabling System provides a custom, pre-terminated cabling solution which meets unique requirements. Fast and simple to install, the system enables quick network deployment, increased reliability, and lower total cost of ownership as compared to field terminated installations. Engineered for maximum design flexibility and high rack density utilization (up to 48-ports in one rack space), the system offers 100% factory tested pre-terminated cable assemblies in custom lengths and configurations. QuickNet™ Angled and Flat Patch Panels accept QuickNet™ Pre-Terminated Cassettes, Patch Panel Adapters, and Blanks, which snap in and out, with one hand, for quick installation.

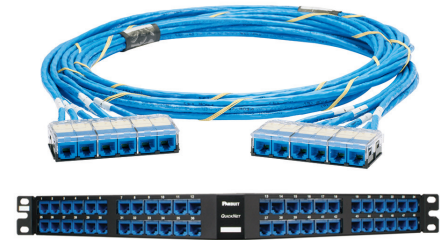

## Key Features


## Benefits

<b>Pre-terminated</b>	Controlled factory environment provides consistent network performance while reducing installation time and on-site waste as compared to field-terminated installations
<b>100% factory tested</b>	Eliminates the time and cost associated with on-site testing and ensures verified performance (permanent link test data supplied with each cable assembly)
<b>Wide range of cable types and performance levels</b>	Category 6A UTP/FTP and Category 6 UTP performance levels available in plenum or riser cable fire ratings
<b>Wide range of termination configurations and custom lengths</b>	Cable assemblies allow customization including pre-terminated cassettes, jack modules, modular plugs, and/or unterminated cable options to provide design flexibility for all installations in lengths from 10' to 295
<b>Pre-terminated cassettes</b>	Snap in and out of QuickNet™ Patch Panels and include an integral release tab to ensure easy on-site moves, adds, and changes
<b>Patch panel adapter</b>	Snaps in and out of QuickNet™ Patch Panels and accepts Mini-Com™ Modules for UTP, fiber optic and audio/visual applications
<b>Standard and high-density solution</b>	QuickNet™ Patch Panels in angled and flat designs enable 24 and 48-ports in one rack unit for efficient rack space utilization
<b>Assembly identification</b>	Each cable assembly label includes part number, performance level, and serialized quality assurance number for future traceability
<b>Integrated bonding and grounding</b>	Innovative shielded cassette and shielded jack design provides linear conductive path for proper bonding to QuickNet™ Shielded Metal Patch Panels

## Technical Information

- Each QuickNet™ Cable Assembly is factory tested to electrical permanent link specifications
- TX6A™ 10Gig™ Copper Cabling Systems exceed requirements of ANSI/TIA-568-C.2, ISO 110801 Class E<sub>A</sub> Edition 2.1, and IEEE 802.3an standards for supporting 10GBASE-T requirements
- TX6500™ and TX6000™ Copper Cabling Systems exceed ANSI/TIA-568-C.2 and ISO 11801 2nd Edition Class E standards
- Jack modules utilize patented Giga-TX™ Technology which optimizes performance by maintaining cable pair geometry and eliminating conductor untwist
- Modular plugs meet all applicable ANSI/TIA-968-A requirements and exceed IEC 60603-7 specifications

# QuickNet™ Cable Assembly Ordering Information for North America

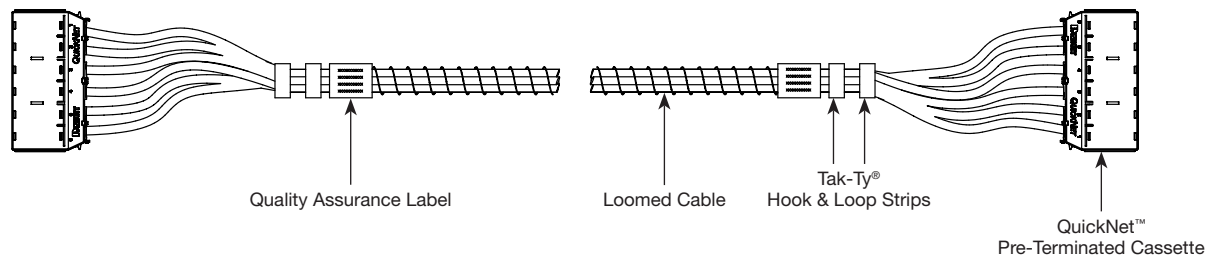

**Example:**

<b>Q</b>	<b>Z</b>	<b>P</b>	<b>B</b>	<b>C</b>	<b>C</b>	<b>B</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>1</b>	<b>F</b>	<b>0</b>	<b>1</b>	<b>0</b>
<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>	<b>6</b>	<b>7</b>	<b>8</b>	<b>9</b>	<b>10</b>	<b>11</b>	<b>12</b>	<b>13</b>	<b>14</b>	<b>15</b>

Copper QN Trunk, Cat6A, UTP VariMaTriX, Plenum, Blue Cable, End 1 Cassette, End 2 Cassette, Blue Jacks, Standard Pkg, 10 Feet

**1 – Q = QuickNet™**

**2 – Performance Level**

C = Category 6 UTP

E = Category 6A U/FTP Shielded

Z = Category 6A UTP Vari-MaTriX

**3 – Flame/Smoke Rating**

R = Riser or P = Plenum

**4 – Cable Color**

B = Blue or W = White

**5 – Termination End 1**

C = Cassette

J = Jack modules

P = Modular plugs

**6 – Termination End 2**

C = Cassette

J = Jack modules

P = Modular plugs

U = Unterminated

**7 – Termination Color Options**

**Jack Module Color Options**

B = Blue, L = Black, R = Red, W = White,

Shielded Jack Modules, choose option L

(all Shielded Jack Modules are Black)

**Modular Plug and Unterminated Color Options**

X = No color option available, End 1 and End 2 are plug and/or unterminated

**8-11 – Serial Code**

**0001** No Variation

**000B** End 2 Unterminated with loose blue jacks and cassette

**000Y** End 2 Unterminated with loose black jacks and cassette

**0013** End 2 Unterminated with loose red jacks and cassette

**0017** End 2 Unterminated with loose white jacks and cassette

**12 – Unit of Measure**

F = Feet

**13, 14, 15 – Assembly Length\*\***

Feet = 010 to 295

# QuickNet™ Cable Assembly Ordering Information for North America

## QuickNet™ Patch Panel and Accessories Ordering Information

Part Number	Part Description	No. of ^ Rack Spaces	Std. Pkg. Qty.
<b>QAPP24BL</b>	Angled 24-port patch panel	1	1
<b>QAPP48HDBL</b>	Angled 48-port high density patch panel	1	1
<b>QAPP48HDVNSBL</b>	Angled 48-port high density patch panel with pre-printed vertical numbering on each port for switch applications	1	1
<b>QPP24BL</b>	Flat 24-port patch panel	1	1
<b>QPP48HDBL</b>	Flat 48-port high density patch panel	1	1
<b>QPP48HDVNSBL</b>	Flat 48-port high density patch panel with pre-printed vertical numbering on each port for switch applications	1	1
<b>QSP24BL</b>	Flat 24-port shielded all metal patch panel, for use with shielded QuickNet™ Pre-Terminated Cassettes and Shielded Jack Modules	1	1
<b>QSP48HDBL</b>	Flat 48-port shielded all metal patch panel, for use with shielded QuickNet™ Pre-Terminated Cassettes and Shielded Jack Modules	1	1
<b>QASP24BL</b>	Angled 24-port shielded all metal patch panel, for use with shielded QuickNet™ Pre-Terminated Cassettes and Shielded Jack Modules	1	1
<b>QASP48HDBL</b>	Angled 48-port shielded all metal patch panel, for use with shielded QuickNet™ Pre-Terminated Cassettes and Shielded Jack Modules	1	1
<b>QPPAB</b>	Patch panel adapter accepts all Mini-Com™ Modules for multimedia applications	—	1
<b>QPPBBL</b>	Patch panel blank reserves space for future use and promotes proper airflow and cooling	—	1
<b>QPPLC24</b>	Label/label cover kit for 24-port QuickNet™ Patch Panels	—	1
<b>QPPRT</b>	Removal tool allows individual cables to be removed from plug pack without disruption of other network connections	—	1
<b>QPPLD6-X</b>	Lock-in device prevents unauthorized removal of cables from the plug pack	—	10
<b>QPPN6***</b>	QuickNet™ Plug Pack individual housing accepts six RJ45 modular plugs	—	1
<b>QPPNR6S</b>	QuickNet™ Recessed Plug Pack individual housing accepts six RJ45 modular plugs	—	1

^One rack space = 1.75" (44.45mm).

\*All connectivity is wired T568B. Category 6 Enhanced Performance level utilizes Panduit® TX6500™ Category 6 UTP Cable.

Permanent link test results shipped with each cable assembly.

\*\*QuickNet™ Patch Panels also available in White (WH).

DISCLAIMER: THE INFORMATION CONTAINED HEREIN IS INTENDED AS A GUIDE FOR USE BY PERSONS HAVING TECHNICAL SKILL AT THEIR OWN DISCRETION AND RISK. BEFORE USING ANY PANDUIT PRODUCT, THE BUYER MUST DETERMINE THE SUITABILITY OF THE PRODUCT FOR HIS/HER INTENDED USE AND BUYER ASSUMES ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH. PANDUIT DISCLAIMS ANY LIABILITY ARISING FROM ANY INFORMATION CONTAINED HEREIN OR FOR ABSENCE OF THE SAME.

### WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA  
Phone: 800.777.3300

PANDUIT EUROPE LTD.  
London, UK  
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.  
Republic of Singapore  
Phone: 65.6305.7575

PANDUIT JAPAN  
Tokyo, Japan  
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA  
Guadalajara, Mexico  
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.  
Victoria, Australia  
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to [www.panduit.com/warranty](http://www.panduit.com/warranty)

For more information

Visit us at [www.panduit.com](http://www.panduit.com)

Contact Customer Service by email: [cs@panduit.com](mailto:cs@panduit.com)

or by phone: 800.777.3300

**PANDUIT**®

©2020 Panduit Corp.  
ALL RIGHTS RESERVED.  
Printed in the U.S.A.  
COCB42--WW-ENG  
5/2020