

INSTALLATION INSTRUCTIONS

<u>Product</u> <u>Revision</u> <u>Form</u>

7160-1787 B INST-1138

Zebra ET8X Tablet Dock Printing Spec: PS-001

This instruction sheet is for the Zebra ET8X Tablet Dock only. For instructions on features, set-up, and operation of the computer, please refer to the manual provided by Zebra with the tablet.


This dock is designed to be used with a variety of Gamber-Johnson mounting systems. Installation instructions for other Gamber-Johnson products are provided with each individual product.

This instruction sheet is for the following products:

Item No. 7160-1787-00 Item No. 7160-1787-03

Power Supplies:

11-16V Auto power adapter (7300-0415) 12-32V Isolated Power Adapter (7300-0466) 20-60V Isolated Power Adapter (7300-0467) 72-110V Isolated Power Adapter (7300-0418)

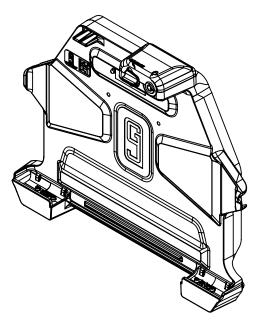

Product Mounting Disclaimer

Gamber-Johnson is not liable under any theory of contract or tort law for any loss, damage, personal injury, special, incidental or consequential damages for personal injury or other damage of any nature arising directly or indirectly as a result of the improper installation or use of its products in vehicle or any other application. In order to safely install and use Gamber-Johnson products full consideration of vehicle occupants, vehicle systems (i.e., the location of fuel lines, brake lines, electrical, drive train or other systems), air-bags and other safety equipment is required. Gamber-Johnson specifically disclaims any responsibility for the improper use or installation of its products not consistent with original vehicle manufactures specifications and recommendations, Gamber-Johnson product instruction sheets, or workmanship standards as endorsed through the Gamber-Johnson Certified Installer Program.

PRE-INSTALLATION RECOMMENDATOINS

Conduct a "Bench Test"

Gamber-Johnson strongly advises a "bench test" be conducted to verify all electronic and software issues are resolved prior to installation:

- 1. Make sure the computer is operational by itself.
- 2. Insert computer into the docking station and verify that the computer is operating in the dock.
- 3. Interconnect entire assembly and verify start-up of all components, including other equipment (printers, modems, scanners, etc.)

Gamber-Johnson recommends positioning of all mounts and equipment in the vehicle prior to the actual install to verify that mounting locations are safe and practical.

IMPORTANT SAFETY INFORMATION FOR INSTALLERS

Safety is dependent on the proper installation and servicing of this docking station. It is important to read and follow all instructions before installing this product.

To properly install a Gamber-Johnson docking station you must have a good understanding of automotive electrical procedures and systems, along with proficiency in the installation and service of aftermarket vehicle equipment.

There are no adjustments required at any time of the electrical components within the docking station. **Opening the docking station will void the product warranty.**

During Installation:

DO NOT connect this docking station to the vehicle battery until:

- 1. All other electrical connections are made
- 2. Mounting of all components is complete
- 3. Verification that no shorts exist in the entire system

DO NOT install equipment or route wiring or cords in the deployment path of any air bag.

When drilling into the vehicle, DO make sure that both sides of the surface are clear of anything that could be damaged.

CAUTION: If wiring is shorted to the frame, high current conductors can cause hazardous sparks resulting in electrical fires or flying molten metal.


After installation:

Test the docking station to ensure that it is working properly.


File these instructions in a safe place and refer to them when performing maintenance or re-installing.

WARNING: Failure to follow all safety precautions and instructions may result in property damage, serious injury, or death.

ZEBRA ET8X DOCKING STATION FEATURE IDENTIFICATION

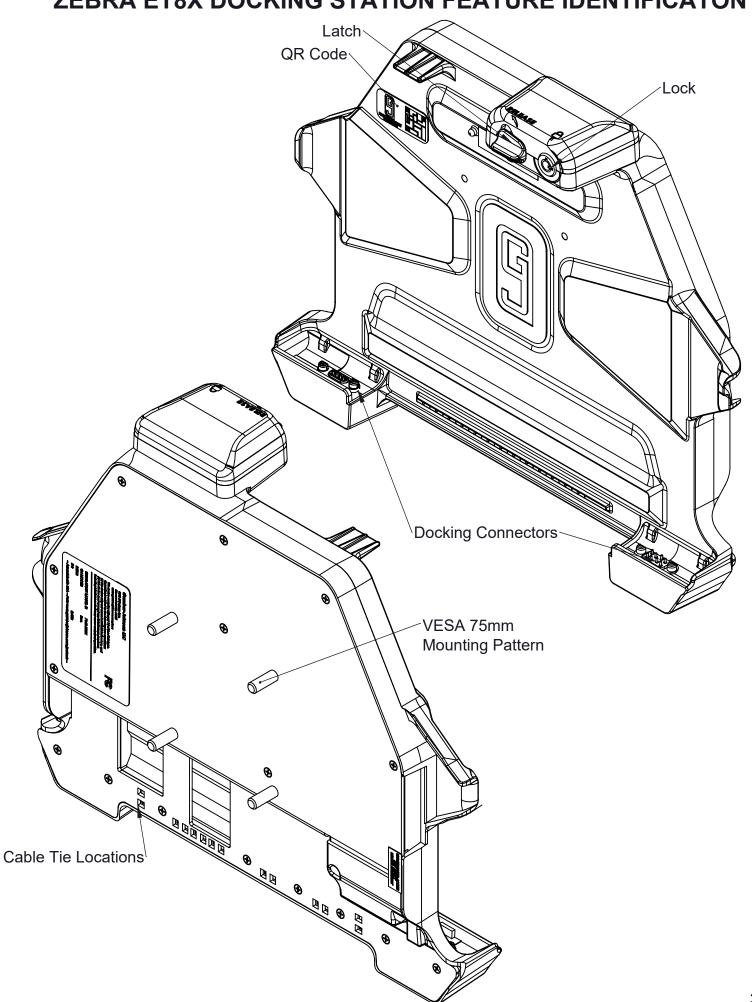

ZEBRA ET8X DOCKING STATION PORT REPLICATION

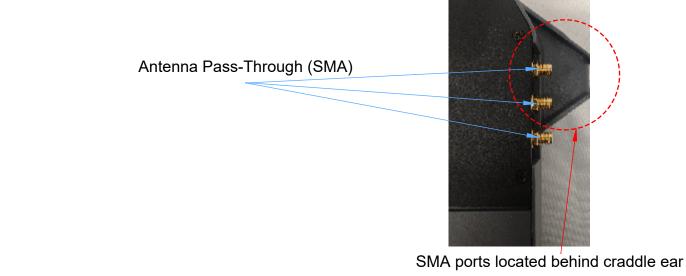


USB 2.0 USB 2.0 12VDC Input



PROPER CABLE MANAGEMENT

- 1. REQUIRED Use zip ties to secure each cable to the specific strain relief feature on the hub plastic.
- 2. OPTIONAL Use zip ties to secure bundled cables for improved routing

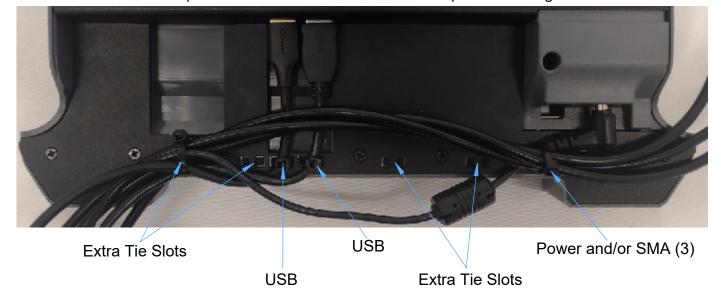

DOCKING AND UNDOCKING THE TABLET

Figure 1

TO DOCK THE TABLET

- 1. Insert the bottom of the tablet into the docking station (Figure 1)
- 2. Rotate the top of the tablet into the dock (Figure 2)
- While holding the tablet in place, pull the latch down into the closed position (Figure 3)
- 4. Use the key to lock and secure the latch when the dock is in use



Figure 2



Figure 3

TO UNDOCK THE TABLET

- 1. Unlock the latch
- 2. Flip the latch up to release the tablet
- 3. Pull the tablet out of the dock from the top of the tablet



REGULATORY CERTIFICATION INFORMATION

Regulatory Model #: **7160-1787**

GJ Part Numbers and Description:

DOCK-ZEBRA-ET8X-DUAL USB-NO RF 7160-1787-00 DOCK-ZEBRA-ET8X-DUAL USB-TRI RF 7160-1787-03

Certifications:

EN 55032: 2015+A11:2020 (Class B)

EN 55035: 2017

- EN 62368-1
- IEC 62368-1
- UL 62368-1

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

USB Peripherals must include Looped-Ferrite core to prevent EMI during operation. If the peripheral is directly wired without a built-in filter, (2x) 15064 Ferrite Clamps have been included. A single clamp must be snuggly installed within 4" of USB-A termination of unrated cables or devices for EMI compliant operation.



CAN ICES-003(B)/NMB-003(B)









Gamber-Johnson LLC, 5001 Joerns Dr., Stevens Point. WI. 54481. USA. 715-344-3482