

Precision 5690

Technical Guidebook

Notes, cautions, and warnings

 **NOTE:** A NOTE indicates important information that helps you make better use of your product.

 **CAUTION:** A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.

 **WARNING:** A WARNING indicates a potential for property damage, personal injury, or death.

Chapter 1: Views of Precision 5690	5
Right.....	5
Left.....	5
Top.....	6
Front.....	8
Bottom.....	9
Service Tag.....	10
Battery charge and status light	10
Chapter 2: Specifications of Precision 5690	11
Dimensions and weight.....	11
Processor.....	11
Chipset.....	12
Operating system.....	12
Memory.....	12
External ports.....	13
Internal slots.....	13
Wireless module.....	13
Audio.....	14
Storage.....	15
Media-card reader.....	15
Keyboard.....	15
Camera.....	16
Haptics touchpad.....	16
Power adapter.....	17
Battery.....	17
Display.....	18
Fingerprint reader.....	19
Sensor	19
GPU—Integrated.....	20
GPU—Discrete.....	20
Multiple display support matrix.....	20
Hardware security.....	20
Smart-card reader.....	21
Contactless smart-card reader.....	21
Contacted smart-card reader.....	24
Operating and storage environment.....	24
Chapter 3: Engineering specifications	26
Wireless module.....	26
Intel BE200, 2x2 MIMO, 5760 Mbps, 2.4/5/6 GHz, Wi-Fi 7 (WiFi 802.11be) and Bluetooth 5.4.....	26
GPU—Integrated.....	27
Intel Arc Graphics	27
GPU—Discrete.....	28

NVIDIA RTX 1000 Ada Generation Laptop, GDDR6.....	28
NVIDIA RTX 2000 Ada Generation Laptop, GDDR6.....	28
NVIDIA RTX 3500 Ada Generation Laptop, GDDR6.....	29
NVIDIA RTX 4000 Ada Generation Laptop, GDDR6.....	29
NVIDIA RTX 5000 Ada Generation Laptop, GDDR6.....	30
Storage.....	30
M.2 2230, 256 GB, PCIe NVMe Gen3 x4, Class 35 SSD.....	30
M.2 2280, 512 GB, PCIe NVMe Gen4 x4, Class 40 SSD.....	31
M.2 2280, 1 TB, PCIe NVMe Gen4 x4, Class 40 SSD.....	31
M.2 2280, 2 TB, PCIe NVMe Gen4 x4, Class 40 SSD.....	32
M.2 2280, 4 TB, PCIe NVMe Gen4 x4, Class 40 SSD.....	33
M.2 2280, 512 GB, PCIe NVMe Gen3 x4, Class 40 SSD, self-encrypting drive.....	33
M.2 2280, 1 TB, PCIe NVMe Gen3 x4, Class 40 SSD, self-encrypting drive.....	34
Media-card reader	34
Power adapter.....	35
Accessories.....	36
Security.....	36
Software security.....	36
Fingerprint reader.....	37
Dell ControlVault 3 Plus.....	37
Trusted Platform Module.....	38
System management features.....	38
Dell Client Command Suite for in-band systems management	38
Out-of-band systems management.....	39
Chapter 4: ComfortView Plus.....	40
Chapter 5: Dell Optimizer.....	41
Chapter 6: Color, material, and finish	42
Chapter 7: Keyboard shortcuts of Precision 5690.....	43
Chapter 8: Getting help and contacting Dell.....	45

Views of Precision 5690

Right



Figure 1. Right view

1. SD-card slot (optional)

Reads from and writes to the SD card. The computer supports the following card types:

- Secure Digital (SD)
- Secure Digital High Capacity (SDHC)
- Secure Digital Extended Capacity (SDXC)

2. USB 3.2 Gen 2 Type-C port with DisplayPort Alt Mode

Connect devices such as external storage devices, printers, and external displays. Provides data transfer rate of up to 10 Gbps.

Supports DisplayPort 1.4 and also enables you to connect an external display using a display adapter.

3. Wedge-shaped lock slot

Connect a security cable to prevent unauthorized movement of your computer.

Left



Figure 2. Left view

1. HDMI 2.1 port

Connect to a TV, external display, or another HDMI-in enabled device. Provides video and audio output.

2. Universal audio jack

Connect headphones or a headset (headphone and microphone combo).

3. Thunderbolt 4.0 (40 Gbps) port with Power Delivery

Supports USB4, DisplayPort 1.4, Thunderbolt 4 and also enables you to connect to an external display using a display adapter. Provides data transfer rates of up to 40 Gbps for USB4 and Thunderbolt 4.

NOTE: You can connect a Dell Docking Station to the Thunderbolt 4 ports. For more information, see the knowledge base article [000124295](https://www.dell.com/support/000124295) at www.dell.com/support.

NOTE: A USB Type-C to DisplayPort adapter (sold separately) is required to connect a DisplayPort device.

NOTE: USB4 is backward compatible with USB 3.2, USB 2.0, and Thunderbolt 3.

NOTE: Thunderbolt 4 supports two 4K displays or one 8K display.

4. Smart-card reader slot (optional)

Provides physical electronic authorization for access control to the resources.

Supports both Contactless and Contacted Smart Cards.

Provides personal identification, authentication, data storage, and application processing.

Top



Figure 3. Top view

1. Microphones

Provide digital sound input for audio recording, voice calls, and so on.

2. Power button with fingerprint reader

Press to turn on the computer if it is turned off, in sleep state, or in hibernate state.

When the computer is turned on, press the power button to put the computer into sleep state; press and hold the power button for ten seconds to force shut-down the computer.

If the power button has a fingerprint reader, place your finger on the power button to log in.



Figure 4. Active fingerprint reader area

NOTE: The highlighted area indicates the actual active fingerprint reader area and the image is for illustration purposes only.

NOTE: You can customize power-button behavior in Windows. For more information, see www.dell.com/support/manuals.

3. Haptics touchpad

Move your finger on the Haptics touchpad to move the mouse pointer. Tap to left-click and two fingers tap to right-click.



Figure 5. Top view (computer shipped with optional NFC)

1. Microphones

Provide digital sound input for audio recording, voice calls, and so on.

2. Power button with fingerprint reader

Press to turn on the computer if it is turned off, in sleep state, or in hibernate state.

When the computer is turned on, press the power button to put the computer into sleep state; press and hold the power button for ten seconds to force shut-down the computer.

If the power button has a fingerprint reader, place your finger on the power button to log in.




Figure 6. Active fingerprint reader area

NOTE: The highlighted area indicates the actual active fingerprint reader area and the image is for illustration purposes only.

NOTE: You can customize power-button behavior in Windows. For more information, see www.dell.com/support/manuals.

3. NFC-sensor area

Enables NFC-enabled devices to communicate with your computer.

4. Haptics touchpad

Move your finger on the Haptics touchpad to move the mouse pointer. Tap to left-click and two fingers tap to right-click.

Front

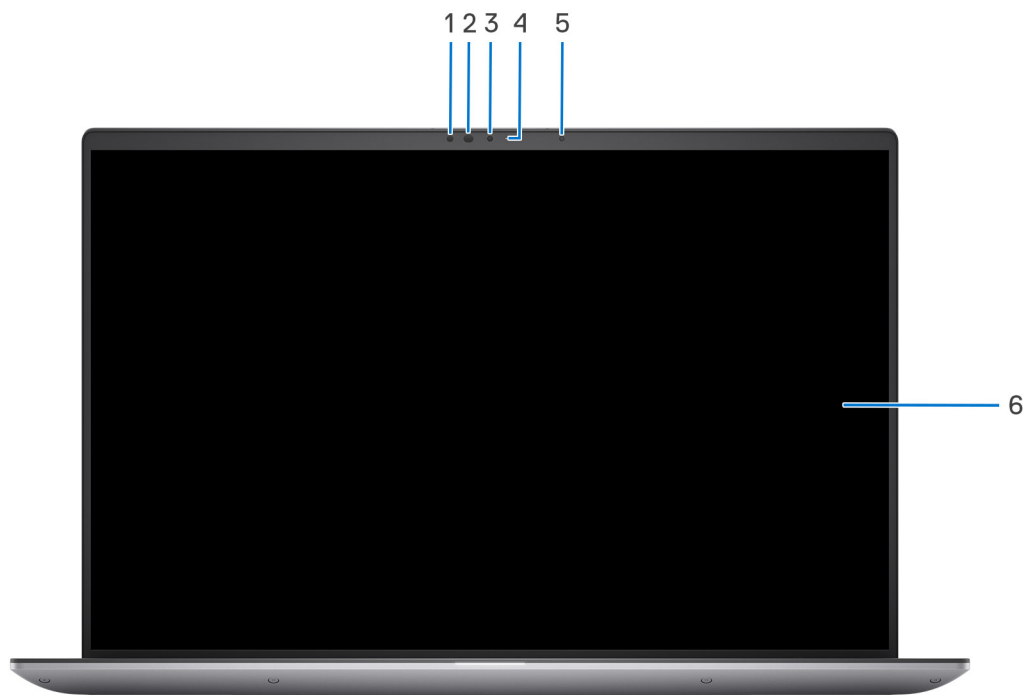


Figure 7. Front view

1. IR sensor

Provides digital sound input for audio recording and voice calls.

2. Infrared LED

Emits infrared light, which enables the infrared camera to sense and track motion.

3. Camera

Enables you to video chat, capture photos, and record videos.

4. Camera-status light

Turns on when the camera is in use.

5. Ambient-light sensor

The sensor detects the ambient light and automatically adjusts the keyboard backlight and display brightness.

6. Display

Provides visual output.

Bottom

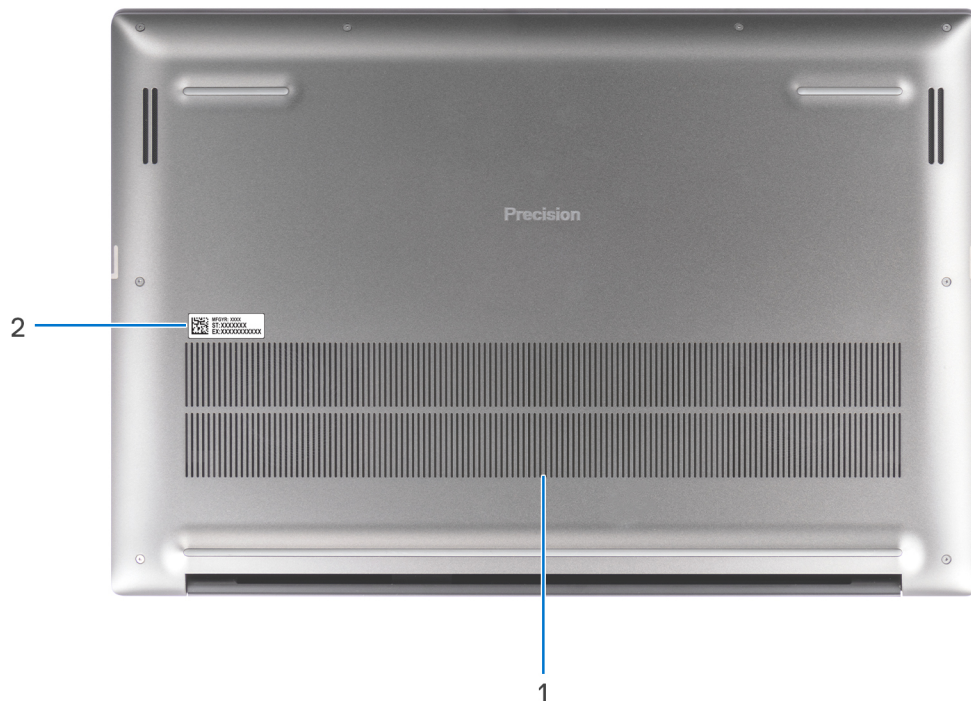


Figure 8. Bottom view

1. Air vents

Air vents provide ventilation for your computer. Clogged air vents can cause overheating and can affect your computer performance and potentially cause hardware issues. Keep the air vents clear of obstructions and clean them regularly to prevent the build-up of dust and dirt. For more information about cleaning air vents, search for articles in the Knowledge Base Resource at www.dell.com/support.

2. Service Tag label

The Service Tag is a unique alphanumeric identifier that enables Dell service technicians to identify the hardware components in your computer and access warranty information.

Service Tag

The service tag is a unique alphanumeric identifier that allows Dell service technicians to identify the hardware components in your computer and access warranty information.



Figure 9. Service Tag

Battery charge and status light

The following table lists the battery charge and status light behavior of your Precision 5690.

Table 1. Battery charge and status light behavior

Power Source	LED Behavior	System Power State	Battery Charge Level
AC Adapter	Off	S0 - S5	Fully Charged
AC Adapter	Solid White	S0 - S5	< Fully Charged
Battery	Off	S0 - S5	11-100%
Battery	Solid Amber (590+/-3 nm)	S0 - S5	< 10%


- S0 (ON) - System is turned on.
- S4 (Hibernate) - The system consumes the least power compared to all other sleep states. The system is almost at an OFF state, except for a trickle power. The context data is written to a hard drive.
- S5 (OFF) - The system is in a shutdown state.

Specifications of Precision 5690

Dimensions and weight

The following table lists the height, width, depth, and weight of your Precision 5690.

Table 2. Dimensions and weight

Description	Values
Height:	
Front height	20.50 mm (0.80 in.)
Rear height	22.17 mm (0.87 in.)
Width	353.68 mm (13.92 in.)
Depth	240.33 mm (9.46 in.)
Weight  NOTE: The weight of your computer depends on the configuration that is ordered and manufacturing variability.	2.17 kg (4.80 lb)

Processor

The following table lists the details of the processors that are supported for your Precision 5690.

Table 3. Processor

Description	Option one	Option two	Option three	Option four
Processor type	Intel Core Ultra 5 135H vPro	Intel Core Ultra 7 155H vPro Essentials	Intel Core Ultra 7 165H vPro	Intel Core Ultra 9 185H vPro
Processor wattage	45 W	45 W	45 W	45 W
Processor core count	14	16	16	16
Processor thread count	18	22	22	22
Processor speed	Up to 3.20 GHz	Up to 3.0 GHz	Up to 3.10 GHz	Up to 3.10 GHz
Processor cache	18 MB	24 MB	24 MB	24 MB
Integrated graphics	Intel Arc Graphics	Intel Arc Graphics	Intel Arc Graphics	Intel Arc Graphics

Chipset

The following table lists the details of the chipset that is supported for your Precision 5690.

Table 4. Chipset

Description	Values
Chipset	Intel MTL-H
Processor	<ul style="list-style-type: none">• Intel Core Ultra 5 135H vPro• Intel Core Ultra 7 155H vPro Essentials• Intel Core Ultra 7 165H vPro• Intel Core Ultra 9 185H vPro
DRAM bus width	128-bit
Flash EPROM	64 MB
PCIe bus	Up to Gen 4.0

Operating system

Your Precision 5690 supports the following operating systems:

- Windows 11 Home
- Windows 11 Pro
- Windows 11 Pro for Workstation
- Windows 11 Pro for Education
- Windows 11 Enterprise
- Ubuntu Linux 22.04 LTS, 64-bit
- Red Hat Linux 9.4

Memory

The following table lists the memory specifications of your Precision 5690.

Table 5. Memory specifications


Description	Values
Memory slots	Integrated on system board  NOTE: The memory is not replaceable or upgradeable. If memory has error, the system board must be replaced.
Memory type	Dual-channel LPDDR5x
Memory speed	7467 MT/s
Maximum memory configuration	64 GB
Minimum memory configuration	16 GB
Memory size per slot	16 GB, 32 GB, 64 GB
Memory configurations supported	<ul style="list-style-type: none">• 16 GB, LPDDR5x, 7467 MT/s, dual-channel (onboard)• 32 GB, LPDDR5x, 7467 MT/s, dual-channel (onboard)

Table 5. Memory specifications (continued)

Description	Values
	<ul style="list-style-type: none">64 GB, LPDDR5x, 7467 MT/s, dual-channel (onboard)

External ports

The following table lists the external ports on your Precision 5690.


Table 6. External ports

Description	Values
USB ports	<ul style="list-style-type: none">One USB 3.2 Gen 2 Type-C port with DisplayPort 1.4 Alt ModeTwo Thunderbolt 4 (40 Gbps) ports with Power Delivery
Audio port	One universal audio port
Video port/ports	<ul style="list-style-type: none">One USB 3.2 Gen 2 Type-C port with DisplayPort 1.4 Alt ModeTwo Thunderbolt 4 (40 Gbps) ports with Power DeliveryOne HDMI 2.1 port
Media-card reader	One SD-card slot (optional)
Power-adaptor port	Two Thunderbolt 4 (40 Gbps) port with Power Delivery
Security-cable slot	One wedge-shaped lock slot

Internal slots

The following table lists the internal slots of your Precision 5690.

Table 7. Internal slots

Description	Values
M.2	<ul style="list-style-type: none">Two M.2 2230/2280 for solid state drive <p> NOTE: To learn more about the features of different types of M.2 cards, search in the Knowledge Base Resource at www.dell.com/support.</p>

Wireless module

The following table lists the Wireless Local Area Network (WLAN) module that is supported on your Precision 5690.

Table 8. Wireless module specifications

Description	Values
Model number	Intel BE200
Transfer rate	Up to 5760 Mbps
Frequency bands supported	2.4 GHz/5 GHz/6 GHz

Table 8. Wireless module specifications (continued)

Description	Values
Wireless standards	<ul style="list-style-type: none"> ● Wi-Fi 802.11a/b/g ● Wi-Fi 4 (WiFi 802.11n) ● Wi-Fi 5 (WiFi 802.11ac) ● Wi-Fi 6E (WiFi 802.11ax) ● Wi-Fi 7 (WiFi 802.11be)
Encryption	<ul style="list-style-type: none"> ● 64-bit/128-bit WEP ● AES-CCMP ● TKIP
Bluetooth wireless card	Bluetooth 5.4 wireless card
	<p>i NOTE: The version of the Bluetooth wireless card may vary depending on the operating system that is installed on your computer.</p>

Audio

The following table lists the audio specifications of your Precision 5690.

Table 9. Audio specifications

Description	Values
Audio controller	Waves MaxxAudio 13
Stereo conversion	Supported
Internal audio interface	High definition audio interface
External audio interface	One universal audio port
Number of speakers	<ul style="list-style-type: none"> ● 2 x Woofers ● 2 x Tweeters
Internal-speaker amplifier	Supported
External volume controls	Keyboard shortcut controls
Speaker output:	
Average speaker output	<ul style="list-style-type: none"> ● Woofer: 2 x 2 W ● Tweeters: 2 x 2 W
Peak speaker output	<ul style="list-style-type: none"> ● Woofer: 2 x 2.5 W ● Tweeters: 2 x 2.5 W
Subwoofer output	Supported
Microphone	Dual-array microphones in camera assembly

Storage

This section lists the storage options on your Precision 5690.

Your Precision 5690 supports one of the following storage configurations:


Table 10. Storage specifications

Storage type	Interface type	Capacity
M.2 2230, Class 35 solid state drive	PCIe NVMe Gen 4	256 GB
M.2 2280, Class 40 solid state drive	PCIe NVMe Gen 4	512 GB/1 TB/2 TB/4 TB
M.2 2280, Class 40 Self-Encrypting Opal 2.0 solid state drive	PCIe NVMe Gen 4	512 GB/1 TB

Media-card reader

The following table lists the media cards that are supported on your Precision 5690.

Table 11. Media-card reader specifications

Description	Values
Media-card type	One SD-card slot (optional)
Media-cards supported	<ul style="list-style-type: none">Secure Digital (SD)Secure Digital High Capacity (SDHC)Secure Digital Extended Capacity (SDXC)
 NOTE: The maximum capacity supported by the media-card reader varies depending on the standard of the media card that is installed on your computer.	


Keyboard

The following table lists the keyboard specifications of your Precision 5690.

Table 12. Keyboard specifications

Description	Values
Keyboard type	AI hotkey backlit keyboard
Keyboard layout	QWERTY
Number of keys	<ul style="list-style-type: none">United States and Canada: 79 keysUnited Kingdom: 80 keysJapan: 83 keys
Keyboard size	19.05 mm 18.05 mm
Keyboard shortcuts	Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. To type the alternate character, press Shift and the desired key. To perform secondary functions, press Fn and the desired key.

Table 12. Keyboard specifications (continued)

Description	Values
	 NOTE: You can define the primary behavior of the function keys (F1–F12) changing Function Key Behavior in BIOS setup program.

Camera

The following table lists the camera specifications of your Precision 5690.

Table 13. Camera specifications

Description	Values
Number of cameras	One
Camera type	FHD RGB + IR camera with HDR technology
Camera location	Front camera
Camera sensor type	CMOS sensor technology
Camera resolution:	
Still image	2.07 megapixel
Video	1920 x 1080 FHD at 30 fps
Infrared camera resolution:	
Still image	0.23 megapixel
Video	640 x 360 at 15 fps
Diagonal viewing angle:	
Camera	80 degrees
Infrared camera	80.6 degrees

Haptics touchpad

The following table lists the touchpad specifications of your Precision 5690.


Table 14. Touchpad specifications

Description	Values
Touchpad resolution:	300 dpi
Touchpad dimensions:	
Horizontal	136 mm (5.35 inch)
Vertical	85 mm (3.34 inch)
Touchpad gestures	For more information about touchpad gestures available on Windows, see the Microsoft knowledge base article at support.microsoft.com .

Power adapter

The following table lists the power adapter specifications of your Precision 5690.

Table 15. Power adapter specifications

Description	Option one	Option two
Type	100 W AC Adapter, USB Type-C	165 W AC adapter, USB Type-C
Input voltage	100 VAC - 240 VAC	100 VAC - 240 VAC
Input frequency	50 Hz - 60 Hz	50 Hz - 60 Hz
Input current (maximum)	1.70 A	2.20 A
Output current (continuous)	<ul style="list-style-type: none"> • 20 V/5 A • 15 V/3 A • 9 V/3 A • 5 V/3 A 	<ul style="list-style-type: none"> • 28 V/5.89 A • 20 V/6.50 A • 15 V/3 A • 9 V/3 A • 5 V/3 A
Rated output voltage	5 VDC/9 VDC/15 VDC/20 VDC	5 VDC/9 VDC/15 VDC/20 VDC/28 VDC
Temperature range:		
Operating	0 °C to 40 °C (32 °F to 104 °F)	0 °C to 40 °C (32 °F to 104 °F)
Storage	-40 °C to 70 °C (-40 °F 158 °F)	-40 °C to 70 °C (-40 °F 158 °F)
 CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.		

Battery

The following table lists the battery specifications of your Precision 5690.

Table 16. Battery specifications

Description	Option one	Option two
Battery type	6-cell 99.5 Whr lithium-ion battery	6-cell 99.5 Whr lithium-ion LcL battery
Battery voltage	11.55 VDC (Nominal)	11.55 VDC (Nominal)
Battery weight (maximum)	0.363 kg (0.8 lb)	0.363 kg (0.8 lb)
Battery dimensions:		
Height	7.66 mm (0.30 inch)	7.66 mm (0.30 inch)
Width	289 mm (11.38 inch)	289 mm (11.38 inch)
Depth	84.4 mm (3.32 inch)	85.4 mm (3.32 inch)
Temperature range:		
Operating	<ul style="list-style-type: none"> • Charge: 0°C to 50°C (32°F to 122°F) 	<ul style="list-style-type: none"> • Charge: 0°C to 50°C (32°F to 122°F) • Discharge: 0°C to 60°C (32°F to 140°F)

Table 16. Battery specifications (continued)

Description		Option one	Option two
		<ul style="list-style-type: none"> Discharge: 0°C to 60°C (32°F to 140°F) 	
	Storage	-20°C to 65°C (-4°F to 149°F)	-20°C to 65°C (-4°F to 149°F)
Battery operating time		Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.	Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.
Battery charging time (approximate) ⓘ NOTE: Control the charging time, duration, start and end time, and so on, using the Dell Power Manager application. For more information about Dell Power Manager, search in the Knowledge Base Resource at www.dell.com/support .		<ul style="list-style-type: none"> 2 hours (Express charge) 3 hours (Standard charge) 	<ul style="list-style-type: none"> 2 hours (Express charge) 3 hours (Standard charge)
Coin-cell battery		No	No
<p>⚠ CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.</p> <p>⚠ CAUTION: Dell Technologies recommends that you charge the battery regularly for optimal power consumption. If your battery charge is depleted, connect the power adapter, turn on your computer, and then restart your computer to reduce the power consumption.</p>			

Display

The following table lists the display specifications of your Precision 5690.

Table 17. Display specifications

Description		Option one	Option two
Display type		16" Full High-Definition Plus (FHD+)	16" Ultra High-Definition Plus (UHD+)
Touch options		No	Yes
Display-panel technology		IPS (In-plane switching)	OLED
Display-panel dimensions (active area):			
	Height	22.17 mm (0.87 in.)	22.17 mm (0.87 in.)
	Width	344.68 mm (13.57 in.)	344.45 mm (13.56 in.)
	Diagonal	406.40 mm (16 in.)	406.40 mm (16 in.)
Display-panel native resolution		1920 x 1200	3840 x 2400
Luminance (typical)		500 nits	400 nits
Megapixels		2.3	9.2
Color gamut		100% DCI-P3	100% DCI-P3

Table 17. Display specifications (continued)

Description	Option one	Option two
Pixels Per Inch (PPI)	142	283
Contrast ratio (minimum)	1300:1	100000:1
Response time (maximum)	30 ms	1 ms typical
Refresh rate	60 Hz	60 Hz
Horizontal view angle	+/- 85 degrees	+/- 85 degrees typical
Vertical view angle	+/- 85 degrees	+/- 85 degrees typical
Pixel pitch	0.18 mm	0.09 mm
Power consumption (maximum)	6.32 W	11.14 W
Anti-glare vs glossy finish	Anti-glare	Anti-smudge

Fingerprint reader

The following table lists the fingerprint-reader specifications of your Precision 5690.


 **NOTE:** The fingerprint reader is on the power button.

Table 18. Fingerprint reader specifications

Description	Values
Fingerprint-reader sensor technology	Capacitive
Fingerprint-reader sensor resolution	500 dpi
Fingerprint-reader sensor pixel size	108 x 88

Sensor

The following table lists the sensor of your Precision 5690.

Table 19. Sensor

Sensor support
Accelerometer for adaptive thermal
Ambient light sensor
Windows auto-brightness
IR proximity sensor
Gyro + Accelerometer
Hall effect sensor
Sensor hub

GPU—Integrated

The following table lists the specifications of the integrated Graphics Processing Unit (GPU) supported by your Precision 5690.

Table 20. GPU—Integrated

Controller	Memory size	Processor
Intel Arc Graphics	Shared system memory	<ul style="list-style-type: none"> • Intel Core Ultra 5 135H vPro • Intel Core Ultra 7 155H vPro Essentials • Intel Core Ultra 7 165H vPro • Intel Core Ultra 9 185H vPro

GPU—Discrete

The following table lists the specifications of the discrete Graphics Processing Unit (GPU) supported by your Precision 5690.

Table 21. GPU—Discrete

Controller	Memory size
NVIDIA RTX 1000 Ada Generation Laptop GPU	6 GB
NVIDIA RTX 2000 Ada Generation Laptop GPU	8 GB
NVIDIA RTX 3500 Ada Generation Laptop GPU	12 GB
NVIDIA RTX 4000 Ada Generation Laptop GPU	12 GB
NVIDIA RTX 5000 Ada Generation Laptop GPU	16 GB

Multiple display support matrix

The following table lists the multiple display support matrix for your Precision 5690.

Table 22. Multiple display support matrix

Graphics Card	Supported external displays
Intel Arc Graphics	Yes, supported on USB Type-C, Thunderbolt, and HDMI port.
NVIDIA RTX 1000 Ada Generation Laptop GPU	Yes, supported on the right side USB Type-C port only.
NVIDIA RTX 2000 Ada Generation Laptop GPU	Yes, supported on the right side USB Type-C port only.
NVIDIA RTX 3500 Ada Generation Laptop GPU	Yes, supported on the right side USB Type-C port only.
NVIDIA RTX 4000 Ada Generation Laptop GPU	Yes, supported on the right side USB Type-C port only.
NVIDIA RTX 5000 Ada Generation Laptop GPU	Yes, supported on the right side USB Type-C port only.

Hardware security

The following table lists the hardware security of your Precision 5690.

Table 23. Hardware security

Hardware security
Wedge-shaped lock slot
Chassis Intrusion Prevention Lock

Table 23. Hardware security (continued)

Hardware security
Hardware TPM 2.0 discrete
FIPS 140-2 certification for TPM
TCG Certification for TPM (Trusted Computing Group)
ControlVault 3+ Advanced Authentication with FIPS 140-2 Level 3 Certification
Fingerprint Reader
Contacted Smart Card and ControlVault 3 or 3+
Contactless Smart Card, NFC, and ControlVault 3 or 3+
SED SSD NVMe (Opal 2.0)
Statement of Non-Volatility
Chassis Intrusion Detection
Battery Removal Detection
RPMC (specify through SPI Flash or eRPMC)
SPI Flash Tamper Detection/Prevention Shunt Circuit
Board Level Shield Tamper Detection

Smart-card reader

Contactless smart-card reader

This section lists the contactless smart-card reader specifications of your Precision 5690. This module is only available in computers shipped with Smart-card readers.

Table 24. Contactless smart-card reader specifications

Title	Description	Dell ControlVault 3 contactless smart-card reader with NFC
Felica Card Support	Reader and software capable of supporting Felica contactless cards	Yes
Prox (Proximity) (125kHz) Card support	Reader and software capable of supporting Prox /Proximity/125kHz contactless cards	No
ISO 14443 Type A Card Support	Reader and software capable of supporting ISO 14443 Type A contactless cards	Yes
ISO 14443 Type B Card Support	Reader and software capable of supporting ISO 14443 Type B contactless cards	Yes
ISO/IEC 21481	Reader and software capable of supporting ISO/IEC 21481 compliant contactless cards and tokens	Yes
ISO/IEC 18092	Reader and software capable of supporting ISO/IEC 21481 compliant contactless cards and tokens	Yes
ISO 15693 Card Support	Reader and software capable of supporting ISO15693 contactless cards	Yes

Table 24. Contactless smart-card reader specifications (continued)

Title	Description	Dell ControlVault 3 contactless smart-card reader with NFC
NFC Tag Support	Supports reading and processing of NFC compliant tag information	Yes
NFC Reader Mode	Support for NFC Forum Defined Reader mode	Yes
NFC Writer Mode	Support for NFC Forum Defined Writer mode	Yes
NFC Peer-to-Peer Mode	Support for NFC Forum Defined Peer to Peer mode	Yes
NFC Proximity OS Interface	Enumerates NFP (Near Field Proximity) device for OS to utilize	Yes
PC/SC OS interface	Personal Computer/Smart Card specification for integration of hardware readers into personal computer environments	Yes
CCID driver compliance	Common driver support for Integrated Circuit Card Interface Device for OS level drivers	Yes
Dell ControlVault support	Device connects to Dell ControlVault for usage and processing	Yes


 **NOTE:** 125 Khz proximity cards are not supported.

Table 25. Supported cards

Manufacturer	Card
HID	jCOP readertest3 A card (14443a)
	1430 1L
	DESFire D8H
	DESFIRE 4K Standard - 1450NGGNN
	iClass 16K/16 - 2002PGGMN
	iClass SR 16K/16 - 2002HPGGMN
	iCLASS 2K tag
	iCLASS GP - 2003 PGGMN
	iClass Clamshell - 2080PMSMV
	iClass Prox 16K/16 - 2022BGGMNN
	Mifare M1P 1430 NGGNN
	iclass Prox 2020BGGMNM
	DesFire D8P 1456CSGMN
	iCLASS MIFARE Px GM49Y 2623BNPGBNAB
	iCLASS MIFARE Px 8M1L
	iClass SEOS JW 5006PGGMN
	Crescendo iCLASS Px G8H
iCLASS Seos IY	

Table 25. Supported cards (continued)

Manufacturer	Card
	SEOS JMC4 J1Y 5806VNG1NNN4
	SEOS Key FOB 5266PNNA
	SEOS Clamshell 5656PMSAV
	SEOS + Prox 5106RGGMNN
	SEOS + DESFire 5906PNG1ANN7
	SEOS iClass 5006PGGMN7
	Seos Essential + Prox 551PPGGANN
	iCLASS 2K 2000PGGMN
	iCLASS 2K 3000PGGMN
	MIFARE DESFire 3700CPGGAN
	iCLASS DP
	DESFire 1Y
NXP/Mifare	Mifare DESFire 8K White PVC Cards
	Mifare Classic 1K White PVC Cards
	Mifare Mifare S50 ISO Cards
	Mifare DESFire 2K
	Mifare Plus S 2K/4K
	Mifare Plus X 4K
G&D	idOnDemand - SCE3.2 144K
	SCE6.0 FIPS 80K Dual+ 1 K Mifare
	SCE6.0 nonFIPS 80K Dual+ 1 K Mifare
	SCE6.0 FIPS 144K Dual + 1K Mifare
	SCE6.0 nonFIPS 144K Dual + 1 K Mifare
	SCE7.0 FIPS 144K
Oberthur	idOnDemand - OCS5.2 80K
	ID-One Cosmo 64 RSA D V5.4 T=0 card
	ID-One Cosmo 128K V5.5 card
Gemalto	TOP DL GX4 144K card
Sony	Felica RC-S962
	Felica RC-S965
	Felica RC-S966
PIVKey	C910 PKI
NIST	PIV1
IDENTIV	PIV programmed cards
	uTrust
Transport cards	Oyster (London) MIFARE DESFire
	T-Money (Korea)

Table 25. Supported cards (continued)

Manufacturer	Card
	Octopus Card (Hong Kong)
	SUICA (Japan)

Contacted smart-card reader

The following table lists the contacted smart-card reader specifications of your Precision 5690.

Table 26. Contacted smart-card reader specifications


Title	Description	Dell ControlVault 3 smart-card reader
ISO 7816 -3 Class A Card Support	Reader capable of reading 5V powered smart mcard	Yes
ISO 7816 -3 Class B Card Support	Reader capable of reading 3V powered smart card	Yes
ISO 7816 -3 Class C Card support	Reader capable of reading 1.8V powered smart card	Yes
ISO 7816-1 Compliant	Specification for the reader	Yes
ISO 7816 -2 Compliant	Specification for smart card device physical characteristics (size, location of connection points, etc.)	Yes
ISO 7816-3 Compliant	Specification for electrical interface and transmission protocols	Yes
ISO 7816-4 Compliant	Specification for organization, security and commands for interchange	Yes
Dell ControlVault support	Device connects to Dell ControlVault for usage and processing	Yes
T=0 support	Cards support character level transmission	Yes
T=1 support	Cards support block level transmission	Yes
EMVCo Certified	Formally certified based on EMVCO smart card standards	Yes
PC/SC OS interface	Personal Computer/Smart Card specification for integration of hardware readers into personal computer environments	Yes
CCID driver compliance	Common driver support for Integrated Circuit Card Interface Device for OS level drivers.	Yes
Windows Certified	Device certified by WHCK	Yes
FIPS 201 (PIV/HSPD-12) Compliant via GSA	Device compliant with FIPS 201/PIV/HSPD-12 requirements	Yes

Operating and storage environment

This table lists the operating and storage specifications of your Precision 5690.

Airborne contaminant level: G1 as defined by ISA-S71.04-1985

Table 27. Computer environment

Description	Operating	Storage
Temperature range	0°C to 35°C (32°F to 95°F)	-40°C to 65°C (-40°F to 149°F)
Relative humidity (maximum)	10% to 90% (non-condensing)	0% to 95% (non-condensing)
Vibration (maximum)*	0.66 GRMS	1.30 GRMS
Shock (maximum)	110 G†	160 G†
Altitude range	-15.2 m to 3048 m (-49.87 ft to 10000 ft)	-15.2 m to 10668 m (-49.87 ft to 35000 ft)
 CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.		

* Measured using a random vibration spectrum that simulates the user environment.

† Measured using a 2 ms half-sine pulse.

Engineering specifications

Wireless module

Intel BE200, 2x2 MIMO, 5760 Mbps, 2.4/5/6 GHz, Wi-Fi 7 (WiFi 802.11be) and Bluetooth 5.4


The following table lists the Intel BE200 specifications.

Table 28. Intel BE200 specifications

Description	Value
Host interface	<ul style="list-style-type: none"> • PCIe for Wi-Fi • USB/I2S for Bluetooth
Network standard	IEEE 802.11a/b/g/n/ac/ax/be, 320 MHz channel use, MU-MIMO, new 6 GHz band
Wi-Fi Alliance certifications	Wi-Fi 7 Technology support, Wi-Fi CERTIFIED 6 with Wi-Fi 6E, Wi-Fi CERTIFIED a/b/g/n/ac, WMM, WMM-Power Save, WPA3, PMF, Wi-Fi Direct, Wi-Fi Agile Multiband, Wi-Fi Location R2 HW readiness
Operating frequency bands	<ul style="list-style-type: none"> • 2.4 GHz • 5 GHz • 6 GHz
Data rate	<ul style="list-style-type: none"> • 2.4 GHz 40M: Up to 688 Mbps • 5/6 GHz 80M: Up to 1.44 Gbps • 5/6 GHz 160M: Up to 2.88 Gbps • 5/6 GHz 320M: Up to 5.76 Gbps
Power consumption	Optimized power modes (sleep states) reduce power consumption during periods of inactivity.
Security methods	WPA3 personal and enterprise including WPA2 transition mode
Authentication protocols	<ul style="list-style-type: none"> • 802.1X EAP-TLS • EAP-TTLS/MSCHAPv2 • PEAPv0 -MSCHAPv2 (EAP-SIM, EAP-AKA, EAP-AKA)
Encryption	<ul style="list-style-type: none"> • 128-bit AES-CCMP • 256-bit AES-GCMP
Product safety	<ul style="list-style-type: none"> • UL • C-UL • CB (IEC60950-1)
Management capabilities alerting	Support for Intel AMT
Government compliance	FIPS 140-3
Client utility	Intel PRO/Set wireless software v23 and later
Antenna diversity	Supported

Table 28. Intel BE200 specifications (continued)

Description	Value
Radio on/off	Supported
Roaming	Support seamless roaming between access points.
Wake on wireless	Supported
Wireless display	Native Miracast support by Windows 11
Wireless PAN standard	<ul style="list-style-type: none"> • Dual Mode Bluetooth 5.4 • BLE
Bluetooth data rates	Up to 3 Mbps
Bluetooth operating frequency bands	2.4 GHz
Bluetooth profiles supported	Support for Microsoft Inbox Bluetooth profiles in Windows
Bluetooth data encryption	128-bit encryption
Bluetooth output power	Power class 1
Temperature	Operating temperature (Adapter shield) 0°C to +80°C
Humidity	Non-operating 50% to 90% RH non-condensing (at temperatures of 25°C to 35°C)


 **NOTE:** Other names and brands may be claimed as the property of others.

GPU—Integrated

Intel Arc Graphics

The following table lists the Intel Arc Graphics specifications.

Table 29. Intel Arc Graphics specifications

Feature	Values
Bus Type	Integrated graphics
Memory type	Shared with system memory
Graphics level	Intel Core Ultra 5/7/9 processors
Estimated maximum power consumption (TDP)	45 W, included in the CPU power
Overlay planes	Yes
Operating systems graphics/ video API support	DirectX 12 Ultimate, OpenGL 4.6
Maximum vertical refresh rate	Up to 120 Hz  NOTE: The refresh rate depends on the resolution.
External ports	<ul style="list-style-type: none"> • HDMI 2.1 x 1 • USB 3.2 Gen 2 Type-C port with DisplayPort 1.4 Alt Mode x 1 • Thunderbolt™ 4 (40 Gbps) ports with Power Delivery x 2
Multiple display support	Up to 4 displays including the computer display

GPU—Discrete

NVIDIA RTX 1000 Ada Generation Laptop, GDDR6

The following table lists the NVIDIA RTX 1000 Ada Generation laptop GPU specifications.

Table 30. NVIDIA RTX 1000 Ada Generation Laptop GPU specifications

Feature	Values
GPU	NVIDIA RTX 1000 Ada Generation Laptop GPU
CUDA Cores	2560
Memory bandwidth	192 GB/s
Memory type	GDDR6
Memory size	6 GB
Memory interface	96-bit
TGP	35 W
GPU base clock	990 MHz
GPU boost clock	1740 MHz
Vram clock	8001 MHz
PCIe	Gen 4 x8
Features	<ul style="list-style-type: none">• Dynamic boost• Configurable TGP

NVIDIA RTX 2000 Ada Generation Laptop, GDDR6

The following table lists the NVIDIA RTX 2000 Ada Generation Laptop GPU specifications.

Table 31. NVIDIA RTX 2000 Ada Generation Laptop GPU specifications

Feature	Values
GPU	NVIDIA RTX 2000 Ada Generation Laptop GPU
CUDA Cores	CUDA cores 3072
Memory bandwidth	256 GB/s
Memory type	GDDR6
Memory size	8 GB
Memory interface	128-bit
TGP	35 W
GPU base clock	930 MHz
GPU boost clock	1455 MHz
Vram clock	8001 MHz
PCIe	Gen 4 x 8
Features	<ul style="list-style-type: none">• Dynamic boost• Configurable TGP

NVIDIA RTX 3500 Ada Generation Laptop, GDDR6

The following table lists the NVIDIA RTX 3500 ADA Generation laptop GPU specifications.

Table 32. NVIDIA RTX 3500 Ada Generation Laptop GPU specifications

Feature	Values
GPU	NVIDIA RTX 3500 Ada Generation Laptop GPU
CUDA cores	5120
Memory bandwidth	432 GB/s
Memory type	GDDR6
Memory size	12 GB
Memory interface	192-bit
TGP	60 W
GPU base clock	1110 MHz
GPU boost clock	1545 MHz
Vram clock	9001 MHz
PCIe	Gen4 x 8
Features	<ul style="list-style-type: none">• Dynamic boost• Configurable TGP

NVIDIA RTX 4000 Ada Generation Laptop, GDDR6

The following table lists the NVIDIA RTX 4000 Ada Generation Laptop GPU specifications.

Table 33. NVIDIA RTX 4000 Ada Generation Laptop GPU specifications

Feature	Values
GPU	NVIDIA RTX 4000 Ada Generation Laptop GPU
CUDA cores	7424
Memory bandwidth	432 GB/s
Memory type	GDDR6
Memory size	12 GB
Memory interface	192-bit
TGP	60 W
GPU base clock	765 MHz
GPU boost clock	1440 MHz
Vram clock	9001 MHz
PCIe	Gen4 x 8
Features	<ul style="list-style-type: none">• Dynamic boost• Configurable TGP

NVIDIA RTX 5000 Ada Generation Laptop, GDDR6

The following table lists the NVIDIA RTX 5000 Ada Generation Laptop GPU specifications.

Table 34. NVIDIA RTX 5000 Ada Generation Laptop GPU specifications

Feature	Values
GPU	NVIDIA RTX 5000 Ada Generation Laptop GPU
CUDA cores	9728
Memory bandwidth	576 GB/s
Memory type	GDDR6
Memory size	16 GB
Memory interface	256-bit
TGP	80 W
GPU base clock	930 MHz
GPU boost clock	1680 MHz
Vram clock	9001 MHz
PCIe	Gen4 x 8
Features	Dynamic boost

Storage

M.2 2230, 256 GB, PCIe NVMe Gen3 x4, Class 35 SSD

The following table lists the M.2 2230, 256 GB SSD specifications.

Table 35. 256 GB SSD specifications

Capacity	256 GB
Height (approximate)	2.38 mm (0.09 in.)
Width (approximate)	22.00 mm (0.87 in.)
Depth (approximate)	30.00 mm (1.18 in.)
Interface type	PCIe Gen3
Speed (maximum)	32 Gb/s (up to 4 lanes)
MTBF	1.4M hours
Logical blocks	500,118,192
Power source	
Power consumption (reference only)	<ul style="list-style-type: none"> Idle: 5 mW (PS4) Active: 3.50 W
Environmental operating conditions (non-condensing)	
Temperature range	0°C to 70°C
Relative humidity range	10% to 90%
Op shock	1500G
Environmental non-operating conditions (non-condensing)	

Table 35. 256 GB SSD specifications (continued)

Temperature range	-40°C to 70°C
Relative humidity range	5% to 95%

M.2 2280, 512 GB, PCIe NVMe Gen4 x4, Class 40 SSD

The following table lists the M.2 2280, 512 GB SSD specifications.

Table 36. 512 GB SSD specifications

Description	Values
Capacity	512 GB
Height (approximate)	2.38 mm (0.17 in.)
Width (approximate)	22 mm (0.87 in.)
Depth (approximate)	80 mm (3.15 in.)
Interface type	PCIe Gen4
Speed (maximum)	64 Gb/s (up to 4 lanes)
MTBF	1.4M hours
Logical blocks	1,000,215,216
Power source	
Power consumption (reference only)	<ul style="list-style-type: none"> • Idle: 5 mW (PS4 - L1.2) • Active: 5 W
Environmental operating conditions (non-condensing)	
Temperature range	0°C to 70°C
Relative humidity range	10% to 90%
Op shock	1500G
Environmental non-operating conditions (non-condensing)	
Temperature range	-40°C to 70°C
Relative humidity range	5% to 95%

M.2 2280, 1 TB, PCIe NVMe Gen4 x4, Class 40 SSD

The following table lists the M.2 2280, 1 TB SSD specifications.

Table 37. 1 TB SSD specifications

Description	Values
Capacity	1 TB
Height (approximate)	2.38 mm (0.17 in.)
Width (approximate)	22 mm (0.87 in.)
Depth (approximate)	80 mm (3.15 in.)
Interface type	PCIe Gen4
Speed (maximum)	64 Gb/s (up to 4 lanes)
MTBF	1.4M hours

Table 37. 1 TB SSD specifications (continued)

Description	Values
Logical blocks	2,000,409,264
Power source	
Power consumption (reference only)	<ul style="list-style-type: none"> • Idle: 5 mW (PS4 - L1.2) • Active: 5 W
Environmental operating conditions (non-condensing)	
Temperature range	0°C to 70°C
Relative humidity range	10% to 90%
Op shock	1500G
Environmental non-operating conditions (non-condensing)	
Temperature range	-40°C to 70°C
Relative humidity range	5% to 95%

M.2 2280, 2 TB, PCIe NVMe Gen4 x4, Class 40 SSD

The following table lists the M.2 2280, 2 TB SSD specifications.

Table 38. 2 TB SSD specifications

Description	Values
Capacity	2 TB
Height (approximate)	2.38 mm (0.09 in.)
Width (approximate)	22 mm (0.87 in.)
Depth (approximate)	80 mm (3.15 in.)
Interface type	PCIe Gen4
Speed (maximum)	64 Gb/s (up to 4 lanes)
MTBF	1.4M hours
Logical blocks	4,000,797,360
Power source	
Power consumption (reference only)	<ul style="list-style-type: none"> • Idle: 5 mW (PS4 - L1.2) • Active: 5 W
Environmental operating conditions (non-condensing)	
Temperature range	0°C to 70°C
Relative humidity range	10% to 90%
Op shock	1500G
Environmental non-operating conditions (non-condensing)	
Temperature range	-40°C to 70°C
Relative humidity range	5% to 95%

M.2 2280, 4 TB, PCIe NVMe Gen4 x4, Class 40 SSD

The following table lists the M.2 2280, 4 TB SSD specifications.

Table 39. 4 TB SSD specifications

Description	Values
Capacity	4 TB
Height (approximate)	3.73 mm (0.15 in.)
Width (approximate)	22 mm (0.87 in.)
Depth (approximate)	80 mm (3.15 in.)
Interface type	PCIe Gen4
Speed (maximum)	64 Gb/s (up to 4 lanes)
MTBF	1.4M hours
Logical blocks	8,001,573,552
Power source	
Power consumption (reference only)	<ul style="list-style-type: none"> • Idle: 5 mW (PS4 - L1.2) • Active: 5 W
Environmental operating conditions (non-condensing)	
Temperature range	0°C to 70°C
Relative humidity range	10% to 90%
Op shock	1500G
Environmental non-operating conditions (non-condensing)	
Temperature range	-40°C to 70°C
Relative humidity range	5% to 95%

M.2 2280, 512 GB, PCIe NVMe Gen3 x4, Class 40 SSD, self-encrypting drive

The following table lists the M.2 2280, 512 GB SSD, self-encrypting drive specifications

Table 40. 512 GB SSD, self-encrypting drive specifications

Capacity	512 GB
Height (approximate)	2.38 mm (0.09 in.)
Width (approximate)	22.00 mm (0.87 in.)
Depth (approximate)	80.00 mm (3.15 in.)
Interface type	PCIe Gen3
Speed (maximum)	32 Gb/s (up to 4 lanes)
MTBF	1.4M hours
Logical blocks	1,000,215,216
Power source	
Power consumption (reference only)	<ul style="list-style-type: none"> • Idle: 5 mW (PS4 - L1.2) • Active: 4.50 W

Table 40. 512 GB SSD, self-encrypting drive specifications (continued)

Environmental operating conditions (non-condensing)	
Temperature range	0°C to 70°C
Relative humidity range	10% to 90%
Op shock	1500G
Environmental non-operating conditions (non-condensing)	
Temperature range	-40°C to 70°C
Relative humidity range	5% to 95%

M.2 2280, 1 TB, PCIe NVMe Gen3 x4, Class 40 SSD, self-encrypting drive

The following table lists the M.2 2280, 1 TB SSD, self-encrypting drive specifications

Table 41. 1 TB SSD, self-encrypting drive specifications

Capacity	1 TB
Height (approximate)	2.38 mm (0.09 in.)
Width (approximate)	22.00 mm (0.87 in.)
Depth (approximate)	80.00 mm (3.15 in.)
Interface type	PCIe Gen3
Speed (maximum)	32 Gb/s (up to 4 lanes)
MTBF	1.4M hours
Logical blocks	2,000,409,264
Power source	
Power consumption (reference only)	<ul style="list-style-type: none"> Idle: 5 mW (PS4 - L1.2) Active: 4.50 W
Environmental operating conditions (non-condensing)	
Temperature range	0°C to 70°C
Relative humidity range	10% to 90%
Op shock	1500G
Environmental non-operating conditions (non-condensing)	
Temperature range	-40°C to 70°C
Relative humidity range	5% to 95%

Media-card reader

The following table lists the media-card reader specifications of your Precision 5690.

Table 42. Media-card reader (standard offering)

Media supported (Maximum capacity supported will vary by Flash Media Types)	
Media Supported	<ul style="list-style-type: none"> Secure Digital (SD)

Table 42. Media-card reader (standard offering) (continued)

	<ul style="list-style-type: none"> Secure Digital High Capacity (SDHC) Secure Digital Extended Capacity (SDXC)
Support Specification Versions	One SD-card slot (optional)
Power source	
Max Power Requirements	1.5 A
Supply Voltage Range	3.3 V
Power Consumption	MS 0.18 A
Environmental operating conditions (Non-condensing)	
Operating Temperature Range	0°C to 70°C
Relative Humidity Range	N/A
Environmental non-operating conditions (Non-condensing)	
Operating Temperature Range	N/A
Relative Humidity Range	N/A

Power adapter

The following table lists the power adapter specifications of your Precision 5690.

Table 43. Power adapter specifications

Description	Option one	Option two
Type	100 W AC adapter, USB Type-C	165 W AC adapter, USB Type-C
Input voltage	100 VAC–240 VAC	100 VAC–240 VAC
Input frequency	50 Hz–60 Hz	50 Hz–60 Hz
Input current (maximum)	1.70 A	2.20 A
Output current (continuous)	<ul style="list-style-type: none"> 20 V/5 A 15 V/3 A 9 V/3 A 5 V/3 A 	<ul style="list-style-type: none"> 28 V/5.893 A 20 V/6.5 A 15 V/3 A 9 V/3 A 5 V/3 A
Rated output voltage	5 VDC/9 VDC/15 VDC/20 VDC	5 VDC/9 VDC/15 VDC/20 VDC/28 VDC
BTUs/h (based on PSU max wattage)	888	888
Temperature range		
Operating	0 °C to 40°C (32°F to 104°F)	0°C to 40°C (32 °F to 104°F)
Storage	-40°C to 70°C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)
Compliance		
Erp Lot6 Tier 2 requirement	Yes	Yes
80Plus compliant	Yes	Yes

Table 43. Power adapter specifications (continued)

Description	Option one	Option two
Energy Star 8.0 compliant	Yes	Yes
GS mark compliant	Yes	Yes
NCTC Anti Power Surge certification	Yes	Yes
NCTC Anti Lightning Strike certification	Yes	Yes

Accessories

The following table lists the supported accessories on your Precision 5690.

Table 44. Accessories

Accessories
3Dconnexion SpaceMouse Wireless - 3DX-700066
Dell Bluetooth Travel Mouse - MS700
Dell Collaboration Keyboard and Mouse - KM900
Dell EcoLoop Pro Backpack - CP5723
Dell Performance Dock - WD19DCS
Dell Premier Rechargeable Wireless Mouse - MS7421W
Dell Pro Wireless ANC Headset - WL5024
Dell Speakerphone - SP3022
Dell UltraSharp 24 Monitor - U2424H
Dell UltraSharp 34 Curved USB-C HUB Monitor - U3425WE
Dell UltraSharp 40 Curved WUHD Monitor - U4025QW
Dell UltraSharp Webcam - WB7022
HTC VIVE Pro 2 - Virtual Reality Headset
Wacom Cintiq Pro 24 Creative Pen Display Touch - DTH-2420

Security

Software security

The following table lists the software security details of your Precision 5690.

Table 45. Software security

Software security
Intel Platform Trust Technology (PTT)
Intel Boot Guard
Intel BIOS Guard
Intel Trusted Execution Technology (TXT)

Table 45. Software security (continued)

Software security
ADL- Hypervisor Linear Address Translation (HLAT)
Intel Total Memory Encryption Multi-Key TME
D-Pedigree (Secure Supply Chain Functionality)
Dell Digital Device ID: TPM Platform Root Key Provisioning
Dell Trusted Device Agent Validation
VMware Workspace ONE
Absolute Endpoint Visibility and Control
Netskope
Dell Supply Chain Defense

Fingerprint reader

The following table lists the fingerprint reader specifications of your Precision 5690.

Table 46. Fingerprint reader specifications

Description	Values
Sensor technology	Capacitive
Sensor resolution	500 dpi
Sensor pixel size	108 x 88 pixels
Dell ControlVault support	No
Dell ControlVault 3.0 support	No
Anti-spoofing	Yes
Template storage	No
Match on chip	Yes
FIPS 201 certified	No

Dell ControlVault 3 Plus

Dell ControlVault is a dedicated security processor with secure storage that provides hardware isolation for authentication. Reducing the risk of malware attacking critical login information that is associated with fingerprint readers and contacted or contactless smartcard readers. The following table lists the Dell ControlVault 3 Plus specifications of your Precision 5690.

Table 47. Dell ControlVault 3.0 Plus specifications

Title	Description	Dell ControlVault 3 Plus
CPU technology	N/A	1 GHz ARM Cortex A7
RAM	N/A	1 MB
ROM	N/A	16 MB
Host Interface	N/A	USB 2.0
Fingerprint procession on chip	Fingerprint processing occurs within secure boundary of ControlVault	Yes
Windows WBF support	Support for Windows biometric framework when Fingerprint reader is attached	Yes

Table 47. Dell ControlVault 3.0 Plus specifications (continued)

Title	Description	Dell ControlVault 3 Plus
Windows Hello Enhanced Sign-in Security Support	Support for Windows Hello Enhanced Sign-in Security when Fingerprint Reader is attached	Yes
FIPS 140-3 Level 3 Certified	Device certified with FIPS 140-3 Level 3 requirements	{BCM58202B0} CY24 Modules In Process List ~CY25 Final Certification

Trusted Platform Module

The following table lists the Trusted Platform Module (TPM) of your Precision 5690.

Table 48. Trusted Platform Module (TPM)

TPM: ST/ST33 HTPH2X32AHD8
SPI interface
TPM 2.0
FIPs 140-2 certificate

System management features

Dell commercial systems come with a number of systems management options that are include by default for In-Band management with our Dell Client Command Suite. In-Band management meaning that the Operating System is functional and the device is connected to a network so that it can be managed. The Dell Client Command Suite of tools can be leveraged individually or with a systems management console like SCCM, LANDESK, KACE, etc.

We also offer Out-of-Band management as an option. Out-of-band management is when the system does not have a functional operating system or is turned off and you still want to be able to manage the system in that state.

Dell Client Command Suite for in-band systems management

Dell Client Command Suite is a free toolkit available for download, for all Latitude Rugged tablets at dell.com/support, that automates and streamlines systems management tasks, saving time, money, and resources. It consists of the following modules that can be used independently, or with a variety of systems management consoles such as SCCM.

Dell Client Command Suite's integration with VMware Workspace ONE Powered by AirWatch, now allows customers to manage their Dell client hardware from the cloud, using a single Workspace ONE console.

Dell Command | Deploy enables easy operating system (OS) deployment across all major OS deployment methodologies and provides numerous system-specific drivers that have been extracted and reduced to an OS-consumable state.

Dell Command | Configure is a graphical user interface (GUI) admin tool for configuring and deploying hardware settings in a pre-OS or post-OS environment, and it operates seamlessly with SCCM and Airwatch and can be self-integrated into LANDesk and KACE. Simply, this is all about the BIOS. Command | Configure allows you to remotely automate and configure over 150+ BIOS settings for a personalized user experience.

Dell Command | PowerShell Provider can do the same things as Command | Configure, but with a different method. PowerShell is a scripting language that allows customers to create a customized and dynamic configuration process.

Dell Command | Monitor is a Windows Management Instrumentation (WMI) agent that provides IT admins with an extensive inventory of the hardware and health-state data. Admins can also configure hardware remotely by using command line and scripting.

Dell Command | Update (end-user tool) is factory-installed and allows admins to individually manage and automatically present and install Dell updates to the BIOS, drivers, and software. Command | Update eliminates the time-consuming hunting and pecking process of update installation.

Dell Command | Update Catalog provides searchable metadata that allows the management console to retrieve the latest system-specific updates (driver, firmware or BIOS). The updates are then delivered seamlessly to end-users using the customer's systems management infrastructure that is consuming the catalog (like SCCM).


Dell Command | vPro Out of Band console extends hardware management to systems that are offline or have an unreachable OS (Dell exclusive features).

Dell Command | Integration Suite for System Center - This suite integrates all the key components of the Client Command Suite into Microsoft System Center Configuration Manager 2012 and Current Branch versions.

Out-of-band systems management

Intel Standard Manageability option **must be configured in our factory at the time of purchase, as it is NOT field upgradable**. It offers out-of-band management and DASH compliance (https://registry.dmtf.org/registry/results/field_initiative_name%3A%22DASH%201.0%22).

ComfortView Plus

 **WARNING: Prolonged exposure to blue light from the display may lead to long-term effects such as eye strain, eye fatigue, or damage to the eyes.**

Blue light is a color in the light spectrum which has a short wavelength and high energy. Chronic exposure to blue light, particularly from digital sources, may disrupt sleep patterns and cause long-term effects such as eye strain, eye fatigue, or damage to the eyes.

The display on this computer is designed to minimize blue light and complies with TÜV Rheinland's requirement for low blue light displays.

Low blue light mode is enabled at the factory, so no further configuration is necessary.

To reduce the risk of eye strain, it is also recommended that you:

- Position the display at a comfortable viewing distance between 20 and 28 inches (50 cm and 70 cm) from your eyes.
- Blink frequently to moisten your eyes, wet your eyes with water, or apply suitable eye drops.
- Look away from your display, and gaze at a distant object at 20 ft (609.60 cm) away for at least 20 seconds during each break.
- Take an extended break for 20 minutes every two hours.

Dell Optimizer

This section details the Dell Optimizer specifications of your Precision 5690.

Dell Optimizer is a software application that intelligently optimizes the performance of your computer by using artificial intelligence and machine learning. Dell Optimizer dynamically configures your computer settings to optimize the performance of your applications. It improves the productivity, performance, and user experience through computer usage analysis and learning.

On Precision 5690 with Dell Optimizer, the following features are supported:

- Improves user experience through computer usage analysis and learning
- Faster application launch and seamless application transition
- Intelligent battery run-time extension
- Optimized Audio for best meeting experience
- Locks computer when walks away for enhanced security
- Faster computer wake-on-user approach
- Intelligently shows alerts
- Updates automatically to minimize disruption

For more information about configuring and using these features, search for the Dell Optimizer User Guide at www.dell.com/support.

Color, material, and finish

This section details the color, material, and finish (CMF) specifications of your Precision 5690.



Figure 10.

Table 49. CMF specifications

A Cover (Top)	<ul style="list-style-type: none"> Aluminum + resin + NMT IM + Beadblast #120 + Anodize + Mask paint Anodized Titan Gray/paint Apollo Dull WUVM Titan Gray 11+/-3 GU / Apollo MT11005
B Cover (Hinge up)	<ul style="list-style-type: none"> PC UV Molding +CNC + Back Printing Match to Apollo
C Cover (Palmrest)	<ul style="list-style-type: none"> Plastic (Dell standard black, Resin) WB COB-ST + CNC drilled speaker holes Apollo velvet WPUST
D Cover (Bottom)	<ul style="list-style-type: none"> Aluminum + resin + NMT IM + Beadblast #120 + Anodize + laser etch regulatory artwork Anodized Titan Gray + Rustic Pewter resin Titan Gray 11+/-3 GU / Apollo MT11005

NOTE: Titan Gray, Dull – Cool Gray 9C = RGB 117 120 123 HEX/HTML 75787B CMYK 30 22 17 57

NOTE: Apollo –19-4205 TPG RGB 64 65 69 HEX/HTML 404145 CMYK NA

Keyboard shortcuts of Precision 5690

NOTE: Keyboard characters may differ depending on the keyboard language configuration. Keys used for shortcuts remain the same across all language configurations.

Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. The symbol shown on the lower part of the key refers to the character that is typed out when the key is pressed. If you press shift and the key, the symbol shown on the upper part of the key is typed out. For example, if you press **2**, **2** is typed out; if you press **Shift + 2**, **@** is typed out.

The keys F1-F12 at the top row of the keyboard are function keys for multi-media control, as indicated by the icon at the bottom of the key. Press the function key to invoke the task represented by the icon. For example, pressing F1 mutes the audio (refer to the table below).

However, if the function keys F1-F12 are needed for specific software applications, multi-media functionality can be disabled by pressing **Fn + Esc**. Subsequently, multi-media control can be invoked by pressing **Fn** and the respective function key. For example, mute audio by pressing **Fn + F1**.

NOTE: You can also define the primary behavior of the function keys (F1–F12) by changing **Function Key Behavior** in BIOS setup program.

Table 50. List of keyboard shortcuts

key	Primary behavior
Copilot	Launch Copilot in Windows NOTE: Copilot in Windows is not available on your computer, the Copilot key launches Windows Search. For more information about Copilot in Windows, search in the Knowledge Base Resource at www.dell.com/support .
F1	Mute audio
F2	Decrease volume
F3	Increase volume
F4	Mute Microphone
F5	Click keyboard backlight NOTE: Non-backlight keyboards have F5 function key without the backlight icon and do not support toggle keyboard backlight function. NOTE: Toggle to cycle the keyboard backlight status through off, low-backlight, and high-backlight
F6	Decrease brightness
F7	Increase brightness
F8	Switch to external display
F9	
F10	Print Screen
F11	Home
F12	End

The **Fn** key is also used with selected keys on the keyboard to invoke other secondary functions.

Table 51. Secondary behavior



Function key	Secondary behavior
Fn + F1	Operating system and application specific F1 behavior
Fn + F2	Operating system and application specific F2 behavior
Fn + F3	Operating system and application specific F3 behavior
Fn + F4	Operating system and application specific F4 behavior
Fn + F5	Operating system and application specific F5 behavior
Fn + F6	Operating system and application specific F6 behavior
Fn + F8	Operating system and application specific F8 behavior
Fn + F9	Operating system and application specific F9 behavior
Fn + F10	Operating system and application specific F10 behavior
Fn + F11	Operating system and application specific F11 behavior
Fn + F12	Operating system and application specific F12 behavior
Fn + Right Ctrl	Open application menu
Fn + Esc	Toggle Fn-key lock
Fn + PgUp	Page up

Getting help and contacting Dell

Self-help resources


You can get information and help on Dell products and services using these self-help resources:


Table 52. Self-help resources

Self-help resources	Resource location
Information about Dell products and services	www.dell.com
My Dell app	
Tips	
Contact Support	In Windows search, type <code>Contact Support</code> , and press Enter.
Online help for operating system	www.dell.com/support/windows www.dell.com/support/linux
Access top solutions, diagnostics, drivers and downloads, and learn more about your computer through videos, manuals, and documents.	Your Dell computer is uniquely identified using a Service Tag or Express Service Code. To view relevant support resources for your Dell computer, enter the Service Tag or Express Service Code at www.dell.com/support . For more information about how to find the Service Tag for your computer, see Locate the Service Tag on your computer .
Dell knowledge base articles	<ol style="list-style-type: none"> 1. Go to www.dell.com/support. 2. On the menu bar at the top of the Support page, select Support > Support Library. 3. In the Search field on the Support Library page, type the keyword, topic, or model number, and then click or tap the search icon to view the related articles.

Contacting Dell

To contact Dell for sales, technical support, or customer service issues, see www.dell.com/contactdell.

 **NOTE:** Availability of the services may vary depending on the country or region, and product.

 **NOTE:** If you do not have an active Internet connection, you can find contact information about your purchase invoice, packing slip, bill, or Dell product catalog.