

FS42 Fixed Industrial Scanner



ZEBRA

Product Reference Guide

2024/05/09

ZEBRA and the stylized Zebra head are trademarks of Zebra Technologies Corporation, registered in many jurisdictions worldwide. All other trademarks are the property of their respective owners. ©2023 Zebra Technologies Corporation and/or its affiliates. All rights reserved.

Information in this document is subject to change without notice. The software described in this document is furnished under a license agreement or nondisclosure agreement. The software may be used or copied only in accordance with the terms of those agreements.

For further information regarding legal and proprietary statements, please go to:

SOFTWARE: zebra.com/linkoslegal.

COPYRIGHTS: zebra.com/copyright.

PATENTS: ip.zebra.com.

WARRANTY: zebra.com/warranty.

END USER LICENSE AGREEMENT: zebra.com/eula.

Terms of Use

Proprietary Statement

This manual contains proprietary information of Zebra Technologies Corporation and its subsidiaries ("Zebra Technologies"). It is intended solely for the information and use of parties operating and maintaining the equipment described herein. Such proprietary information may not be used, reproduced, or disclosed to any other parties for any other purpose without the express, written permission of Zebra Technologies.

Product Improvements

Continuous improvement of products is a policy of Zebra Technologies. All specifications and designs are subject to change without notice.

Liability Disclaimer

Zebra Technologies takes steps to ensure that its published Engineering specifications and manuals are correct; however, errors do occur. Zebra Technologies reserves the right to correct any such errors and disclaims liability resulting therefrom.

Limitation of Liability

In no event shall Zebra Technologies or anyone else involved in the creation, production, or delivery of the accompanying product (including hardware and software) be liable for any damages whatsoever (including, without limitation, consequential damages including loss of business profits, business interruption, or loss of business information) arising out of the use of, the results of use of, or inability to use such product, even if Zebra Technologies has been advised of the possibility of such damages. Some jurisdictions do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

Contents

About the Guide.....	6
Copyright.....	6
Notational Conventions.....	7
Service Information.....	7
Icon Conventions.....	7
 Getting Started.....	 9
Configurations.....	9
Specifications.....	11
Accessories.....	13
External Lighting.....	13
Internal Ring Lighting.....	15
Internal Filters.....	17
Cables.....	18
Brackets.....	19
Power Supplies.....	19
 Installation.....	 21
Dimensional Drawings.....	21
Connections.....	23
Torque Specification.....	23
Power Sources.....	24
12 Pin M12 Power Input.....	24
Power Over Ethernet.....	25
USB Type C.....	25

Grounding for Electro-Magnetic Compliance and ESD Safe.....	25
Cable Pin Outs.....	26
Power and IO Connector.....	26
Ethernet Connector.....	27
External Light Connector.....	28
Mounting Instructions.....	28
Mounting the Device Using the L-Bracket.....	29
Mounting Bracket Dimensions.....	31
Light Bracket Dimensions.....	34
Installing an Illumination System.....	35
Disassembling the Illumination System.....	36
Using the Device.....	38
USB Type C.....	38
USB Type C Operation.....	38
Supported Display Resolutions.....	39
User Interface.....	39
UI Label.....	40
Decode LEDs.....	40
LED and Beeper Indicators.....	41
Aiming Patterns.....	44
General Purpose Input and Outputs.....	45
GPIO Summary.....	46
Optically Coupled GPIO.....	47
Digital Industrial GPIO.....	49
Analog Output.....	50
GPIO Wire Diagrams.....	51
Output as Current Source.....	51
Output as Current Sink.....	52
Power and Thermal Management.....	52
Power Cycling the Device.....	53
Symbologies.....	53
Fixed Industrial Scanning Toolset.....	54
Reading Diagrams.....	55

Maintenance.....	61
Known Harmful Ingredients.....	61
Approved Cleaning Agents.....	61
Tolerable Industrial Fluids and Chemicals.....	62
Cleaning the Device.....	62
 Troubleshooting.....	 63
Device Discovery Troubleshooting Methods.....	63
Factory Reset the Device.....	63
Power Cycling the Device.....	64

About the Guide

Copyright

ZEBRA and the stylized Zebra head are trademarks of Zebra Technologies Corporation, registered in many jurisdictions worldwide. All other trademarks are the property of their respective owners. ©2024 Zebra Technologies Corporation and/or its affiliates. All rights reserved.

COPYRIGHTS & TRADEMARKS: For complete copyright and trademark information, go to www.zebra.com/copyright.

WARRANTY: For complete warranty information, go to www.zebra.com/warranty.

END USER LICENSE AGREEMENT: For complete EULA information, go to www.zebra.com/eula.

Terms of Use

Proprietary Statement

This manual contains proprietary information of Zebra Technologies Corporation and its subsidiaries ("Zebra Technologies"). It is intended solely for the information and use of parties operating and maintaining the equipment described herein. Such proprietary information may not be used, reproduced, or disclosed to any other parties for any other purpose without the express, written permission of Zebra Technologies.

Product Improvements

Continuous improvement of products is a policy of Zebra Technologies. All specifications and designs are subject to change without notice.

Liability Disclaimer

Zebra Technologies takes steps to ensure that its published Engineering specifications and manuals are correct; however, errors do occur. Zebra Technologies reserves the right to correct any such errors and disclaims liability resulting therefrom.

Limitation of Liability

In no event shall Zebra Technologies or anyone else involved in the creation, production, or delivery of the accompanying product (including hardware and software) be liable for any damages whatsoever (including, without limitation, consequential damages including loss of business profits, business interruption, or loss of business information) arising out of the use of, the results of use of, or inability to use such product, even if Zebra Technologies has been advised of the possibility of such damages. Some jurisdictions do not allow

the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

Notational Conventions

The following notational conventions make the content of this document easy to navigate.

- **Bold** text is used to highlight the following:
 - Dialog box, window, and screen names
 - Dropdown list and list box names
 - Checkbox and radio button names
 - Icons on a screen
 - Key names on a keypad
 - Button names on a screen
- Bullets (•) indicate:
 - Action items
 - List of alternatives
 - Lists of required steps that are not necessarily sequential.
- Sequential lists (for example, those that describe step-by-step procedures) appear as numbered lists.

Service Information

If you have a problem with your equipment, contact Zebra Global Customer Support for your region. Contact information is available at: zebra.com/support.

When contacting support, please have the following information available:

- Serial number of the unit
- Model number or product name
- Software type and version number

Zebra responds to calls by email, telephone, or fax within the time limits set forth in support agreements.

If your problem cannot be solved by Zebra Customer Support, you may need to return your equipment for servicing and will be given specific directions. Zebra is not responsible for any damages incurred during shipment if the approved shipping container is not used. Shipping the units improperly can possibly void the warranty.

If you purchased your Zebra business product from a Zebra business partner, contact that business partner for support.

Icon Conventions

The documentation set is designed to give the reader more visual clues. The following visual indicators are used throughout the documentation set.



NOTE: The text here indicates information that is supplemental for the user to know and that is not required to complete a task.



IMPORTANT: The text here indicates information that is important for the user to know.



CAUTION: If the precaution is not heeded, the user could receive a minor or moderate injury.



WARNING: If danger is not avoided, the user CAN be seriously injured or killed.



DANGER: If danger is not avoided, the user WILL be seriously injured or killed.

Getting Started

Configurations

The guide covers the following configurations.

Table 1 FS42 Configurations

SKU	Description
FS42-SR20G4-2C00K	FS42 Fixed Industrial Auto Focus Scanner: Standard Range, 2.3 MP, Fast 2D Barcode Decoder w/ DL OCR, Ethernet with POE, Serial, USB and Industrial Protocols, Red Illumination, No Filter - India / Korea
FS42-SR20G4-2C00W	FS42 Fixed Industrial Auto Focus Scanner: Standard Range, 2.3 MP, Fast 2D Barcode Decoder w/ DL OCR, Ethernet with POE, Serial, USB and Industrial Protocols, Red Illumination, No Filter - Worldwide
FS42-SR20G4-3C00K	FS42 Fixed Industrial Auto Focus Scanner: Standard Range, 2.3 MP, Fast 2D Barcode Decoder w/ DL OCR, Ethernet with POE, Serial, USB and Industrial Protocols, White Illumination, No Filter - India / Korea
FS42-SR20G4-3C00W	FS42 Fixed Industrial Auto Focus Scanner: Standard Range, 2.3 MP, Fast 2D Barcode Decoder w/ DL OCR, Ethernet with POE, Serial, USB and Industrial Protocols, White Illumination, No Filter - Worldwide
FS42-SR20F4-2C00K	FS42 Fixed Industrial Auto Focus Scanner: Standard Range, 2.3 MP, Fast 2D Barcode Decoder, Ethernet with POE, Serial, USB and Industrial Protocols, Red Illumination, No Filter - India / Korea
FS42-SR20F4-2C00W	FS42 Fixed Industrial Auto Focus Scanner: Standard Range, 2.3 MP, Fast 2D Barcode Decoder, Ethernet with POE, Serial, USB and Industrial Protocols, Red Illumination, No Filter - Worldwide
FS42-SR20F4-3C00K	FS42 Fixed Industrial Auto Focus Scanner: Standard Range, 2.3 MP, Fast 2D Barcode Decoder, Ethernet with POE, Serial, USB and Industrial Protocols, White Illumination, No Filter - India / Korea
FS42-SR20F4-3C00W	FS42 Fixed Industrial Auto Focus Scanner: Standard Range, 2.3 MP, Fast 2D Barcode Decoder, Ethernet with POE, Serial, USB and Industrial Protocols, White Illumination, No Filter - Worldwide
FS42-SR20Z4-2C00K	FS42 Fixed Industrial Auto Focus Scanner: Standard Range, 2.3 MP, Standard 2D Barcode Decoder, Ethernet with POE, Serial, USB and Industrial Protocols, Red Illumination, No Filter - India / Korea

Table 1 FS42 Configurations (Continued)

SKU	Description
FS42-SR20Z4-2C00W	FS42 Fixed Industrial Auto Focus Scanner: Standard Range, 2.3 MP, Standard 2D Barcode Decoder, Ethernet with POE, Serial, USB and Industrial Protocols, Red Illumination, No Filter - Worldwide
FS42-SR20Z4-3C00K	FS42 Fixed Industrial Auto Focus Scanner: Standard Range, 2.3 MP, Standard 2D Barcode Decoder, Ethernet with POE, Serial, USB and Industrial Protocols, White Illumination, No Filter - India / Korea
FS42-SR20Z4-3C00W	FS42 Fixed Industrial Auto Focus Scanner: Standard Range, 2.3 MP, Standard 2D Barcode Decoder, Ethernet with POE, Serial, USB and Industrial Protocols, White Illumination, No Filter - Worldwide
FS42-WA20G4-2C00K	FS42 Fixed Industrial Auto Focus Scanner: Wide Angle, 2.3 MP, Fast 2D Barcode Decoder w/ DL OCR, Ethernet with POE, Serial, USB and Industrial Protocols, Red Illumination, No Filter - India / Korea
FS42-WA20G4-2C00W	FS42 Fixed Industrial Auto Focus Scanner: Wide Angle, 2.3 MP, Fast 2D Barcode Decoder w/ DL OCR, Ethernet with POE, Serial, USB and Industrial Protocols, Red Illumination, No Filter - Worldwide
FS42-WA20G4-3C00K	FS42 Fixed Industrial Auto Focus Scanner: Wide Angle, 2.3 MP, Fast 2D Barcode Decoder w/ DL OCR, Ethernet with POE, Serial, USB and Industrial Protocols, White Illumination, No Filter - India / Korea
FS42-WA20G4-3C00W	FS42 Fixed Industrial Auto Focus Scanner: Wide Angle, 2.3 MP, Fast 2D Barcode Decoder w/ DL OCR, Ethernet with POE, Serial, USB and Industrial Protocols, White Illumination, No Filter - Worldwide
FS42-WA20F4-2C00K	FS42 Fixed Industrial Auto Focus Scanner: Wide Angle, 2.3 MP, Fast 2D Barcode Decoder, Ethernet with POE, Serial, USB and Industrial Protocols, Red Illumination, No Filter - India / Korea
FS42-WA20F4-2C00W	FS42 Fixed Industrial Auto Focus Scanner: Wide Angle, 2.3 MP, Fast 2D Barcode Decoder, Ethernet with POE, Serial, USB and Industrial Protocols, Red Illumination, No Filter - Worldwide
FS42-WA20F4-3C00K	FS42 Fixed Industrial Auto Focus Scanner: Wide Angle, 2.3 MP, Fast 2D Barcode Decoder, Ethernet with POE, Serial, USB and Industrial Protocols, White Illumination, No Filter - India / Korea
FS42-WA20F4-3C00W	FS42 Fixed Industrial Auto Focus Scanner: Wide Angle, 2.3 MP, Fast 2D Barcode Decoder, Ethernet with POE, Serial, USB and Industrial Protocols, White Illumination, No Filter - Worldwide
FS42-WA20Z4-2C00K	FS42 Fixed Industrial Auto Focus Scanner: Wide Angle, 2.3 MP, Standard 2D Barcode Decoder, Ethernet with POE, Serial, USB and Industrial Protocols, Red Illumination, No Filter - India / Korea
FS42-WA20Z4-2C00W	FS42 Fixed Industrial Auto Focus Scanner: Wide Angle, 2.3 MP, Standard 2D Barcode Decoder, Ethernet with POE, Serial, USB and Industrial Protocols, Red Illumination, No Filter - Worldwide
FS42-WA20Z4-3C00K	FS42 Fixed Industrial Auto Focus Scanner: Wide Angle, 2.3 MP, Standard 2D Barcode Decoder, Ethernet with POE, Serial, USB and Industrial Protocols, White Illumination, No Filter - India / Korea
FS42-WA20Z4-3C00W	FS42 Fixed Industrial Auto Focus Scanner: Wide Angle, 2.3 MP, Standard 2D Barcode Decoder, Ethernet with POE, Serial, USB and Industrial Protocols, White Illumination, No Filter - Worldwide

Specifications

The following table describes the device's physical attributes, performance and user environment specifications, and regulatory certifications.

Table 2 Specifications

Specification	Description
Physical Characteristics	
Dimensions	2.1 in. H x 2.5 in. W x 3.6 in. D 54.0 mm H x 64.0 mm W x 91.4 mm D
Weight	14.1 oz./400.0 g
Power	10 to 30 VDC external power supply, 36W max at 24V Class 4 PoE+ source, 25.5W max Class 3 PoE source, 13W max USB Type-C host, 7.5W max at 5V 1.5A or 15W max at 5V 3.0A
Configurable IO	(4) Four optoisolated GPIO: GPIO0,1,2,3 (5) Five non-isolated GPIO: GPIO4,5,6*,7*,8* *Unavailable when External Light Mode is enabled
Interface Ports	(1) M12 X-Coded 1000/100/10 Mbps Ethernet (1) M12 12-pin Power/GPIO (1) M12 5-pin External Light Power & Control/GPIO (1) USB 3.0 SuperSpeed Type-C with DisplayPort Alt Mode
Communication Protocols	Ethernet/IP, PROFINET, CC-Link, Modbus TCP, TCP/IP
Performance Characteristics	
Image Sensor	Monochrome: 2.3 MP (1920 x 1200 pixels) CMOS Sensor
Acquisition Rate	Up to 60 frames/second
Aimer	Red Class II Laser; 8-point sunburst pattern
Illumination	Field replaceable modules: (8) 660nm Red LEDs (8) 850nm IR LEDs (8) 2700K (Color Temperature) White LEDs (4) 660nm Red LEDs + (8) 850nm IR LEDs + (8) 2700K (Color Temperature) White LEDs
Imager Field of View	SR (Standard Range): 10.8mm Liquid Lens (30° H x 19° V Nominal) WA (Wide Angle): 6.8mm Liquid Lens (46° H x 29° V Nominal)
User Environment	

Table 2 Specifications (Continued)

Specification	Description
Operating Temperature	32° F to 113° F/0° C to 45° C (10-30VDC external power supply, duty cycle-dependent) 32° F to 104° F/0° C to 40° C (POE, duty cycle dependent)
Storage Temperature	-40°F to 158°F / -40° to 70°C
Vibration Resistance	EN 60068-2-6, 14 mm @ 2 to 10 Hz, 1.5 mm @ 13 to 55 Hz; 2 g @ 70 to 500 Hz; 2 hours on each axis
Shock Resistance	EN 60068-2-27, 30g; 11 ms; 3 shocks on each axis
Environmental Sealing	IP65 & IP67
Humidity	5% to 90% RH (Non-Condensing)
Light Immunity	The product operates in Incandescent 450 ft candles, Sunlight <6000 ft candles, Florescent 450 ft candles, LED 450 ft candles
Electrostatic Discharge	±15 kV Air, ±8 kV Contact, ±8 kV Indirect
Trigger Durability	Withstand 1,000 cycles of operation with no degradation in functionality
Regulatory	
Environmental	EN 50581:2012 EN IEC 63000:2018
Electrical Safety	IEC 62368-1 (Ed.2) EN 62368-1:2014/A11:2017
Laser Safety (xS42 Only)	21CFR1040.10 & 21CFR1040.11 IEC/EN 60825-1:2014 (Ed.3)
LED Safety	IEC 62471: 2006 (Ed.1) EN 62471: 2008
EMI/EMS	EN 55032:2015/A11: 2020 EN 55032:2015/A1: 2020 EN 55035:2017/A11: 2020 EN IEC 61000-3-2: 2019/A1:2021 EN 61000-3-3: 2013/A2:2021/AC:2022-01 EN 61000-6-2: 2005,2019 FCC 47 CFR Part 15, Subpart B ICES-003, Issue 7
EU Declaration of Conformity	2014/30/EU; 2014/35/EU; 2011/65/EU. Refer to the Declaration of Conformity (DoC) for details of compliance with the current standards. The DoC is available at: zebra.com/doc

Accessories

This section provides details on compatible external lights, ring lights, and polarizers for the device.

External Lighting

The following table lists all compatible external lighting accessories for the device.

Table 3 External Lighting Accessories

Part Number	Description	
LGHT-B100RD-0000	LED Bar light, 100MM, red-625 wavelength, 5-Pin male M12 connector, semi-diffused, includes transparent and opaque diffusers.	
LGHT-B100BL-0000	LED Bar light, 100MM, blue-465 wavelength, 5-Pin male M12 connector, semi-diffused, includes transparent and opaque diffusers.	
LGHT-B100WH-0000	LED Bar light, 100MM, white wavelength, 5-Pin male M12 connector, semi-diffused, includes transparent and opaque diffusers.	
LGHT-B100IR-0000	LED Bar light, 100MM, IR-850 wavelength, 5-Pin male M12 connector, semi-diffused, includes transparent and opaque diffusers.	

Table 3 External Lighting Accessories (Continued)

Part Number	Description	
LGHT-B300RD-0000	LED Bar light, 300MM, red-625 wavelength, 5-Pin male M12 connector, semi-diffused, includes transparent and opaque diffusers.	
LGHT-B300BL-0000	LED Bar light, 300MM, blue-465 wavelength, 5-Pin male M12 connector, semi-diffused, includes transparent and opaque diffusers.	
LGHT-B300WH-0000	LED Bar light, 300MM, white wavelength, 5-Pin male M12 connector, semi-diffused, includes transparent and opaque diffusers.	
LGHT-B300IR-0000	LED Bar light, 300MM, IR-850 wavelength, 5-Pin male M12 connector, semi-diffused, includes transparent and opaque diffusers.	
Ring Lights		
LGHT-R100BL-0000	LED Ring light, 100MM, blue-465 wavelength, 5-Pin male M12 connector, semi-diffused, includes transparent and opaque diffusers.	
LGHT-R100WH-0000	LED Ring light, 100MM, white wavelength, 5-Pin male M12 connector, semi-diffused, includes transparent and opaque diffusers.	
LGHT-R100IR-0000	LED Ring light, 100MM, IR-850 wavelength, 5-Pin male M12 connector, semi-diffused, includes transparent and opaque diffusers.	
LGHT-R100RD-0000	LED Ring light, 100MM, red-625 wavelength, 5-Pin male M12 connector, semi-diffused, includes transparent and opaque diffusers.	
Polarizers		
LGHT-A100BP-0000	100MM Bar Light Polarizer, For use with 100mm External Light Bars (LGHT-B100xx-0000). Not for use with IR-850 wavelengths or when IR image capture is required.	

Table 3 External Lighting Accessories (Continued)

Part Number	Description	
LGHT-A300BP-0000	300MM Bar Light Polarizer, For use with 300mm External Light Bars (LGHT-B300xx-0000). Not for use with IR-850 wavelengths or when IR image capture is required.	
LGHT-A100RP-0000	Light Polarizer, For use with 100mm External Ring Lights (LGHT-R100xx-0000). Not for use when IR image capture is required.	

Internal Ring Lighting

The following table provides information on compatible internal lighting accessories and replacement ring light covers.

Table 4 Internal Lighting Accessories

Part Number	Description	
ZLED-XS40WH-000	Internal Ring Light, White LED For use with 100mm External Ring Lights (LGHT-R100xx-0000). Not for use when IR image capture is required.	
ZLED-XS40RD-0000	Internal Ring Light, Red LED Red lighting is typically used to capture images on paper.	
ZLED-XS40IR-0000	Internal Ring Light, IR LED IR lighting is typically used in environments where users do not want to see any external lighting when detecting clear liquids or when inspecting produce.	

Table 4 Internal Lighting Accessories (Continued)

Part Number	Description	
ZLED-XS40MC-0000	Internal Ring Light Multi-Color - White, Red, IR, Blue, and Green LEDs White LEDs are controllable in individual banks of 4 LEDs. IR and Red are controllable in individual banks of 2 LEDs.	
Replacement Ring Light Covers		
ZLED-XS40PW-0000	Integrated Light Cover (Replacement) Cross Polarizer For use with Wide Angle (WA) configurations only. Not for use when IR image capture is required.	
ZLED-XS40PS-0000	Integrated Light Cover (Replacement) Cross Polarizer For use with Standard Range (SR) configurations only. Not for use when IR image capture is required.	
ZLED-XS40CW-0000	Integrated Light Cover (Replacement) For use with Wide Angle (WA) configurations only.	
ZLED-XS40CS-0000	Integrated Light Cover (Replacement) For use with Standard Range (SR) configurations only.	

Internal Filters

The device supports red, blue, IR bandpass, and IR blocker filters.

Table 5 Internal Filters

Part Number	Description	
ZFLT-XS40RD-0000	Red Bandpass Zebra Filter	
ZFLT-XS40BL-0000	Blue Bandpass Zebra Filter	
ZFLT-XS40IR-0000	IR Bandpass Zebra Filter	
ZFLT-XS40MC-0000	IR Blocker Zebra Filter	

Spectral Transmission Data

The following table provides spectral transmission data while using supported internal filters for the device.



NOTE: The spectral transmission table applies to the following filters on the device:

- ZFLT-XS40RD-0000 Red Bandpass Zebra Filter
- ZFLT-XS40BL-0000 Blue Bandpass Zebra Filter
- ZFLT-XS40IR-0000 IR Bandpass Zebra Filter
- ZFLT-XS40MC-0000 IR Blocker Zebra Filter

Spectral Transmission	Blue	Red	IR	RGB (IR Block)	Clear
Normal Incident Angle					
3% Maximum		400-565 nm	400-720 nm		

Spectral Transmission	Blue	Red	IR	RGB (IR Block)	Clear
10% Maximum	400 nm	600 nm	755 nm		
90% Minimum	425-525 nm	625-700 nm	780-925 nm	400-700 nm	400-925 nm
Maximum (Reference)	465-495 nm	650-680 nm	855-895 nm		
10% Maximum	550 nm	725 nm	950 nm	725 nm	950 nm
3% Maximum	585-1050 nm	760-1050 nm	985-1050 nm	760-1050 nm	985-1050 nm
30° Incident Angle					
88% Minimum	465-495 nm	650-670 nm	855-890 nm	400-665 nm	465-890 nm



NOTE: Filter coating is applied to one side only.

Cables

The device is compatible with various USB, Ethernet, external light control, and power cables.

Table 6 Cables

Part Number	Description
USB Cables	
CBL-USB00200-USC00	USB 2M, IP67 locking USB-C to USB C (SuperSpeed), Compatible with all FS/VS devices.
CBL-USB00400-USC00	USB 4M, IP67 locking USB-C to USB C, Compatible with all FS/VS devices.
CBL-USB00200-USA00	USB 2M, IP67 locking USB-C to USB-A (SuperSpeed) Compatible with all FS/VS devices.
CBL-USB00400-USA00	USB 4M, IP67 locking USB-C to USB-A Compatible with all FS/VS devices.
Ethernet Cables	
CBL-ENT00500-M1200	5M length, X-Coded M12 to RJ45 connectors, Compatible with all FS/VS devices that include an Ethernet port.
CBL-ENT01500-M1200	15M length, X-Coded M12 to RJ45 connectors, Compatible with all FS/VS devices that include an Ethernet port.
External Light Control Cables	
CBL-LGT00000-M1200	5-pin M12 to 5-pin M12 External Light Control C, 0.3M length. Only compatible with devices that include an external light port.
CBL-LGT00200-M1200	5-pin M12 to 5-pin M12 External Light Control C, 2M length. Only compatible with devices that include an external light port.
Power Cables	
CBL-PWR00500-M1200	12-pin M12 to flying lead breakout cable, 5M length
CBL-PWR01500-M1200	12-pin M12 to flying lead breakout cable, 15M length

Brackets

All Zebra FS/VS devices support mounting with a standard L-Mount bracket.

Table 7 Brackets

Part Number	Description	
BRKT-LMNT-U000	L-Mount Bracket	

See Also

[Mounting the Device Using the L-Bracket](#)

Power Supplies

The device is compatible with 24VDC power supplies and PoE injectors.

Table 8 Power Supplies

Part Number	Description	
PWR-24V03A-0000	Power Supply, 24VDC 3AMP	
PWR-24V05A-0000	Power Supply, 24VDC 5AMP	

Table 8 Power Supplies (Continued)

Part Number	Description	
PWR-POE30W-0000	Power over Ethernet Injector, 30W POE+, AC Input	
PWR-POE60W-0000	Power over Ethernet Injector, 60W POE+, AC Input	

Installation

Dimensional Drawings

The diagrams in this section outline the dimensions and mounting hole positions of the device.

Figure 1 Side Dimensional Drawings



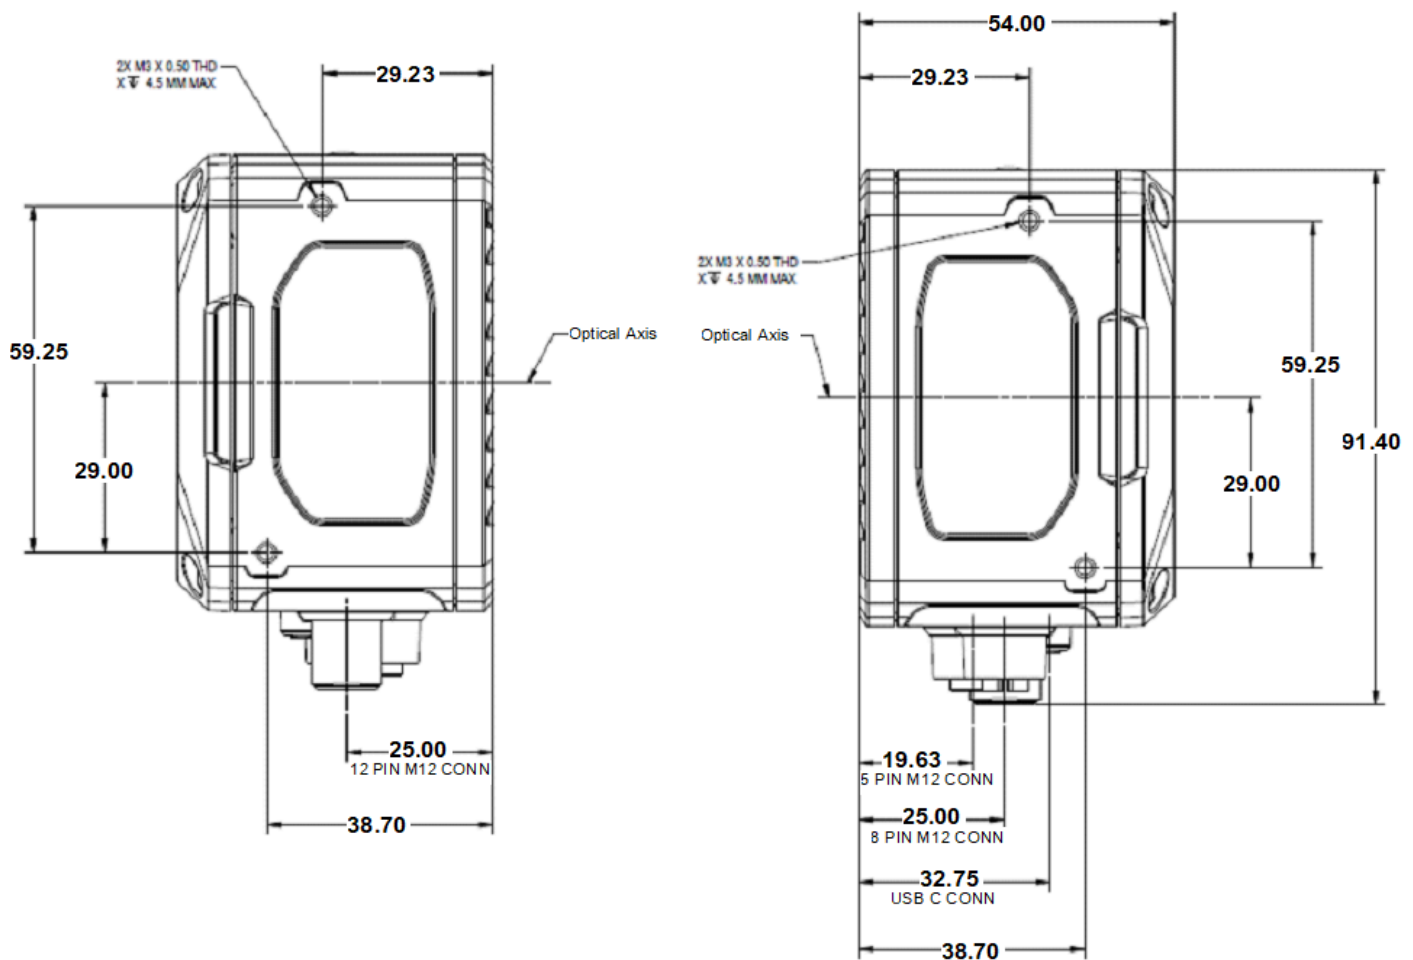


Figure 2 Back Mounting Holes

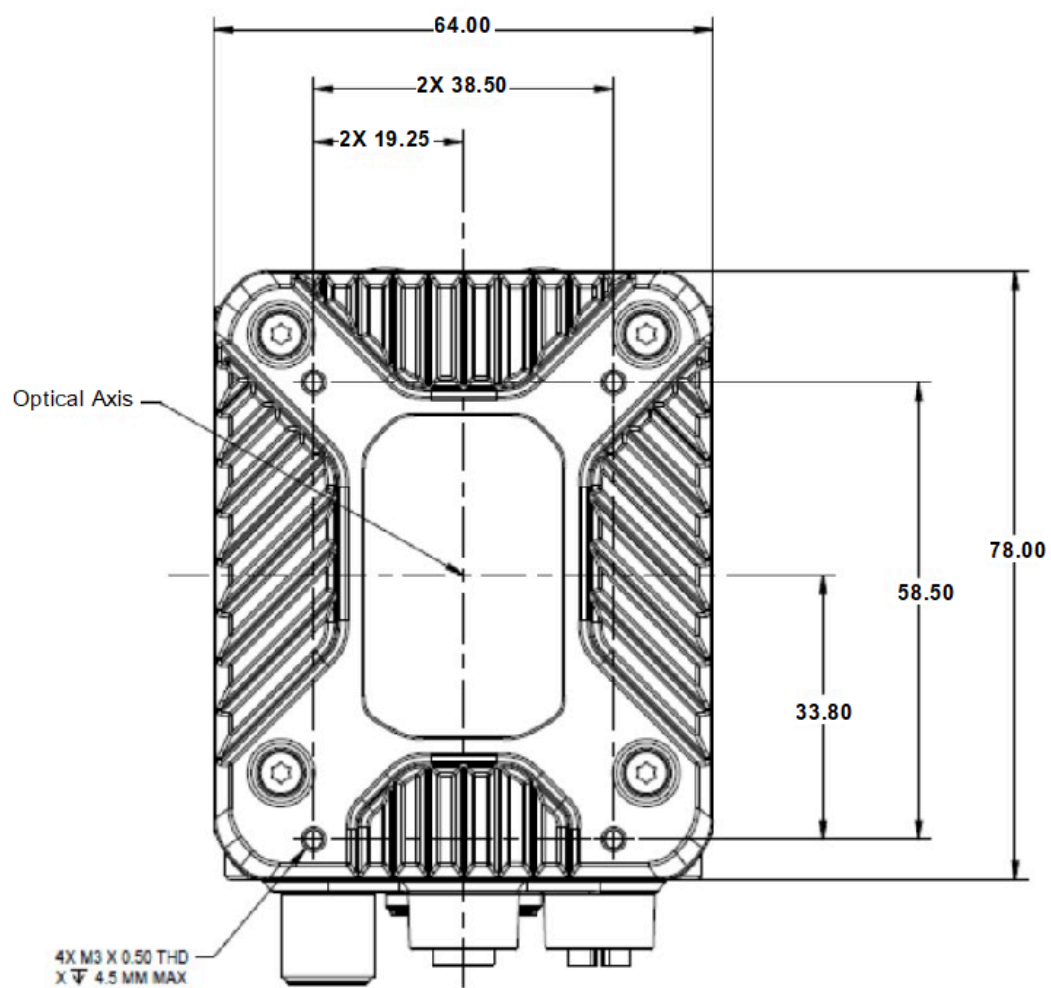

Connections

The device supports connections for USB-C with DisplayPort, power serial and GPIO, x-coded Ethernet, and external lighting.

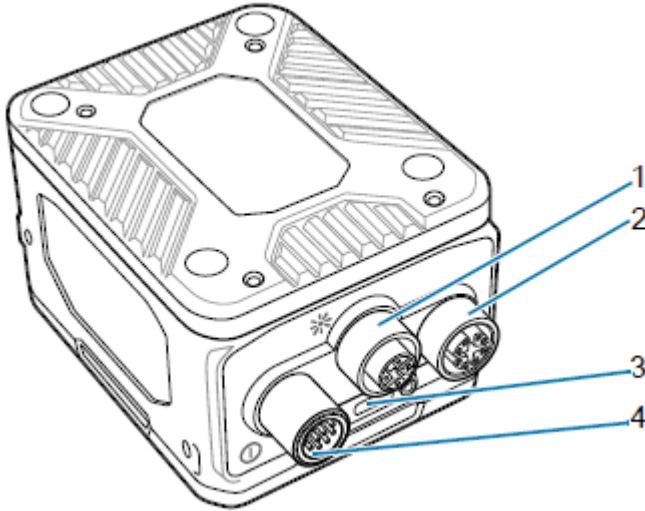

1	External Lighting
2	X-Coded Ethernet Port
3	USB-C (with DisplayPort)
4	Power Serial and GPIO

Torque Specification


To ensure an IP65 & IP67 product specification, Zebra cables and/or connector covers must be torqued to the following specification:

- Torque for M12 Zebra cables: 24.0 in-lbs
- Torque for connector covers: 10.0 in-lbs



NOTE: Connector covers are hand tightened from the factory to allow for easy hand removal. The covers must be torqued at installation to guarantee an IP65 and IP67 specification if cables are not used.

Refer to the following diagram for the reference dimension (in mm) of the 12-pin M12 cable:

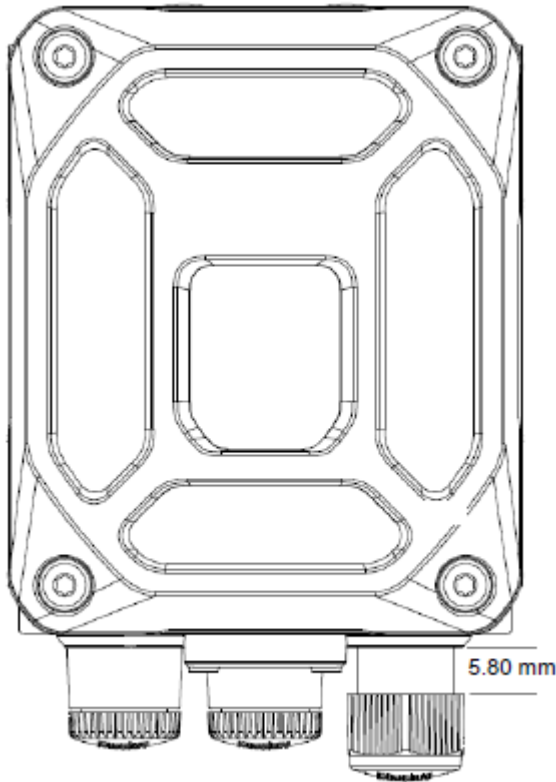

Power Sources

Power the device through a 12-pin M12 connector, Power over Ethernet (PoE), or USB Type C to satisfy various use cases.

A power priority scheme selects power from the M12 connector over PoE and PoE over USB-C to ensure the device consumes the least restrictive power source. Changes to the power source trigger a reboot. This acts as a power budget for the device, dynamically allocating power to prevent an overload condition. Allocation is based on sensor type and enabled features such as Ethernet PHYs, digital outputs, and advertised USB Type C port current. Models with internal illumination reduce illumination intensity or duration to operate within budget and may disable internal illumination entirely if necessary.



NOTE: Develop jobs with power sources and auxiliary equipment that are representative of the final intended configuration to prevent a mismatch during deployment.

12 Pin M12 Power Input

If the input voltage exceeds 21.5 V, the vision system enables up to 1.5 A output to the USB Type C connector. If the external light connector is placed in external light mode, power is shunted from the power supply directly to the light through a bypass circuit that supports the high peak currents of strobe lights. A self-resettable fuse prevents physical overload of the 12-pin M12 connector.

If less than 21.5 V is provided to the device, the advertised USB Type C current is lowered to 500 mA, and the overall power budget is reduced. This may impact allowable internal illumination configurations. As a result, a 24 V industrial power supply capable of high pulse currents of long duration is recommended for optimal performance.

Power Over Ethernet

The devices support operation from power sourcing equipment meeting the 802.3at class 4 (30 W) or 802.3af class 3 (15.4 W) IEEE Power Over Ethernet (PoE) standards. These are commonly referred to as PoE+ and PoE, respectively by equipment providers.

Peak power draw must be strictly maintained within the power envelope of the power-sourcing equipment. If the external light connector is enabled in external light mode, the vision system generates 24 V to power the external light with the following limitations in place:

- Simultaneous activation of the internal and external illumination is not permitted.
- Auto-strobe lights with high pulse current are not supported and trip over current protection in the vision system, disabling the external light connector.
- External lights with adjustable intensity may be used, provided the peak current draw is below the over-current protection limit. It is recommended to start with the lowest intensity setting and work upwards or to use the auto-tune feature.

Power over Ethernet requires an extra regulation step which incurs additional thermal buildup within the device. As a result, the specified operating temperature range is reduced when powered by PoE.

USB Type C

USB Type C allows for novel and cost-effective installations provided the following constraints are acceptable:

- Digital GPIO are unavailable.
- Optocoupled GPIO is still functional, provided the COMMON_IN and COMMON_OUT are properly terminated.
- The External Light Connector is disabled and cannot be used in GPIO or External Light modes.
- 0 V to 10 V analog output is disabled.
- Illumination is limited or requires a USB power source with further capabilities to be enabled at any capacity.



NOTE: The devices boot from legacy USB host ports. However, the current draw is not guaranteed to be under 500 mA, and device functionality may be restricted to the extent that performance can be impaired. An override mode can be enabled for legacy host ports that are known by the operator to be capable of supplying up to 1.5 A. Ports of this type are often described as having USB BC1.2 or USB charging support.

Grounding for Electro-Magnetic Compliance and ESD Safe

The vision system is designed with a rugged metal chassis connected internally to ground for robust Electro-Magnetic Compliance (EMC) and ESD Safe operation. Do not mount to any conductive object, body, structure, or mechanism that may become connected to line voltage or a voltage potential other than Protected Earth Ground. Chassis grounding via cable shield, mounting screws, or low inductance ground strap to a local Protected Earth Ground is acceptable.



NOTE: There is no galvanic connection to Earth Ground when the device is powered over an unshielded Ethernet cable. In this scenario, grounding to local Earth Ground through another

cable shield, mounting screw, or ground strap is required for ESD Safe compliance and best practice for EMC.

Cable Pin Outs

This section provides pin and cable color information for the power and I/O, Ethernet, and external lighting connectors.

Power and IO Connector

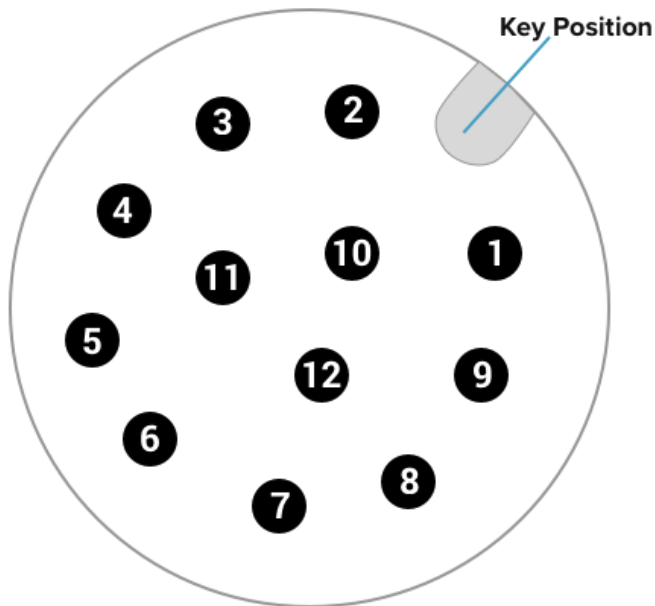


Table 9 Power and I/O Connector Pinout Diagram

Pin	Color	Description
1	Yellow	GPIO2
2	White/Yellow	TXD
3	Brown	RXD
4	White/Brown	GPIO4
5	Violet	GPIO5
6	White/Violet	COMMON_IN
7	Red	DC_IN
8	Black	GND
9	Green	COMMON_OUT
10	Orange	GPIO0
11	Blue	GPIO1

Table 9 Power and I/O Connector Pinout Diagram (Continued)

Pin	Color	Description
12	Grey	GPIO3
SHELL	Bare	SHIELD

Ethernet Connector

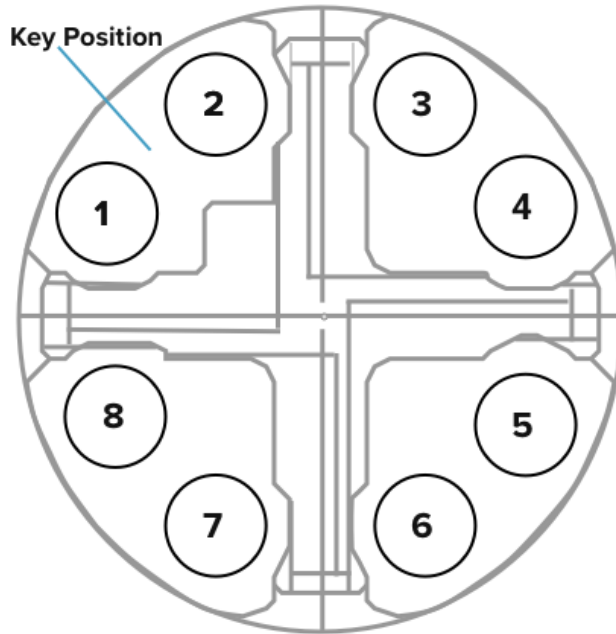


Table 10 Ethernet Connector Pinout Diagram

Pin	Description
1	TP1+
2	TP1-
3	TP2+
4	TP2-
5	TP4+
6	TP4-
7	TP3-
8	TP3+
SHELL	SHIELD

External Light Connector

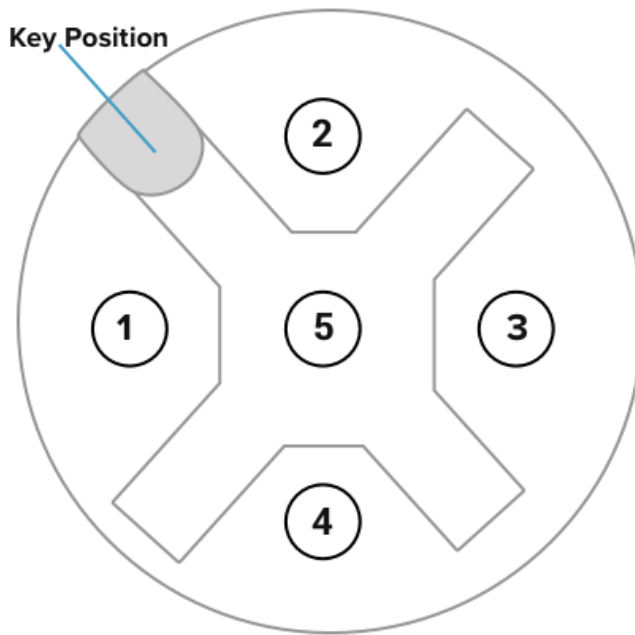


Table 11 External Light Connector Pinout Diagram

Pin	Color	Description
1	Brown	DC_OUT / GPIO8
2	White	GPIO7
3	Blue	GND
4	Black	GPIO6
5	Grey	ANALOG_OUT
SHELL	Bare	SHIELD

Mounting Instructions

The following sections describe the steps to mount the device to the L-bracket accessory.


1. Align the holes on the mounting surface with the mounting holes on the device.
2. Insert screws into the mounting holes and tighten. It is recommended to use four M3 screws to attach the camera on the bottom surface. Torque screws to 6.9 kgf-cm (6.0 lbf-in).

Review the dimensional drawings for mounting hole placements on the devices to determine the proper screw lengths needed based on the provided tapping depths into the camera.

Mounting the Device Using the L-Bracket


- 1. Use the mounting screws provided with the kit to attach the camera to the bracket. Torque screws to 6.9 kgf-cm (6.0 lbf-in).
- 2. Refer to the L-bracket mounting options outlined below.

Figure 3 Bottom and Side Mounting Options

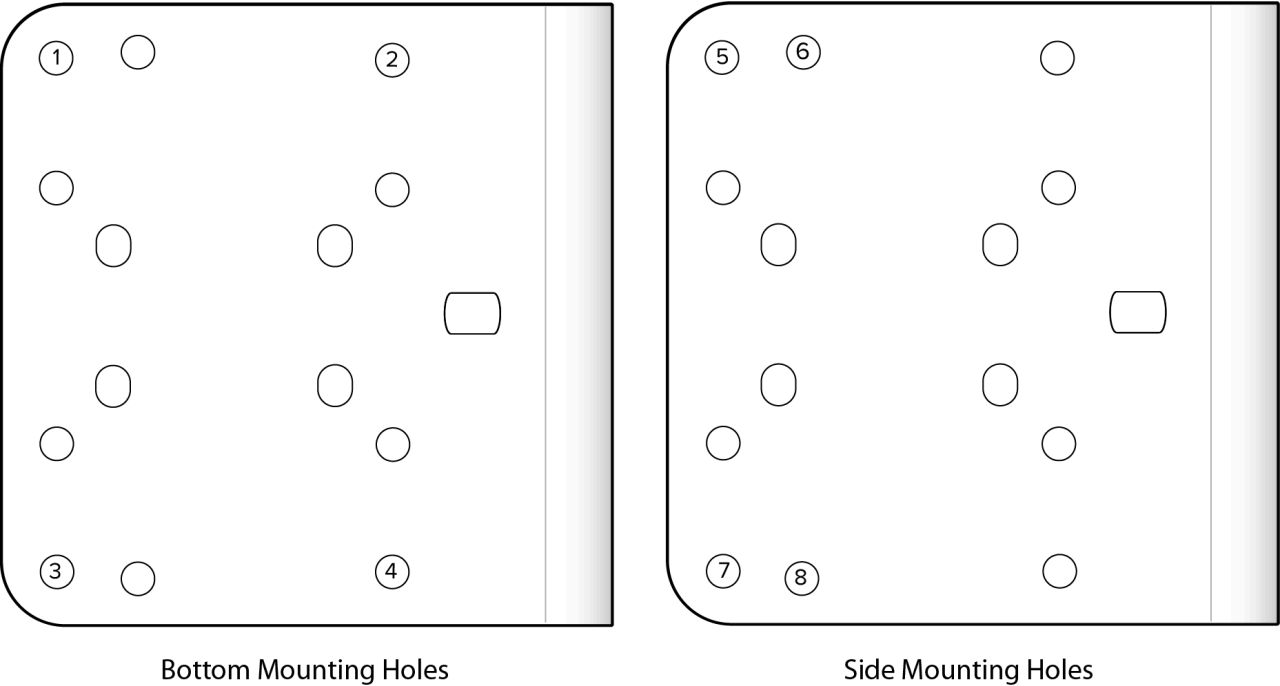


1-4	Bottom Surface Mounting Holes for both devices
5-8	Side Mounting Holes for both devices

Figure 4 Side Mounting Orientation

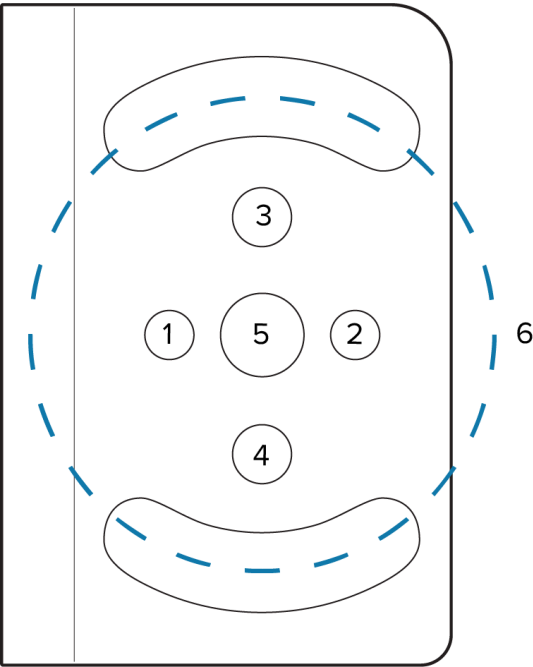

1-2	M5 Clearance
3-4	1/4-20 Clearance
5	M8 Clearance
6	M8 Clearance Slots

Figure 5 Side Mounting Orientation

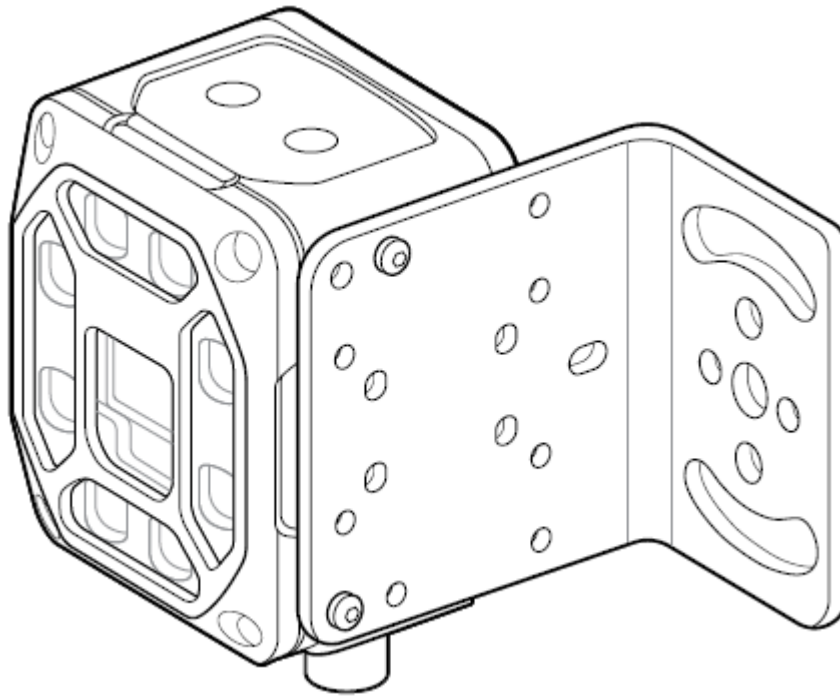

Mounting Bracket Dimensions

The following diagrams provide dimensions for the mounting bracket.

Figure 6 L Bracket Dimensions

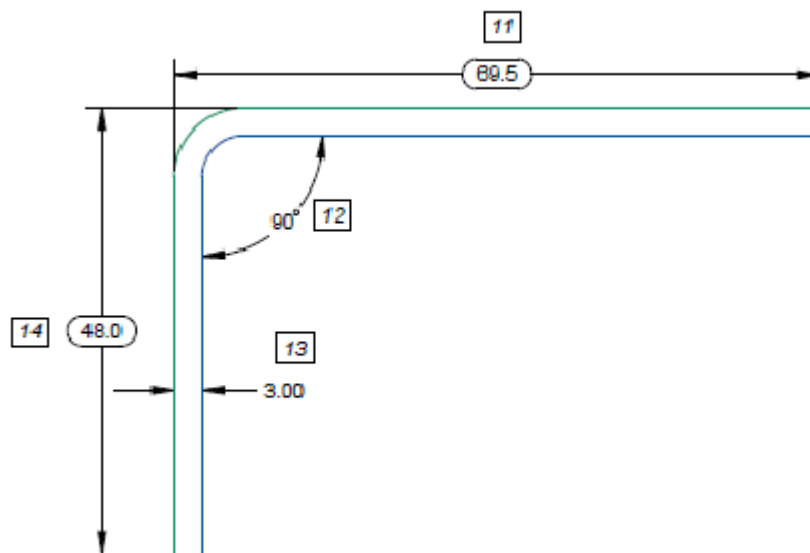


Figure 7 L Bracket Bottom Dimensions


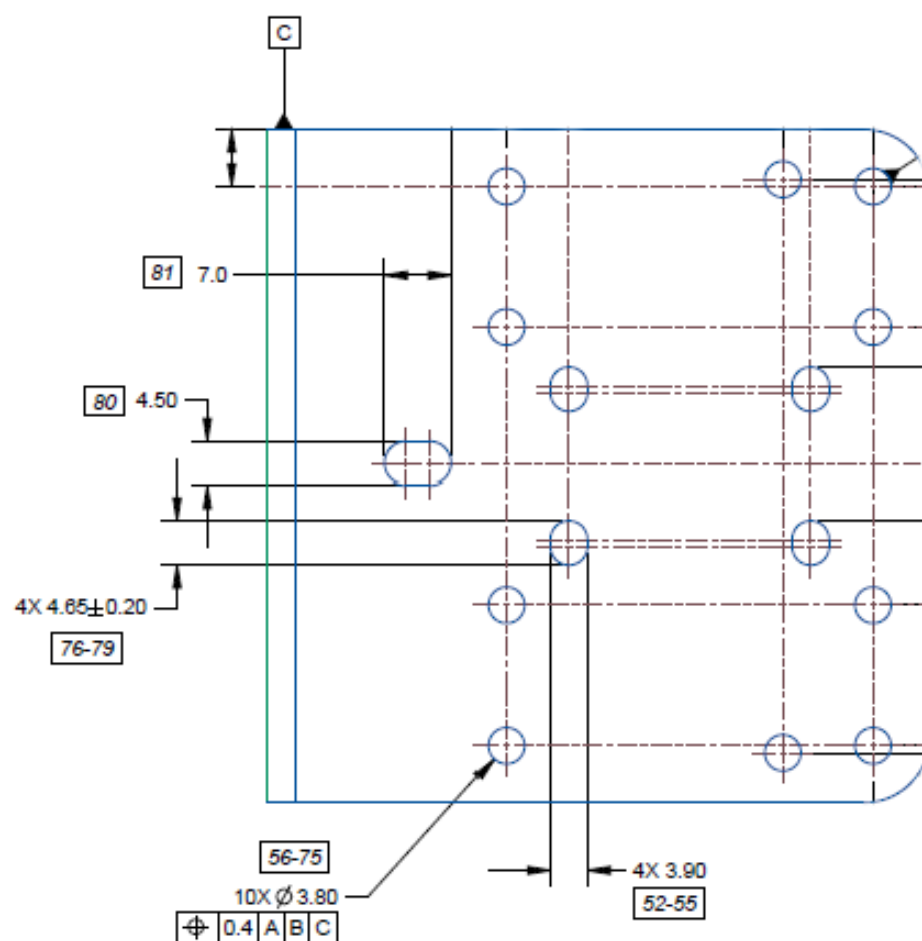


Figure 8 L Bracket Side Dimensions

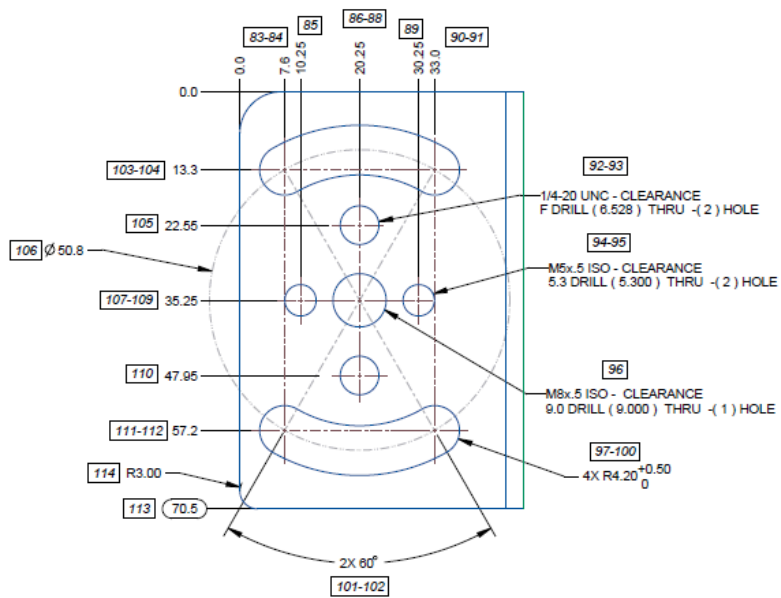

Light Bracket Dimensions

The diagrams in this section describe the dimensions of the light bracket.

Figure 9 Light Bracket Dimensions

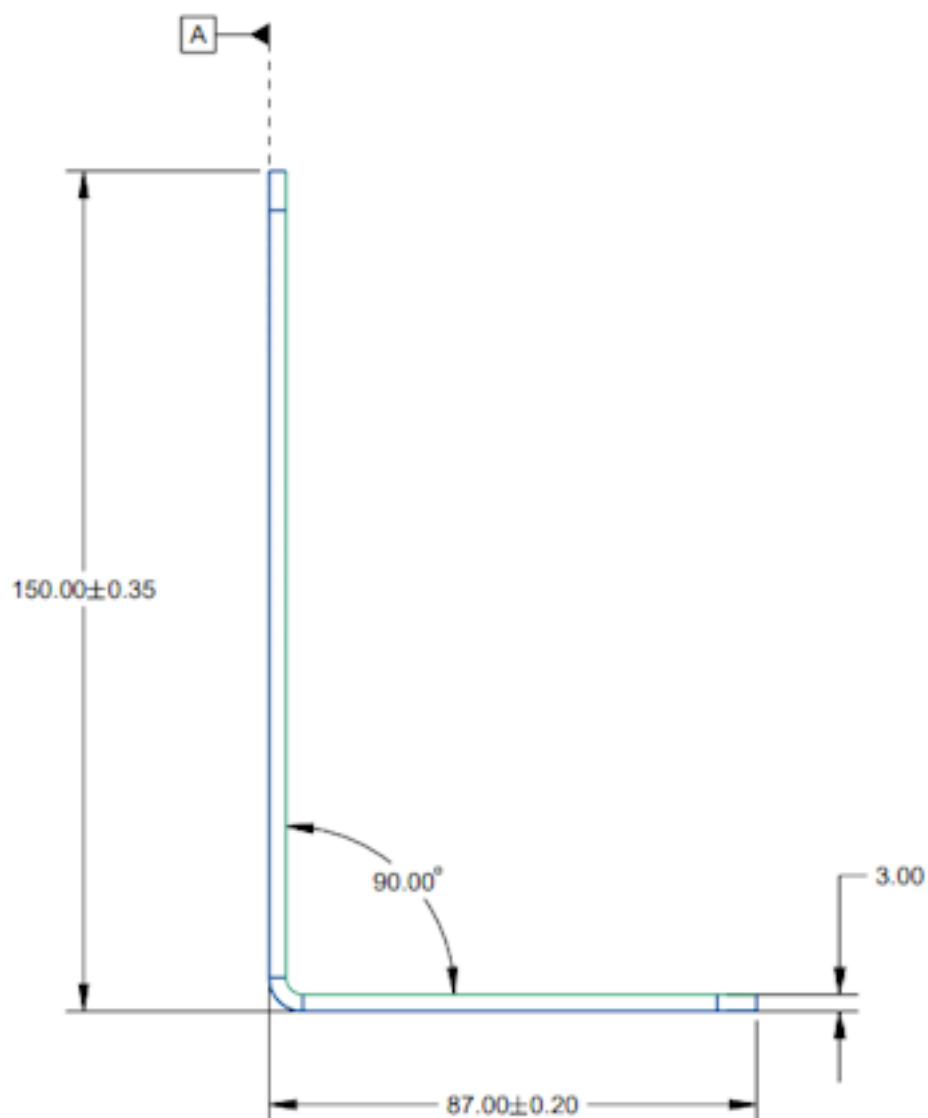


Figure 10 Light Bracket Dimensions


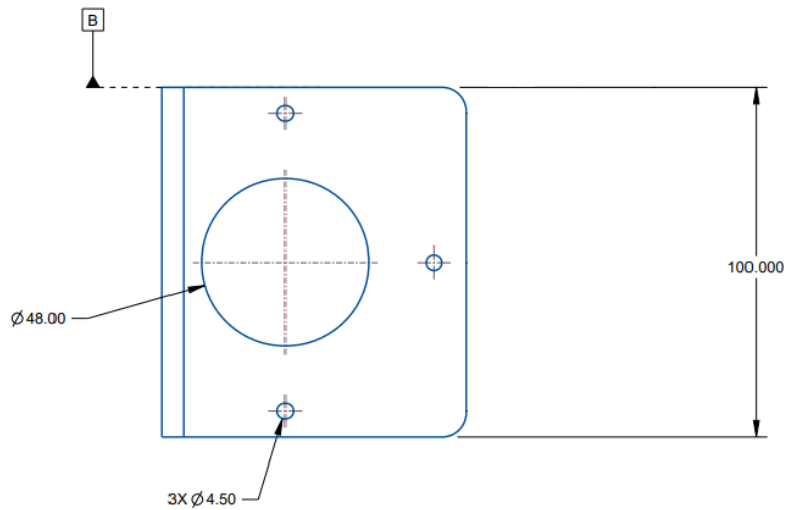


Figure 11 Light Bracket Dimensions

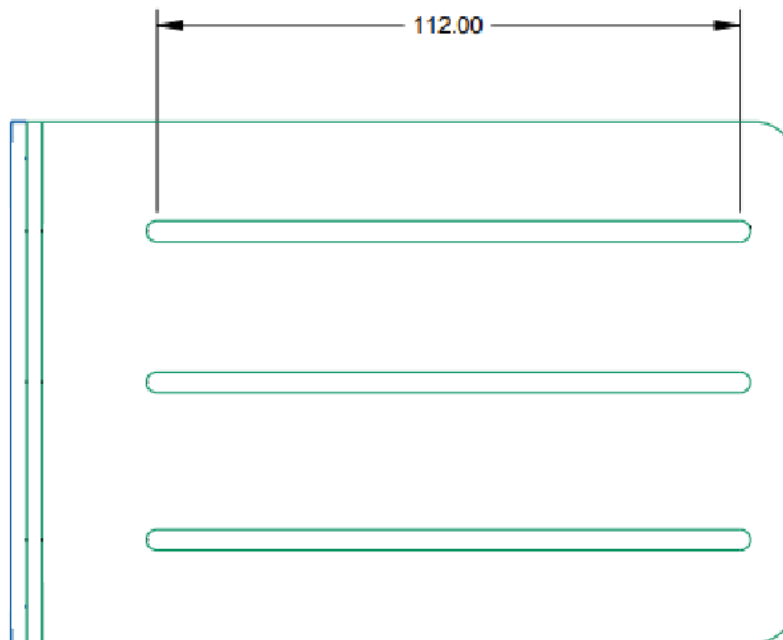

Installing an Illumination System

To install the illumination system on the device, follow the steps below:

1. Place the gasket onto the camera.
2. Attach the Illumination PCB to the camera via the board-to-board connector and secure it with two screws. The recommended Torque is 6.9 kgf-cm (6.0 lbf-in) using the Torx T8 fasteners.

3. Place the filter onto the camera exit window, lining up the corner chamfer of the filter to the corner chamfer of the camera housing (if required).
4. Place the illumination plate assembly onto the camera.
5. Attach the top cover and secure it with four screws. The recommended Torque is 6.0 in-lbs using the Torx T8 fasteners.


Disassembling the Illumination System

To disassemble the illumination system on the device, follow the steps below:

1. Remove the four screws and remove the top cover.
2. Remove the illumination plate assembly.
3. Remove the filter (if applicable).
4. Remove the two screws and gently lift the PCB to disconnect it from the device.

The gasket can be left in place unless damaged. Replace the gasket if it is damaged to maintain its IP67 specification.

Figure 12 Lens Disassembly

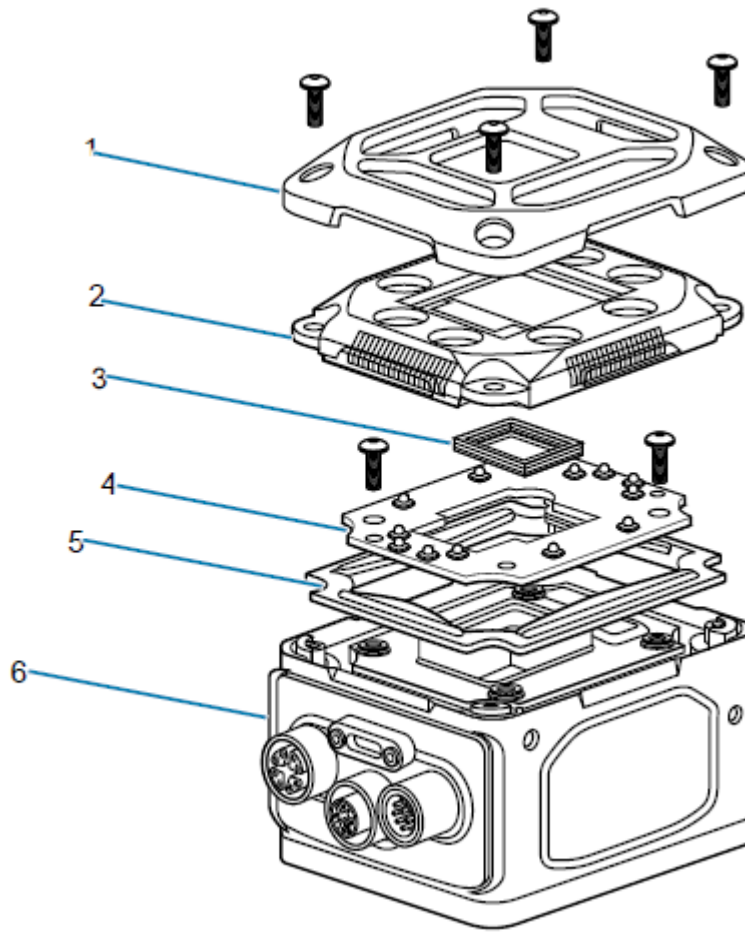

Installation

1	ESD Safe Cover (Four Screws)
2	Illumination Plate Sub-Assembly
3	Filter Assembly
4	Illumination PCB (Two Screws)
5	Illumination Plate Gasket
6	Main Assembly

Using the Device

This section explains how to use the device.

USB Type C

USB Type C allows for novel and cost-effective installations provided the following constraints are acceptable:

- Digital GPIO are unavailable.
- Optocoupled GPIO is still functional, provided the `COMMON_IN` and `COMMON_OUT` are properly terminated.
- The External Light Connector is disabled and cannot be used in GPIO or External Light modes.
- 0 V to 10 V analog output is disabled.
- Illumination is limited or requires a USB power source with further capabilities to be enabled at any capacity.



NOTE: The devices boot from legacy USB host ports. However, the current draw is not guaranteed to be under 500 mA, and device functionality may be restricted to the extent that performance can be impaired. An override mode can be enabled for legacy host ports that are known by the operator to be capable of supplying up to 1.5 A. Ports of this type are often described as having USB BC1.2 or USB charging support.

USB Type C Operation

The devices implement a full capability 5 Gbps USB 3.0 USB Type C port with support for DisplayPort Alt Mode. The sealed port implements a standard USB Type C dual screw lock mechanism for secure connections. When paired with the IP67 series of Zebra screw locking cables, the interface maintains a full IP67 seal.



NOTE: The sealing gasket on IP67 series Zebra USB Type C cables requires adequate pressure for proper seal and connector engagement. Always tighten the locking screws when using these cables, even if IP67 sealing is not required.

When connected as a peripheral to a USB host, the devices can be configured to support the following functionality:

- RNDIS Ethernet over USB
- USB-CDC or HID keyboard (configurable using Windows device settings)

When operating as a host, the USB Type C port supports many types of accessories and functionality, including:

- Native USB-C displays
- USB-C to Display Port and USB-C to HDMI adaptors
- HID-compliant keyboards and trackpads
- USB mass storage devices for firmware updates
- USB docks and hubs



NOTE: DisplayPort output is only supported over USB Type C to Type C cables capable of SuperSpeed data rates. High-speed charging cables typically do not have the necessary data wires for DisplayPort functionality.

Supported Display Resolutions

Display resolution is automatically negotiated upon connection. Displays with at least 1920 x 1080 resolution provide the preferred user experience.

The FS/VS Smart Camera series supports the following resolutions:

- 1024 x 768
- 1280 x 800
- 1280 x 1024
- 1366 x 768
- 1600 x 900
- 1600 x 1050
- 1920 x 1080
- 1920 x 1200



NOTE: Monitors with USB-C input offer an efficient method for quick and easy configuration over a single USB Type C to Type C cable. An attached device powers directly from the monitor's USB Power Delivery and outputs the Human Machine Interface (HMI) directly to the display. A USB mouse and keyboard attached to the monitor hub ports provide the user with interface control. Battery-powered portable USB Type C monitors are also compatible for easy status or manipulation in the field.

User Interface

The device is compatible with 24VDC power supplies and PoE injectors.

UI Label

Two sensors PCB switches control the device's trigger and tune buttons. The TRIG switch acts as a trigger, and the TUNE switch adjusts and optimizes focus.

Figure 13 UI Label




1	Power
2	Power over Ethernet
3	Device Status
4	Focus Status
5	Warning

Decode LEDs

The device has a 360° LED decode indicator that flashes green upon successful decode and red upon job failure.

Figure 14 360° LEDs

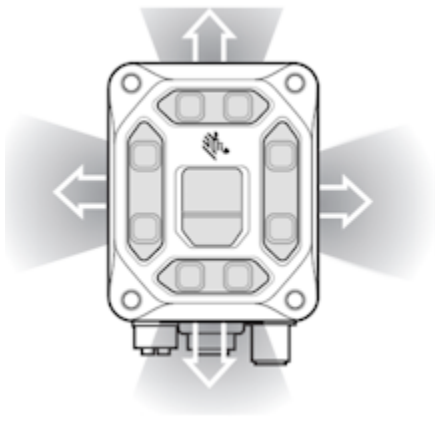

LED and Beeper Indicators

The following table describes the LED and beeper indications of the FS/VS Smart Camera upon device events such as power-up, running a job, maintenance operations, and parameter programming.

Table 12 LED and Beeper Indications





Event	Beeper	360° LED 	Power LED 	Device Status LED 	Focus Status LED 	Warning LED 
Power Up						
Power up with Low Power	 Low, Medium, High Tone	 Single Green Blink	 Solid Red	-	-	-
Power up with Limited Power (USB or 15W PoE)	 Low, Medium, High Tone	 Single Green Blink	 Solid Amber	-	-	-
Power up with Full Power (24V or 30W PoE)	 Low, Medium, High Tone	 Single Green Blink	 Solid Green	-	-	-
Job Error	 Low, Low Tone	-	 Solid Green	 Solid Red	-	 Solid Red
Device Maintenance						

Table 12 LED and Beeper Indications (Continued)




Event	Beeper	360° LED 	Power LED 	Device Status LED 	Focus Status LED 	Warning LED 
Factory Reset	 Medium, Medium Tone	 Continuous Red Flash (5hz)	 Solid Green	-	-	-
Firmware Operations						
Firmware Update Start	-	 Continuous Red Flash (2hz)	 Solid Green	 Continuous Red Flash (2hz)	-	-
Firmware Update Success	-	-	 Solid Green	-	-	-
Firmware Update Fail	 Low Tone	 Continuous Red Flash (5hz)	 Solid Green	 Continuous Red Flash (5hz)	-	-
Autotune Operations						
AutoTune Start	 Medium Tone	-	 Solid Green	-	 Continuous Green (2Hz)	-

Table 12 LED and Beeper Indications (Continued)







Event	Beeper	360° LED 	Power LED 	Device Status LED 	Focus Status LED 	Warning LED 
AutoTune Success	 High Tone	-	 Solid Green	-	 Solid Green	-
AutoTune Fail	 Low Tone	-	 Solid Green	-	 Solid Red	-
Decode						
Barcode Decode Start ¹	-	-	 Solid Green	 Solid Amber	-	-
Barcode Decode Success ¹	 Medium Tone	 Single Green Flash	 Solid Green	-	-	-
Barcode Decode Failure	-	 Single Red Flash	 Solid Green	-	-	-
Parameter Programming						
Parameter Entry Accepted	 High, Low, High, Low Tone	 Single Green Blink	-	 Solid Green	-	-

Table 12 LED and Beeper Indications (Continued)

Event	Beeper	360° LED 	Power LED 	Device Status LED 	Focus Status LED 	Warning LED 
Parameter Number Entry Expecting Barcodes	 High, Low Tone	 Single Green Blink	-	 Solid Green	-	-
Parameter Entry Error	 Low, High Tone	 Single Red Blink	-	 Solid Green	-	-




NOTE:¹ This is the default, Barcode Decode Success and Barcode Decode Failure beeper UI feedback is configurable in Aurora Focus.

Aiming Patterns

The aimer indicates the center and size of the field of view including diagonal corners 24 in. away from the subject.

The device has a red Class II laser aimer that generates the pattern shown in the following figure.

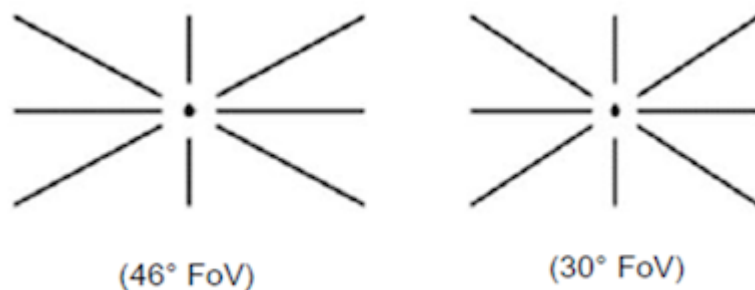Figure 15 Aiming Patterns

General Purpose Input and Outputs

The device has two types of general-purpose inputs and outputs (GPIO).

GPIO0 through GPIO3 are optically coupled to provide electrical isolation and wiring flexibility. GPIO4 through GPIO8 are 24 V Digital GPIO, which are not isolated and source power from the external power supply or Power over Ethernet (PoE). Digital GPIO is unavailable when the system is powered by USB. However, optocoupled GPIOs remain functional when COMMON_IN and COMMON_OUT are terminated appropriately.

Figure 16 Opto-Isolated Inputs

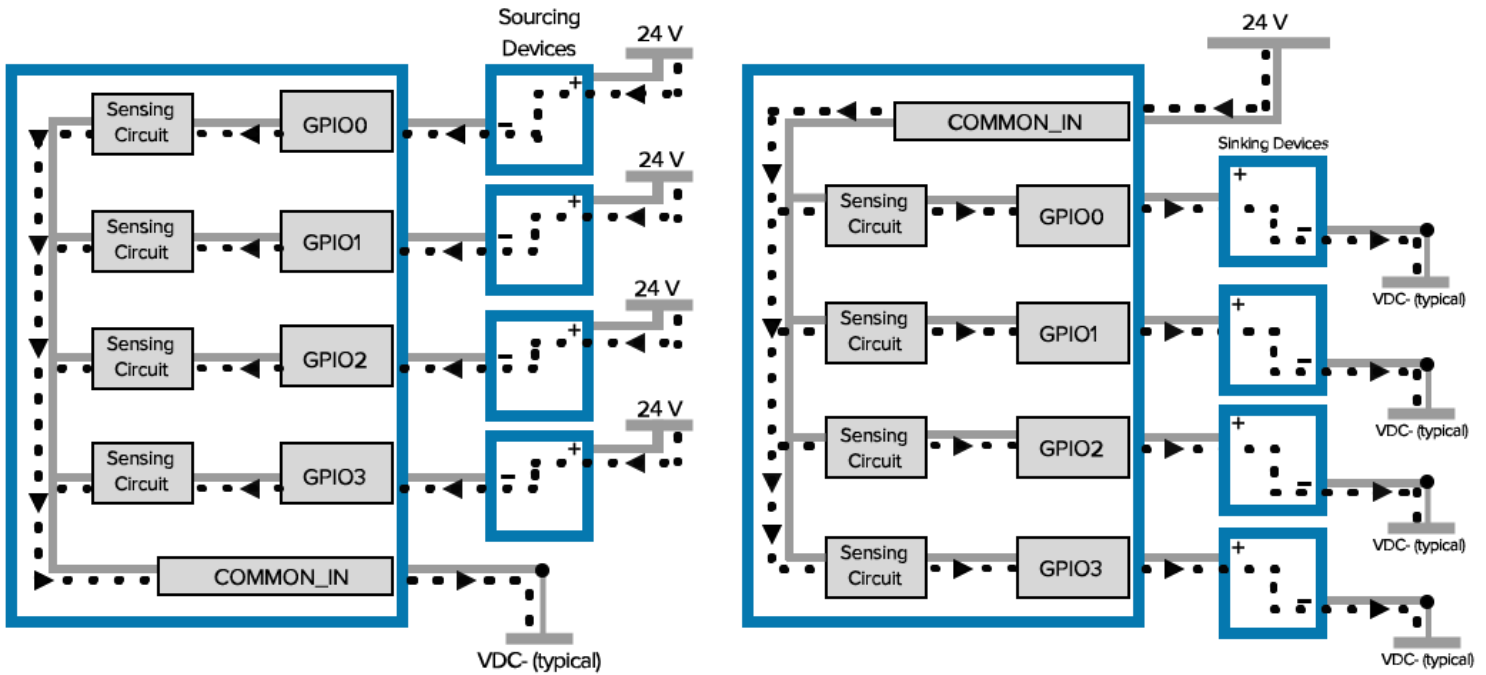
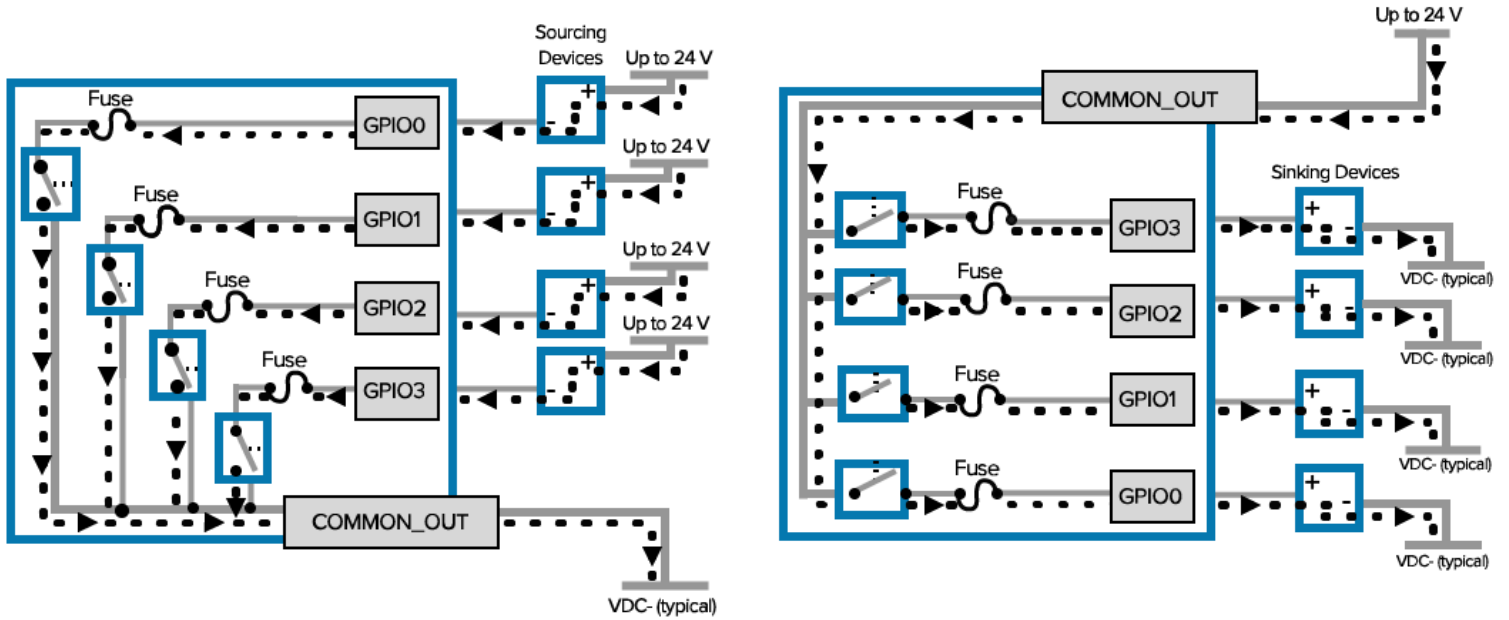


Figure 17 Opto-Isolated Outputs

GPIO Summary

The following table provides GPIO details such as connector, input mode, and output mode.

Table 13 GPIO Summary

Hardware	PIN	Conn.	Iso	Input Mode		Output Mode				
				Sink PNP	Source NPN	Sink NPN	Source PNP	Push-Pull	Max Current	USB Power
Opto	GPIO0	12 Pin	Yes	Yes	Yes	Yes	Yes	No	50mA	Yes
Opto	GPIO1	12 Pin	Yes	Yes	Yes	Yes	Yes	No	50mA	Yes
Opto	GPIO2	12 Pin	Yes	Yes	Yes	Yes	Yes	No	50mA	Yes
Opto	GPIO3	12 Pin	Yes	Yes	Yes	Yes	Yes	No	50mA	Yes
Digital	GPIO4	12 Pin	No	Yes	No	Yes ²	Yes ²	Yes	100mA ¹	No
Digital	GPIO5	12 Pin	No	Yes	No	Yes ²	Yes ²	Yes	100mA ¹	No
Digital	GPIO6	5 Pin	No	Yes	No	Yes ²	Yes ²	Yes	100mA ¹	No
Digital	GPIO7	5 Pin	No	Yes	No	Yes ²	Yes ²	Yes	100mA ¹	No
Digital	GPIO8	5 Pin	No	Yes	No	Yes ²	Yes ²	Yes	100mA ¹	No



NOTE: ¹Digital outputs consume power and reduce the power budget available for illumination. It is recommended to disable unused output when using PoE.




NOTE: ²Push-pull output is compatible with auxiliary equipment having NPN inputs referenced to GND or PNP inputs referenced to DC IN.

Optically Coupled GPIO


Optocoupled GPIO are electrically isolated from the rest of the system and require external reference through the COMMON_IN and COMMON_OUT wires.

The termination of COMMON_IN and COMMON_OUT to an external voltage or ground determines if the input or output is Sinking type or Sourcing type.

In output mode, the GPIO performs similarly to switches connecting the GPIO pin to COMMON_OUT. When disabled, the GPIO pin is disconnected from COMMON_OUT and allowed to float. As a result, optocoupled outputs turn on quickly, while the turn-off time depends on how quickly the connected load dissipates the charge

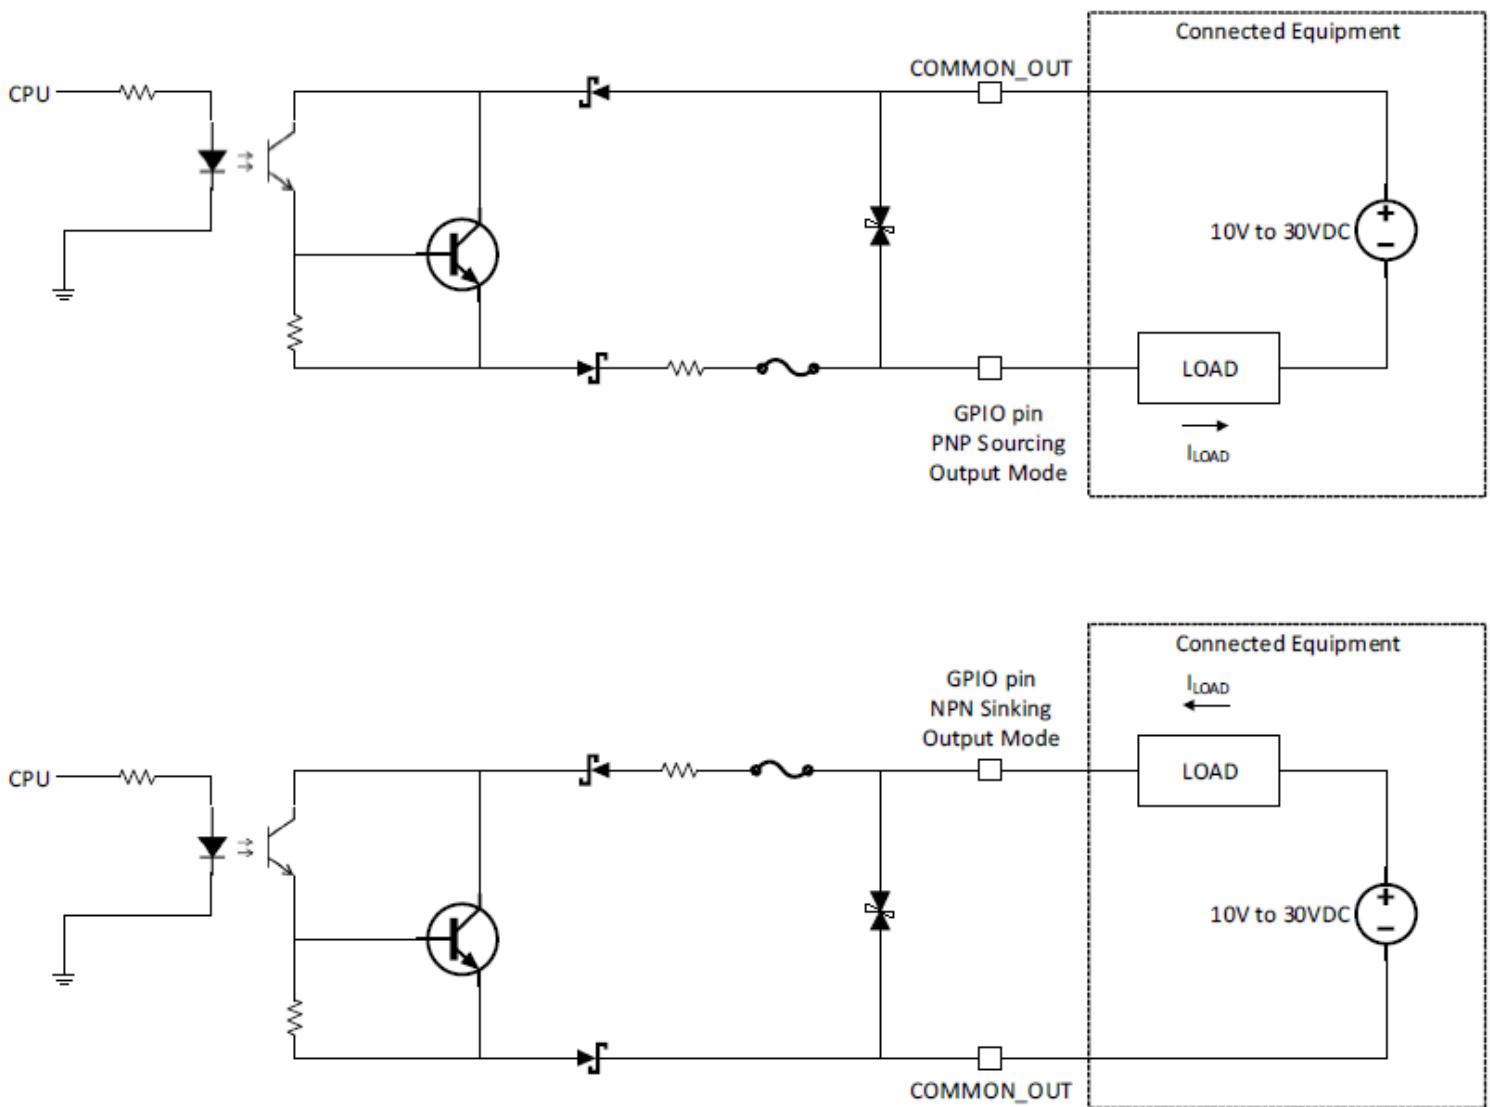

Optocoupled inputs are enabled when voltage is applied across the GPIO pin and COMMON_IN.

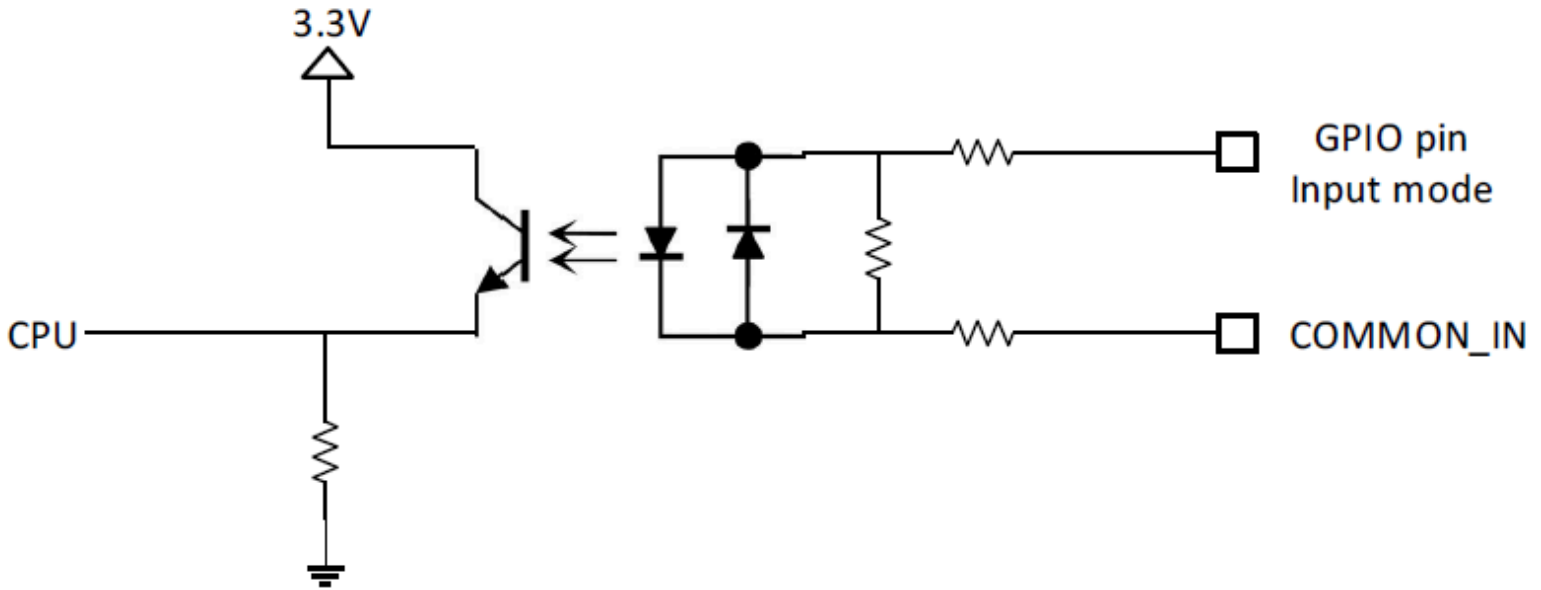

Optocoupled GPIO can operate non-isolated by terminating COMMON_IN and COMMON_OUT to the DC_IN or GND wires that power the device.

Table 14 Connection References

Wire	Termination	Configuration
COMMON_IN	GND	Sinking Input (PNP)
COMMON_IN	DC_IN	Sourcing Input (NPN)
COMMON_OUT	GND	Sinking Output (NPN)
COMMON_OUT	DC_IN	Sourcing Output (PNP)

While it is possible to configure inputs and outputs of the same type, this is not recommended as inputs and outputs must be of opposite type to be compatible. All optocoupled GPIO share the COMMON_IN for input mode and COMMON_OUT for output mode. Therefore, all inputs must be of the same type and all outputs must be of the same type. For example, it is not possible to simultaneously configure sinking output on GPIO0 and sourcing output on GPIO1.

In practice, sinking inputs paired with sourcing outputs is common. This combination is compatible with widely available digital industrial GPIO, which typically only support sinking-type inputs.



NOTE: Refer to the documentation of the connected auxiliary equipment to ensure a compatible configuration, and remember to leave unused GPIO in a disabled state.

Optocoupled outputs are individually fused to protect against damage from short circuits or overload events. Since no power is consumed from the vision system, optocoupled GPIO have no impact on power budgeting.


Digital Industrial GPIO

Unlike optocoupled GPIO, digital GPIO actively drive the output signal high and low for significantly faster turn-on and turn-off time. Digital GPIO is not isolated and references the power supply and ground of the system. COMMON_IN and COMMON_OUT do not need to be terminated to use digital GPIO.



NOTE: Refer to the documentation of the connected auxiliary equipment to ensure a compatible configuration, and remember to leave unused GPIOs disabled.

Figure 18 Digital Outputs (Non-Isolated)

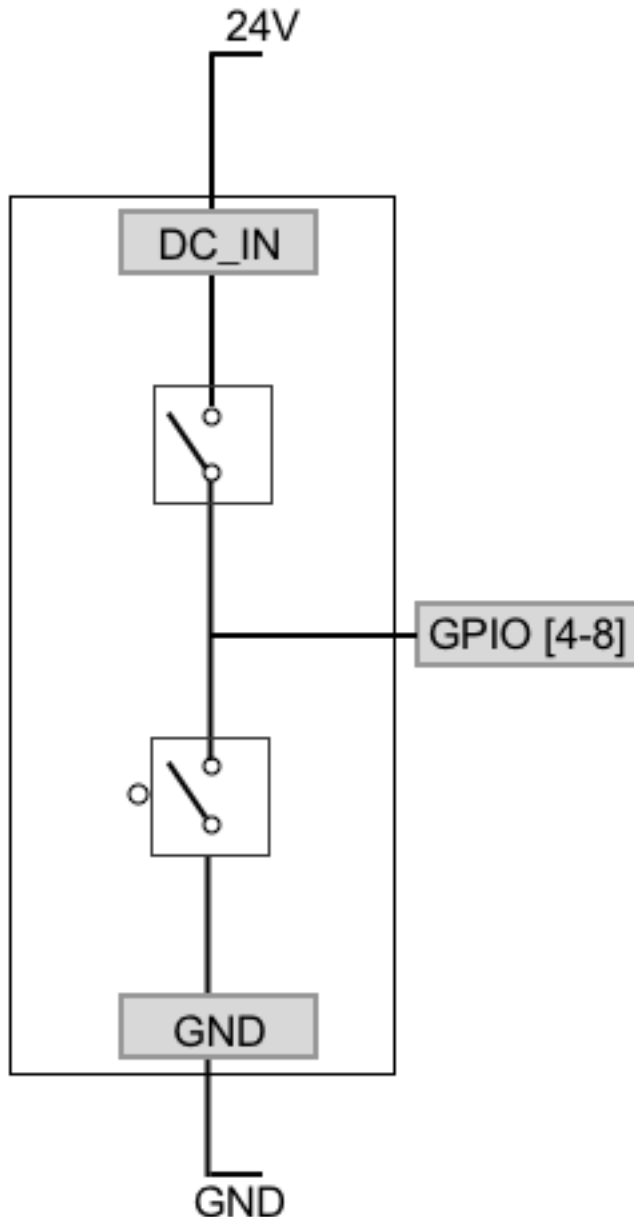

NOTE: A digital GPIO can be configured as a 24 V output and wired back into COMMON_IN or COMMON_OUT to create the necessary bias voltage to operate an optocoupled GPIO when PoE

powers the system. Knowing the 100 mA total current budget per digital GPIO is essential when attaching loads to any optocoupled outputs powered this way.

are of the sinking (PNP) input type and do not support the less common sourcing (NPN) input configuration. For a logic high to register, voltage above the specified threshold relative to the vision system ground must be applied. Drive these inputs with a sourcing (PNP) or push-pull output.

Configuring the 5-pin M12 External Light connector to GPIO Mode makes GPIO6 through GPIO8 available for general use. Configuring the External Light connector to External Light Mode switches GPIO8 into a high current output to provide power and sets up GPIO6 and GPIO7 to control the connected light.




NOTE: When a 24VDC external power supply powers the vision system, and the External Light connector is configured for External Light mode, GPIO8 operates in a bypass mode capable of shunting input power directly to high-power strobe lights. High peak currents are possible with adequate power supply capability, minimized cable losses, and observing the duty cycle limits that keep the average current in the system below 1500 mA.

Analog Output

The system has an analog output on the External Light connector capable of generating between 0 V and 10 V.

An output impedance of approximately 400 ohms protects the analog output driver against overload conditions. However, this introduces an output voltage offset directly proportional to the output current. For optimal accuracy, connect devices with low input bias current.

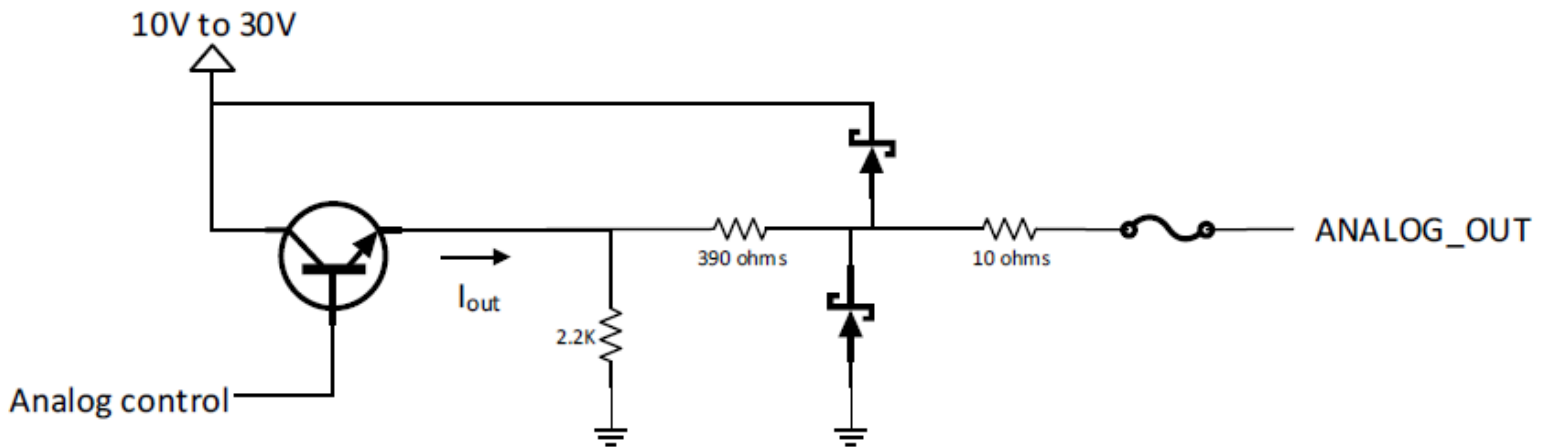

GPIO Wire Diagrams


The diagrams in this section describe GPIO wiring with the Output as Current Source and as Current Sink.

Output as Current Source

The following diagram displays a configuration with GPIO 3 set to Input. GPIO0, GPIO1, and GPIO2 are set to Output.

The GPIO Outputs are the Current Source (PNP) and the GPIO Input is the Current Sink (PNP). Input is received from a PNP proximity sensor. The power source is a PLC 24VDC PSU, and the GPIO functions are not opto-isolated.

Figure 19 Output as Current Source / Input as Current Sink

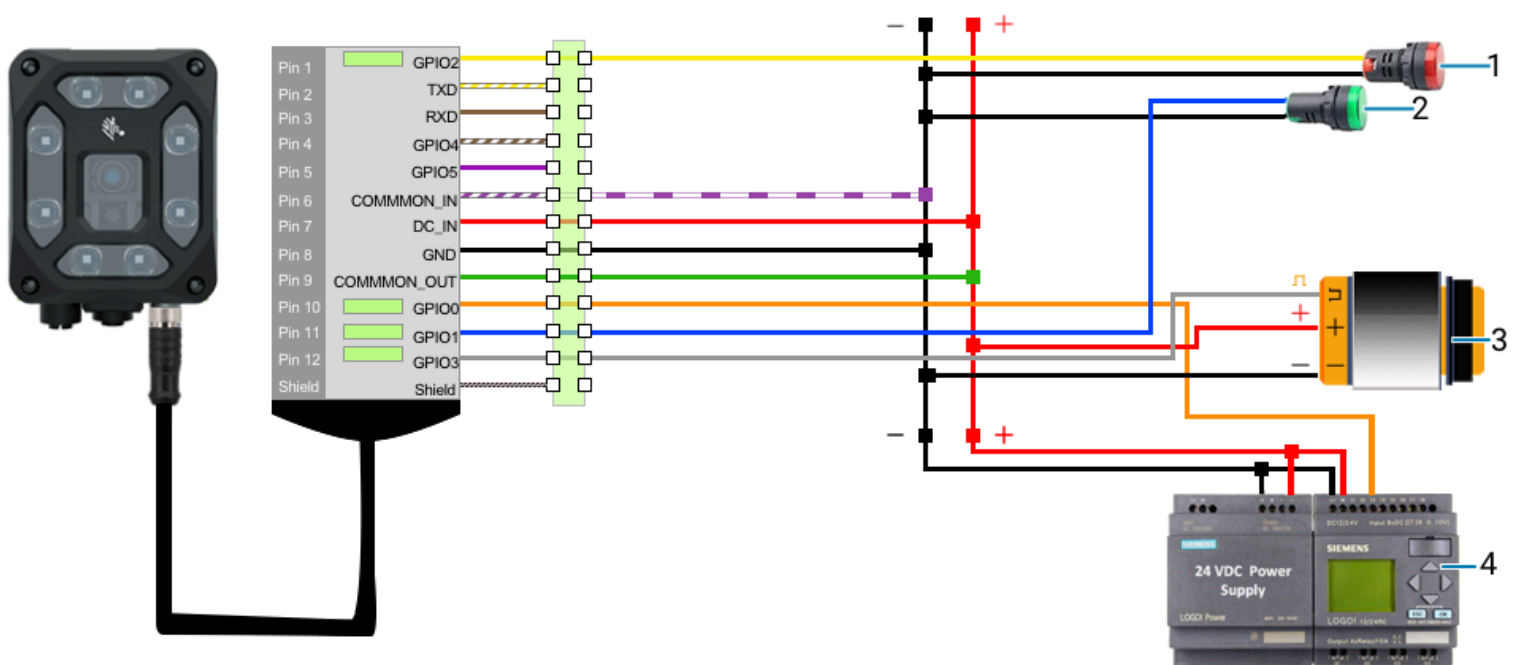


1	Job Fail
2	Job Pass
3	PNP Proximity Sensor
4	Power Supply

Output as Current Sink

The following diagram displays a configuration with GPIO 3 set to Input. GPIO1, GPIO2, and GPIO3 are set to Output.

The GPIO Outputs are the Current Sink (NPN) and the GPIO Input is the Current Source (NPN). Input is received from an NPN proximity sensor. The power source is a PLC 24VDC PSU, and the GPIO functions are not opto-isolated.

Figure 20 Output as Current Sink / Input as Current Source

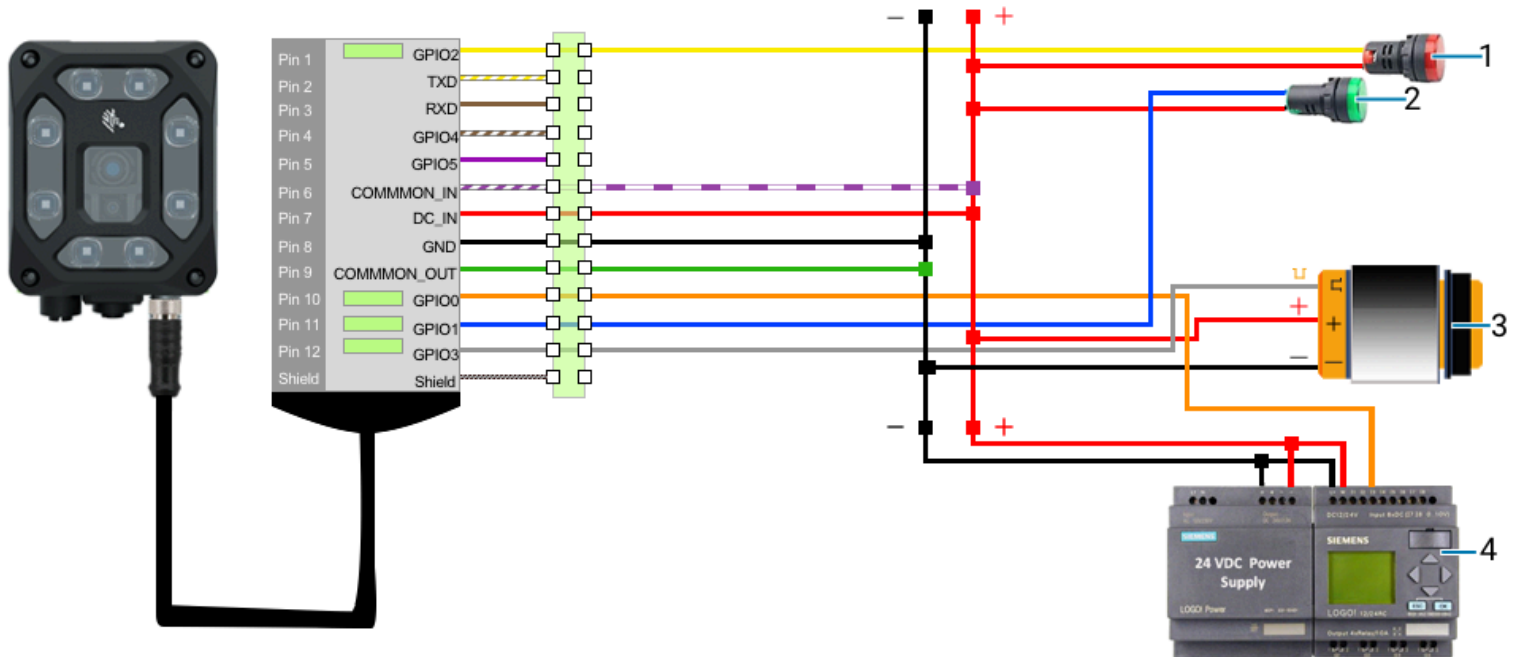

1	Job Fail
2	Job Pass
3	NPN Proximity Sensor
4	Power Supply

Power and Thermal Management

Algorithms keep the system within acceptable power and thermal parameters to ensure reliable operation over the device's lifetime.



CAUTION: A warning indicates if the available power budget is inadequate for the configured settings. In some cases, the user can choose to ignore or override the warning. In this case, the integrator should evaluate the operational stability of the system.

If the device temperature exceeds a safe limit, the system response may include disabling certain features, reducing processor performance, or stopping active jobs.

If overheating is a problem, effective mitigation strategies include:

- Reducing the average system power consumption
- Using external illumination
- Avoiding operating from PoE
- Operating in a cooler environment
- Actively cooling with a fan
- Heatsinking the chassis to a large thermally conductive mounting surface through a thermally conductive mounting system

For optimal performance, ensure that the device does not exceed the recommended operating ranges stated below.

Table 15 Operating Temperature

Temperature	Operating Range
Ambient Temperature	0°C to 40°C (POE, duty cycle-dependent) 0°C to 45°C (non-POE, duty cycle-dependent)



NOTE: If temperatures exceed the operating range, additional heatsinking strategies may be necessary, for example, mounting to a metal infrastructure or forced convection via an external fan. The Zebra Universal Mounting Bracket (BRKT-LMNT-U000) provides multiple mounting options for a metal infrastructure.

Power Cycling the Device

Power cycling the device can help in troubleshooting potential network discoverability issues.

1. Remove all cables to ensure no power is being directed to the device.
2. Reinsert a power source and allow the device approximately one minute to boot up.
3. Re-attempt to:
 - Discover a device in Zebra Aurora Focus by restarting the application and clicking **View Devices**.
 - View a device in the Windows Network.
 - Access a device using the Zebra Web HMI.

If failure persists, repeat the steps above for all of the connection types being used with the device, including:

- Ethernet directly to the PC.
- Ethernet connection to a network via switch or hub.

Symbologies

The following table lists supported symbologies for the devices.

Table 16 Supported Symbologies

Type	Symbologies
1D	Codabar, Code 39, Code 93, Code 128, Interleaved 2 of 5, MSI, UPC/EAN, Discrete 2 of 5, GS1 Databar
2D	Aztec, Data Matrix, DotCode, MaxiCode, PDF417, QR Code
OCR	Deep Learning-based OCR



NOTE: Deep Learning OCR supports Latin characters and is available through an add-on license.

Fixed Industrial Scanning Toolset

The following tools are available with a specific license type.

Table 17 Fixed Industrial Scanning Tools


Tool	Standard 2D	Fast 2D	DPM with Fast 2D	OCR
Barcode Reading	X	X	X	
Fast 2D (60 fps)		X	X	
DPM			X	
Locate Object				X
Deep Learning OCR				X

Reading Diagrams

This section provides reading distances for 2MP standard range and wide angle configurations while scanning Code128 and ECC 200 barcodes.

Standard Range


Figure 21 2MP Standard Range

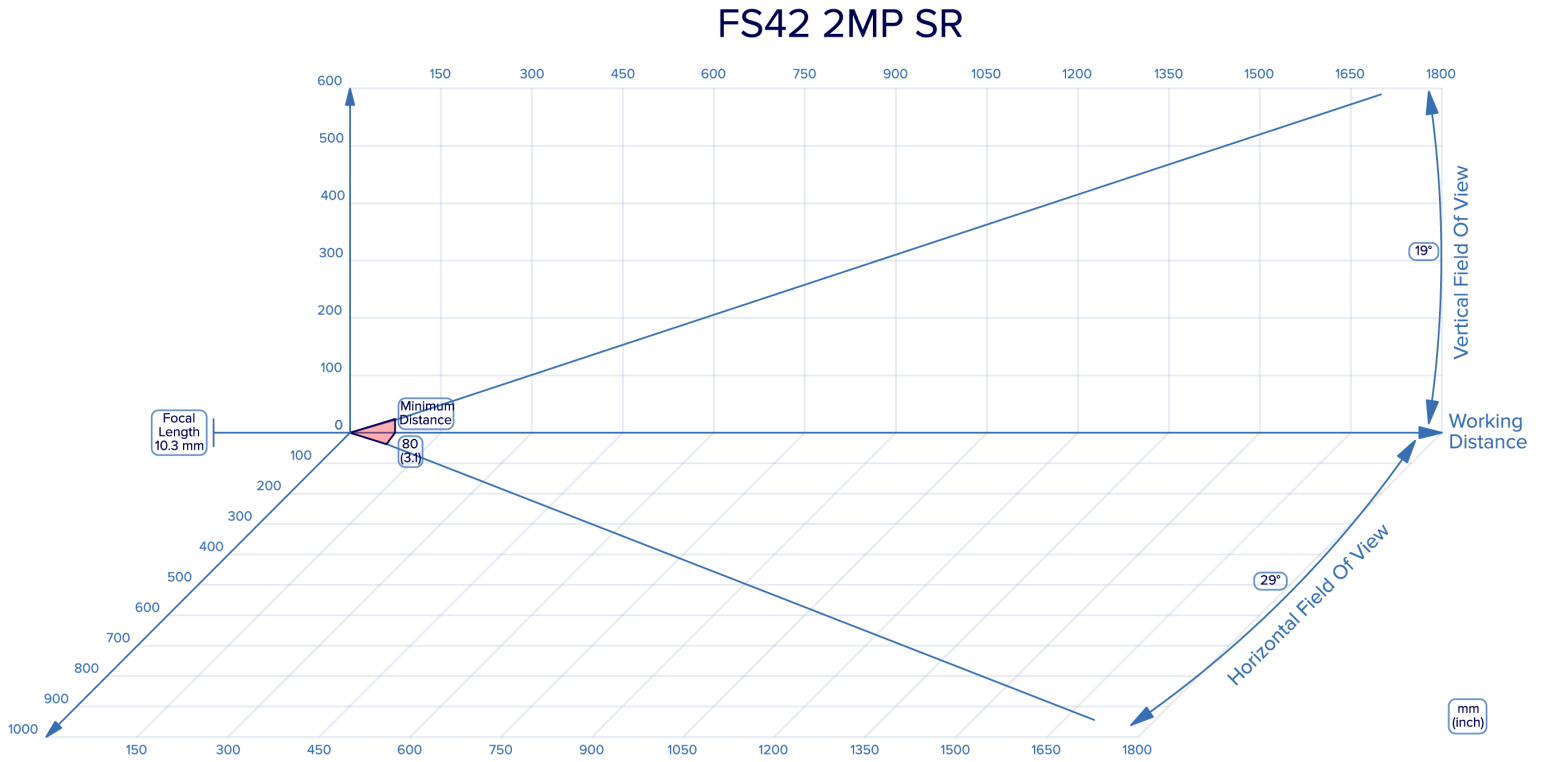

Standard Range - Code128

Figure 22 2MP Standard Range Code128


FS42 2MP SR - Code128

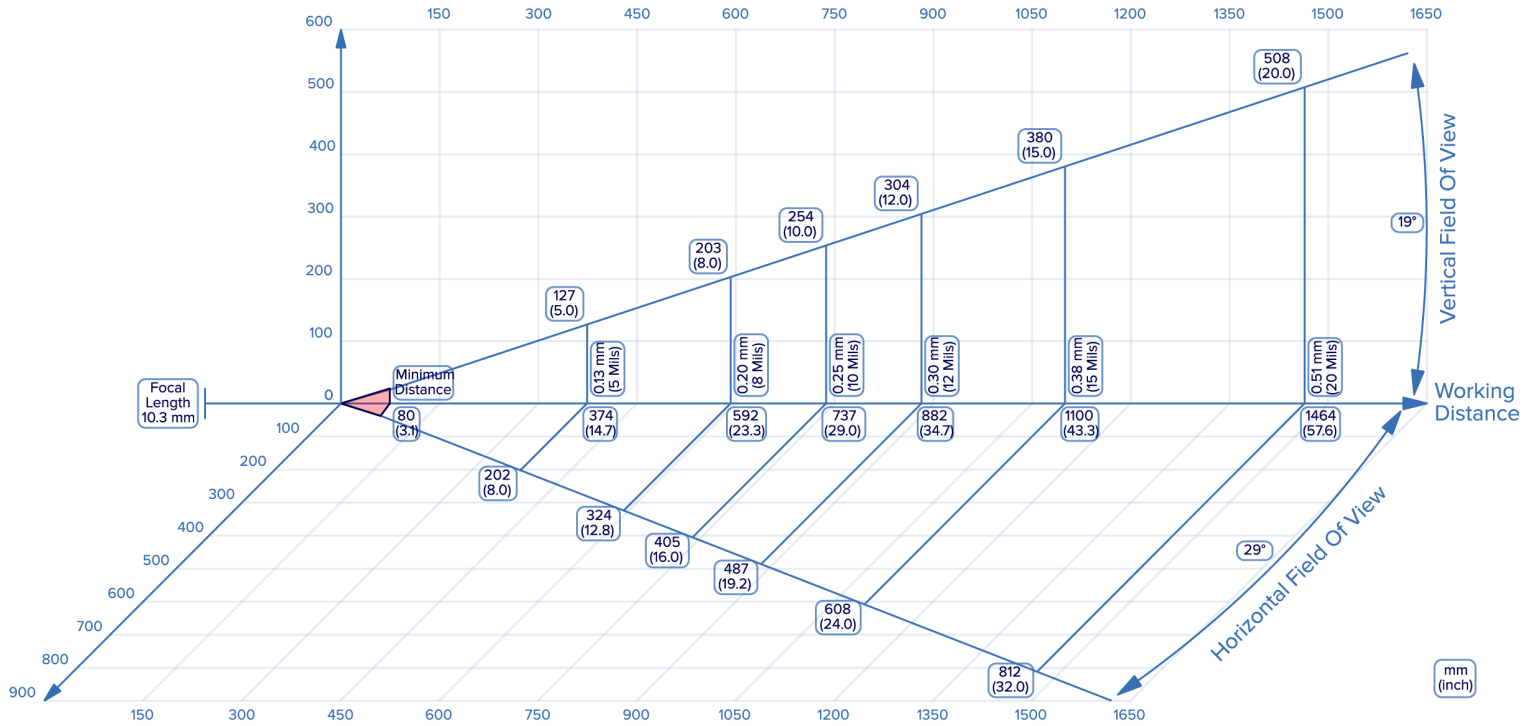

Standard Range - ECC 200


Figure 23 2MP Standard Range ECC 200

FS42 2MP SR - ECC 200

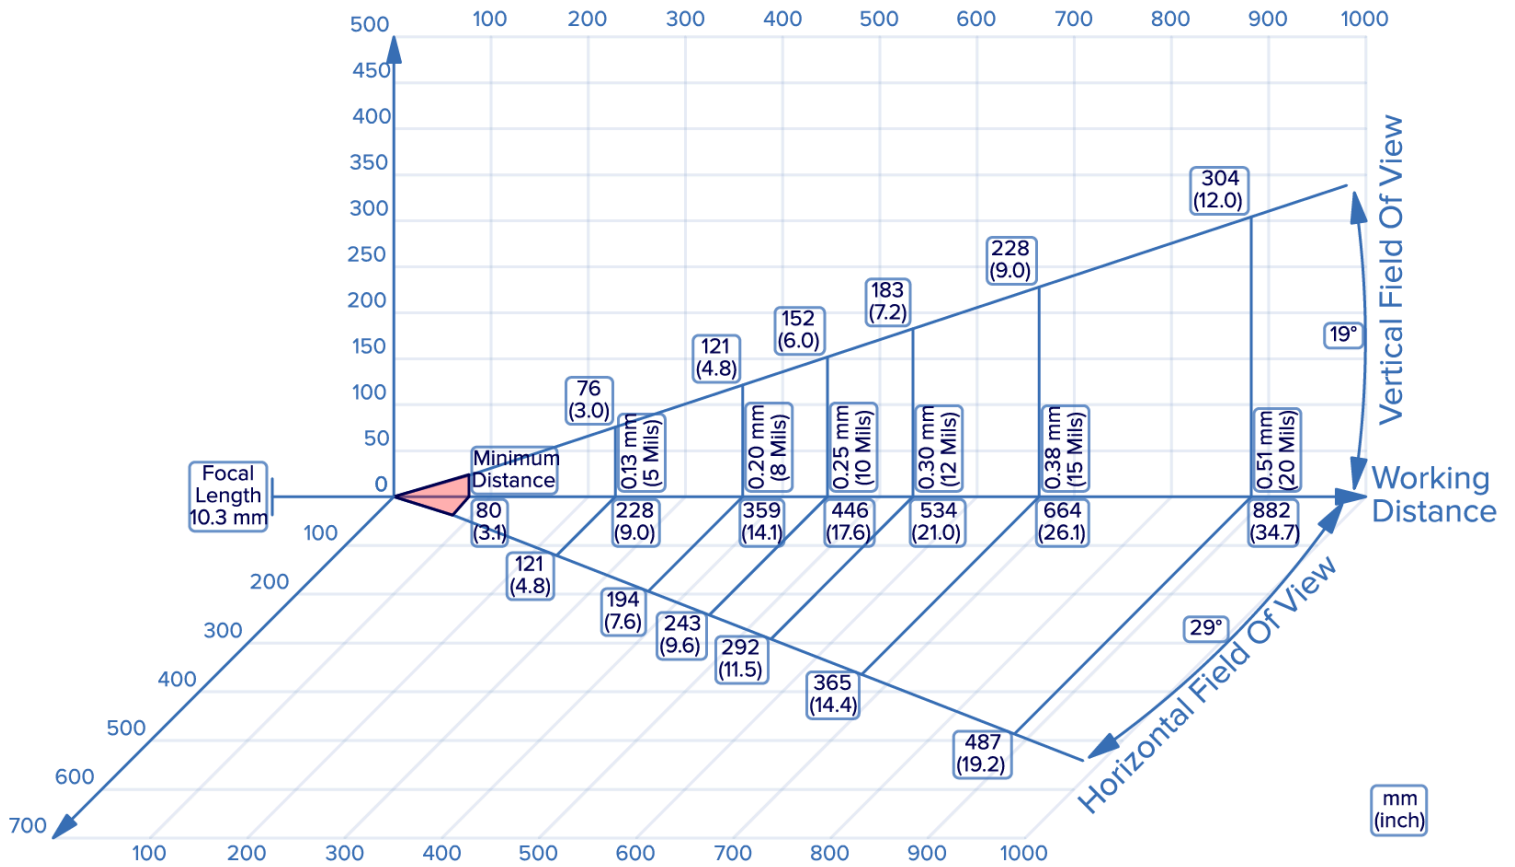

Wide Angle


Figure 24 2MP Wide Angle

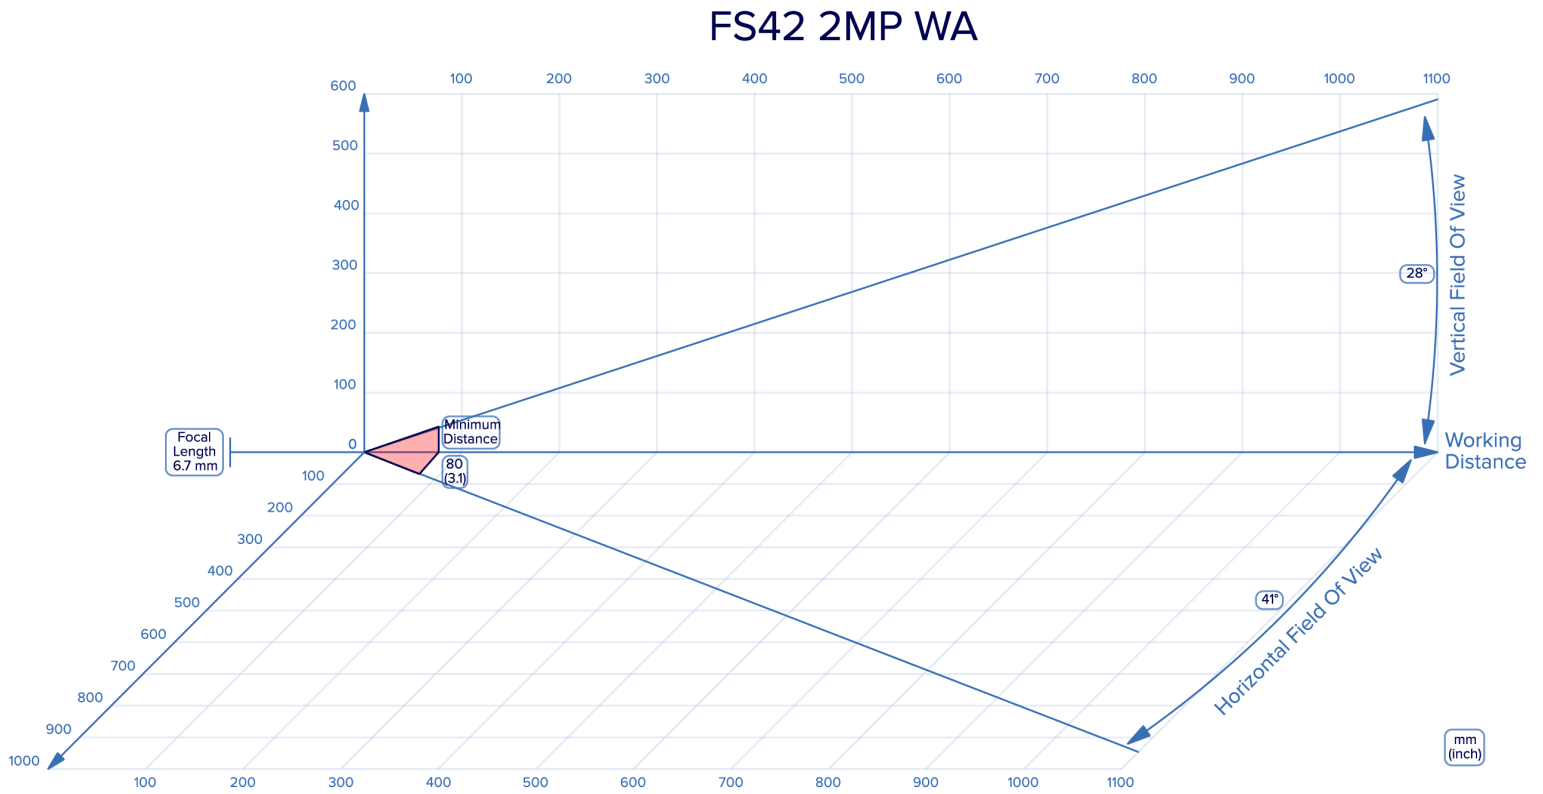

Wide Angle - Code128

Figure 25 2MP Wide Angle - Code128


FS42 2MP SR - Code128

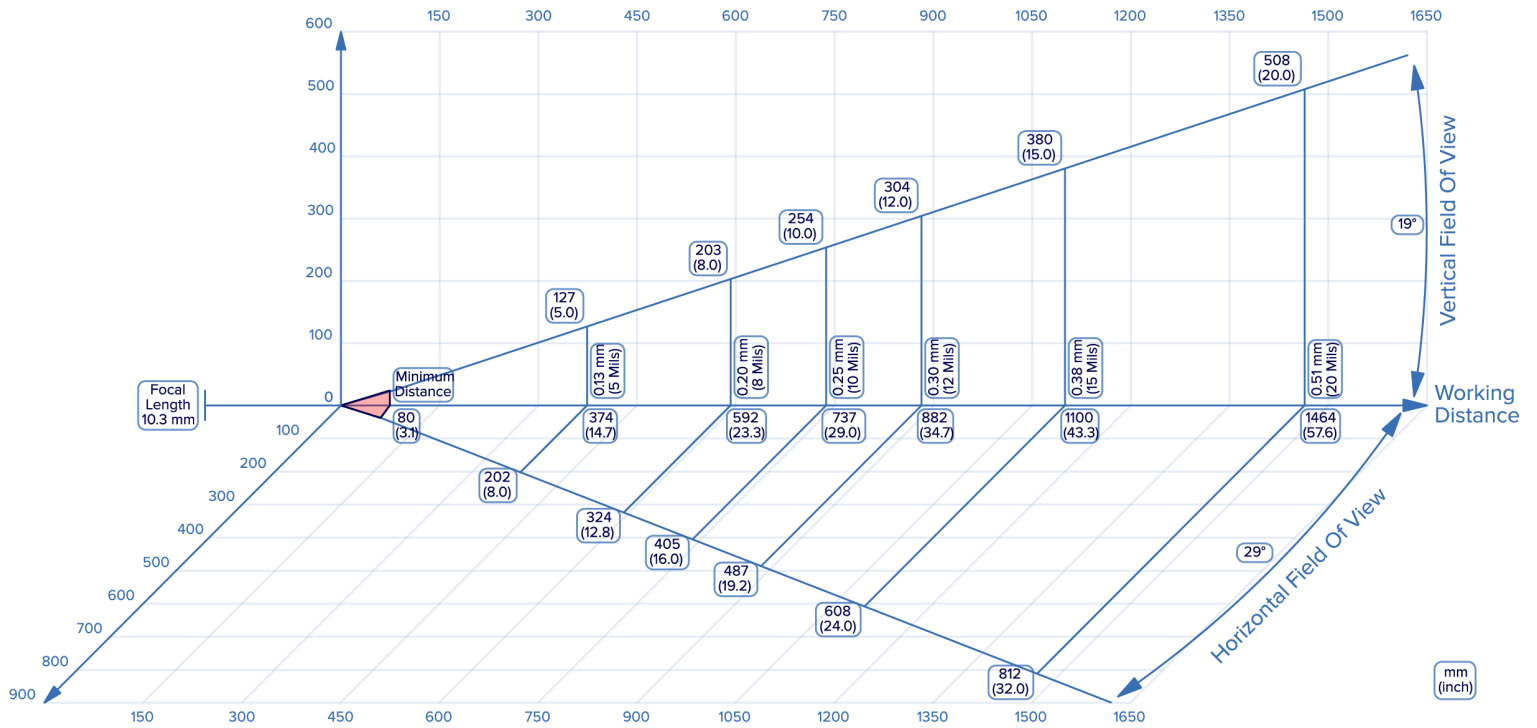

Wide Angle - ECC 200

Figure 26 2MP Wide Angle - ECC 200

FS42 2MP WA - ECC 200

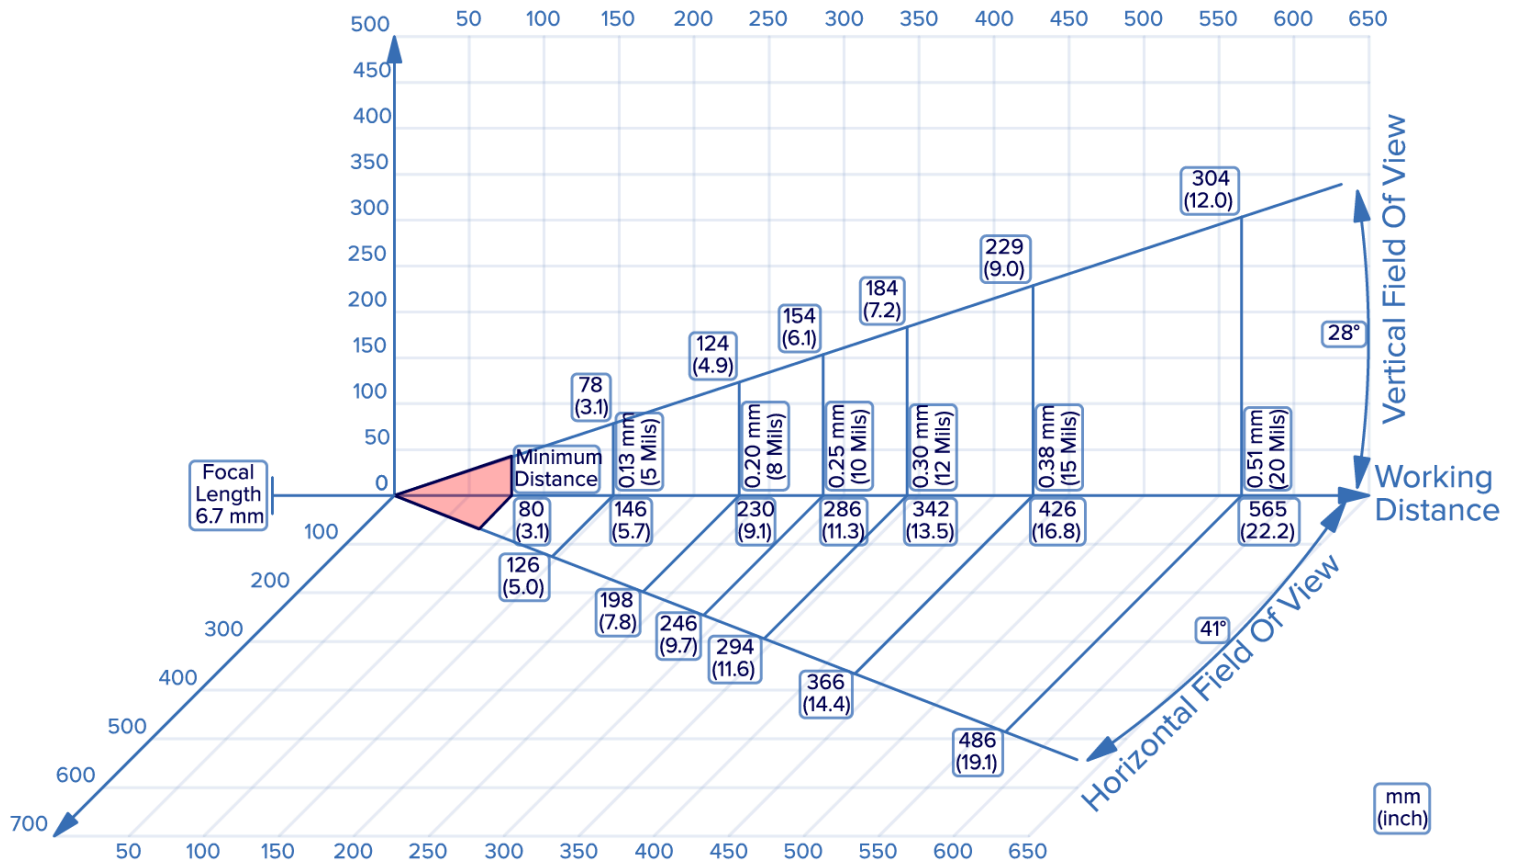

Maintenance

This section explains how to maintain the device.

Known Harmful Ingredients

The following chemicals are known to damage the plastics on Zebra devices and should not come in contact with the device:

- Acetone
- Ammonia solutions
- Aqueous or alcoholic alkaline solutions
- Aromatic and chlorinated hydrocarbons
- Benzene
- Bleach
- Carboic acid
- Compounds of amines or ammonia
- Ethanolamine
- Ethers
- Ketones
- TB-lysoform
- Toluene
- Trichloroethylene

Approved Cleaning Agents

The following cleaning agents are approved for cleaning the plastics on Zebra devices:

- Pre-moistened wipes
- Isopropyl alcohol 70%

Tolerable Industrial Fluids and Chemicals

The following industrial fluids and chemicals were evaluated and deemed tolerable for Zebra devices.



NOTE: Not all fluid variants and brands have been tested.

- Motor/Engine Oil
- Automatic Transmission Fluid (ATF)
- Continuously Variable Transmission Fluid (CVT)
- Industrial De-Greaser (Engine Brite Heavy Duty)

Cleaning the Device

Routinely cleaning the exit window is required. A dirty window may affect scanning accuracy. Do not allow any abrasive material to touch the window.

1. Dampen a soft cloth with one of the approved cleaning agents listed above or use pre-moistened wipes.
2. Gently wipe all surfaces, including the front, back, sides, top and bottom. Never apply liquid directly to the device. Be careful not to let liquid pool around the scanner window, trigger, cable connector or any other area on the device.
3. Be sure to clean the trigger area by wiping the surface with careful attention to avoid lifting the label from the device.
4. Do not spray water or other cleaning liquids directly into the exit window.
5. Wipe the scanner exit window with a lens tissue or other material suitable for cleaning optical material such as eyeglasses.
6. Immediately dry the scanner window after cleaning with a soft non-abrasive cloth to prevent streaking.
7. Allow the unit to air dry before use.
8. Device connectors:
 - a. Dip the cotton portion of a cotton-tipped applicator in isopropyl alcohol.
 - b. Rub the cotton portion of the cotton-tipped applicator back-and-forth across the connector on the device at least three times. Do not leave any cotton residue on the connector.
 - c. Use the cotton-tipped applicator dipped in alcohol to remove any grease and dirt near the connector area.

Use a dry cotton tipped applicator and rub the cotton portion of the cotton-tipped applicator back-and-forth across the connectors at least three times. Do not leave any cotton residue on the connectors.

Troubleshooting

This section describes potential issues that could arise while using the device and solutions that could correct the problem, such as power cycling and pinging the device.

Table 18 Troubleshooting

Problem	Cause	Solution
The device is not connecting to the network when using Device Discovery.	Specific ports that are utilized by the application are blocked by Windows Defender Firewall.	Ensure that Zebra Aurora Focus can access Domain, Public, and Private networks.
	Ensure that the device is visible in the Windows Network by viewing the File Explorer and selecting Network.	If the device is not viewable under the Network dropdown or listed under Other Devices, it is not connected.
	There is no RNDIS driver available to the device when connected via USB.	To verify that there is an NDIS driver, go to the Windows Device Manager and search under the Network Adapters drop-down.
The device is cycling power or data connection on the USB port.	The USB cable may be loose or intermittent.	Reseat the USB cable and tighten the locking screws firmly.

Device Discovery Troubleshooting Methods

Two common solutions to enable the device to re-connect via device discovery are performing a factory reset on the device and power cycling the device.

Factory Reset the Device

To factory reset the device using the hardware buttons:

1. Disconnect all power sources.
2. Press and hold the TRIG button on the device.
3. Connect to a power source.
4. Continue to hold the TRIG button. After 20 seconds, the Power LED on the device turns from yellow to green, and the Ethernet LED turns from orange to amber. Release the TRIG within 5 seconds after the Ethernet LED changes to amber.

Power Cycling the Device

Power cycling the device can help in troubleshooting potential network discoverability issues.

1. Remove all cables to ensure no power is being directed to the device.
2. Reinsert a power source and allow the device approximately one minute to boot up.
3. Re-attempt to:
 - Discover a device in Zebra Aurora Focus by restarting the application and clicking **View Devices**.
 - View a device in the Windows Network.
 - Access a device using the Zebra Web HMI.

If failure persists, repeat the steps above for all of the connection types being used with the device, including:

- Ethernet directly to the PC.
- Ethernet connection to a network via switch or hub.

