



### Overview

### HP Elite t655 Thin Client

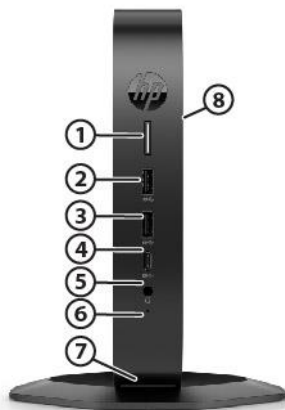

#### FRONT

- 1 Power button (with integrated power indicator)
- 2 USB-A 3.1 Gen 1 port
- 3 USB-A 3.1 Gen 1 port
- 4 USB-C® 3.2 Gen 2 port
- 5 3.5mm combo headset/audio jack
- 6 Flash memory activity indicator
- 7 Stand
- 8 100 x 100mm VESA mounting holes

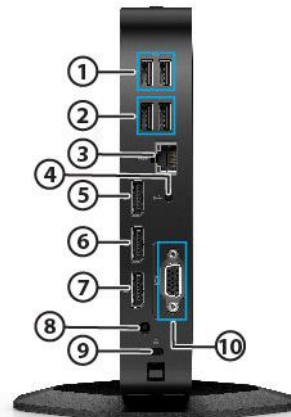

#### BACK

- 1 (2) USB-A 2.0 port
- 2 (2) USB-A 3.2 Gen 1 port
- 3 RJ-45 (network)jack- option with or without DASH Manageability support
- 4 Audio-out (headphone)
- 5 DisplayPort™ 1.2 connector
- 6 DisplayPort™ 1.2 connector
- 7 DisplayPort™ 1.2 connector
- 8 Power connector
- 9 Security cable slot
- 10 Configurable Option Port supporting one of the following:
  - Blank; no optional configured port
  - DP/USB-C® with PD
  - DisplayPort™ over USB-C® with USB Power Delivery
  - (2) USB-A 3.2 Gen 1 port
  - HDMI digital video output
  - VGA analog video output
  - External Wi-Fi® antenna connector
  - Fiber Optic NIC connectors (SC or LC)
  - Serial port with configurable power
  - Dual serial ports (includes cable adapter)

### Overview

#### AT A GLANCE

- AMD Ryzen R2314 System-on-Chip; 2.1 – 3.5 GHz; 4 cores, 4 threads<sup>3</sup>
- DASH Manageability support - Option to order with DASH or non-DASH
- AMD Memory Guard Secure Run technology that encrypts data in main memory
- DDR4 dual-channel SDRAM system memory; up to 2667 MT/s transfer rate; two SODIMM slots
- (3) DisplayPort™ 1.2 video outputs supporting up to UHD/4K (3840 x 2160 @ 60 Hz) resolutions  
**NOTE:** DisplayPort™ cables and displays sold separately.
- Solid-state flash memory storage; M.2 form factor modules; one slot
- Gigabit Ethernet (GbE) network connection; support for DASH out-of-band remote management
- Optional Allied Telesis M.2 Fiber Optic NICs; Fast Ethernet (100 Mb/s) or Gigabit (1,000 Mb/s)
- Optional Realtek WLAN 8852AE Wi-Fi 6 + Bluetooth® 5.2 WW adapter including antennas integrated internally in the chassis. (Antenna is internally integrated in the chassis with the Wi-Fi® SKU)  
**NOTE:** Fiber optic and Wi-Fi® NIC options cannot be supported together<sup>1</sup>  
**NOTE:** Wireless features, performance and support may vary depending on environmental variables such placement, settings and firmware of your access points. Please contact your wireless vendor for support of your wireless environment
- Optional remote external Wi-Fi® antenna system
- Option Port with a selection of available factory options (see detailed listing later in this document)
- Integrated PC speaker for basic audio playback; 3.5 mm combo headset/audio port on front and 3.5 mm audio port on rear that can be configured as line in or line out supporting headphones, external speaker systems, or microphone
- 45W non-PFC external power adapter
- Security features include a TCG certified TPM version 2.0 and a system UEFI (BIOS) designed to address NIST SP 800-147 BIOS protection guidelines and NIST SP800-155 BIOS integrity measurement guidelines. A cable lock slot is provided for use with a cable lock to enable the system's physical security
- Passive thermal design (no cooling fans) and active thermal management technology that monitors the system operating temperatures, throttles SOC operation if appropriate and prevents unit thermal shutdown.
- Rated for a maximum ambient operating temperature of 40 degree C
- ENERGY STAR® certified configurations available and EPEAT® Silver registered in the United States. See <http://www.epeat.net> for registration status in other countries
- Post-consumer recycled plastics content greater than 50% total unit plastics (by weight)
- Low halogen<sup>2</sup> material content
- All models TAA compliant in North America

**NOTE: See important legal disclosures for all listed specs in their respective features sections.**

### Overview

#### Warranty

HP one-year hardware limited warranty in most regions; HP Care Packs\* are extended service contracts that go beyond your standard limited warranties; for more details visit <http://www.hp.com/go/cpc>

\*HP Care Packs are sold separately. Service levels and response times for HP Care Packs may vary depending on your geographic location. Service starts on date of hardware purchase. Restrictions and limitations apply. For details, visit [www.hp.com/go/cpc](http://www.hp.com/go/cpc). HP Services are governed by the applicable HP terms and conditions of service provided or indicated to Customer at the time of purchase. Customer may have additional statutory rights according to applicable local laws, and such rights are not in any way affected by the HP terms and conditions of service or the HP Limited Warranty provided with your HP Product.

### Technical Specifications

#### OPERATING SYSTEMS

- HP ThinPro, including HP /Smart Zero Core, HP Cloud Endpoint Manager<sup>2</sup>
- Windows 10 IoT Enterprise LTSC 2021<sup>1</sup>
- IGEL
- No OS

1. Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS update to take full advantage of Windows functionality. ISP fees may apply, and additional requirements may apply over time for updates. See <http://www.windows.com>.

2. Not all features are available with HP ThinPro, Smart Zero Core and FreeDOS.

#### PROCESSOR<sup>3,4,5</sup>

Model	CPU Frequency Max/Base	Cores/Threads	GPU Type	GPU Frequency
AMD Ryzen™ Embedded R2314 with Radeon™ Graphics	3.5/2.1 GHz	4/4	Radeon™ Graphics	1,200 MHz

3. Multicore is designed to improve performance of certain software products. Not all customers or software applications will necessarily benefit from use of this technology. Performance and clock frequency will vary depending on application workload and your hardware and software configurations. Intel's numbering, branding and/or naming is not a measurement of higher performance.

4. Processor speed denotes maximum performance mode; processors will run at lower speeds in battery optimization mode.

5. In accordance with Microsoft's support policy, HP does not support the Windows 8 or Windows 7 operating system on products configured with Intel and AMD 7th generation and forward processors or provide any Windows 8 or Windows 7 drivers on <http://www.support.hp.com>.

#### DISPLAY SUPPORT

##### Number of displays supported

**A maximum of 3 displays are supported.**

Combination:

3 x DisplayPort™ (onboard)

2 x DisplayPort™ (onboard) + 1 x DisplayPort over USB-C (optional)

2 x DisplayPort™ (onboard) + 1 x HDMI (optional)

2 x DisplayPort™ (onboard) + 1 x VGA (optional)

### Technical Specifications

#### Video Resolution Support Matrix\*

Windows 10 IoT 21H2* *Min of 8GB required	≤3 x FHD 1920 X 1080 @ 60Hz	1 x UHD/4K 3840 x 2160 @ 60Hz	2 x UHD/4K 3840 x 2160 @ 60Hz	3 x UHD/4K 3840 x 2160 @ 60Hz (2 x 4G RAM or above)
Static screen (no video)	✓	✓	✓	✓
1080 60fps(or below) video	✓	✓	✓	✓
4K 30fps video	✓	✓	✓	✓
4K 60fps video	✓	✓	✓	✓

ThinPro 8	≤3 x FHD 1920 X 1080 @ 60Hz	1 x UHD/4K 3840 x 2160 @ 60Hz	2 x UHD/4K 3840 x 2160 @ 60Hz	3 x UHD/4K 3840 x 2160 @ 60Hz (2 x 4G RAM or above)
Static screen (no video)	✓	✓	✓	✓

\*For best 4K experience dual channel memory is required.

### Technical Specifications

#### HP USB-C® DOCK G5 (support requires system to be configured with the Type-C® option Port)

Maximum resolution support for monitors connected to the HP USB-C® Dock G5:

Single Monitor – Max of 2560 x 1440 @60Hz refresh rate

Dual Monitor – Max of two monitors at 1920x1080 @60Hz refresh rate

For an expanded list of supported monitor combinations, refer to the HP Dock Quickspecs document. For the HP Elite t655 Thin Client, refer to the “DP 1.2 MF” column.

**NOTE:** The HP USB-C® Dock G5 is currently only supported with the Windows operating system

## GRAPHICS

**Number of displays supported:** 3

**Video outputs:**

Standard: (3) DisplayPort™ 1.2

Optional: (1) DisplayPort™ over USB-C® with USB Power Delivery  
(1) VGA analog output  
(1) HDMI digital output

**NOTE:** adding an optional output does not increase the number of displays supported.

**Max. screen resolution:** 3840 x 2160 @ 60 Hz

**NOTE:** HP recommends dual channel memory (two SODIMMs) configurations for optimal display resolution performance

## MEMORY

**Type:** DDR4 dual channel SDRAM

**Data Transfer Rate:** Up to 2,667 MT/s

**Peak Transfer Rate:** Up to 19,200 MB/s

**Number of Slots** 2 x SODIMM

**Capacities:** 4\*, 8, 16 and 32 GB

### NOTES:

- \* 4GB not configurable with Windows 10 IoT Enterprise LTSC 2021
- The actual transfer rates will be dependent upon the specification of the SODIMM modules used
- The Graphics Processing Unit (GPU) uses part of the total system memory. System memory dedicated to graphics performance is not available for use by other programs
- HP recommends dual channel memory (two SODIMMs) configurations for optimal system performance

### Technical Specifications

<b>UEFI</b>	
<b>UEFI Specification Revision</b>	2.3.1
<b>TPM 2.0</b>	Meets requirements for Common Criteria, an independent third-party certification of trustworthiness Meets requirements for FIPS 140-2, a standard for cryptographic integrity
<b>Security features</b>	System UEFI designed to address NIST SP 800-147 BIOS protection guidelines and NIST SP800-155 BIOS integrity measurement guidelines

### STORAGE\*

<b>Type:</b>	NAND flash memory; non-volatile
<b>Number of Sockets:</b>	(1) M.2
<b>Capacities:</b>	32 GB M.2 eMMC flash module (32GB not configurable with Windows 10 IoT Enterprise LTSC 2021) 64 GB M.2 eMMC flash module 256 GB M.2 PCIe NVMe flash module 512 GB M.2 PCIe NVMe flash module

\*For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 30 GB (for Windows 10 and 11) is reserved for system recovery software.

### Input/Output

<b>USB:</b>	Front access: (2) USB-A 3.2 Gen 1 port (1) USB-C® 3.2 Gen 1 port Rear access: (2) USB-A 2.0 port (optional WOSK (designated for Power-on from Keyboard if equipped)) (2) USB-A 3.2 port (2) USB-A 3.2 Gen 1 ports (optional) (1) USB-C® DisplayPort™ (optional)
<b>Video Outputs:</b>	Standard: (3) DisplayPort™ 1.2 digital outputs Optional: (1) VGA analog output (1) HDMI digital output (1) DisplayPort™ over USB-C® with USB Power Delivery <b>NOTE:</b> adding an optional output does not increase the number of displays supported.
<b>I/O Interfaces:</b>	Standard: (1) RJ45 network connector (1) 3.5 mm combo headset/audio jack (front) (1) 4.5 mm DC audio jack (rear) Optional: (1) Dual serial port with configurable power (2) serial ports enabled with an included cable adapter
<b>Option Port:</b>	The rear I/O panel includes an Option Port that can be configured with one of the following factory options: <ul style="list-style-type: none"><li>• Blank; no optional configured port</li><li>• 2 x USB-A 3.0 Gen 1 ports</li><li>• DisplayPort™ over USB-C® with USB Power Delivery</li><li>• HDMI digital video output</li><li>• VGA analog video output</li><li>• External Wi-Fi® antenna connector (requires Wi-Fi® adapter option)</li><li>• Fiber Optic NIC connectors; SC or LC connector (requires Fiber Optic NIC option)</li></ul>

### Technical Specifications

- Serial port with configurable power
- Dual serial ports enabled with an included cable adapter

---

## AUDIO/VIDEO

### Audio Subsystem

- Internal amplified speaker system for basic audio playback
- 3.5 mm combo headset/headphone/analog microphone audio jack (front access)
- 3.5 mm /4.5mm combo line-out/ line-in socket (rear access)

### Audio CODECs

- MP3
- AAC Stereo
- HE AAC
- Includes hardware acceleration support

### Video CODECs

- MPEG-4 part 2 (DivX, Xvid)
- MPEG-4 part 10 (H.264, AVC), Advanced Video Coding (AVC) (H.264 encode & decode )
- MPEG-H part 2, High Efficiency Video Coding (HEVC, available with Windows 10 IoT Only) (H.265 (8-bit / 10-bit) decode and (8-bit) encode
- WMV 7/8/9 VC-1 & ASF Demuxer
- Includes hardware acceleration support

---

## NETWORKING

### Local Area Networking

Realtek RTL8111EPH-CG Gigabit Ethernet (GbE) Controller with support for DASH out-of-band remote management and Realtek RTL8111HSH-CG Gigabit Ethernet (GbE) Controller with support non-DASH<sup>2</sup>

### Wi-Fi® Networking

Realtek 8852AE Wi-Fi 6 +BT5.2 WLAN<sup>1</sup>  
Realtek 8852BE Wi-Fi 6 +BT5.2 WLAN<sup>1</sup>

1. Wireless access point and Internet service required and sold separately. Availability of public wireless access points limited. Wi-Fi 6 (802.11ax) is backwards compatible with prior 802.11 specs. Wi-Fi 6 is designed to support gigabit data rate when transferring files between two devices connected to the same router. Requires a wireless router, sold separately, that supports 80MHz and higher channels.

2. The term "10/100/1000" or "Gigabit" Ethernet indicates compatibility with IEEE standard 802.3ab for Gigabit Ethernet, and does not connote actual operating speed of 1 Gb/s. For high-speed transmission, connection to a Gigabit Ethernet server and network infrastructure is required.

---

## FIBER OPTIC NETWORKING

### Adapter Options:

- Allied Telesis AT-27M2/SC Fiber Fast Ethernet M.2 Adapter
- Allied Telesis AT-29M2/SC or LC Fiber Gigabit M.2 Adapter

### Features:

- IEEE 802.1p priority encoding/tagging (QoS, CoS)
- IEEE 802.1q VLAN tagging
- IEEE 802.3x flow control
- Buffer/FIFO: 22K transmit and 40K receive
- Loopback mode
- Descriptor-Based Buffer Management
- Wake-on-LAN from S3 (Sleep) and S4 (Hibernate) not supported (AT-29M2)

### Technical Specifications

- Link Detection and PHY interface power; the PHY interface, Link detection and Link LED should be enabled by default at power-up

**Performance:**

- AT-27M2
- $\geq 85$  Mbit/s receive,  $\leq 30\%$  CPU utilization
  - $\geq 85$  Mbit/s transmit,  $\leq 30\%$  CPU utilization
  - $\geq 170$  Mbit/s total bi-directional,  $\leq 30\%$  CPU utilization

**NOTE:** The minimum transfer size at 100 Mbit/s is 1 Gbps

- AT-29M2
- $\geq 800$  Mbit/s receive,  $\leq 30\%$  CPU utilization
  - $\geq 800$  Mbit/s transmit,  $\leq 30\%$  CPU utilization
  - $\geq 1500$  Mbit/s total bi-directional,  $\leq 30\%$  CPU utilization

**NOTE:** The minimum transfer size at 1000 Mbit/s is 1500 Gbps

**External Interface:**

Complies with IEEE 802.3 100BASE-FX operation (AT-27M2)  
Complies with IEEE 802.3 1000BASE-X operation (AT-29M2)

**Power:**

- Uses less than 1800 mW of power at full performance (AT-27M2)
- Uses less than 2100 mW of power at full performance (AT-29M2)
- Supports all PCI Express bus states L0, L0s, L1 and L2

**Non-volatile Storage:**

The MAC address is unique for each system; assigned from the board assembly manufacturer's IEEE registered allocation.

The PCI subsystem ID is unique to HP and unique to each design to allow Windows Update to be finely controlled.

### Technical Specifications

#### SOFTWARE SUPPORT

Host Environment	Protocol	HP	Microsoft
		ThinPro	Windows 10 IoT Enterprise 2021
Remote Desktop Services	Remote FX (RFX), RDP	✓	✓
Citrix®	ICA, HDX	✓	✓
VMware® Horizon	RDP, PCoIP, Blast Extreme	✓	✓

Protocol Clients	HP	Microsoft
	ThinPro	Windows 10 IoT Enterprise 2021
Citrix® Workspace app	✓	✓
Microsoft Remote Desktop Client		✓
Free Remote Desktop Client	✓	
VMware™ Horizon View™ Client	✓	✓
HP Remote Graphics Software (RGS)	via add-on	✓
TurboSoft TTerm for Linux® Terminal emulation Software	via add-on	
TurboSoft TTWin Terminal emulation software		via add-on
AVD/Win365	via add-on	via add-on
AWS Amazon Workspace	via add-on	via add-on
HP Anyware <sup>1</sup>	via add-on	via add-on

<sup>1</sup>HP Anyware supports Windows®, Linux® and MacOS® host environments and Window, Linux, MacOS, iOS®, Android®, and Chrome OS® end-user devices. For more on the system requirements for installing HP Anyware, refer to the Admin Guides at: <https://docs.teradici.com/find/product/cloud-access-software>

Browser Support	HP	Microsoft
	ThinPro	Windows 10 IoT Enterprise 2021
Mozilla Firefox	✓	
Internet Explorer		✓
Microsoft Edge		✓

Security	HP	Microsoft
	ThinPro	Windows 10 IoT Enterprise 2021

### Technical Specifications

Smart Card	✓	✓
Log-on Manager	✓	✓
Read only Operating System	✓	✓
802.1x	✓	✓
Microsoft Firewall		✓
HP Write Manager		✓
Microsoft Unified Write Filter		✓

**NOTE:** the HP Write Manager is the default active write filter. The Microsoft Unified Write Filter is disabled by default but can be enabled by the user if required.

Management Tools	HP	Microsoft
	ThinPro	Windows 10 IoT Enterprise 2021
HP Cloud Endpoint Manager	✓	✓
HP Device Manager	✓	✓
HP ThinUpdate		✓
HP Easy Tools	✓	
HP Smart Zero Client Services	✓	
Microsoft SCCM/EDM agent		✓
HP USB Port Manager		✓
HP User State Tool		Add-on only

Additional Windows Components	HP	Microsoft
	ThinPro	Windows 10 IoT Enterprise 2021
HP Easy Shell		✓
Windows Media Player		✓
Microsoft Direct Access		✓
Microsoft BranchCache		✓
Microsoft AppLocker		✓
Microsoft Sideload		✓
CyberLink Media Player		✓

### Technical Specifications

**NOTE:** Other add-on software available (see: <http://www.hp.com/support> for latest list of available add-ons). Software performance and support may vary depending on customer environment and backend.

Audio/Video CODECs	HP	Microsoft
	ThinPro	Windows 10 IoT Enterprise 2021
MP3	✓	✓
WMA stereo	✓	✓
AAC stereo & HE AAC	✓	
Microsoft AC3 encoder		✓
MPEG-1	✓	
MPEG-4 part 2 (DivX, Xvid, H.263)	✓	✓
MPEG-4 part 10 (H.264, AVC)	✓	✓
h.365/HEVC	✓	✓
WMV 7/8/9/ VC-1 & ASF Demuxer	✓	✓

### Recommended TC config for Microsoft Teams media optimization

	TC CPU	VMware Teams Optimization	Citrix Teams Optimization
t655	2.10 GHz 4 Core	✓	✓
- Not recommended, ✓ recommended			

### WEIGHTS & DIMENSIONS

<b>W x D x H:</b> (vertical orientation)	35 x 200 x 200 mm
<b>Volume:</b>	1.4 liter
<b>System Weight</b> (unit with stand)	1174g Lowest weight. Weight will vary by configuration.
<b>Shipping Weight</b> (System+Stand+AC+PC)	2106g

**NOTE:** All measurements are approximate; the addition of optional modules will increase the weight

### EXTERNAL POWER SUPPLY

45W non-PFC Smart external power adapter  
Worldwide auto-sensing 100 - 240 VAC; nominal voltage is 120 VAC; 50 - 60 Hz

### *Technical Specifications*

Energy saving automatic power-down; surge tolerant  
1.8m output cable

External power adapters are sourced from several suppliers in order to ensure adequate supply and availability is maintained. The actual dimensions of the power brick will vary by supplier.

HP P/N	Vendor	Dimensions:
L25296-001	Lite-On	94 x 40 x 26.5 mm
L25296-002	Chicony	95 x 40 x 26.5 mm
L25296-003	Delta	94 x 39 x 26.5 mm
L25296-004	AcBel	91.4 x 44 x 26.8 mm

---

### Technical Specifications

#### COMPLIANCE/CERTIFICATIONS

<b>Accessibility:</b>	Section 508 Accessibility; VPAT report available.
<b>Environmental Stewardship:</b>	Worldwide (ENERGY STAR® configurations available, EPEAT 2.0, RoHS2, ERP, TCO Certified, CECP& SEPA, HP GSE, WEEE, Low Halogen, etc.)
<b>Product Safety:</b>	Worldwide (UL, CB, GS, CCC, BSMI, etc.)
<b>Electromagnetic Compliance (EMC):</b>	Worldwide (FCC/CISPR/EN/VCCI/ICES/AS/NZS/CNS/KCC) “Class B” EMI regulations
<b>International Medical Safety Standard:</b>	EN60601-1-2 (Medical Equipment EMC) passed

#### ENVIRONMENTAL

<b>Operating Temperature Range:</b>	50° to 104° F 10° to 40° C
<b>Non-operating Temperature Range:</b>	-22° to 140° F -30° to 65° C
<b>Humidity:</b>	Condensing: 20% to 80% Non-condensing: 10% to 90%

**NOTE:** Specifications are at sea level with altitude derating of 1° C/300m (1.8° F/1000ft) to a maximum of 3 Km (10,000 ft), with no direct, sustained sunlight. Upper limit may be limited by the type and number of options installed.

#### Basic Configuration (does not include a fiber optic NIC):

Energy Consumption	115 V ac, 60 Hz	230 V ac, 50 Hz	100 V ac, 60 Hz
Normal Operation (Short idle)	6.85 W	6.98 W	6.75 W
Normal Operation (Long idle)	6.48 W	6.59 W	6.26 W
Sleep	0.96 W	1.06 W	0.95 W
Off	0.80 W	0.87 W	0.77 W

Heat Dissipation*	115 V ac, 60 Hz	230 V ac, 50 Hz	100 V ac, 60 Hz
Normal Operation (Short idle)	23 BTU/hr	24 BTU/hr	23 BTU/hr
Normal Operation (Long idle)	22 BTU/hr	22 BTU/hr	21 BTU/hr
Sleep	3 BTU/hr	4 BTU/hr	3 BTU/hr
Off	3 BTU/hr	3 BTU/hr	3 BTU/hr

**NOTE:** Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

System configuration includes: HP Thin Pro 64bit operating system, 128 GB storage, 32 GB system memory, USB keyboard & mouse

#### Optional Configuration (includes a fiber optic NIC):

Energy Consumption	115 V ac, 60 Hz	230 V ac, 50 Hz	100 V ac, 60 Hz
Normal Operation (Short idle)	7.19 W	7.23 W	7.16 W
Normal Operation (Long idle)	6.64 W	6.62 W	6.58 W

### Technical Specifications

Sleep	0.98 W	1.03 W	0.98 W
Off	0.80 W	0.89 W	0.79 W

Heat Dissipation*	115 V ac, 60 Hz	230 V ac, 50 Hz	100 V ac, 60 Hz
Normal Operation (Short idle)	24 BTU/hr	25 BTU/hr	24 BTU/hr
Normal Operation (Long idle)	23 BTU/hr	23 BTU/hr	22 BTU/hr
Sleep	3 BTU/hr	4 BTU/hr	3 BTU/hr
Off	3 BTU/hr	3 BTU/hr	3 BTU/hr

**NOTE:** Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

System configuration includes: Windows 10 IoT Enterprise LTSC 2019 operating system, 128 GB storage, 32 GB system memory, 100 Mbps SC Fiber Optic NIC, USB keyboard & mouse

Acoustic Noise Emission Declaration						
Measurement and declaration standards:	ISO 7779: Acoustics – Measurement of airborne noise emitted by information technology and telecommunications equipment					
	ISO 9296: Acoustics – Declared noise emission values of computer and business equipment					
Declared Noise Emission Values in accordance with ISO 9296						
Product Configuration or Operating Mode # (see section below for description)	Declared Sound Power Level, $L_{Wad}$ Bels			Declared Sound Pressure Level, $L_{pAm}$ dBA		
	Tested on ISO Table			Tested on ISO Table		
	Idle	Operating		Idle	Operating	
	ECMA-74 C.15.3.2 Idle Mode	ECMA-74 C.9.3.2 Drive Random Seek	ECMA-74 C.15.3.3 g Active Mode	ECMA-74 C.15.3.2 Idle Mode	ECMA-74 C.9.3.2 Drive Random Seek	ECMA-74 C.15.3.3 g Active Mode
Vertical	2.6	2.6	2.6	13.7	13.7	13.7
Horizontal	2.6	2.6	2.6	N/A	N/A	N/A
The Product meets the acoustic noise limits of these voluntary Eco labels:				TCO Certified Blue Angel Nordic Swan EU Flower		

**NOTE:** Measured under ISO 7779 and ISO 9296 measurement and declaration standards.

### Summary of Changes

<b>Date of change:</b>	<b>Version History:</b>	<b>Type of change</b>	<b>Description of change:</b>
October 7, 2022	From v1 to v2	Changed	PROCESSOR and MEMORY sections
October 13, 2022	From v2 to v3	Changed	PROCESSOR section
October 27, 2022	From v3 to v4	Changed	WEIGHTS & DIMENSIONS, Recommended TC config for Microsoft Teams media optimization sections
February 6, 2023	From v4 to v5	Changed	Format page 1, Storage and COMPLIANCE/CERTIFICATIONS sections
March 17, 2023	From v5 to v6	Changed	SOFTWARE SUPPORT section

© 2023 HP Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express limited warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. AMD and Radeon are trademarks of Advanced Micro Devices, Inc. DisplayPort™ and the DisplayPort™ logo are trademarks owned by the Video Electronics Standards Association (VESA®) in the United States and other countries. Amazon Web Services, the “Powered by Amazon Web Services” logo, and Amazon WorkSpaces are trademarks of Amazon.com, Inc. or its affiliates in the United States and/or other countries. Bluetooth® is a trademark owned by its proprietor and used by HP Inc. under license. ENERGY STAR is a registered trademark owned by the U.S. Environmental Protection Agency. Linux® is the registered trademark of Linus Torvalds in the U.S. and other countries. Microsoft and Windows are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. VMware Horizon and VMware Horizon View are registered trademarks or trademarks of VMware, Inc. in the United States and/or other jurisdictions. Citrix and Citrix Workspace are trademarks of Citrix Systems, Inc. and/or one more of its subsidiaries, and may be registered in the United States Patent and Trademark Office and in other countries.