
Product End of Life Instructions

APC Smart-UPS Ultra On-Line, Lithium-ion





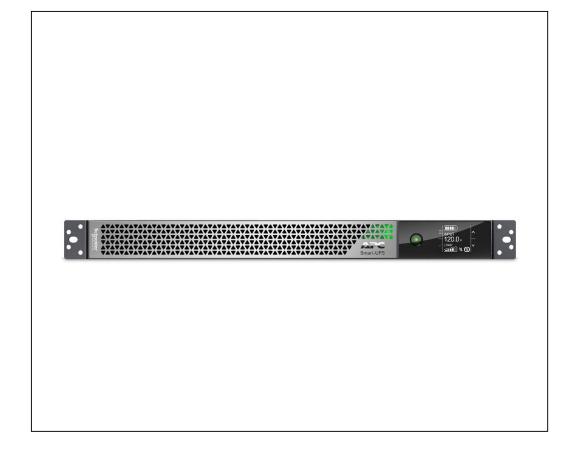

🛕 Potential disassembly risks


AWARNING

HAZARD OF ARC FLASH OR FIRE

- Disconnect battery terminals before disassembly
- Avoid any electrical connection between the terminals

Failure to follow these instructions can result in death or serious injury.

End of Life Instructions

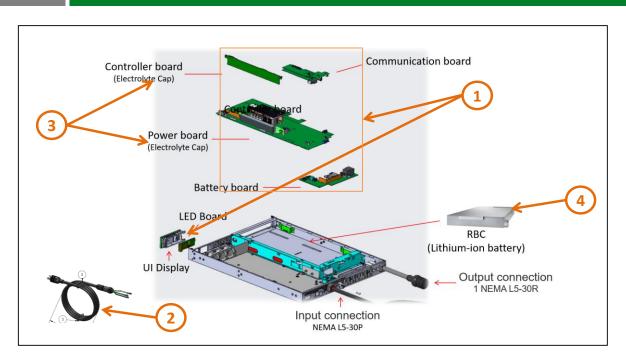

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be depolluted	1	Electronic Board > 10cm ²	4628	7 X PCBAs >10cm ²
To be depolluted	2	Cable (high current)	1200	1 X External cable
To be depolluted	3	Electrolyte capacitors which size: height > 25 mm, diameter > 25 mm or proportionately similar volume	48	8 X Large electrolyte capacitors
To be depolluted	4	Batteries	1500	Lithium-ion battery



Product description

Manufacturer identification	Schneider Electric Industries SAS	
Brand name	APC by Schneider Electric	
Product function	This APC Smart-UPS Ultra On-Line, Lithium-ion Uninterruptible Power Supply is designed for IT professionals or network administrators to maintain business uptime and continuity. This Smart-UPS offers cloud-based remote power monitoring, UPS firmware upgrades, remote diagnostics and proactive email notifications with recommended actions. The UPS can connect to EcoStruxure IT or third-party centralized management platforms	
Product reference	SRTL3KRM1UC	
Total representative product mass	18600 g	
Representative product dimensions	s 43mm x 432mm x 560mm	
Accessories	No	
Date of information release	2023/11/13	

Additional information

Legal information	This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.		
Recyclability potential	Recyclability rate has been calculated based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the "ECO'DE recyclability and recoverability calculation method" was taken. If no data was found a conservative assumption was used (0% recyclability).		

Schneider Electric Industries SAS Country Customer Care Center http://www.schneider-electric.com/contact 35, rue Joseph Monier

CS 30323

F- 92500 Rueil Malmaison Cedex RCS Nanterre 954 503 439 Capital social 896 313 776 €

www.se.com

Published by Schneider Electric

ENVEOLI2311011_V1

© 2023 - Schneider Electric - All rights reserved

2023/11/13