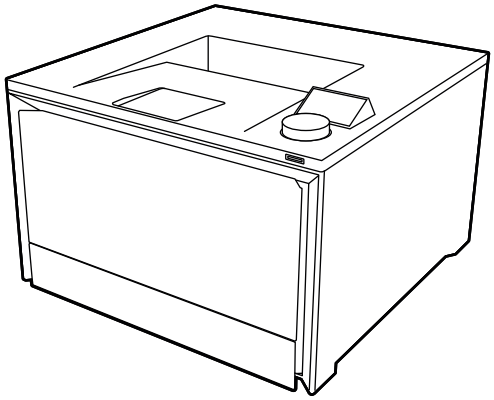
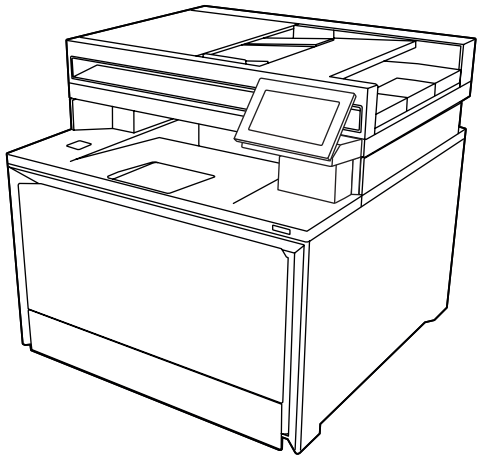
HP Color LaserJet Pro 4201
HP Color LaserJet Pro 4202
HP Color LaserJet Pro 4203
HP Color LaserJet Pro MFP 4301
HP Color LaserJet Pro MFP 4302
HP Color LaserJet Pro MFP 4303

Repair Manual





www.hp.com/support/colorlj4201
www.hp.com/support/colorlj4202
www.hp.com/support/colorlj4203

www.hp.com/support/colorlj4301MFP
www.hp.com/support/colorlj4302MFP
www.hp.com/support/colorlj4303MFP

HP Color LaserJet Pro 4201, 4202, 4203, HP Color LaserJet Pro MFP 4301, 4302, 4303 - Repair manual

SUMMARY

This guide provides troubleshooting and repair information.

Legal information

Copyright and License

© Copyright 2023 HP Development Company, L.P.

Reproduction, adaptation, or translation without prior written permission is prohibited, except as allowed under the copyright laws.

The information contained herein is subject to change without notice.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Edition 1, 12/2023

Conventions used in this guide

Learn about the conventions used in this publication.

TIP: Tips provide helpful hints or shortcuts.

NOTE: Notes provide important information to explain a concept or to complete a task.

CAUTION: Cautions indicate procedures that you should follow to avoid losing data or damaging the product.

WARNING! Warnings alert you to specific procedures that you should follow to avoid personal injury, catastrophic loss of data, or extensive damage to the product.

Safety precautions

Follow these safety protocols when handling or repairing the printer.

Product safety classification: This is a Safety Class I product, which means it has a protective earth terminal. This terminal must be connected to earth ground.

IMPORTANT: Before operation or repair, check the product and review this manual for safety warnings and instructions. Safety warnings for specific procedures are located at appropriate places in the manual.

WARNING: Hazardous voltages exist within the product.

NOTE: HP recommends that only qualified personnel trained in working with high voltage power equipment should service this unit.

Follow these precautions always:

NOTE: If you do not want to disassemble and repair the printer yourself, contact your local HP Service Representative for service, see Contact HP Support section.

Warnings and Cautions

To ensure the proper use of the printer and to prevent the printer from being damaged, follow the warning and caution symbols marked in this guide. See Conventions used in this guide.

Electrical precautions

- **Power cord instructions**
  - Make sure your power source is adequate for the product voltage rating. The voltage rating is on the product label.

    Typically, the product uses either 110-127 Vac or 220-240 Vac and 50/60 Hz. Depending on a product, the voltage usage might change (100-127 Vac, for example). It is recommended to refer your product manual for the specified voltage.
  - Connect the power cord between the product and a grounded AC outlet.

    CAUTION: To prevent damage to the product, use only the power cord that is provided with the product.

    Do not damage, cut, or repair the power cord. A damaged power cord can cause fire or electric shock. Replace a damaged power cord with an HP-approved power cord.
  - Unplug the power cord when disassembling or assembling the printer.

The printer utilizes a power switch (button) that is turned "ON" or "OFF". Be aware that electricity may flow on the primary side of the printer even when the printer is "OFF".

- Power off the printer and unplug the power cord and fax cord (if available) from the electrical outlet in any of the following cases:
  - When removing product enclosure or covers from the printer or when accessing internal parts of a printer.
  - If there is smoke or an unusual smell coming from the printer.
  - A piece of metal or a liquid (not part of cleaning and maintenance routines) touches internal parts of the printer.
  - During an electrical storm (with thunder and/or lightning).
  - During an electrical power failure.

Electrostatic Discharge (ESD) precautions

Electrostatic discharge (ESD) can damage electronic components inside your printer.

Use these guidelines to protect sensitive parts against damage from electrostatic discharge.

- Touch a metal object that is not painted and is grounded.
- Leave electronic parts such as a memory chip in the bag it was shipped in until you are ready to perform the installation.
- ESD wrist straps can also be used to help release excess electrostatic charge.

- **CAUTION:** 

  Some parts are sensitive to electrostatic discharge (ESD). Look for the ESD reminder when removing printer parts.

  Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly.

- Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

Handling toner

HP recommends that you wear gloves when handling toner cartridges and toner system components.

Do not expose toner or toner cartridge to fire or any heat source.

Keep imaging unit and/or toner cartridge away from children. The toner powder contained in the imaging unit and toner cartridge may be harmful, and if swallowed, you should contact a doctor.

Lifting equipment

Follow the recommendations for lifting or moving your printer.

The printed inbox guides and support documentation available on support.hp.com for your printer model will provide the lifting requirements to avoid injury and to safely move the printer.

NOTE: Do not attempt to lift heavy equipment without assistance.

Safety measures during disassembling or reassembling

IMPORTANT: Before disassembling or reassembling a printer, be sure to unplug its power cord from the electrical outlet.

NOTE: Assembly is the reverse of disassembly unless otherwise specified.

- During disassembly, reassembly, or transportation of a printer, remove the toner cartridge as necessary.
- Only fuses with the required rated current, voltage, and specified type (normal blow, time delay, etc.) should be used.

  Do not use repaired fuses or short-circuited fuse holders. Doing so, could cause a shock or fire hazard.
- Capacitors inside this product may hold a hazardous charge even if the product has been disconnected from its power source.
- Do not disable safety functions (Interlocks or safety circuits). Safety will not be assured leading to a safety hazard and potential injury.
- Note the length, diameters, and locations of screws as you remove them. When reassembling the printer, be sure to use them in their original locations.
- As a best practice safety rule, do not run the printer with any parts removed.

Ingestion hazards

This product may contain a button cell or coin battery that is not intended to be replaced.

- A swallowed button cell or coin battery can cause internal chemical burns in as little as two (2) hours.

  Death or serious injury can occur if ingested.
- Keep new and used batteries out of reach of children. Used batteries may cause severe injury or death.

  Seek immediate medical attention if a battery is suspected to be swallowed or inserted inside any part of the body. Call a local poison control center for treatment information.
- Remove and immediately recycle or dispose of used batteries according to local regulations and keep away from children. Do not dispose of batteries in household trash or incinerate.

Laser radiation hazards

The printer is certified as a Class 1 laser product.

WARNING: Using controls, adjusting or performing procedures other than those specified in the user guide could result in exposure to hazardous radiation. Do not disassemble the laser/scanner unit as the laser beam can injure your eyes. An invisible laser beam is emitted within the laser/scanner unit.

Mechanical hazards

The printer has moving parts that could cause injury. To avoid personal injury, take the following precautions when working close to the printer.

- Keep your clothes and body away from the printer's moving parts.
  - Avoid wearing dangling jewelry or other hanging objects around the printer as it might be caught by moving parts and lead to injury.
  - Keep long hair tied up and away from the paper feed mechanism.
  - Ensure the sleeves or gloves do not get caught in the printer's moving parts.
- Avoid standing close to the fans as it could cause injury and could also affect print quality (by obstructing the air flow).
- Do not touch gears or moving rolls during printing.
- Do not operate the printer when having enclosure covers removed or interlock switches bypassed.
- The product may have internal sharp edges.

  Make sure the wiring does not come into contact with sharp edges, burrs, or other pointed parts. Current can leak, leading to a risk of electrical shock or fire hazard.
- During and after repair, check internal electrical wiring for squeezing, sheaths and any damage.
- – Make sure that all screws, components, wiring, connectors and so forth that were removed, have been reinstalled in the original location.
  - Do not allow any metal parts such as clips, staples and screws to fall into the printer. This could potentially short internal circuits and cause an electrical shock hazard.
  - Do not allow liquids (except those used in HP cleaning kits) to touch the internal parts of the printer. Doing so may cause fire, electric shock, or other serious hazards.

Thermal hazards

Caution: Inspection before repair for fuser

The area around the fuser unit may be hot. Wait for a few minutes until the fuser assembly cools down.

Contact HP Support

HP offers phone support to assist you for printer issues. Ensure to read the following information before contacting HP Support.

Before contacting HP Support

Before contacting support, consider checking the resources available on HP Customer Support.

1. Go to HP Customer Support (https://support.hp.com) to locate your product support page.
2. Review the documents for troubleshooting before contacting HP.

Information required when contacting HP Support

If you call an HP support representative for assistance, ensure you have the following information for HP support to answer your questions quickly:

- **Product model**: Note the printer model, product number, and serial number you are using. The product number and the serial number are typically found on the label at the back of the product.
- **Error code**: If there is an error code or message displaying on the printer control panel, note the error code and message.
- **Computer (operating system)**: Provide the name of the computer/computer operating system you are using.
- Any **special equipment or software** you are using (for example, spoolers, networks, switch-boxes, modems or special software drivers).
  - The type of interface used on your product (USB or network).
  - The software and driver name and firmware version number that you are currently using.
- **Printer service information**: You can obtain the printer service information from the Embedded Web Server (EWS). If you need to send this information by email, download it as a file from your browser, and send the file.

NOTE: Depending on your printer firmware version, the menu items in the EWS might vary.

1. Open a Web browser on your computer, and then enter the IP address of your printer to access the Embedded Web Server.
2. Click **Support** > **Service support** > **Service information** > **Display**.

Phone support

HP phone support is available on the HP support website. For assistance, go to one of the following websites:

- https://support.hp.com/contact or
- https://support.hp.com/contact/help/printer or
- https://www.hp.com/us-en/contact-hp/contact.html.

Table of contents

1 Printer information, configurations, and specifications 1

Document feeder / scanner 1

Information (document feeder and scanner) 1

Base printer 2

Information (base printer) 2

Specifications (base printer) 8

Input devices 17

Information (input devices) 17

2 Printer installation and maintenance 18

Document feeder / scanner 18

Clean the pickup rollers and separation pad in the document feeder (MFP) 18

Check the scanner glass for dirt and smudges 19

Base printer 21

Supplies and long-life consumables (LLCs) 21

Security setup 27

Cleaning 29

Input devices 38

3 Solve problems 44

Determine the problem source 44

Pre-troubleshooting checklist 44

Troubleshooting flowchart 46

Firmware upgrades 47

Comprehensive list of troubleshooting tools 51

Engine test 52

Control panel diagnostics 52

Defeating interlocks 54

LED Diagnostics (formatter) 55

Scanner tests (MFP) 56

Individual component tests 58

Diagrams: Block diagrams 59

Diagrams: External plug and port locations 68

Diagrams: Locations of major assemblies 70

Internal test and information pages 78

Reports menu 82

Menu (SFP) 84
Menu (MFP) 93
Power on troubleshooting 105
Power-on checks 105
Power on troubleshooting overview 105
Control panel troubleshooting 113
Control-panel diagnostics 114
Control panel messages document (CPMD) 115
Error codes (types and structure) 115
Printer service information 116
Solve paper handling problems 118
Clear paper jams (SFP) 118
Clear paper jams (MFP) 131
Printer feeds incorrect page size 144
Printer pulls from incorrect tray 144
Printer will not duplex or duplexes incorrectly (duplex models) 144
Paper does not feed from Tray 2-X 145
Output is curled or wrinkled 145
The printer does not pick up paper 146
The printer picks up multiple sheets of paper 147
The document feeder jams, skews, or picks up multiple sheets of paper (MFP) 147
Paper does not feed automatically 148
Image-quality troubleshooting 148
Print-quality troubleshooting 149
Copy-quality troubleshooting 165
Performance and connectivity troubleshooting 173
Solve performance problems 173
Solve wired network problems 176
4 Removal and replacement 179
Safety and support guidelines when using the printer 179
Safety precautions 179
Contact HP Support 183
Removal and replacement strategy 184
Introduction 184
Considerations during removal and replacement 184
Electrostatic discharge 185
Required tools 185
Fasteners used in this printer 186
Service approach 186
Before performing service 186
After performing service 187
Print quality test 187
Document feeder / scanner 187
Field-replaceable units (FRUs) 187
Whole-unit replacement (WUR) 196

Base printer 223
Field-replaceable units (FRUs) 223
Input device - 550-sheet paper feeder 858
Field-replaceable units (FRUs) 858
5 Parts and diagrams 929
Document feeder / scanner 929
Integrated scanner assembly 929
Base printer 930
Control panels 931
Covers, panels, and doors 933
Internal parts and assemblies 941
Input device - 550-sheet paper feeder 950
Covers, panels, and doors 950
Internal parts and assemblies 951
Alphabetical parts list 954
Document feeder / scanner 929
Integrated scanner assembly 929
Base printer 930
Control panels 931
Covers, panels, and doors 933
Internal parts and assemblies 941
Input device - 550-sheet paper feeder 950
Covers, panels, and doors 950
Internal parts and assemblies 951
Numerical parts list 965
Document feeder / scanner 929
Integrated scanner assembly 929
Base printer 930
Control panels 931
Covers, panels, and doors 933
Internal parts and assemblies 941
Input device - 550-sheet paper feeder 950
Covers, panels, and doors 950
Internal parts and assemblies 951
Appendix A Glossary of terms 976
Index 986

1 Printer information, configurations, and specifications

Learn about printer configuration and specifications.

Document feeder / scanner

Learn about the printer document feeder and scanner configuration and specifications.

NOTE: This section is for MFP printers only.


Information (document feeder and scanner)

Learn about the document feeder and scanner.

Document feeder and scanner front view

Identify certain parts of the document feeder and scanner.

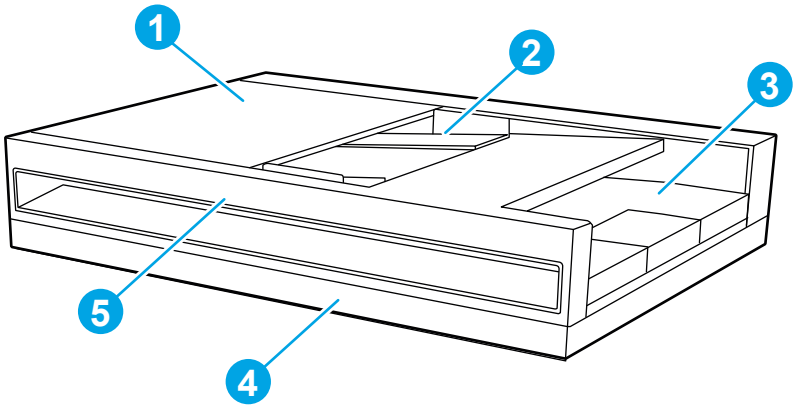Figure 1-1 Document feeder and scanner front view



Item	Description
1	Jam access door
2	Input tray (source documents)
3	Output bin (source documents)
4	Flatbed scanner

Item	Description
5	Document feeder

Base printer

Learn about the base printer (engine) configuration and specifications.

Information (base printer)

Learn about the base printer.


Printer views (SFP)

Identify certain parts of the printer and the control panel.

Printer front view

Identify the parts on the front of the printer.

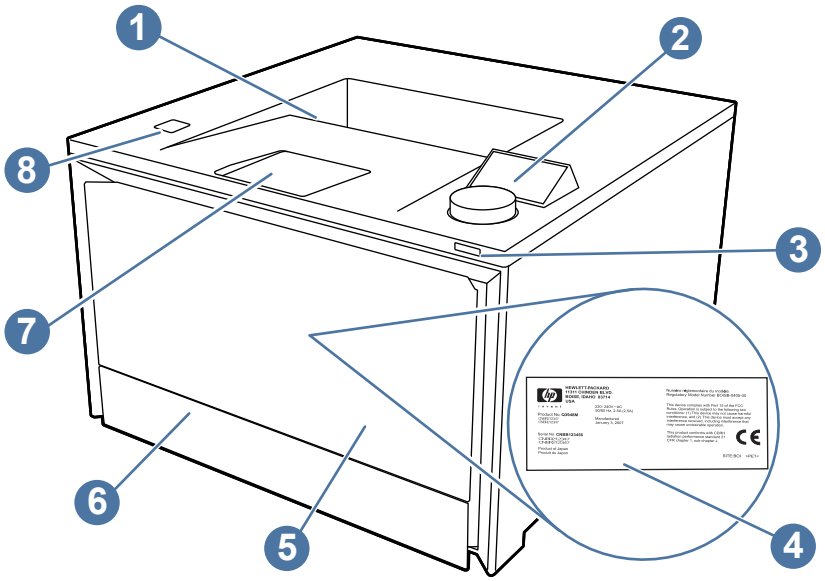Figure 1-2 **Printer front view**




Number	Description
1	Output bin
2	Control panel with dial controller
3	Power on/off button
4	Regulatory label (inside the front door)
5	Front door/Tray 1 (provides toner cartridge access)
6	Tray 2
7	Output bin extension
8	Walk-up USB port for printing without a computer (dw models only)

Printer back view

Identify the parts on the back of the printer.

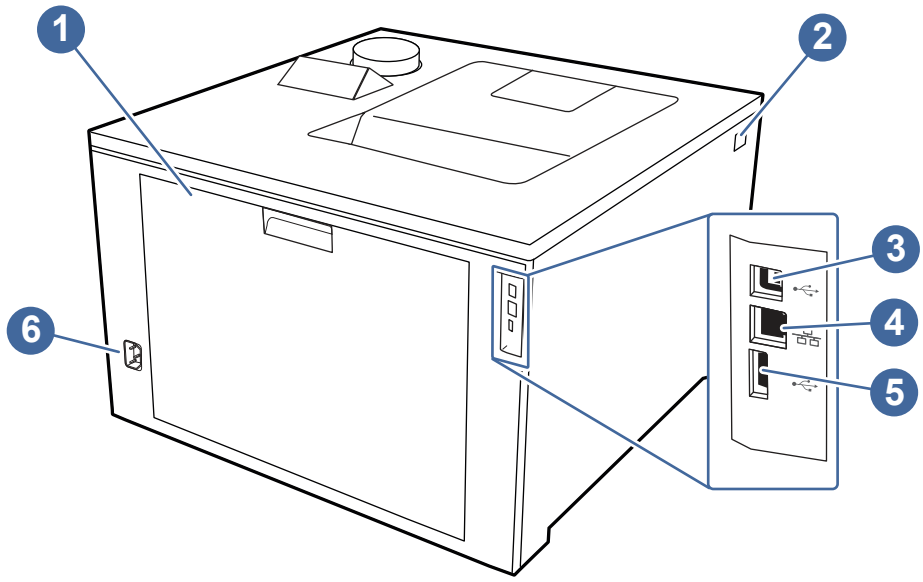Figure 1-3 **Printer rear view**



Number	Description
1	Rear door (provides access for clearing jams)
2	Front door release button
3	USB interface port used for connecting the printer via USB
4	Ethernet port
5	USB port (for job storage and private printing)
6	Power connection

Control panel view

The control-panel display provides access to the printer features.

For information about using the dial control panel, see How to use the dial control panel.

NOTE: For more information about the printer control panel features, go to www.hp.com/support/colorlj4201-4203 or www.hp.com/support/colorlj4201-4203plus or www.hp.com/support/colorlj4301-4303 or www.hp.com/support/colorlj4301-4303plus.

NOTE: The features that appear on the dial control panel and the order in which they appear can vary, depending on the printer configuration.

Figure 1-4 Control panel view

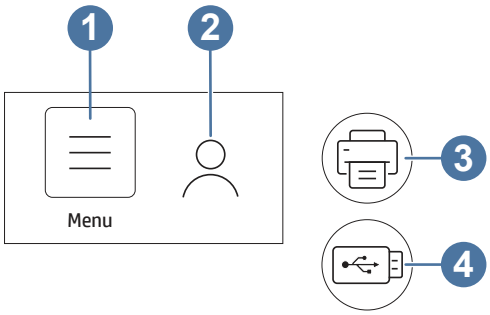


Table 1-1 Control panel features


Number	Item	Description
1	Menu	Select this item to open the Menu sub-menus: • Info • Status • Print • Supplies • Trays • Settings • Tools • Help
2	Sign in	Select this item to enter a password for the printer, if one has been assigned.
3	Print	Select this item to print a file from the USB flash drive.
4	USB Drive	Select this item to update the firmware from a USB flash drive.

NOTE: While the control panel does not have a standard Cancel button, during many printer processes a Cancel option appears on the control panel. This permits users to cancel a process before the printer completes it.

How to use the dial control panel

Use the following actions to operate the printer's dial control panel.

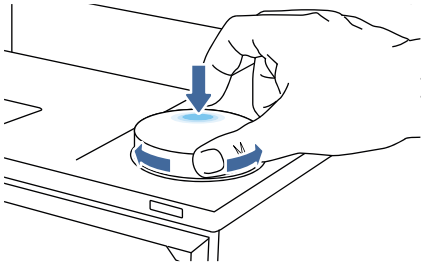
Figure 1-5 Twist or press



Rotate the control-panel dial to the right or left to scroll through available menus, and then press down on the control-panel dial to select an item

NOTE: To open a shortcut menu, long-press down on the dial. This shortcut menu provides options to quickly go back or return to the Main Menu, see the printer status, or access the Help menu.

Figure 1-6 **Go back**



Rotate the dial to select the Back arrow, and then press the dial to return to the previous menu.

Printer views (MFP)

Identify certain parts of the printer and the control panel.

Printer front view

Identify the parts on the front of the printer.

Figure 1-7 **Printer front view**

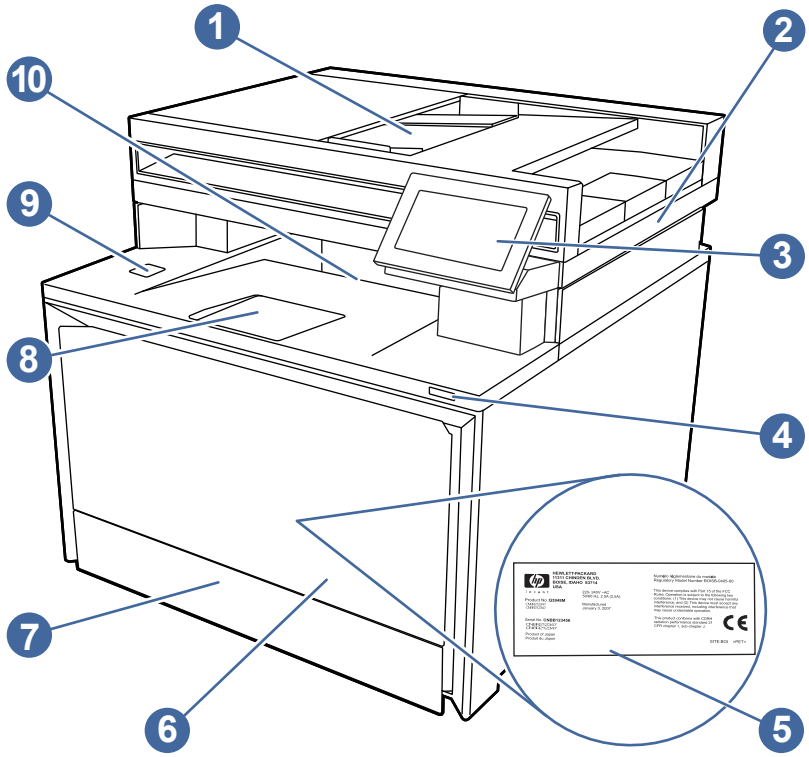


Table 1-2 **Front printer components**

Number	Description
1	Document feeder
2	Scanner
3	Color touchscreen control panel (tilts up for easier viewing)
4	Power on/off button

Table 1-2 Front printer components (continued)

Number	Description
5	Regulatory label (inside the front door)
6	Front door/Tray 1 (provides access to toner cartridges)
7	Tray 2
8	Output bin extension
9	Walk-up USB port (for printing and scanning without a computer)
10	Output bin

Printer back view

Identify the parts on the back of the printer.

Figure 1-8 Printer rear view

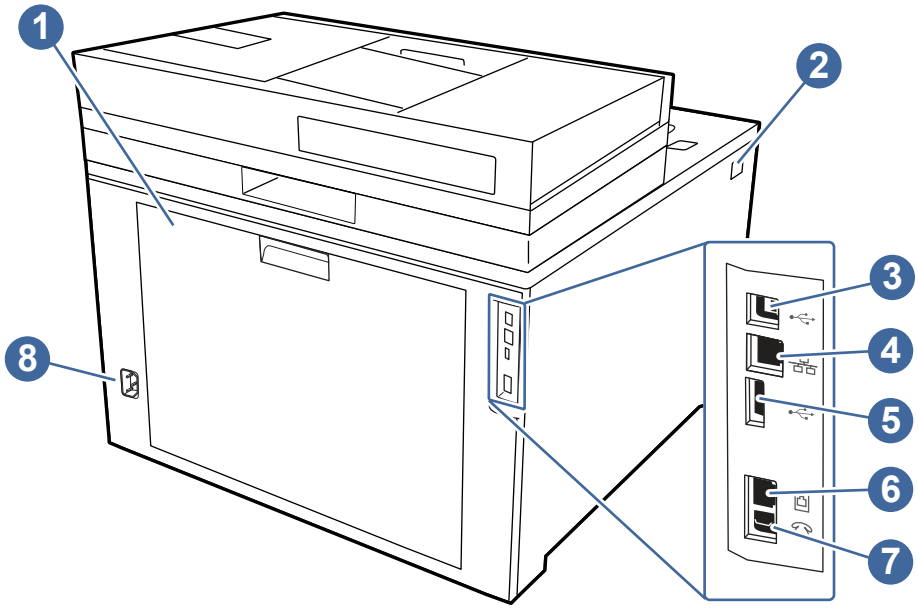


Table 1-3 Rear printer components

Number	Description
1	Rear door (provides access for clearing jams)
2	Front door release button
3	USB interface port used for connecting the printer via USB
4	Ethernet port
5	USB port (for job storage and private printing)
6	Fax "line in" port (for attaching the fax phone line to the printer) NOTE: Fax models only.

Table 1-3 Rear printer components (continued)

Number	Description
7	Telephone "line out" port (for attaching an extension phone, answering machine, or other device) NOTE: Fax models only. This port should remain covered when not in use.
8	Power connection

Control-panel view

Use the touchscreen control panel to obtain printer and job status information, and to configure the printer.

NOTE: Tilt the control panel for easier viewing.

NOTE: The features that appear on the Home screen can vary, depending on the printer configuration.

Figure 1-9 Printer control panel

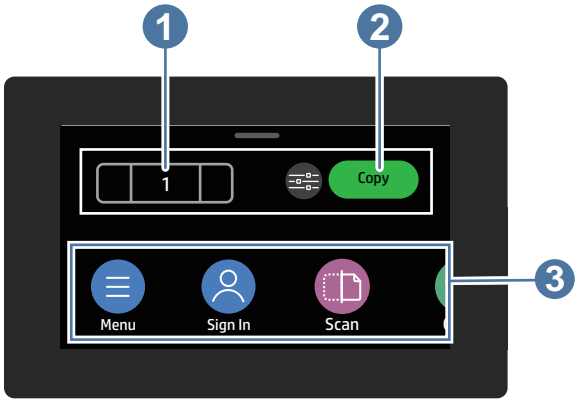





Table 1-4 Control panel components

Number	Item	Description
1	Number of copies field	Touch the field to adjust the number of copies to be printed.
2	Copy button	Touch the Copy button to start a copy job.
3	Applications area	Select any of the icons to open the application. Swipe the screen sideways to access more applications. NOTE: The available applications vary by printer. The administrator can configure which applications appear and the order in which they appear.

How to use the touchscreen control panel

Perform the following actions to use the printer touchscreen control panel.

Table 1-5 Touchscreen control panel actions

Action	Description	Example
Touch 	Touch an item on the screen to select that item or open that menu. Also, when scrolling through menus, briefly touch the screen to stop the scrolling.	Touch the Menu icon to view the sub-menus.
Swipe 	Touch the screen and then move your finger horizontally to scroll the screen sideways.	Swipe until the Help icon displays.
Scroll 	Touch the screen and then move your finger vertically to scroll the screen up and down. When scrolling through menus, briefly touch the screen to stop the scrolling.	Scroll through the sub-menus under Menu.

Specifications (base printer)

Learn about the base printer specifications.

Technical specifications (SFP)

learn about base printer specifications.

Technical specifications

Review the technical specifications for the printer.

See www.hp.com/support/colorlj4201-4203 or www.hp.com/support/colorlj4201-4203plus or www.hp.com/support/colorlj4301-4303 or www.hp.com/support/colorlj4301-4303plus for current information.

Product numbers for each model

- 4201dn - 4RA85F
- 4201dw - 4RA86F
- 4202dn - 4RA87F
- 4202dw - 4RA88F

Table 1-6 Paper handling specifications

Paper handling features	4201dn/dw	4202dn/dw
Tray 1 (50-sheet capacity)	✓	✓
Tray 2 (250-sheet capacity)	✓	✓
Optional 550-sheet accessory tray	Optional	Optional
Automatic duplex printing	✓	✓

Table 1-7 Connectivity specifications

Connectivity features	4201dn	4201dw	4202dn	4202dw
10/100/1000 Ethernet LAN connection with IPv4 and IPv6	✓	✓	✓	✓
Hi-Speed USB 2.0	✓	✓	✓	✓
Walk-up USB port	Not available	✓	Not available	✓
Built-in dual-band wireless card supporting wi-fi functionality	Not available	✓	Not available	✓

Table 1-8 Print specifications

Print features	4201dn/dw	4202dn/dw
Prints 33 pages per minute (ppm) on A4 and 35 ppm on letter-size paper	✓	✓
Job storage and private printing	✓	✓

Table 1-9 Other specifications

Other features	4201dn/dw	4202dn/dw
512 MB memory	✓	✓
Dial control panel	✓	✓

Technical specifications

Review the technical specifications for the printer.

See www.hp.com/support/colorlj4201-4203 or www.hp.com/support/colorlj4201-4203plus or www.hp.com/support/colorlj4301-4303 or www.hp.com/support/colorlj4301-4303plus for current information.

Product numbers for each model

- 4201dne - 4RA85E
- 4201dwe - 4RA86E
- 4202dne - 4RA87E
- 4202dwe - 4RA88E

Table 1-10 Paper handling specifications

Paper handling features	4201dne/dwe	4202dne/dwe
Tray 1 (50-sheet capacity)	✓	✓
Tray 2 (250-sheet capacity)	✓	✓
Optional 550-sheet accessory tray	Optional	Optional
Automatic duplex printing	✓	✓

Table 1-11 Connectivity specifications

Connectivity features	4201dne	4201dwe	4202dne	4202dwe
10/100/1000 Ethernet LAN connection with IPv4 and IPv6	✓	✓	✓	✓
Hi-Speed USB 2.0	✓	✓	✓	✓
Walk-up USB port	Not available	✓	Not available	✓
Built-in wireless card supporting wi-fi functionality	Not available	✓	Not available	✓

Table 1-12 Print specifications

Print features	4201dne/dwe	4202dne/dwe
Prints 33 pages per minute (ppm) on A4 and 35 ppm on letter-size paper	✓	✓
Job storage and private printing	✓	✓

Table 1-13 Other specifications

Other features	4201dne/dwe	4202dne/dwe
512 MB memory	✓	✓
Dial control panel	✓	✓

Technical specifications

Review the technical specifications for the printer.

See www.hp.com/support/colorlj4201-4203 or www.hp.com/support/colorlj4201-4203plus or www.hp.com/support/colorlj4301-4303 or www.hp.com/support/colorlj4301-4303plus for current information.

Product numbers for each model

- 4203dn - 4RA89A
- 4203dw - 5HH48A

Table 1-14 Paper handling specifications

Paper handling features	4203dn	4203dw
Tray 1 (50-sheet capacity)	✓	✓
Tray 2 (250-sheet capacity)	✓	✓
Optional 550-sheet accessory tray	Optional	Optional
Automatic duplex printing	✓	✓

Table 1-15 Connectivity specifications

Connectivity features	4203dn	4203dw
10/100/1000 Ethernet LAN connection with IPv4 and IPv6	✓	✓
Hi-Speed USB 2.0	✓	✓
Walk-up USB port	Not available	✓
Built-in wireless card supporting wi-fi functionality	Not available	✓

Table 1-16 Print specifications

Print features	4203dn	4203dw
Prints 33 pages per minute (ppm) on A4 and 35 ppm on letter-size paper	✓	✓
Job storage and private printing	✓	✓

Table 1-17 Other specifications

Other features	4203dn	4203dw
512 MB memory	✓	✓
Dial control panel	✓	✓

Technical specifications

Review the technical specifications for the printer.

See www.hp.com/support/colorlj4201-4203 or www.hp.com/support/colorlj4201-4203plus or www.hp.com/support/colorlj4301-4303 or www.hp.com/support/colorlj4301-4303plus for current information.

Product numbers for each model

- 4203cdn - 5HH53A

Table 1-18 Paper handling specifications

Paper handling features	4203cdn
Tray 1 (50-sheet capacity)	✓
Tray 2 (250-sheet capacity)	✓
Optional 550-sheet accessory tray	Optional
Automatic duplex printing	✓

Table 1-19 Connectivity specifications

Connectivity features	4203cdn
10/100/1000 Ethernet LAN connection with IPv4 and IPv6	✓
Hi-Speed USB 2.0	✓

Table 1-20 Print specifications

Print features	4203cdn
Prints 33 pages per minute (ppm) on A4 and 35 ppm on letter-size paper	✓
Job storage and private printing	✓

Table 1-21 Other specifications

Other features	4203cdn
512 MB memory	✓
Dial control panel	✓

Technical specifications (MFP)

learn about base printer specifications.

Technical specifications

Review the technical specifications for the printer.

See www.hp.com/support/colorlj4201-4203 or www.hp.com/support/colorlj4201-4203plus or www.hp.com/support/colorlj4301-4303 or www.hp.com/support/colorlj4301-4303plus for current information.

Product numbers for each model

- 4301dw - 4RA80F
- 4301fdn - 4RA81F

- 4301fdw - 4RA82F
- 4302dw - 4RA83F
- 4302fdn - 4RA84F
- 4302fdw - 5HH64F

Table 1-22 Paper handling specifications

Paper handling features	4301dw/fdn/fdw	4302dw/fdn/fdw
Tray 1 (50-sheet capacity)	✓	✓
Tray 2 (250-sheet capacity)	✓	✓
Optional 550-sheet accessory tray	Optional	Optional
Automatic duplex printing	✓	✓

Table 1-23 Connectivity specifications

Connectivity features	4301dw	4301fdn	4301fdw	4302dw	4302fdn	4302fdw
10/100/1000 Ethernet LAN connection with IPv4 and IPv6	✓	✓	✓	✓	✓	✓
Hi-Speed USB 2.0	✓	✓	✓	✓	✓	✓
Walk-up USB port	✓	✓	✓	✓	✓	✓
Built-in wireless card supporting wi-fi functionality	✓	Not available	✓	✓	Not available	✓

Table 1-24 Print specifications

Print features	4301dw/fdn/fdw	4302dw/fdn/fdw
Prints 33 pages per minute (ppm) on A4 and 35 ppm on letter-size paper	✓	✓
Job storage and private printing	✓	✓

Table 1-25 Copy and scan specifications

Copy and scan features	4301dw	4301fdn	4301fdw	4302dw	4302fdn	4302fdw
Copies up to 31 pages per minute (ppm) in black and white (single-sided, letter), or up to 26 ppm in color (single-sided, letter)	✓	✓	✓	✓	✓	✓
50-page document feeder with dual-head scanning for single-pass duplex copying and scanning	Not included	✓	✓	Not included	✓	✓
50-page document feeder with simplex copying and scanning	✓	Not included	Not included	✓	Not included	Not included

Table 1-25 Copy and scan specifications (continued)

Copy and scan features	4301dw	4301fdn	4301fdw	4302dw	4302fdn	4302fdw
Scan to E-mail, Scan to USB, and Scan to Network Folder options	✓	✓	✓	✓	✓	✓

Table 1-26 Other specifications

Other features	4301dw	4301fdn	4301fdw	4302dw	4302fdn	4302fdw
512 MB memory	✓	✓	✓	✓	✓	✓
Color touchscreen control panel	✓	✓	✓	✓	✓	✓
Fax features	Not included	✓	✓	Not included	✓	✓
HP Digital Fax (Fax to Email and Fax to Network Folder options)	Not included	✓	✓	Not included	✓	✓

Technical specifications

Review the technical specifications for the printer.

See www.hp.com/support/colorlj4201-4203 or www.hp.com/support/colorlj4201-4203plus or www.hp.com/support/colorlj4301-4303 or www.hp.com/support/colorlj4301-4303plus for current information.

Product numbers for each model

- 4301dwe - 4RA80E
- 4301fdne - 4RA81E
- 4301fdwe - 4RA82E
- 4302dwe - 4RA83E
- 4302fdne - 4RA84E
- 4302fdwe - 5HH64E

Table 1-27 Paper handling specifications

Paper handling features	4301dwe/fdne/fdwe	4302dwe/fdne/fdwe
Tray 1 (50-sheet capacity)	✓	✓
Tray 2 (250-sheet capacity)	✓	✓
Optional 550-sheet accessory tray	Optional	Optional
Automatic duplex printing	✓	✓

Table 1-28 Connectivity specifications

Connectivity features	4301dwe	4301fdne	4301fdwe	4302dwe	4302fdne	4302fdwe
10/100/1000 Ethernet LAN connection with IPv4 and IPv6	✓	✓	✓	✓	✓	✓
Hi-Speed USB 2.0	✓	✓	✓	✓	✓	✓
Walk-up USB port	✓	✓	✓	✓	✓	✓
Built-in wireless card supporting wi-fi functionality	✓	Not available	✓	✓	Not available	✓

Table 1-29 Print specifications

Print features	4301dwe/fdne/fdwe	4302dwe/fdne/fdwe
Prints 33 pages per minute (ppm) on A4 and 35 ppm on letter-size paper	✓	✓
Job storage and private printing	✓	✓

Table 1-30 Copy and scan specifications

Copy and scan features	4301dwe	4301fdne	4301fdwe	4302dwe	4302fdne	4302fdwe
Copies up to 31 pages per minute (ppm) in black and white (single-sided, letter), or up to 26 ppm in color (single-sided, letter)	✓	✓	✓	✓	✓	✓
50-page document feeder with dual-head scanning for single-pass duplex copying and scanning	Not included	✓	✓	Not included	✓	✓
50-page document feeder with simplex copying and scanning	✓	Not included	Not included	✓	Not included	Not included
Scan to E-mail, Scan to USB, and Scan to Network Folder options	✓	✓	✓	✓	✓	✓

Table 1-31 Other specifications

Other features	4301dwe	4301fdne	4301fdwe	4302dwe	4302fdne	4302fdwe
512 MB memory	✓	✓	✓	✓	✓	✓
Color touchscreen control panel	✓	✓	✓	✓	✓	✓
Fax features	Not included	✓	✓	Not included	✓	✓
HP Digital Fax (Fax to Email and Fax to Network Folder options)	Not included	✓	✓	Not included	✓	✓

Technical specifications

Review the technical specifications for the printer.

See www.hp.com/support/colorlj4201-4203 or www.hp.com/support/colorlj4201-4203plus or www.hp.com/support/colorlj4301-4303 or www.hp.com/support/colorlj4301-4303plus for current information.

Product numbers for each model

- 4303dw - 5HH65A
- 4303fdn - 5HH66A
- 4303fdw - 5HH67A

Table 1-32 Paper handling specifications

Paper handling features	4303dw	4303fdn	4303fdw
Tray 1 (50-sheet capacity)	✓	✓	✓
Tray 2 (250-sheet capacity)	✓	✓	✓
Optional 550-sheet accessory tray	Optional	Optional	Optional
Automatic duplex printing	✓	✓	✓

Table 1-33 Connectivity specifications

Connectivity features	4303dw	4303fdn	4303fdw
10/100/1000 Ethernet LAN connection with IPv4 and IPv6	✓	✓	✓
Hi-Speed USB 2.0	✓	✓	✓
Walk-up USB port	✓	✓	✓
Built-in wireless card supporting wi-fi functionality	✓	Not included	✓

Table 1-34 Print specifications

Print features	4303dw	4303fdn	4303fdw
Prints 33 pages per minute (ppm) on A4 and 35 ppm on letter-size paper	✓	✓	✓
Job storage and private printing	✓	✓	✓

Table 1-35 Copy and scan specifications

Copy and scan features	4303dw	4303fdn	4303fdw
Copies up to 31 pages per minute (ppm) in black and white (single-sided, letter), or up to 26 ppm in color (single-sided, letter)	✓	✓	✓
50-page document feeder with dual-head scanning for single-pass duplex copying and scanning	Not included	✓	✓

Table 1-35 Copy and scan specifications (continued)

Copy and scan features	4303dw	4303fdn	4303fdw
50-page document feeder with simplex copying and scanning	✓	Not included	Not included
Scan to E-mail, Scan to USB, and Scan to Network Folder options	✓	✓	✓

Table 1-36 Other specifications

Other features	4303dw	4303fdn	4303fdw
512 MB memory	✓	✓	✓
Color touchscreen control panel	✓	✓	✓
Fax features	Not included	✓	✓
HP Digital Fax (Fax to Email and Fax to Network Folder options)	Not included	✓	✓

Input devices

Learn about input device configuration and specifications.


Information (input devices)

Learn about the printer input devices.

550-sheet paper feeder front view

Identify the pars on the 550-sheet paper feeder.

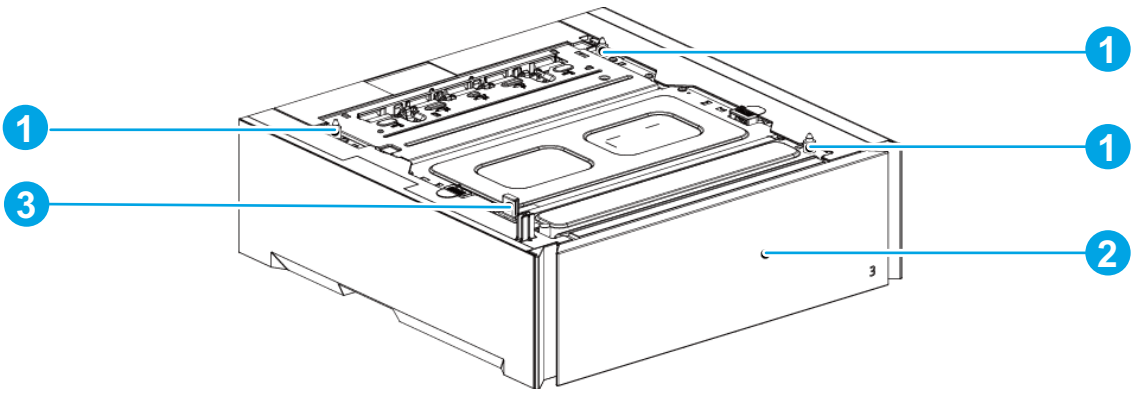Figure 1-10 550-sheet paper feeder front view



Number	Description
1	Positioning pin
2	Tray 3 (cassette)
3	Connector

2 Printer installation and maintenance

Learn about printer installation and maintenance.

Document feeder / scanner

Learn about the printer document feeder and scanner installation and maintenance.

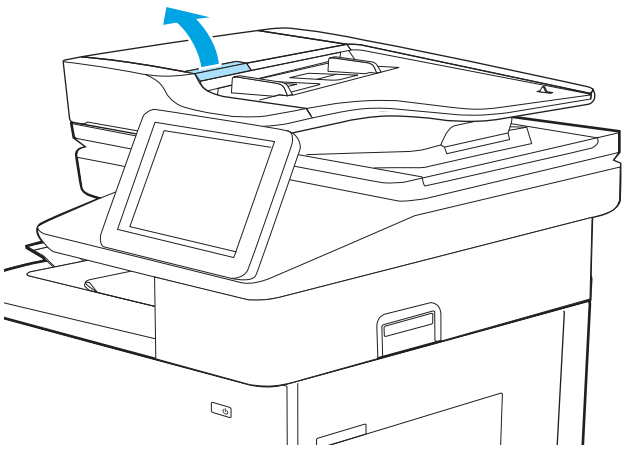
Clean the pickup rollers and separation pad in the document feeder (MFP)

Learn about cleaning the document feeder rollers and pads.


Over time, specks of debris might collect on the document feeder rollers and pads which can affect performance.

NOTE: The figures in this topic show a typical MFP printer. However, the procedure is correct for all MFP printers.

1. . Lift the document-feeder latch.



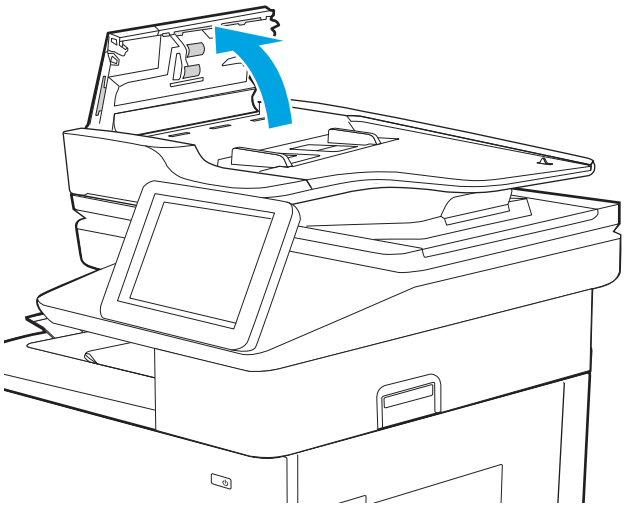2. . Open the document-feeder cover.



3. . Remove any visible lint or dust from each of the feed rollers and the separation pad using compressed air or a clean lint-free cloth moistened with warm water.

NOTE: Lift up the roller assembly to access and clean the second roller.



4. . Close the document-feeder cover.


Check the scanner glass for dirt and smudges

Learn about solving copy-quality debris problems.


Over time, specks of debris might collect on the scanner glass and document feeder white plastic backing, which might cause print defects. Use the following procedure to clean the scanner if the printed pages have streaks, unwanted lines, black dots, poor print quality, or unclear text.

View a video of cleaning the document feeder glass and flatbed glass.


1. Press the power button to turn the printer off, and then disconnect the power cable from the electrical outlet.



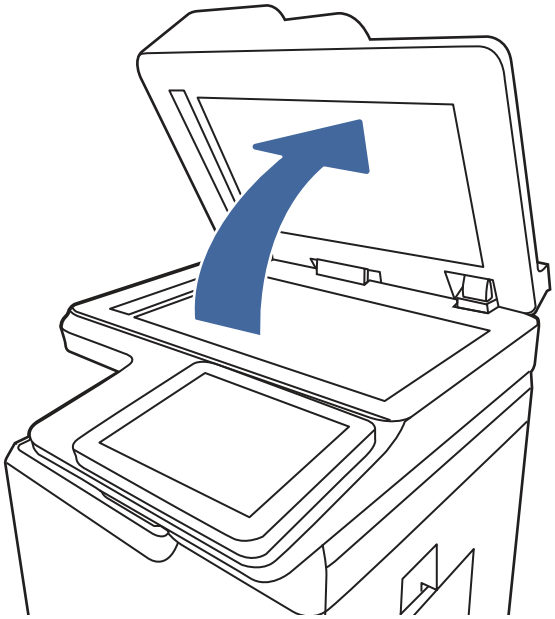2. Open the scanner lid.



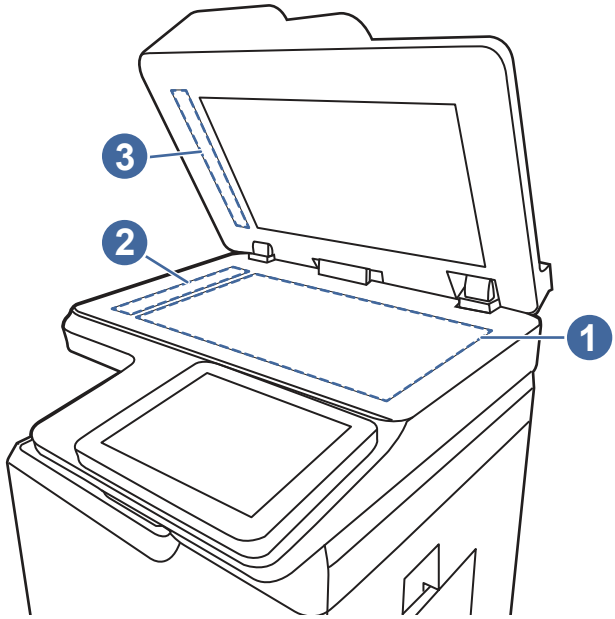3. Clean the scanner glass (callout 1) and the document feeder strips (callout 2, callout 3) with a soft cloth or sponge that has been moistened with nonabrasive glass cleaner.




⚠ **CAUTION:** Do not use abrasives, acetone, benzene, ammonia, ethyl alcohol, or carbon tetrachloride on any part of the printer; these can damage the printer. Do not place liquids directly on the glass or platen. They might seep and damage the printer.

NOTE: If you are having trouble with streaks on copies when you are using the document feeder, be sure to clean the small strips of glass on the left side of the scanner (callout 2, callout 3).

4. Dry the glass and white plastic parts with a chamois or a cellulose sponge to prevent spotting.

5. Connect the power cable to an outlet, and then press the power button to turn the printer on.



Base printer

Learn about the base printer installation and maintenance.

Supplies and long-life consumables (LLCs)

Learn about supplies and LLCs.

Replace the toner cartridges

Replace the toner cartridges if you receive a message on the printer, or if you have print quality problems.

Toner cartridge information

Review details about ordering replacement toner cartridges.

The printer indicates when the toner-cartridge level is low and very low. The actual toner cartridge life remaining can vary. Consider having a replacement cartridge available to install when print quality is no longer acceptable.

The printer uses four colors and has a different toner cartridge for each color: cyan (C), magenta (M), yellow (Y), and black (K). The toner cartridges are inside the front door.

Continue printing with the current cartridge until redistributing the toner no longer yields acceptable print quality. To redistribute the toner, remove the toner cartridge from the printer and gently rock the cartridge back and forth end to end. For graphical representation, see the cartridge replacement instructions. Reinsert the toner cartridge into the printer, and then close the cover.

To purchase cartridges or check cartridge compatibility for the printer, go to www.hp.com/go/suresupply. Scroll to the bottom of the page and verify that the country/region is correct.

NOTE: Cartridges are for distribution and use with their designated product only; they will not work with other printer models.

Table 2-1 **Supplies - For use with 4201/4301 models only**

Item	Description	Part number (service/new)
210A Black Toner Crtg; standard	Standard-capacity black toner cartridge	W2100A
210A Cyan Toner Crtg; standard	Standard-capacity cyan toner cartridge	W2101A
210A Yellow Toner Crtg; standard	Standard-capacity yellow toner cartridge	W2102A
210A Magenta Toner Crtg; standard	Standard-capacity magenta toner cartridge	W2103A
210X Black Toner Crtg; high capacity	High-capacity black toner cartridge	W2100X

Table 2-1 Supplies - For use with 4201/4301 models only (continued)

Item	Description	Part number (service/new)
210X Cyan Toner Crtg; high capacity	High-capacity cyan toner cartridge	W2101X
210X Yellow Toner Crtg; high capacity	High-capacity yellow toner cartridge	W2102X
210X Magenta Toner Crtg; high capacity	High-capacity magenta toner cartridge	W2103X

Table 2-2 Supplies - For use with 4202/4302 models only

Item	Description	Part number (service/new)
220A Black Toner Crtg EMEA; standard	Standard-capacity black toner cartridge	W2200A
220A Cyan Toner Crtg EMEA; standard	Standard-capacity cyan toner cartridge	W2201A
220A Yellow Toner Crtg EMEA; standard	Standard-capacity yellow toner cartridge	W2202A
220A Magenta Toner Crtg EMEA; standard	Standard-capacity magenta toner cartridge	W2203A
220X Black Toner Crtg EMEA; high capacity	High-capacity black toner cartridge	W2200X
220X Cyan Toner Crtg EMEA; high capacity	High-capacity cyan toner cartridge	W2201X
220X Yellow Toner Crtg EMEA; high capacity	High-capacity yellow toner cartridge	W2202X
220X Magenta Toner Crtg EMEA; high capacity	High-capacity magenta toner cartridge	W2203X

Table 2-3 Supplies - For use with 4203/4303 models only

Item	Description	Part number (service/new)
230A Black Toner Crtg; standard	Standard-capacity black toner cartridge	W2300A
230A Cyan Toner Crtg; standard	Standard-capacity cyan toner cartridge	W2301A
230A Yellow Toner Crtg; standard	Standard-capacity yellow toner cartridge	W2302A
230A Magenta Toner Crtg; standard	Standard-capacity magenta toner cartridge	W2303A
230X Black Toner Crtg; high capacity	High-capacity black toner cartridge	W2300X
230X Cyan Toner Crtg; high capacity	High-capacity cyan toner cartridge	W2301X
230X Yellow Toner Crtg; high capacity	High-capacity yellow toner cartridge	W2302X

Table 2-3 Supplies - For use with 4203/4303 models only (continued)

Item	Description	Part number (service/new)
230X Magenta Toner Crtg; high capacity	High-capacity magenta toner cartridge	W2303X


Do not remove the toner cartridge from its package until it is time to replace it.

⚠ CAUTION: To prevent damage to the toner cartridge, do not expose it to light for more than a few minutes. If the toner cartridge must be removed from the printer for an extended period of time, place the cartridge in the original plastic packaging, or cover the cartridge with a lightweight opaque item.

NOTE: High-yield toner cartridges contain more toner than standard cartridges for increased page yield. For more information, go to www.hp.com/go/toneryield.

The following illustration shows the toner cartridge components.

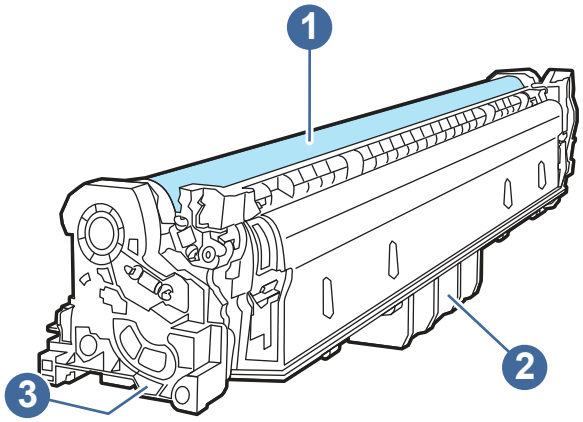Figure 2-1 Toner cartridge components



Number	Description
1	Imaging drum CAUTION: Do not touch the imaging drum. Fingerprints can cause print-quality problems.
2	Handle
3	Memory chip

⚠ CAUTION: If toner gets on clothing, wipe it off by using a dry cloth and wash the clothes in cold water. Hot water sets toner into fabric.

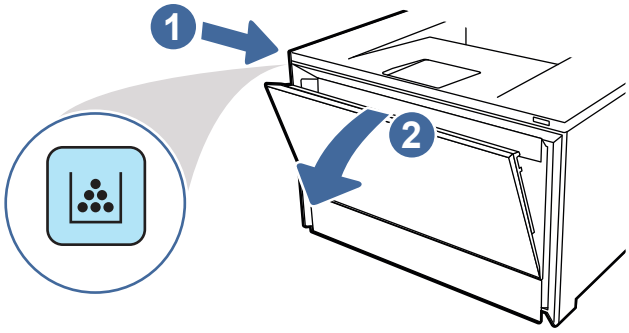
NOTE: Information about recycling used toner cartridges is in the toner cartridge box or at www.hp.com/hprecycle.

Remove and replace the toner cartridges


Follow these steps to replace the toner cartridges.

View a video of how to replace the toner cartridges


1. Open the front door by pressing the button on the left panel.



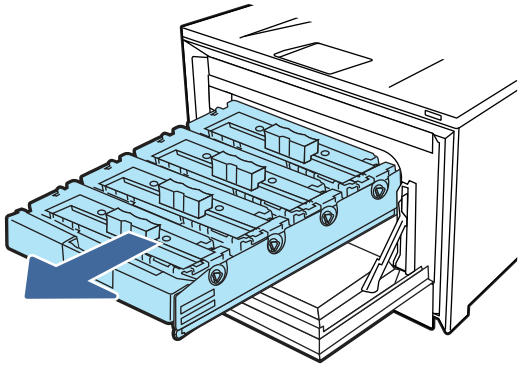
2. Grasp the blue handle on the toner cartridge drawer, and then pull out the drawer.



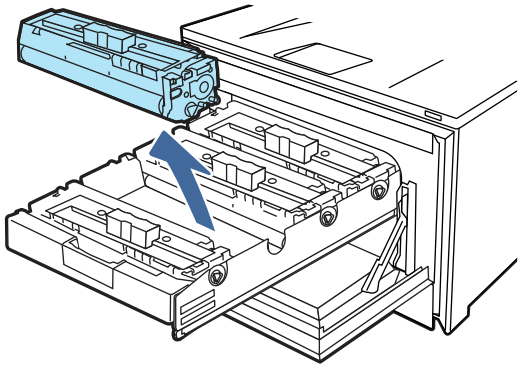
3. Grasp the handle on the toner cartridge, and then pull the toner cartridge straight up to remove it.



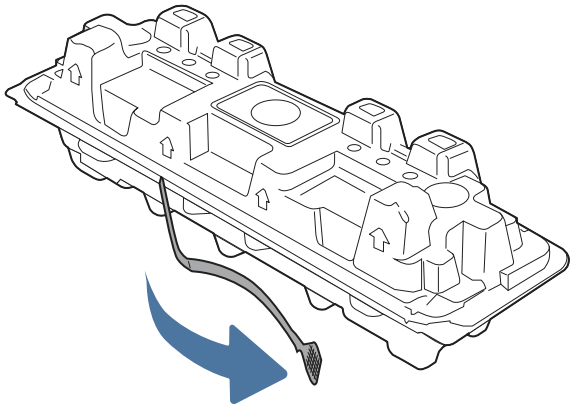
4. Remove the new toner cartridge package from the box, and then pull the release tab on the packaging.



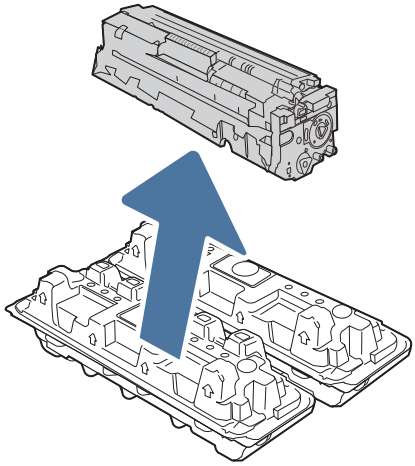
5. Remove the toner cartridge from the opened packaging shell. Place the used toner cartridge in the shell for recycling.



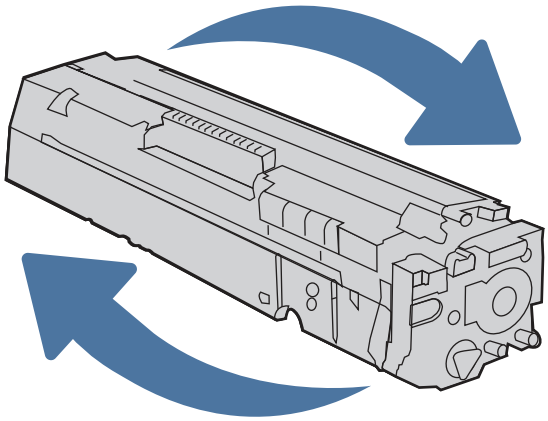
6. Hold both ends of the toner cartridge and rock it end to end to distribute the toner evenly inside the cartridge.



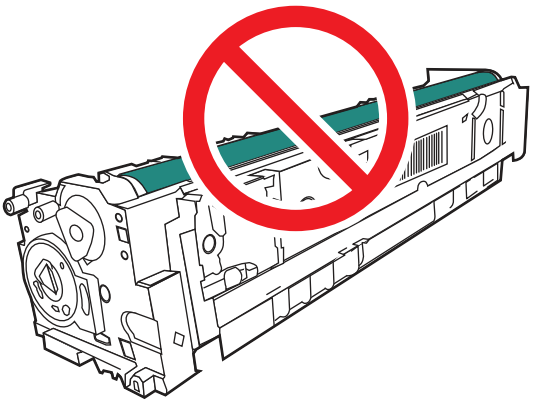
7. Do not touch the imaging drum on the bottom of the toner cartridge. Fingerprints on the imaging drum can cause print-quality problems. Also, do not expose the cartridge to light unnecessarily.



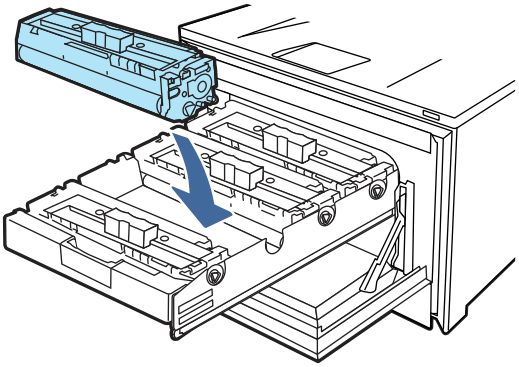
8. Insert the new toner cartridge into the drawer. Make sure that the color chip on the cartridge matches the color chip on the drawer.



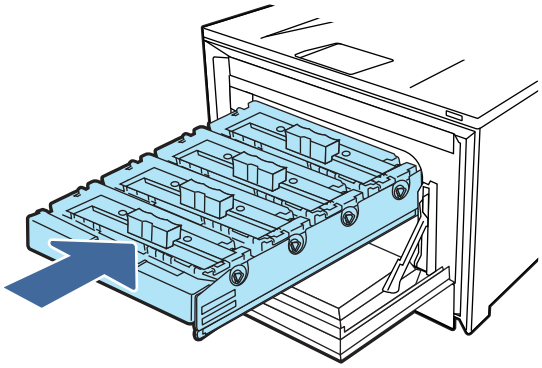9. Close the toner cartridge drawer.



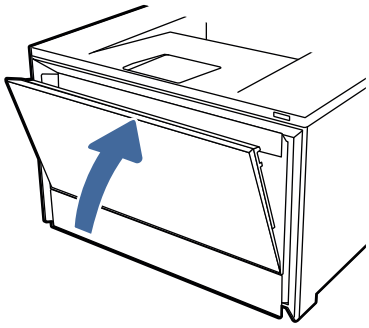
10. Close the front door.



11. Pack the used toner cartridge into the box the new cartridge came in, or use a large cardboard box and fill it with several cartridges you need to recycle. See the enclosed recycling guide for information about recycling.

    In the US, a pre-paid shipping label is included in the box. In other countries/regions, go to www.hp.com/recycle to print a pre-paid shipping label.

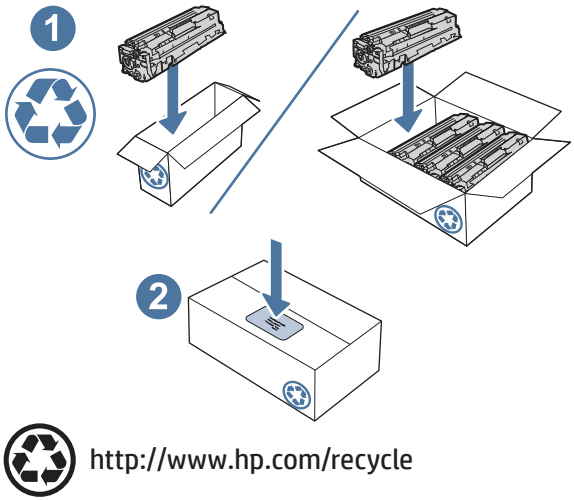    Adhere the pre-paid shipping label to the box, and return the used cartridge to HP for recycling.




Security setup

Review the following information about the printer security features.

IMPORTANT: Access to the Embedded Web Server (EWS) requires a personal identification number (PIN). The default PIN for this printer is located on a sticker adhered to the front of the toner cartridge tray. Use this PIN to open the EWS when prompted.

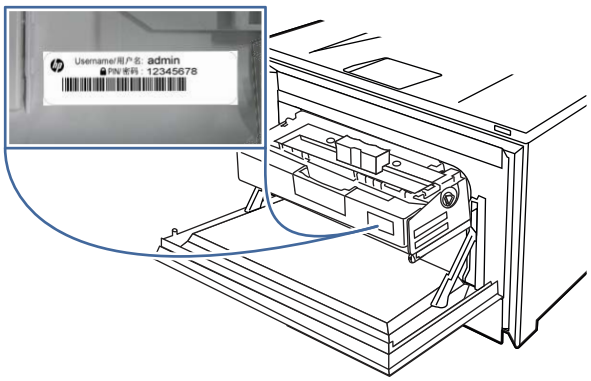The default PIN (password) can be changed in the EWS (**Settings** > **Security** > **Password Settings**).



Introduction

The printer includes several security features to restrict who has access to configuration settings, to secure data, and to prevent access to valuable hardware components.

Assign or change the system password using the Embedded Web Server

Assign an administrator password for access to the printer and the HP Embedded Web Server so that unauthorized users cannot change the printer settings.

Access to the Embedded Web Server (EWS) requires a personal identification number (PIN). The default PIN for this printer is located on a on a sticker adhered to the front of the toner cartridge tray. Use this PIN to open the EWS when prompted.

NOTE: If the default PIN has been changed, contact the printer administrator.

The default PIN (password) can be changed in the EWS (**Security** > **Access Control**).

1. Open the HP Embedded Web Server (EWS).

   a. At the printer control panel, use the control-panel menus to print the Connectivity Status Report (MFP) or **Connectivity Status Page** (SFP). Do the following:

      - Open the **Menu** > **Tools** > **ReportsStatus reports** menus.
      - **MFP**: Select the **Connectivity Status Report** item.


        SFP: Select the **Connectivity Status Page** item.

      NOTE: **MFP**: Touch the Print button on the touchscreen to print the report.

      SFP: Navigate and select the Print item in the menu list, and then press the dial to select it and print the report.

   b. Open a web browser, and in the address line, type the IP address or host name exactly as it appears on the Connectivity Status Report or Connectivity Status Page page. Press the Enter key on the computer keyboard. The EWS opens.


      NOTE: If a message displays in the web browser indicating that the website might not be safe, select the option to continue to the website. Accessing this website will not harm the computer.



2. On the EWS Home page, open the **Security** > **Access Control** menus.

NOTE: When prompted, enter the default PIN from the sticker adhered to the cartridge tray.

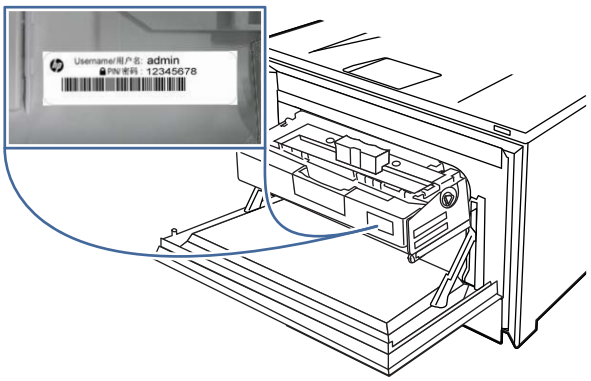Figure 2-2 **Printer default PIN location**



3. Use the **Admin Account Password** fields to set the password, and then click **Apply**.

NOTE: Make note of the password and store it in a safe place.

Cleaning

Learn about printer cleaning techniques and procedures.

Print a cleaning page

Learn how to print a cleaning page.

NOTE: To print using an HP Plus printer, the printer must have genuine original HP toner cartridges installed, must have an ongoing internet connection and an active HP Plus account (for more information, go to hp.com/plus).

During the printing process, paper, toner, and dust particles can accumulate inside the printer and can cause print-quality issues such as toner specks or spatter, smears, streaks, lines, or repeating marks.

Print a cleaning page from a dial control panel

1. Open the following menus:
   - Menu
   - Tools
   - Troubleshooting
   - Print Quality Tools
   - Cleaning Page
2. Navigate to and select the Print item in the menu list, and then press the dial to select it and print the report.

Print a cleaning page from a touchscreen control panel

1. Open the following menus:
   - Menu
   - Tools
   - Troubleshooting
   - Print Quality Tools
2. Touch the Cleaning Page item. A cleaning page prints.

Clean the Tray 1 pickup and separation rollers

Learn about cleaning the Tray 1 rollers.

Before performing service

Turn the printer power off

- Disconnect the power cable.

⚠ **WARNING!** To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

If the part is damaged and cannot be cleaned, use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 2-4 Part information

Part number	Part description
RM2-2758-000CN	Multipurpose feed assembly
RM2-2692-000CN	Separation roller assembly (Tray1/2/3)

Required tools

- No special tools are required to remove or install this assembly.

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test

Print any pages necessary to make sure the printer is functioning correctly.


Remove the Tray 1 pickup roller assembly

Follow the procedure below to remove and replace the Tray 1 pickup roller assembly.

Reinstallation tip: Make sure to follow the special installation instructions for this part or step (located after the unpack and recycle or cleaning section).


1. Open the cartridge door, and then depress the lever (callout 1) and slide it as shown below.

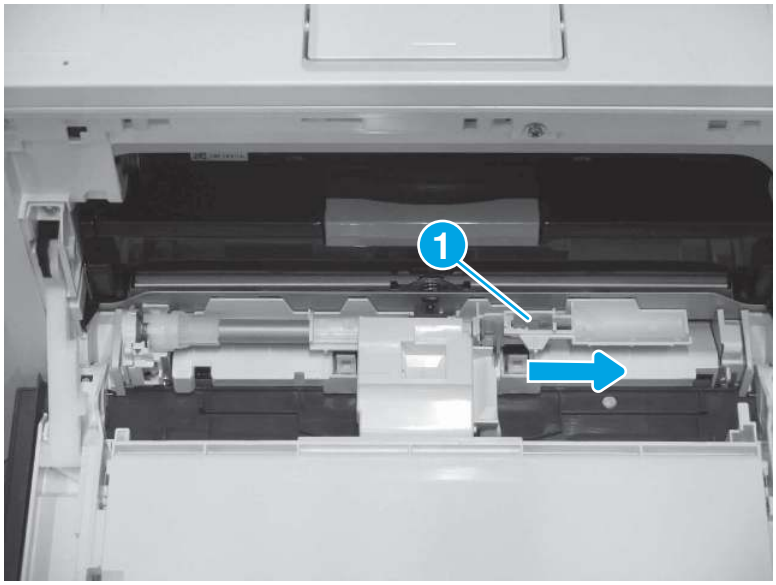Figure 2-3 **Release the Tray 1 pickup roller assembly**



2. Slide the pickup roller assembly (callout 1) as shown below to remove it.

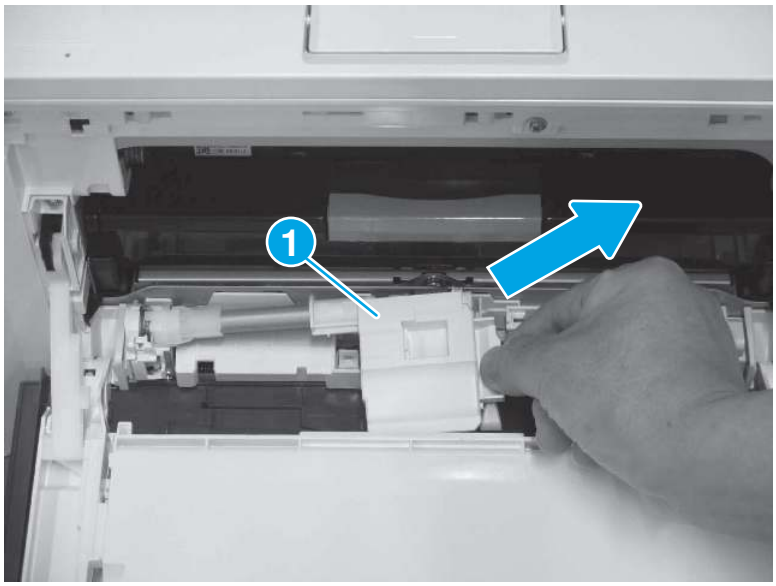Figure 2-4 **Remove the Tray 1 pickup roller assembly**




Remove the Tray 1 separation roller assembly

Follow the procedure below to remove and replace the Tray 1 separation roller assembly.


1. Pull up on the guide (callout 1) to remove it.

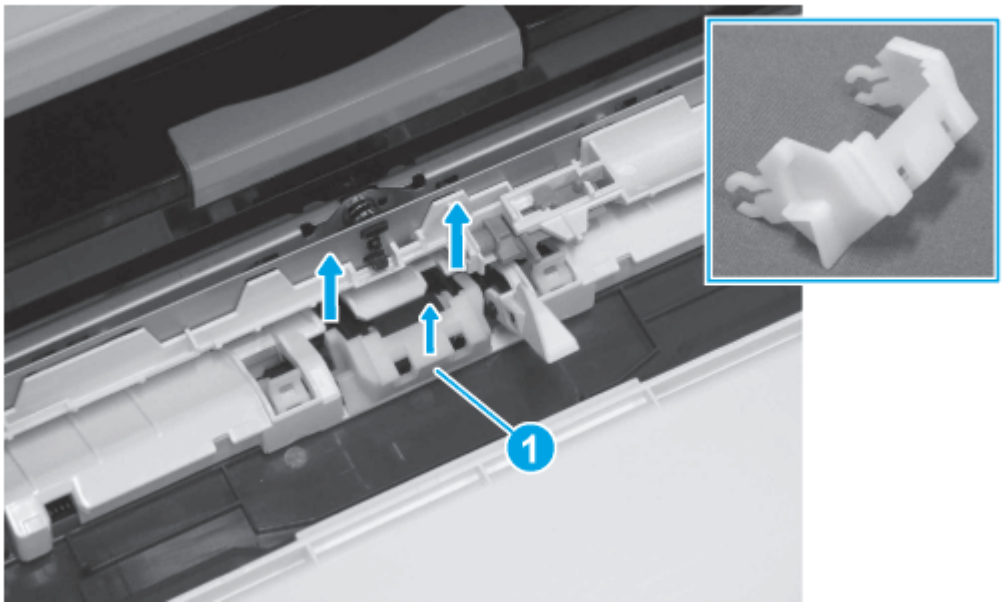Figure 2-5 **Remove the guide**



2. Remove the Tray 1 separation roller (callout 1).

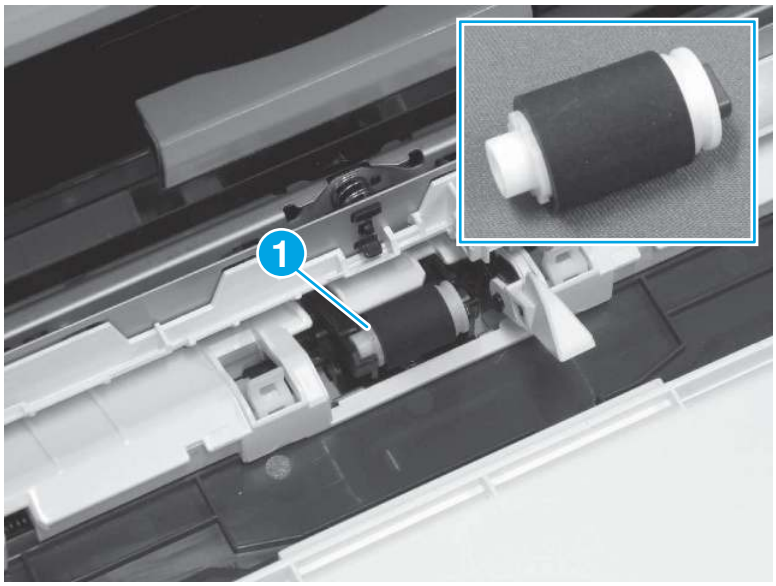Figure 2-6 **Remove the Tray 1 separation roller**




Clean the Tray 1 pickup and separation rollers

Carefully clean the Tray 1 pickup and separation rollers.

- Clean the Tray 1 pickup and separation roller.
  - Use a damp, lint-free cloth to gently clean the rollers.

⚠ CAUTION: When handling the roller and/or pad, avoid touching the spongy surfaces. Skin oils and fingerprints on a roller surface can cause print-quality problems.

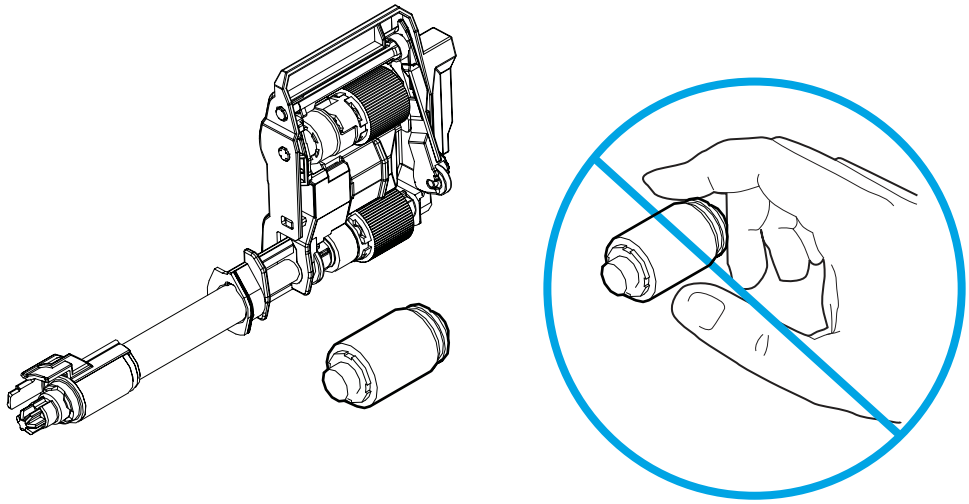Figure 2-7 **Clean the rollers**




Special installation instructions - Tray 1 pickup roller assembly

Follow the special instructions below to install the Tray 1 pickup roller assembly.

- When the Tray 1 pickup roller assembly (callout 1) is installed, make sure that the alignment tab (callout 2) is in the slot (callout 3) on the assembly shaft.

TIP: When correctly installed, the tab fits completely into the slot (callout 4).

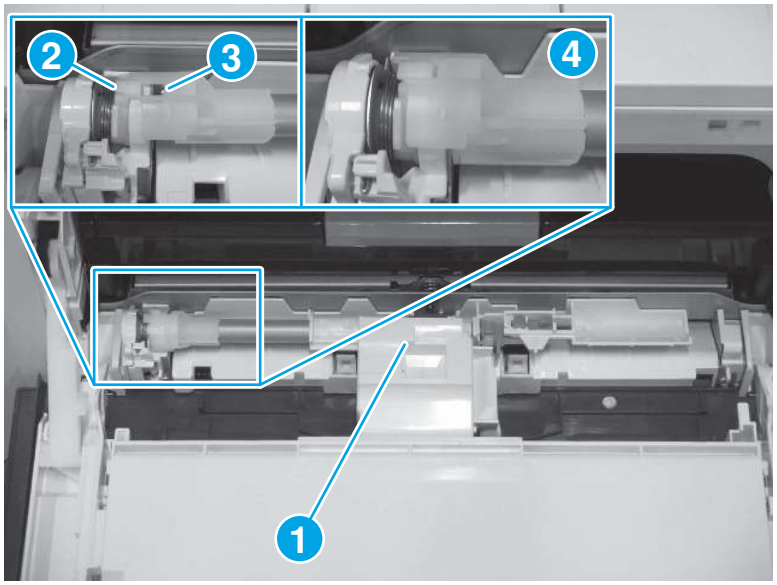Figure 2-8 **Install the Tray 1 pickup roller assembly**



Clean the Tray 2 pickup, feed, and separation rollers

Learn about cleaning the Tray 2 rollers.

Before performing service

Turn the printer power off

- Disconnect the power cable.

> ⚠ **WARNING!** To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

If the part is damaged and cannot be cleaned, use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 2-5 Part information

Part number	Part description
RM2-2695-000CN	Paper pickup roller assembly **NOTE:** RM2-2695-000CN includes both the pickup and feed rollers (identical parts).
RM2-2692-000CN	Separation roller assembly (Tray1/2/3)

Required tools

- No special tools are required to remove or install this assembly.

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test


Print any pages necessary to make sure the printer is functioning correctly.

Remove the Tray 2 pickup and feed rollers

Follow the procedure below to remove and replace the Tray 2 pickup and feed rollers.


1. Position the printer on its left side, press the lever (callout 1) to release the MP feed guide (callout 2).

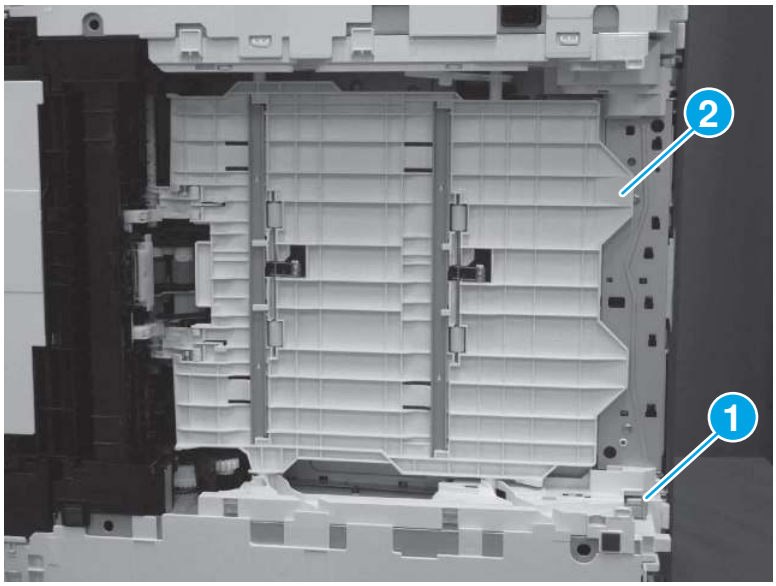Figure 2-9 Release the MP tray guide




2. Push the lever (callout 1) and move the holder (callout 2) as shown below.

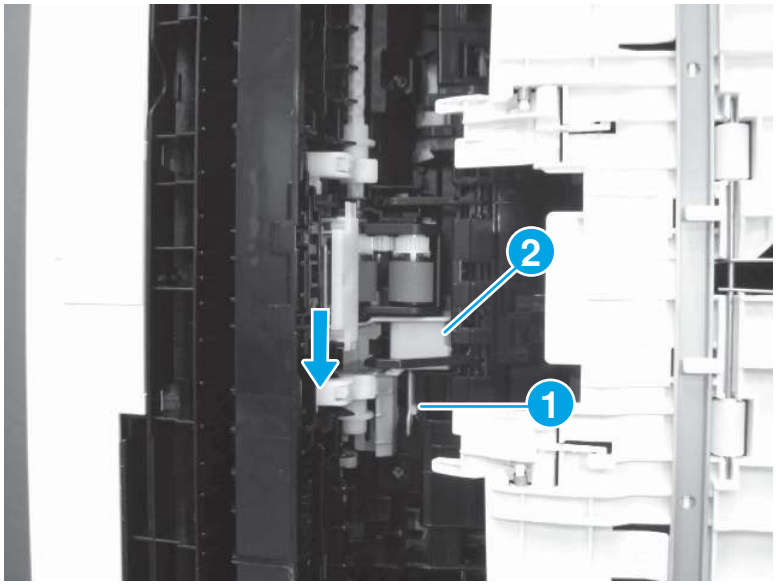Figure 2-10 Move the holder



3. Remove the pickup roller (callout 1) and feed roller (callout 2) as an assembly.

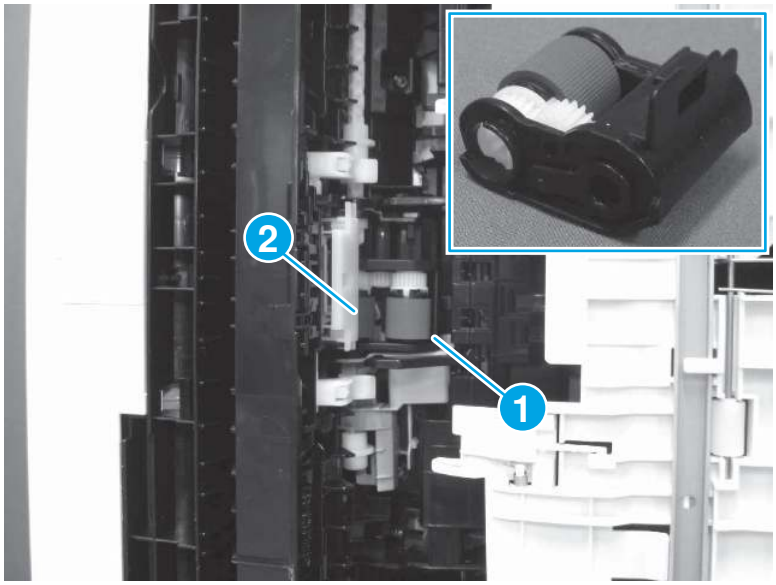Figure 2-11 Remove the roller assembly




4. Do the following:

   a. Rotate the retainer (callout 1) as shown below to remove it.

   b. Remove the pickup roller (callout 2) and the feed roller (callout 3) from the holder (callout 4).

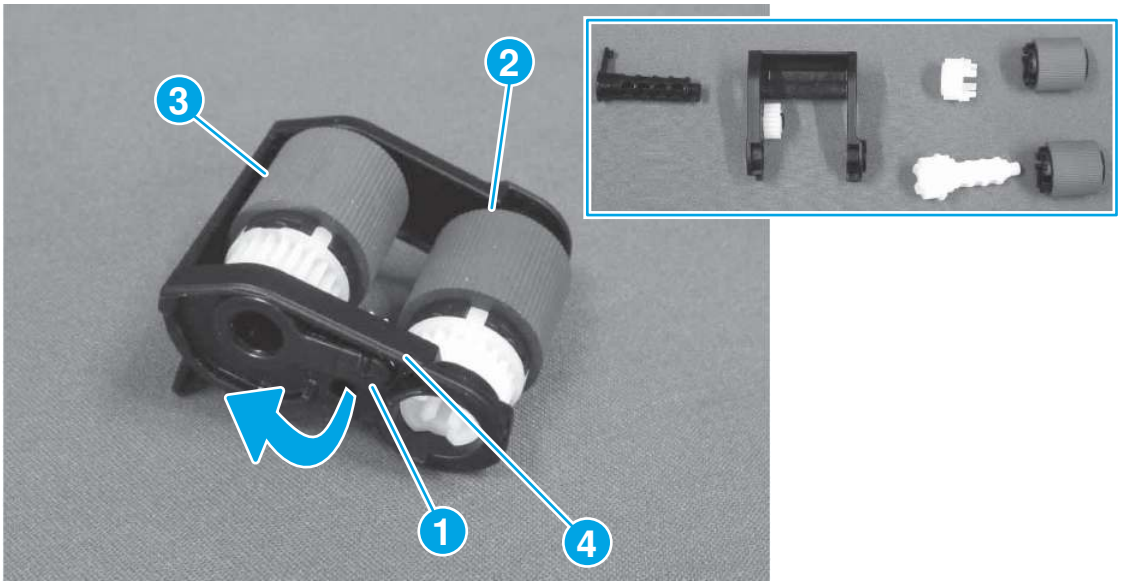Figure 2-12 Remove the rollers




Remove the Tray 2 separation roller

Follow the procedure below to remove and replace the Tray 2 separation roller.


1. Position the printer on its left side, use a small flat-blade screwdriver to release two tabs (callout 1), and then remove the guide (callout 2).

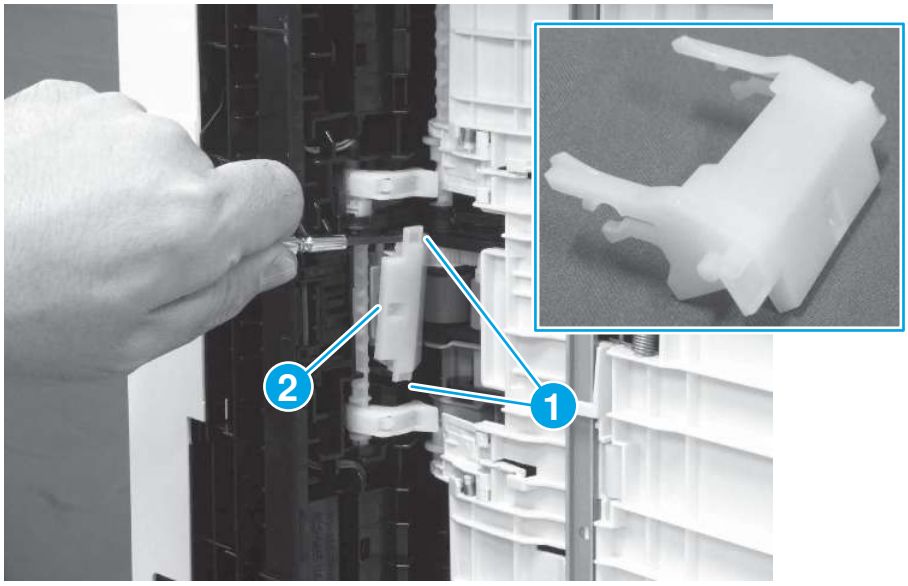Figure 2-13 Remove the guide




2. Remove the Tray 2 separation roller assembly (callout 1).

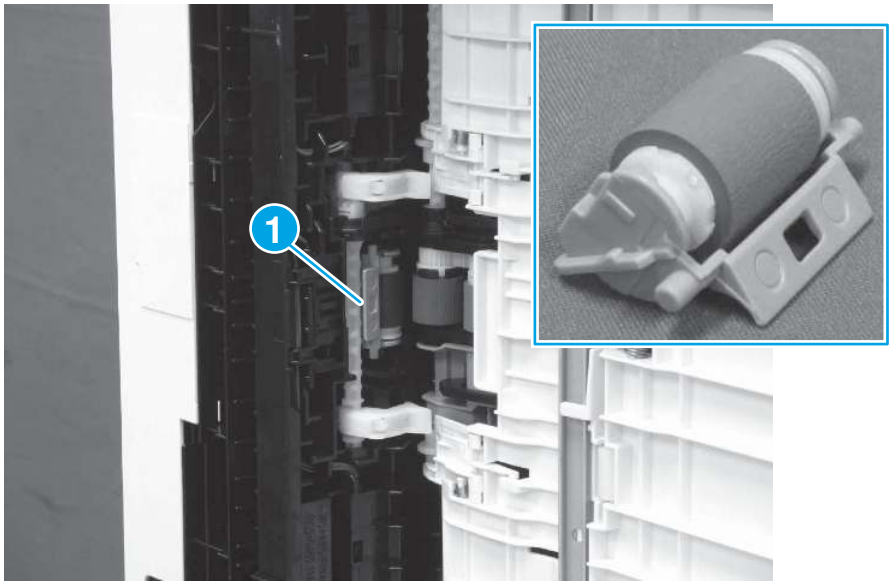Figure 2-14 Move the roller assembly



3. Release one tab (callout 1), and then remove the roller (callout 2) from the holder (callout 3).

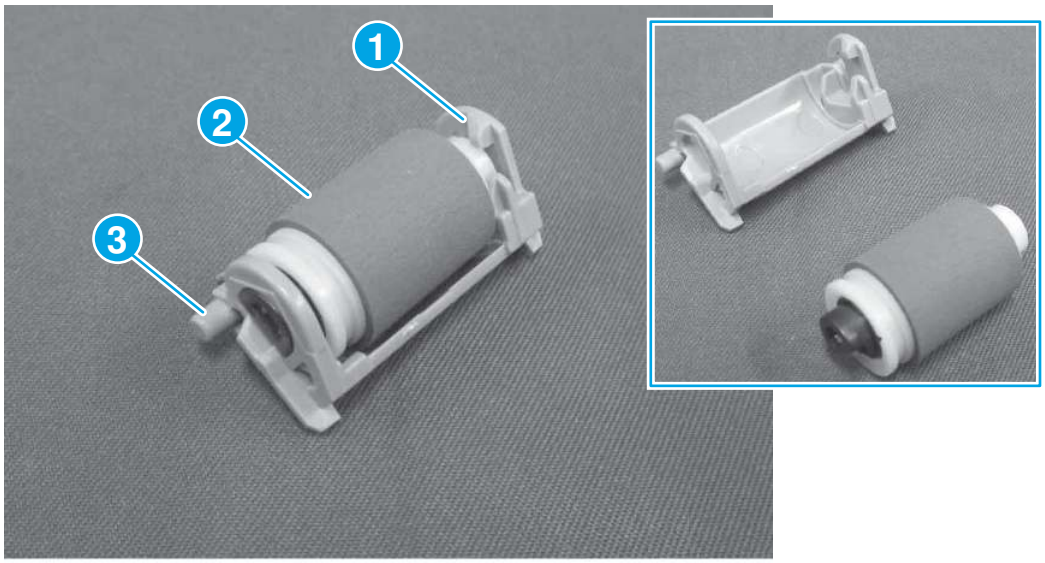Figure 2-15 **Disassemble the roller assembly**




Clean the Tray 2 pickup, feed, and separation rollers

Carefully clean the Tray 1 pickup, feed, and separation rollers.

- Clean the Tray 1 pickup, feed, and separation roller.
  - Use a damp, lint-free cloth to gently clean the rollers.

⚠ CAUTION: When handling the roller and/or pad, avoid touching the spongy surfaces. Skin oils and fingerprints on a roller surface can cause print-quality problems.

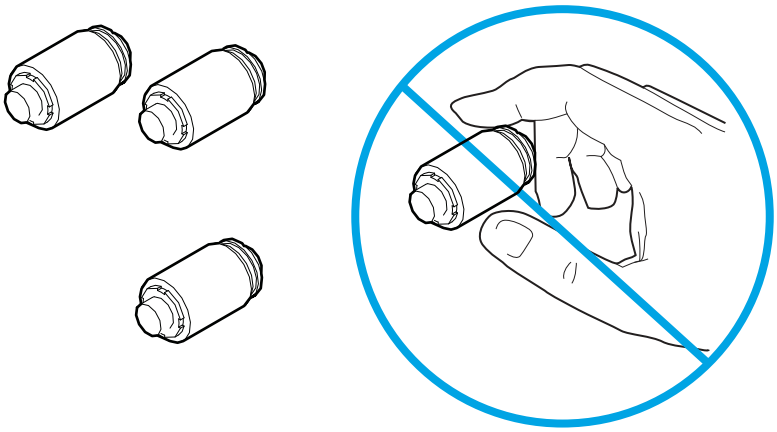Figure 2-16 **Clean the rollers**



Input devices

Learn about input device installation and maintenance.

Cleaning

Learn about input device cleaning techniques and procedures.

Clean the Tray 3 pickup, feed, and separation rollers

Learn about cleaning the Tray 3 rollers.

Before performing service

Turn the printer power off

- Disconnect the power cable.

> ⚠ **WARNING!** To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

If the part is damaged and cannot be cleaned, use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 2-6 Part information

Part number	Part description
RM2-2695-000CN	Paper pickup roller assembly **NOTE:** RM2-2695-000CN includes both the pickup and feed rollers (identical parts).
RM2-2692-000CN	Separation roller assembly (Tray1/2/3)

Required tools

- No special tools are required to remove or install this assembly.

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test

Print any pages necessary to make sure the printer is functioning correctly.


Remove the Tray 3 pickup and feed rollers

Follow the procedure below to remove and replace the Tray 3 pickup and feed rollers.

1. Turn the paper feeder over to gain access to the roller assembly.


2. Use a small flat-blade screwdriver to release two tabs (callout 1), and then remove the cover (callout 2).

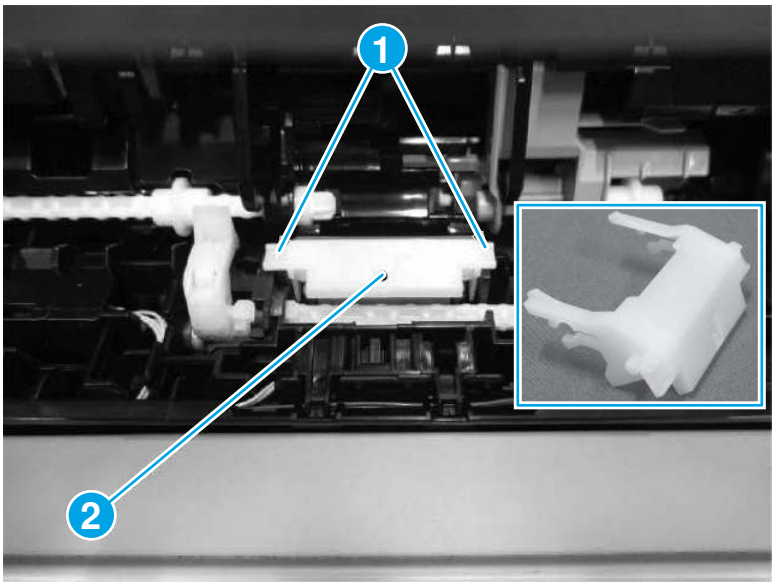Figure 2-17 Remove the cover



3. Push the lever (callout 1) and move the holder (callout 2) as shown below, and then remove the pickup/feed roller assembly (callout 3).

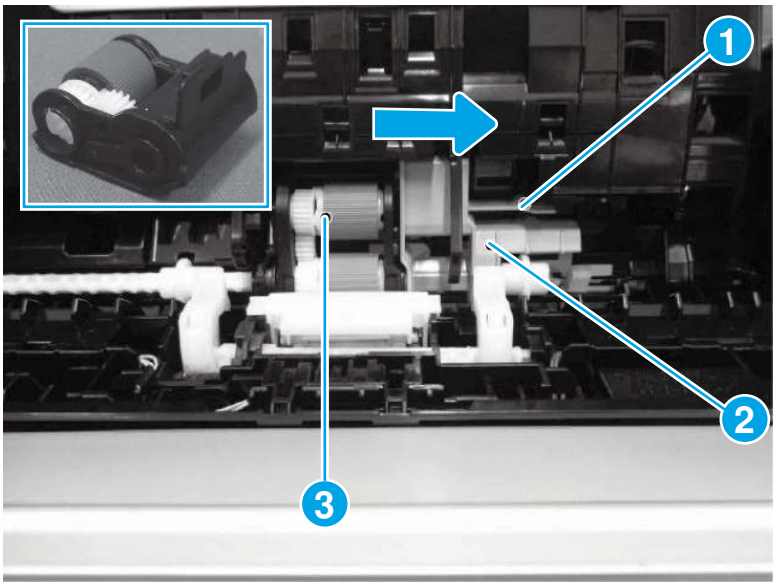Figure 2-18 Remove the roller assembly




4. Do the following:

   a. Rotate the retainer (callout 1) as shown below to remove it.

   b. Remove the pickup roller (callout 2) and the feed roller (callout 3) from the holder (callout 4).

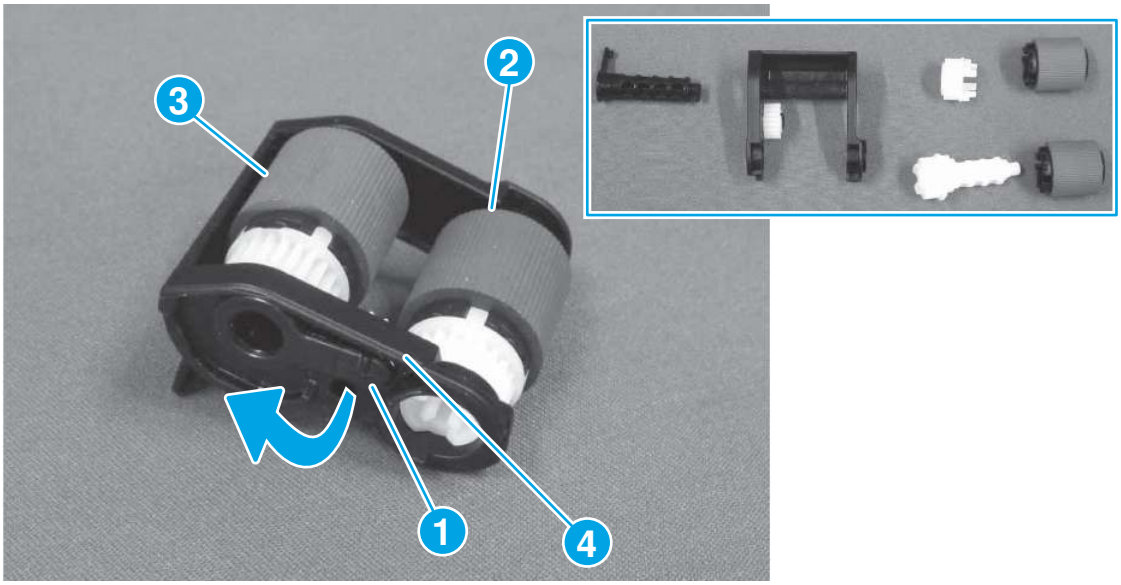Figure 2-19 Remove the rollers




Remove the Tray 3 separation roller

Follow the procedure below to remove and replace the Tray 3 separation roller.


1. Turn the paper feeder over to gain access to the roller assembly.
2. Use a small flat-blade screwdriver to release two tabs (callout 1), and then remove the cover (callout 2).

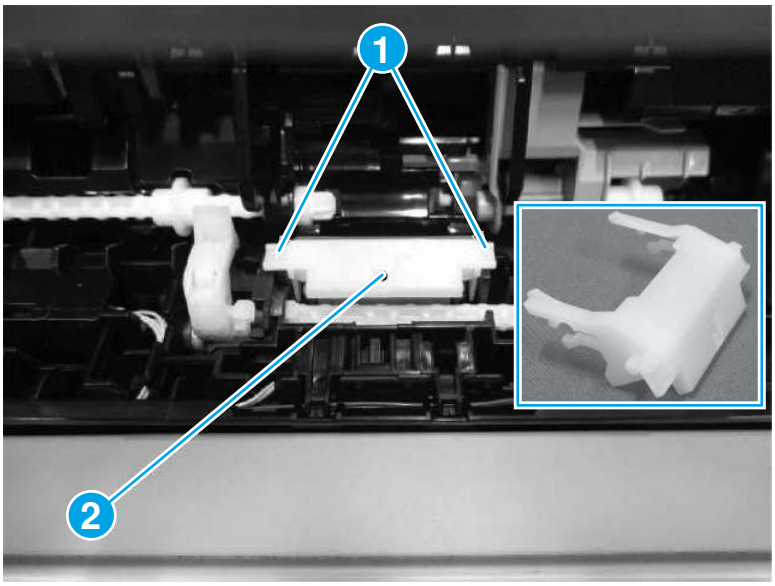Figure 2-20 Remove the cover




3. Remove the Tray 3 separation roller assembly (callout 1).

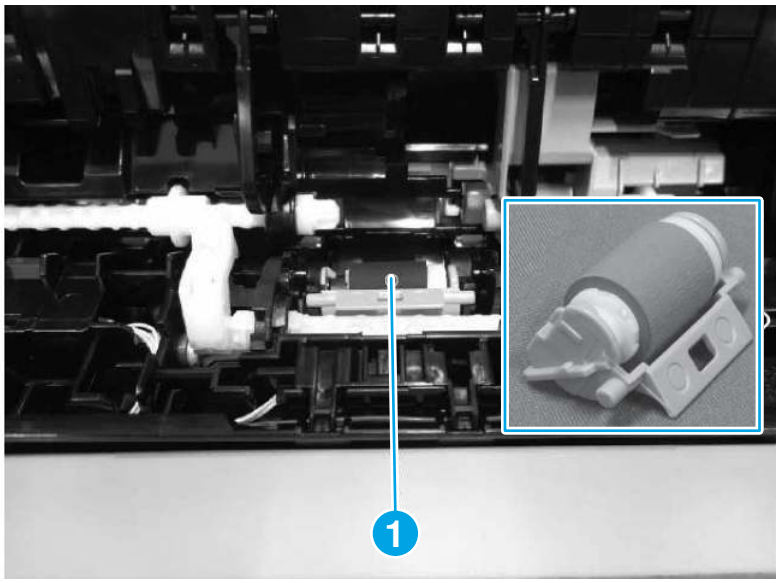Figure 2-21 Move the roller assembly



4. Release one tab (callout 1), and then remove the roller (callout 2) from the holder (callout 3).

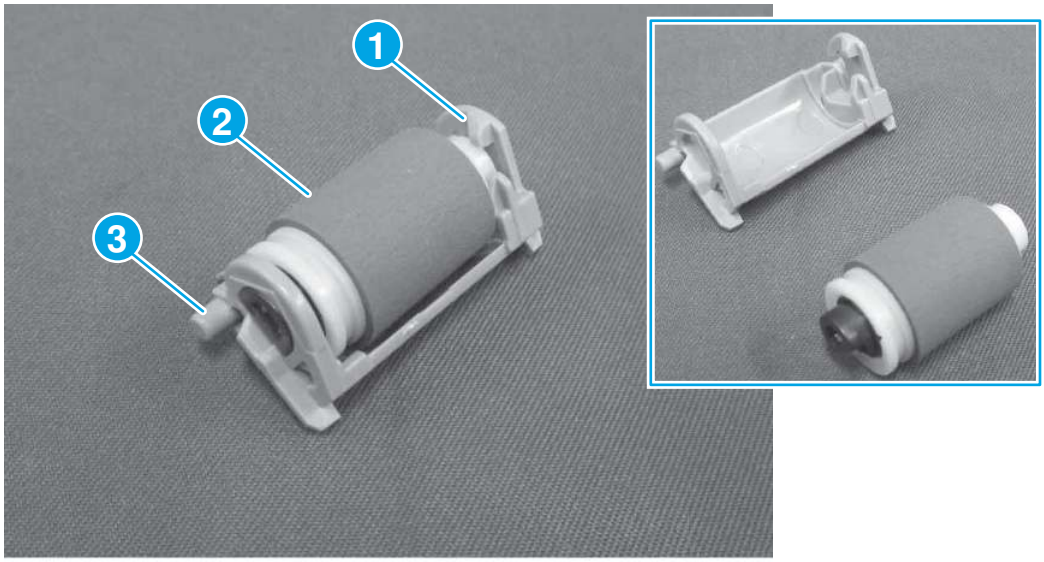Figure 2-22 Disassemble the roller assembly




Clean the Tray 2 pickup, feed, and separation rollers

Carefully clean the Tray 1 pickup, feed, and separation rollers.

- Clean the Tray 1 pickup, feed, and separation roller.
  - Use a damp, lint-free cloth to gently clean the rollers.

⚠ CAUTION: When handling the roller and/or pad, avoid touching the spongy surfaces. Skin oils and fingerprints on a roller surface can cause print-quality problems.

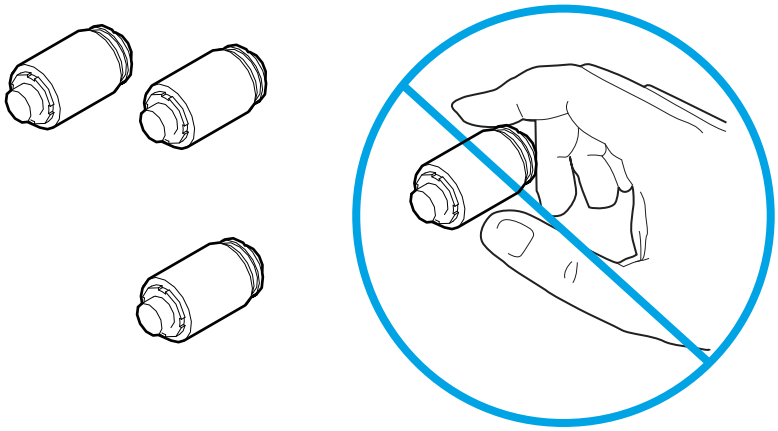Figure 2-23 **Clean the rollers**



3 Solve problems

Learn about solving printer problems.

Determine the problem source

When the printer malfunctions or encounters an unexpected situation, the printer control panel alerts the user to the situation.

This section contains a pre-troubleshooting checklist and a troubleshooting flow chart to filter out many possible causes of the problem.

- Use the pre-troubleshooting check list to gather information about the problem from the customer.
- Use the troubleshooting flowchart to pinpoint the root cause of hardware malfunctions. The flowchart guides you to the section of this chapter that contains steps for correcting the malfunction.

Before beginning any troubleshooting procedure, check the following issues:

- Are supply items within their rated life?
- Does the configuration page reveal any configuration errors?

NOTE: To print a configuration page using an HP Plus printer, the printer must have genuine original HP toner cartridges installed, must have an ongoing internet connection and an active HP Plus account (for more information, go to hp.com/plus).

NOTE: The customer is responsible for checking supplies and for using supplies that are in good condition.

Pre-troubleshooting checklist

The following table includes basic questions to ask the customer to quickly help define the problem(s).

Table 3-1 Pre-troubleshooting checklist

General topic	Questions
Environment	• Is the printer installed on a solid, level surface (+/- 1°)? • Is the power-supply voltage within ± 10 volts of the specified power source? • Is the power-supply plug inserted in the printer and the wall outlet (not a surge protector)? • Is the operating environment within the specified parameters? • Is the printer exposed to ammonia gas, such as that produced by diazo copiers or office cleaning materials? NOTE: Diazo copiers produce ammonia gas as part of the copying processes. Ammonia gas (from cleaning supplies or a diazo copier) can have an adverse effect on some printer components (for example, the toner cartridge or cartridges OPC). • Is the printer exposed to direct sunlight? • Is the printer exposed to an air conditioning or heating vent that can cause temperature fluctuations?
Media	• Does the customer use only supported media? • Is the media in good condition (no curls, folds, or distortion)? • Is the media stored correctly and within environmental limits?
Input trays	• Is the amount of media in the tray within specifications? • Is the media correctly placed in the tray? • Are the paper guides aligned with the stack (no gaps in the stack or excessive pressure causing the stack to bow)? • Is the tray (or trays) correctly installed in the printer?
Toner cartridge	• Is the toner cartridge (or cartridges) installed correctly? NOTE: If country/region specific toner cartridges are available for the printer, make sure the correct cartridge is installed.
Transfer unit and fuser	• Are the transfer unit and fuser installed correctly? NOTE: For printers with an intermediate transfer belt (ITB), is the ITB installed correctly and fully seated. If a replacement ITB was installed, was all of the packing materials removed?
Covers	• Is the toner cartridge door closed?
Condensation	• Does condensation occur following a temperature change (particularly in winter following cold storage)? If so, wipe affected parts dry or leave the printer on for 10 to 20 minutes. • Was a toner cartridge (or cartridges) opened soon after being moved from a cold to a warm room? If so, allow the toner cartridge (or cartridges) to sit at room temperature for 1 to 2 hours.
Miscellaneous	• Check for and remove any non-HP components (toner cartridges, memory modules, and EIO cards) from the printer. • Remove the printer from the network and ensure that the failure is associated with the printer before beginning troubleshooting. • For any color print-quality issues (color printers only), calibrate the printer, and then print a diagnostics page to verify print quality.

Troubleshooting flowchart

This flowchart highlights the general processes to follow to quickly isolate and solve printer hardware problems.

Each row depicts a major troubleshooting step. Follow a “yes” answer to a question to proceed to the next major step. A “no” answer indicates that more testing is needed. Go to the appropriate section in this chapter and follow the instructions there. After completing the instructions, go to the next major step in this troubleshooting flowchart.

NOTE: For solutions that require printing a page, see the following.

To print using an HP Plus printer, the printer must have genuine original HP toner cartridges installed, must have an ongoing internet connection and an active HP Plus account (for more information, go to hp.com/plus).

Table 3-2 Troubleshooting flowchart

Step	Question		Action
1 **Power on**	Is the printer on and does a readable message display?		
	Yes ↓	No →	Basic printer functions should start up when the printer is connected into an electrical outlet and the power switch is pushed to the on position. During normal operation cooling fans and/or motors should be operating. Place a hand over fan intake or exhaust vents to determine if the fan or fans are spinning. Lean close to the printer to hear motors rotating. If fans and/or motors are operating, the dc side of the power supply is functioning. Always make sure that the printer is plugged into a known-functioning wall receptacle. Remove power strips and plug the printer directly into a wall receptacle. After the control panel display is functional, see step 2.
2 **Control panel messages**	Do the printer firmware icons appear on the control panel?		
	Yes ↓	No →	After the errors have been corrected, go to step 3. Use the control panel message document (CPMD) section in this manual to correct any displayed error messages.
3 **Event log**	Use the event log to see the history of errors with this printer. Does the event log print? **NOTE:** The event log can also be accessed form the HP EWS page (**Printer management** > **Event Log**).		• MFP: **Menu** > **Tools** > **Reports** > **Event Log** • SFP: **Menu** > **Tools** > **Reports** > **Status Reports** > **Event Log**

Table 3-2 Troubleshooting flowchart (continued)

Step	Question		Action
	Yes ↓	No →	If the event log does not print, check for error messages. If paper jams inside the printer, see the jams section of the printer service manual. If error messages display on the control panel when trying to print an event log, see the control panel message document (CPMD) section of this manual. After successfully printing and evaluating the event log, see step 4.
4 **Information pages**	Open the Reports menu and print the configuration pages to verify that all the accessories are installed. Are all the accessories installed?		
	Yes ↓	No →	If accessories that are installed are not listed on the configuration page, remove the accessory and reinstall it. Make sure that the most recent firmware is installed. See the firmware upgrade section of this manual for more information. After evaluating the configuration pages, see step 5.
5 **Print quality**	Does the print quality meet the customer's requirements?		
	Yes ↓	No →	Compare the images with the sample defects in the Image-quality troubleshooting section of this manual. Solve print-quality and copy-quality issues as needed. After the print quality is acceptable, see step 6.
6 **Interface**	Can the customer print successfully from the host computer?		
	Yes. This is the end of the troubleshooting process.	No →	Verify that all I/O cables are connected correctly and that a valid IP address is listed on the HP Jetdirect configuration page. If error messages display on the control panel or appear in the event log, see the control-panel message document (CPMD) section of this manual. When the customer can print from the host computer, this is the end of the troubleshooting process.

Firmware upgrades

Learn about printer firmware upgrades.

HP offers periodic printer updates. Use one of the following methods to upgrade the printer firmware.

- HP Embedded Web Server
- USB flash drive (control-panel menu)

For a firmware upgrade using the USB method, download the most recent firmware upgrade for the printer, go to:

- In the US, go to www.hp.com/support/colorlj4201-4203 or www.hp.com/support/colorlj4201-4203plus or www.hp.com/support/colorlj4301-4303 or www.hp.com/support/colorlj4301-4303plus.
  a. Select **Get drivers, Software, and Firmware**, and then select the appropriate product by name.

  NOTE: More than one printer model might be listed. Make sure to select the correct model so that the upgraded firmware supports all of the printer functions.

  b. Select the driver language and operating system.
  c. Locate the firmware download, and then select **Download**.
- Outside the U.S., go to www.hp.com/support.
  – Select your country/region.
  – Select **Drivers & Downloads**.
  – Enter the product name in the **Find my product** dialogue box, and then select **Go**.

  TIP: Click on the **How do I find my product name/number?** link to see a short video on identifying the printer's name and number.

  – Select the appropriate product by name.

  NOTE: More than one printer model might be listed. Make sure to select the correct model so that the upgraded firmware supports all of the printer functions.

  – Select the driver language and operating system.
  – Locate the firmware download, and then select **Download**.

Determine the installed revision of firmware

Learn about how to determine the version of installed printer firmware.

Print a configuration page to determine the installed revision of firmware.

Print the configuration page


1. Open the following menus:
   - Menu
   - Tools
   - Reports
   - Status Reports

2. Select the Configuration Report item.

NOTE: **MFP**: Touch the Print button on the touchscreen to print the report.

SFP: Navigate to and select the Print item in the menu list, and then press the dial to select it and print the report.

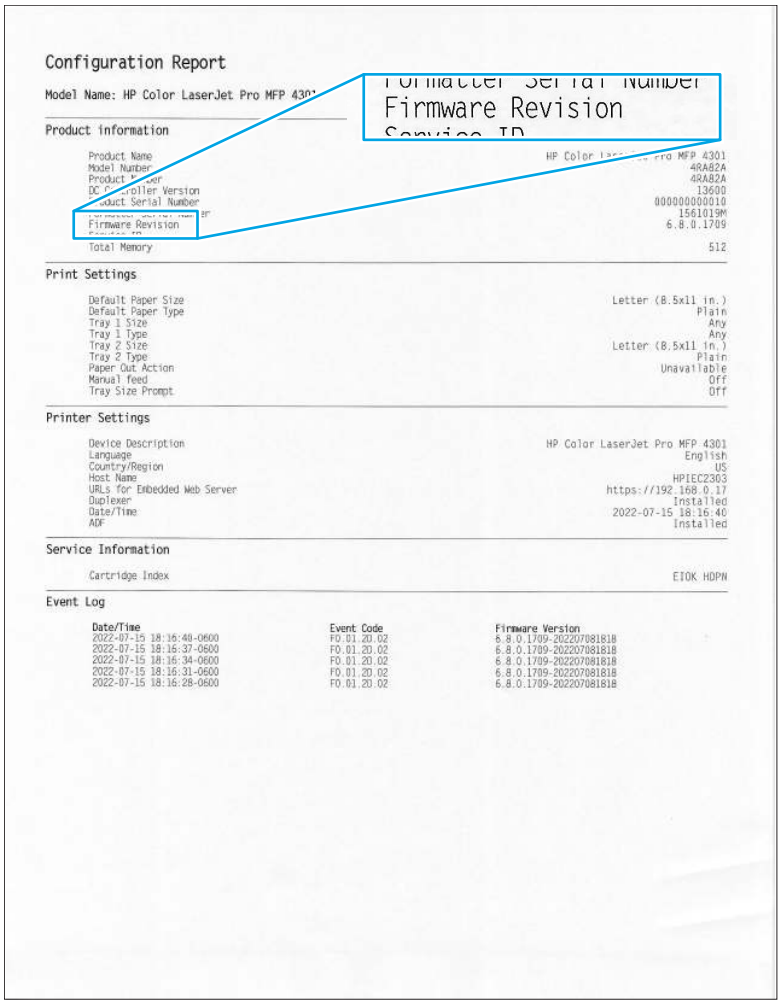Figure 3-1 Configuration page firmware version



HP Embedded Web Server

Learn how to perform a firmware upgrade using the HP Embedded Web Server.

Access to the Embedded Web Server (EWS) requires a personal identification number (PIN). The default PIN for this printer is located on a on a sticker adhered to the front of the toner cartridge tray. Use this PIN to open the EWS when prompted.

NOTE: If the default PIN has been changed, contact the printer administrator.

Figure 3-2 Printer default PIN location



NOTE: The firmware update might take 10 minutes or longer based on the input/output (I/O) transfer rates and the time it takes for the printer to reinitialize.

1. At the printer control panel, use the control-panel menus to print the **Connectivity Status Report** (MFP) or **Connectivity Status Page** (SFP) page. Do the following:

   a. Open the **Menu** > **Tools** > **Reports Status Reports** menus.

   b. **MFP**: Select the **Connectivity Status Report** item.

      SFP: Select the **Connectivity Status Page** item.

      NOTE: **MFP**: Touch the Print button on the touchscreen to print the report.


      SFP: Navigate and select the Print item in the menu list, and then press the dial to select it and print the report.

2. Open a web browser, and in the address line, type the IP address or host name exactly as it appears on the **Connectivity Status Report** or **Connectivity Status Page**. Press the Enter key on the computer keyboard. The EWS opens.

   NOTE: When prompted, enter the default PIN from the sticker adhered to the cartridge tray.

   If the default PIN has been changed, contact the printer administrator.

   If a message displays in the web browser indicating that the website might not be safe, select the option to continue to the website. Accessing this website will not harm the computer.



3. On the EWS Home page, open the **Printer Management** > **Firmware Update** menus.

NOTE: The EWS page automatically checks to see if the installed firmware is the latest version. If it is not, follow the steps on the page to update the firmware.

TIP: For automatic firmware updates, select the **Firmware Update Settings** item and use the toggle button to enable or disable the setting.

4. After a firmware update, print a configuration page and verify that the latest firmware version is installed.

USB flash drive (control-panel menu)

Learn how to perform a USB flash drive firmware upgrade.

1. Copy the .bdl file to a portable USB flash drive.

NOTE: If the firmware file has not already been downloaded, go to Firmware upgrades for more information.

2. Open the following menus:
   - Menu
   - Tools
   - Maintenance
   - Firmware
   - Update Printer from USB
3. When prompted, insert a USB storage device in the walk-up USB port, and then select the Refresh item.
4. Navigate to and then select the correct .bdl file.

TIP: If there is more than one .bdl file on the storage device, make sure to select the correct file for this printer.

5. Select the Upgrade item.

NOTE: The upgrade process can take 10 minutes or longer to complete.

6. When the upgrade is complete, the printer initializes.
7. After a firmware update, print a configuration page and verify that the latest firmware version is installed.

Comprehensive list of troubleshooting tools

Learn about the printer troubleshooting tools.

Engine test


Learn about troubleshooting the printer using the engine test diagnostic.

NOTE: To print using an HP Plus printer, the printer must have genuine original HP toner cartridges installed, must have an ongoing internet connection and an active HP Plus account (for more information, go to hp.com/plus).

When the engine test is performed, a test page with lines prints if the engine is functioning correctly.

- Depress and hold the cartridge door release button, and then open and close the cartridge door four times within a one and one-half (1.5) second time period to print a simplex engine test page.
- Depress and hold the cartridge door release button, and then open and close the cartridge door five times (or more) within a one and one-half (1.5) second time period to print a duplex engine test page.

Figure 3-3 Sample engine test page



Control panel diagnostics

Learn about troubleshooting control panel problems.

The printer includes diagnostic tests for the control panel.

NOTE: Access to the Service menu (and the EWS) requires a personal identification number (PIN). The default PIN for this printer is located on a on a sticker adhered to the front of the toner cartridge tray. Use this PIN to open the EWS when prompted.

Figure 3-4 Printer default PIN location



Control panel display diagnostics (MFP/SFP)

1. Open the following menus:
   - Menu
   - Tools
   - Service
2. Enter the default service personal identification number (PIN).

NOTE: If the default PIN has been changed, contact the printer administrator.

3. From the Service menu, open the following menus:

NOTE: The SFP also includes a rotary dial test. See Control panel dial diagnostic (SFP only).

   - Service Tests
   - Display Tests
4. Do one of the following:
   - **MFP**: Touch the **Proceed** button to step through control panel test screens.
   - **SFP**: Press the dial to select the **Proceed** item. When complete, the message **Test passed** appears on the display.

Control panel dial diagnostic (SFP only)

1. Open the following menus:
   - Menu
   - Tools
   - Service
2. Enter the default service personal identification number (PIN).

NOTE: If the default PIN has been changed, contact the printer administrator.

3. From the Service menu, open the following menus:
   - Service Tests
   - Dial Test
4. Follow the prompts on the display to test the control-panel dial.

Defeating interlocks

Learn about defeating printer interlocks.

NOTE: A SFP printer is shown in this section. However, the procedure is correct for all printer models.

Different tests can be used to isolate different types of issues. For assembly or noise isolation, run the diagnostic test when the toner cartridge door or rear door is open.

Defeating the door interlocks allows observation of the paper pick operation.

Defeat the cartridge door interlock

1. Open the cartridge door.
2. Insert a folded piece of paper into the slot.

TIP: Fold a stiff piece of paper, for example a business card or index card, into a strip, and insert the strip into the slot for the front door logic switch.

Figure 3-5 Defeat the cartridge door interlock




Defeat the rear door interlock

1. Open the rear door.
2. Insert a folded piece of paper into the slot.

TIP: Fold a stiff piece of paper, for example a business card or index card, into a strip, and insert the strip into the slot for the front door logic switch.

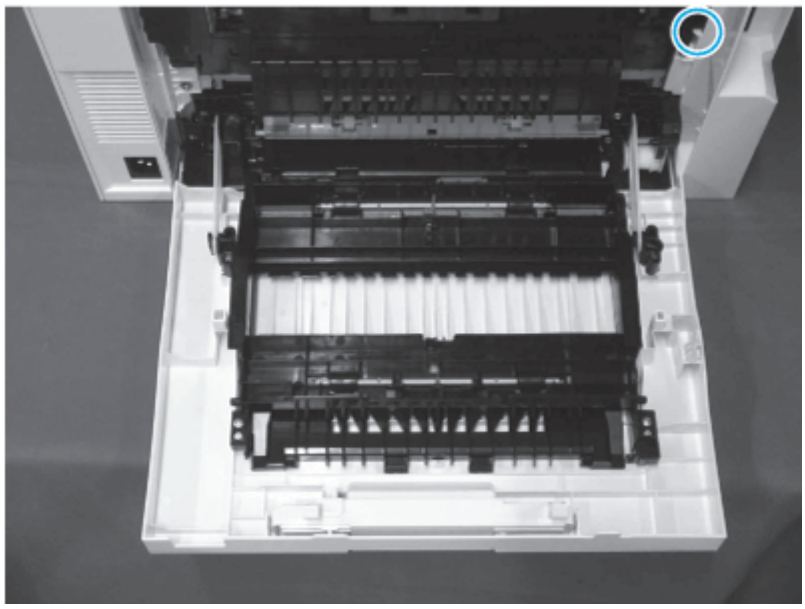Figure 3-6 Defeat the rear door interlock



LED Diagnostics (formatter)

Learn about troubleshooting the printer using formatter LEDs.

Network LEDs (network models only)

The formatter has two network port LEDs. When the printer is connected to a properly working network through a network cable, the amber LED indicates network activity, and the green LED indicates the link status.

A blinking amber LED indicates network traffic. If the green LED is off, a link has failed. For link failures, check all of the network cable connections. In addition, try to manually configure the network card link speed setting by using the printer control panel.

Change the Link Speed setting

1. Open the following menus:
   - Menu
   - Settings
   - Network (MFP)

     Network Settings (SFP)
   - Ethernet (MFP)

     Ethernet Settings (SFP)
   - Link Speed
2. Select from a list of link speed options.

Scanner tests (MFP)

Learn about scanner tests.

The printer includes diagnostic scanner tests for the MFP printer.

NOTE: Access to the Service menu (and the EWS) requires a personal identification number (PIN). The default PIN for this printer is located on a on a sticker adhered to the front of the toner cartridge tray. Use this PIN to open the EWS when prompted.

Figure 3-7 **Printer default PIN location**



Access the scanner tests

1. Open the following menus:
   - Menu
   - Tools
   - Service
2. Enter the default service personal identification number (PIN).

NOTE: If the default PIN has been changed, contact the printer administrator.

3. From the Service menu, open the following menus:
   - Service Tests
4. Choose from the following tests:
   - Scan Motor Test

     NOTE: Touch the **Start** button to begin the test.
   - Continuous Flatbed Scan

     NOTE: Touch the **Dismiss** button to exit the test. Touch the **Proceed** button to start the test.

- Continuous Copy

NOTE: Touch the **Dismiss** button to exit the test. Touch the **Proceed** button to start the test.

Individual component tests

Learn about printer individual component tests.

Test individual components (SFP)

1. Open the following menus:
   - Menu
   - Tools
   - Service
2. Enter the default service personal identification number (PIN)

   The default PIN for this printer is located on a on a sticker adhered to the front of the toner cartridge tray.

NOTE: If the default PIN has been changed, contact the printer administrator.

3. Open the Service Tests menu, and then select from the following component tests:
   - Dial Test

     Use the Dial Test item to test the control-panel rotary dial. Select Start to begin, and then follow the prompts on the display.
   - Display Test

     Use the Display Test item to test the control-panel display. Select Proceed to begin an internal test. If the message **Test Passed** displays, select **Cancel** to exit.
   - Walk-up USB Port Test

     Use the Walk-up USB Port Test item to test the front USB port. Insert a USB storage device in the front USB port, and then select Proceed to begin. If the message **USB Device Connected** displays, the test was successful.

Test individual components (MFP)

1. Open the following menus:
   - Menu
   - Tools
   - Service
2. Enter the default service personal identification number (PIN)

   The default PIN for this printer is located on a on a sticker adhered to the front of the toner cartridge tray.

NOTE: If the default PIN has been changed, contact the printer administrator.

3. Open the Service Tests menu, and then select from the following component tests:

   - Scan Motor Test

     Use the Scan Motor Test item to rotate the scan motor through a cycle. Select the Start button to begin.

   - Continuous Flatbed Scan

     Use the Continuous Flatbed Scan item to continuously scan a page from the flatbed.

     Place a page on the flatbed, and then select the Proceed button. The printer continuously scans and prints the page until the Dismiss button is selected.

   - Continuous Copy

     Use the Continuous Copy item to continuously copy a page from the flatbed.

     Place a page on the flatbed, and then select the Proceed button. The printer continuously copies and prints the page until the Dismiss button is selected.

   - Display Test

     Use the Display Test item to test the control-panel display. Select Proceed to begin (the display screen changes each time the Proceed button is selected).

   - Walk-up USB Port Test

     Use the Walk-up USB Port Test item to test the front USB port. Insert a USB storage device in the front USB port, and then select Proceed to begin. If the message **USB Device Connected** displays, the test was successful.

Diagrams: Block diagrams

View block diagrams for the printer.

Sensors and switches

View printer and paper feeder sensors and switches diagrams.

Sensors and switches (base printer)


Figure 3-8 Sensors and switches (base printer)



Item	Description	Item	Description
SR10	Tray 3 feed sensor **NOTE:** 550-sheet paper feeder only.	PS702	Tray 2 media surface sensor
SR56	Fuser loop sensor	PS751	Tray 2 media width sensor 1
SR57	Fuser output sensor	PS752	Tray 2 media width sensor 2
SR58	Duplex switchback sensor	PS761	Tray 2 media width sensor 3
SR61	Registration sensor	PS761	Tray 1 registration sensor
SR62	Tray 2 media surface sensor	PS762	Tray 2 media width sensor 4
SR69	Output bin media-full sensor	PS762	Tray 1 feed sensor
SR70	Duplex feed sensor	SW39	Tray 2 detection switch
PS701	Tray 2 lifting plate position sensor	SW41	Fuser pressure release detection switch

Sensors and switches (550-sheet paper feeder)

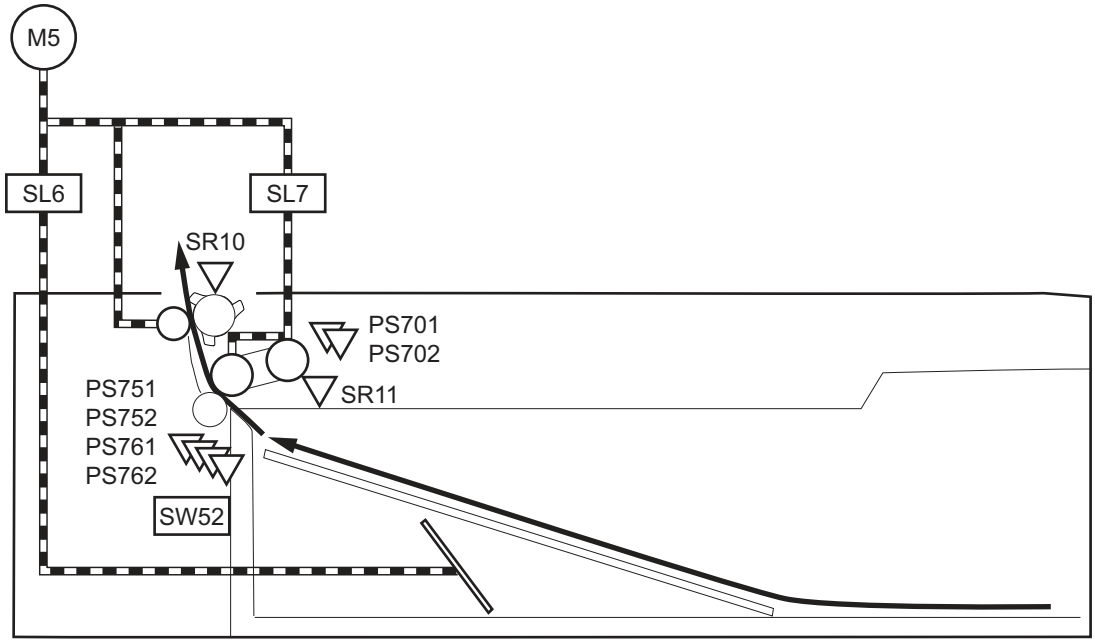Figure 3-9 Sensors and switches (550-sheet paper feeder)




Item	Description	Item	Description
SR10	Tray 3 feed sensor	PS752	Tray 3 media width sensor 2
SR11	Tray 3 media surface sensor	PS761	Tray 3 media width sensor 3
PS701	Tray 3 lifting plate position sensor	PS762	Tray 3 media width sensor 4
PS702	Tray 3 media out sensor	SW5	
PS751	Tray 3 media width sensor 1		Tray 3 detection switch

Cross section diagrams

View printer and paper feeder cross section diagrams.

Cross-sectional view of the printer

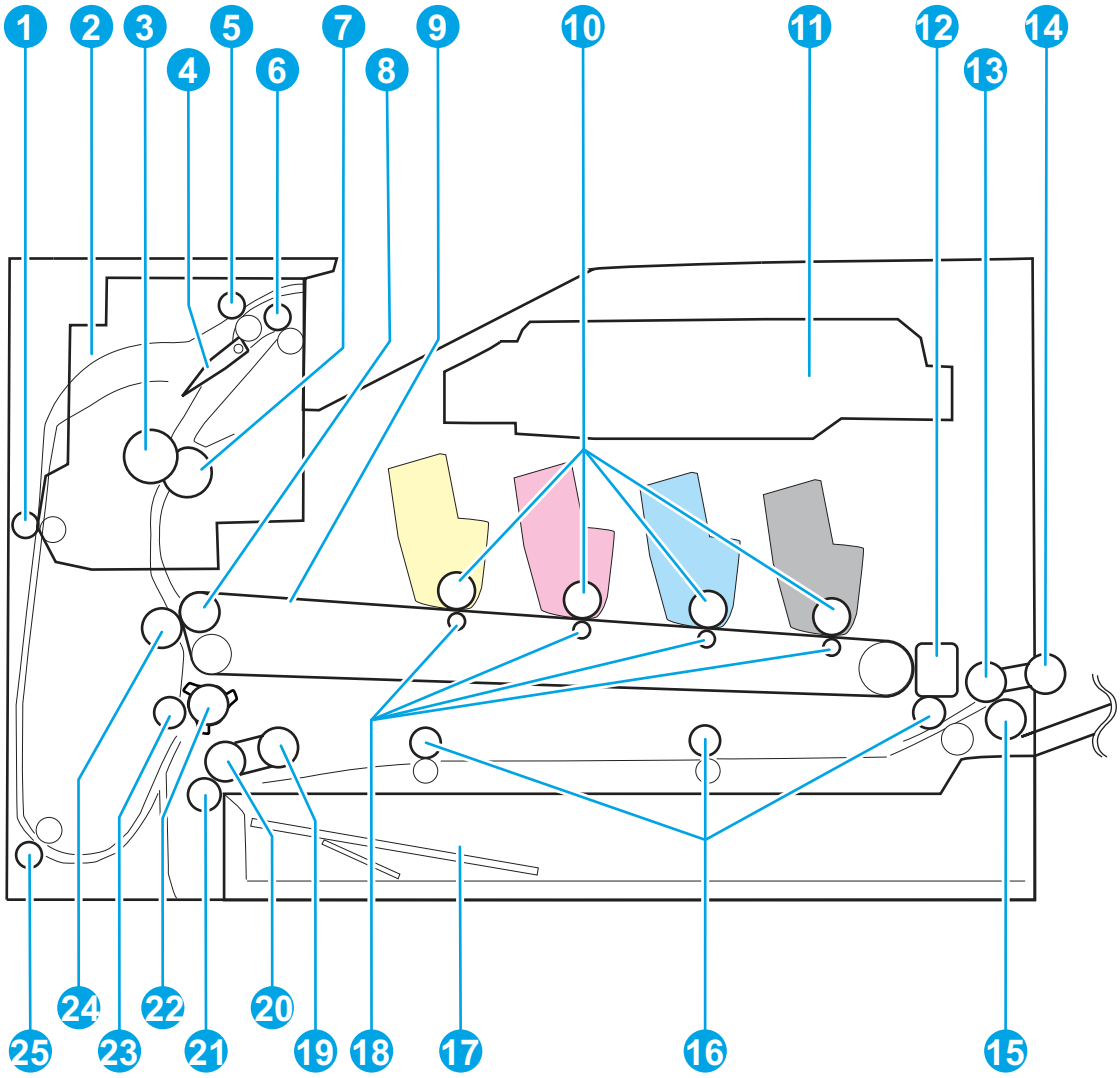
Figure 3-10 Cross-sectional view of the printer (SFP)



Item	Description	Item	Description
1	Duplex feed roller	14	Tray 1 pickup roller
2	Fuser	15	Tray 1 separation roller
3	Pressure roller	16	MP feed roller
4	Duplex flapper	17	Tray 2
5	Duplex switchback roller	18	T1 roller
6	Output roller	19	Tray 2 pickup roller
7	Fuser film assembly	20	Tray 2 feed roller
8	ITB drive roller	21	Tray 2 separation roller
9	ITB	22	Registration shutter
10	Photosensitive drum	23	Registration roller

Item	Description	Item	Description
11	Laser scanner assembly	24	T2 roller
12	Registration density sensor	25	Duplex re-pickup roller
13	Tray 1 feed roller		

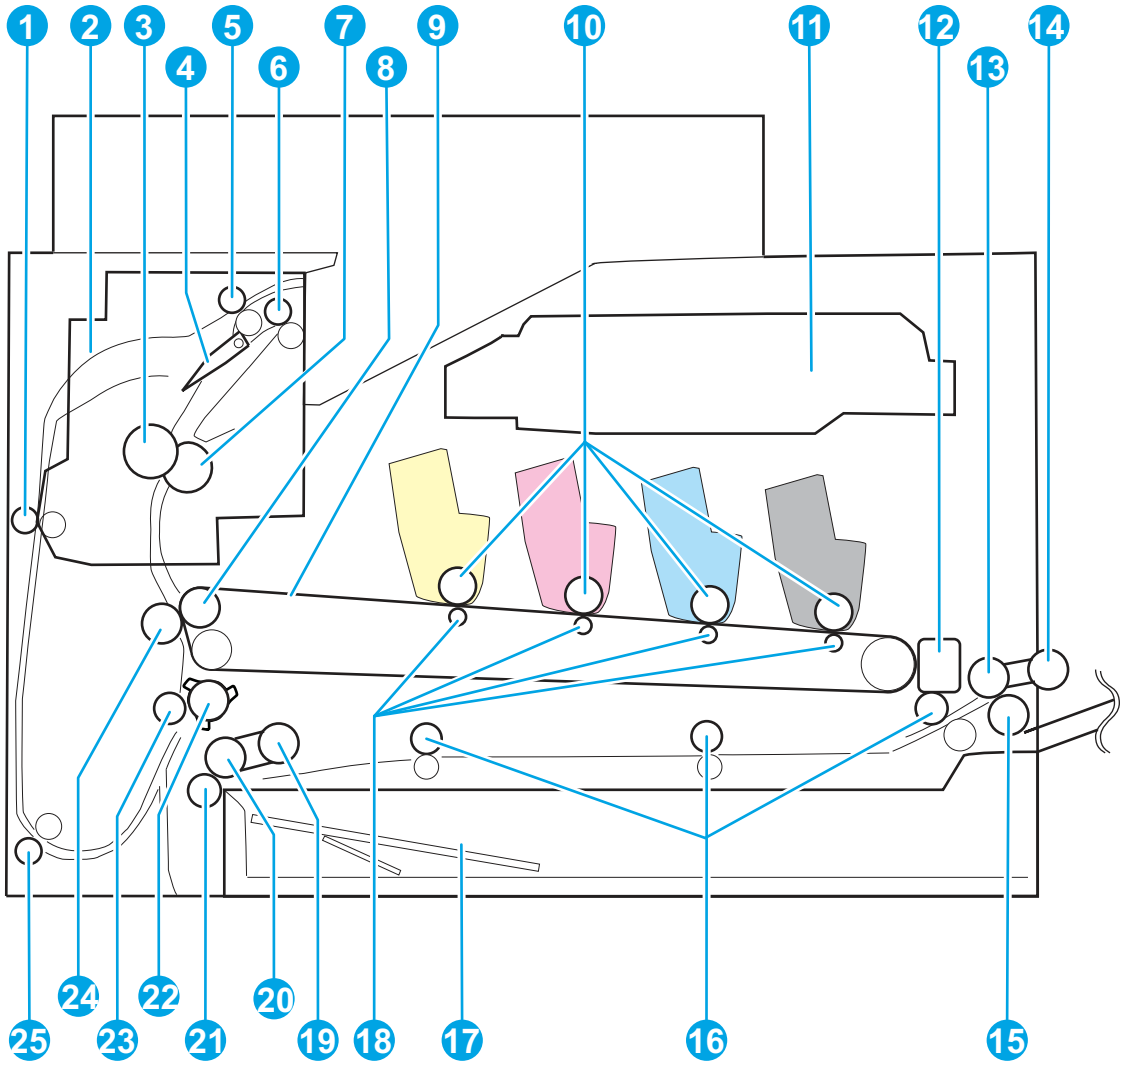Figure 3-11 Cross-sectional view of the printer (MFP)




Item	Description	Item	Description
1	Duplex feed roller	14	Tray 1 pickup roller
2	Fuser	15	Tray 1 separation roller
3	Pressure roller	16	MP feed roller
4	Duplex flapper	17	Tray 2
5	Duplex switchback roller	18	T1 roller
6	Output roller	19	Tray 2 pickup roller
7	Fuser film assembly	20	Tray 2 feed roller

Item	Description	Item	Description
8	ITB drive roller	21	Tray 2 separation roller
9	ITB	22	Registration shutter
10	Photosensitive drum	23	Registration roller
11	Laser scanner assembly	24	T2 roller
12	Registration density sensor	25	Duplex re-pickup roller
13	Tray 1 feed roller		

Cross-sectional view of the 550-sheet paper feeder

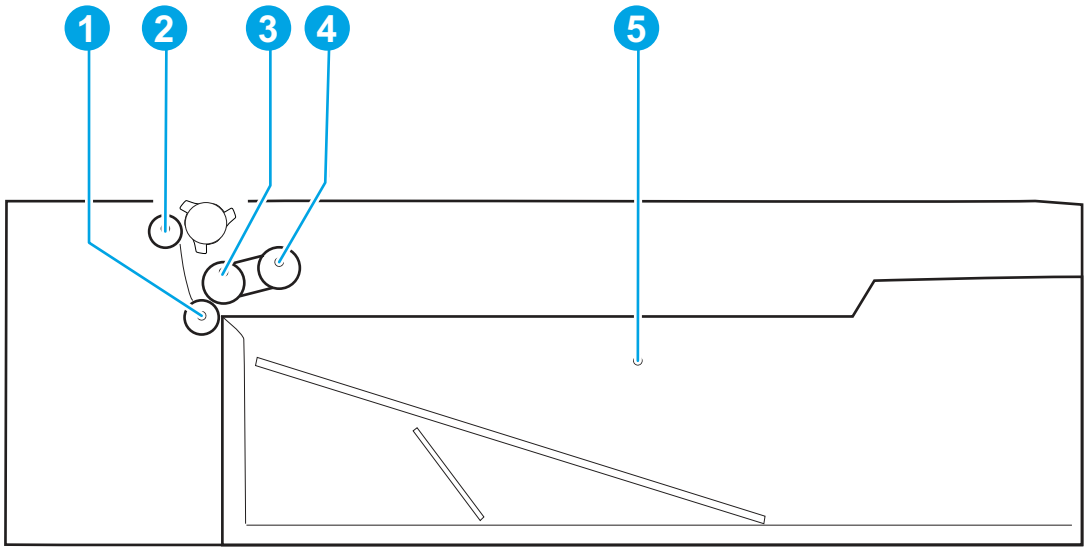Figure 3-12 Cross-sectional view of the 550-sheet paper feeder



Item	Description
1	Tray 3 separation roller
2	PF feed roller
3	Tray 3 feed roller
4	Tray 3 pickup roller
5	Tray 3

Printed circuit assembly (PCA) connector locations


View printed circuit assembly (PCA) diagrams.

Engine controller PCA connections

⚠ CAUTION: There is an environmental sensor (callout 1) mounted on the engine controller PCA. **Do not** apply pressure to this sensor to avoid damaging it.

NOTE: Humidity sensor (SR1671) and temperature sensors (TH1671, TH1672) are mounted directly on the ECU assembly.

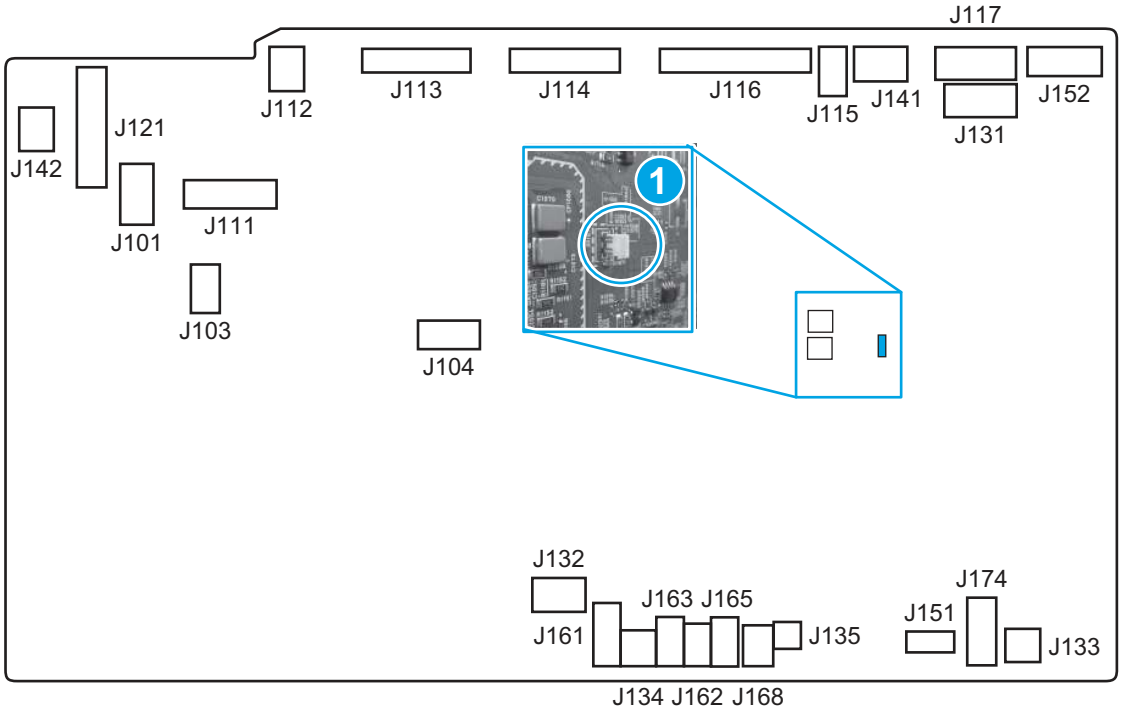
Figure 3-13 Engine controller PCA connections



Item	Description	Item	Description
J101	Not used	J133	Tray 1 pickup solenoid (SL4)
J103	Not used	J134	Tray 2 pickup solenoid (SL3)
J104	Not used	J135	Duplex re-pickup clutch (CL1)
J111	Formatter	J141	Cartridge door switch (SW40)
J112	Formatter	J142	Rear door switch (SW 42)
J113	Laser PCA	J151	Registration density sensor
J114	Laser PCA	J152	E-labels (4)
J115	Scanner motor (M4)	J161	Sensor PCA (SR61/62)
J116	Fuser motor (M2) PCA	J162	Tray 2 detection switch (SW39)
J117	Fuser motor (M2) PCA	J163	Media width sensor PCA2 (SR752)
J121	Fuser PCA (SR56/57/58/69, SL2, SW41, TH8/9/10)	J165	Media width sensor PCA1 (SR751)
J131	Drum motor (M1)	J168	Duplex feed sensor (SR70)
J132	Feed motor (M3)	J174	Paper feeder


Formatter PCA connections

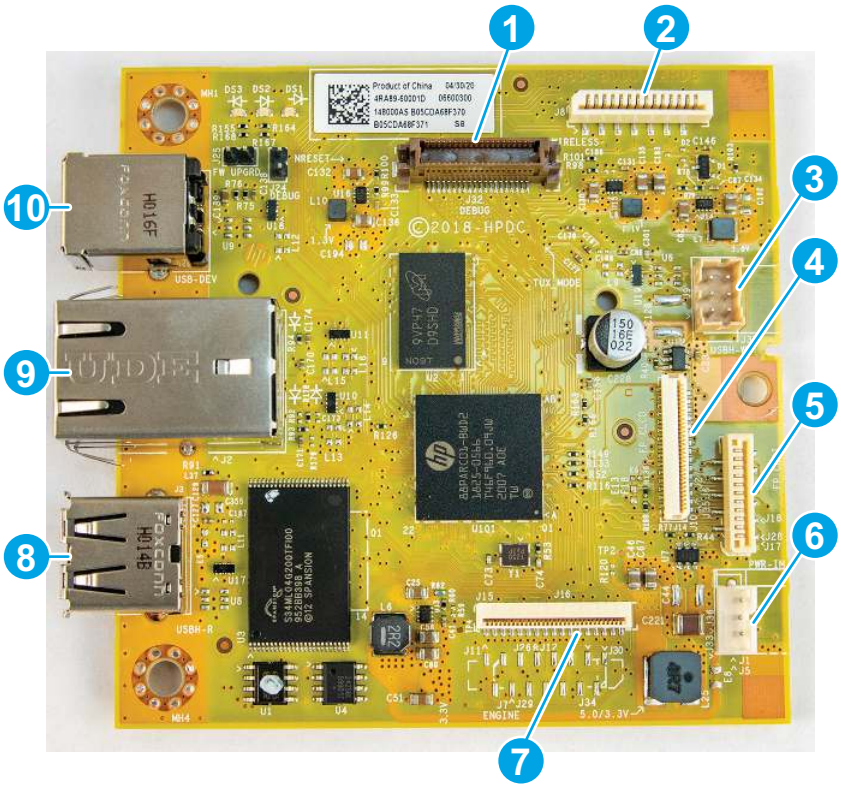Figure 3-14 Formatter PCA connections (SFP)



Item	Description	Item	Description
1	Factory use only (debug) NOTE: This connector is not present on production formatters.	6	Power
2	Wireless PCA	7	Engine controller PCA
3	Front USB	8	USB (job storage and private printing)
4	Empty	9	Ethernet
5	Control panel	10	USB (direct connect via USB cable)

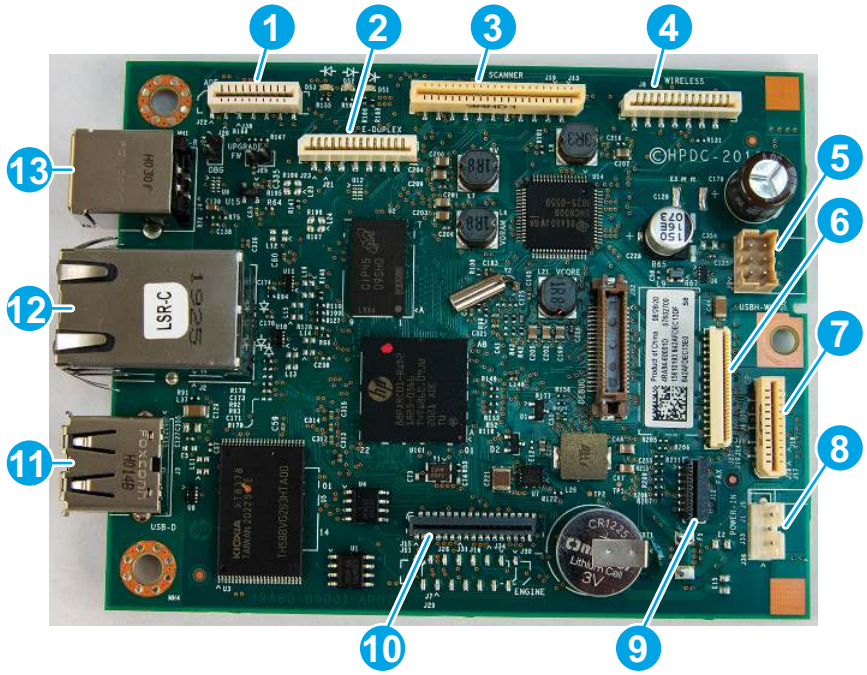
Figure 3-15 Formatter PCA connections (MFP)



Item	Description	Item	Description
1	Document feeder	8	Power
2	E-Duplex	9	Fax PCA
3	Scanner	10	Factory use only (debug) NOTE: This connector is not present on production formatters.
4	Wireless PCA	11	Engine controller PCA
5	Front USB	12	USB (job storage and private printing)
6	Control panel	13	Ethernet
7	Empty	14	USB (direct connect via USB cable)

550-sheet paper feeder PCA connectors

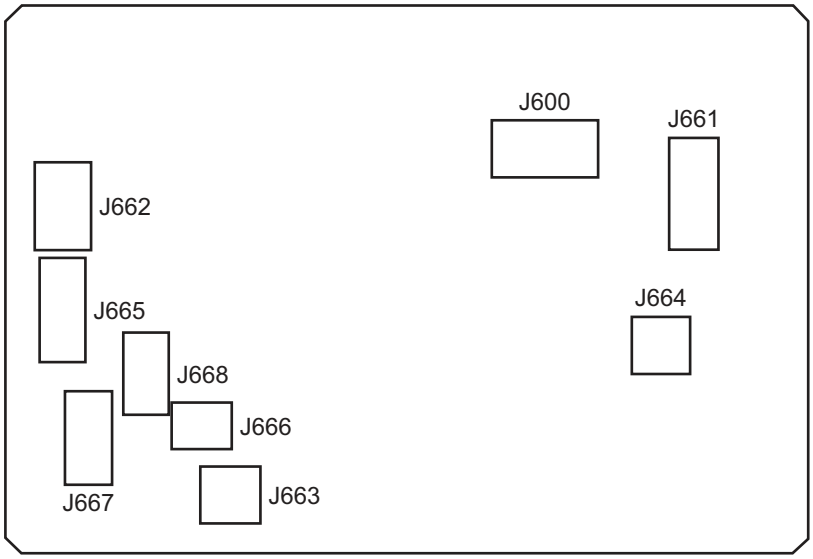Figure 3-16 550-sheet paper feeder PCA connectors




Item	Description	Item	Description
J600	Not used	J665	Tray 3 sensor PCA
J661	Printer	J666	Tray 3 detection switch (SW52)
J662	Tray 3 feed motor (M5)	J667	Tray 3 media width sensor PCA1 (PS751, PS752)
J663	Tray 3 lifter solenoid (SL6)	J668	Tray 3 media width sensor PCA2 (PS761, PS762)
J664	Tray 3 pickup solenoid (SL7)		

Diagrams: External plug and port locations

View printer external plugs and ports diagrams.

External plug and port locations (SFP)

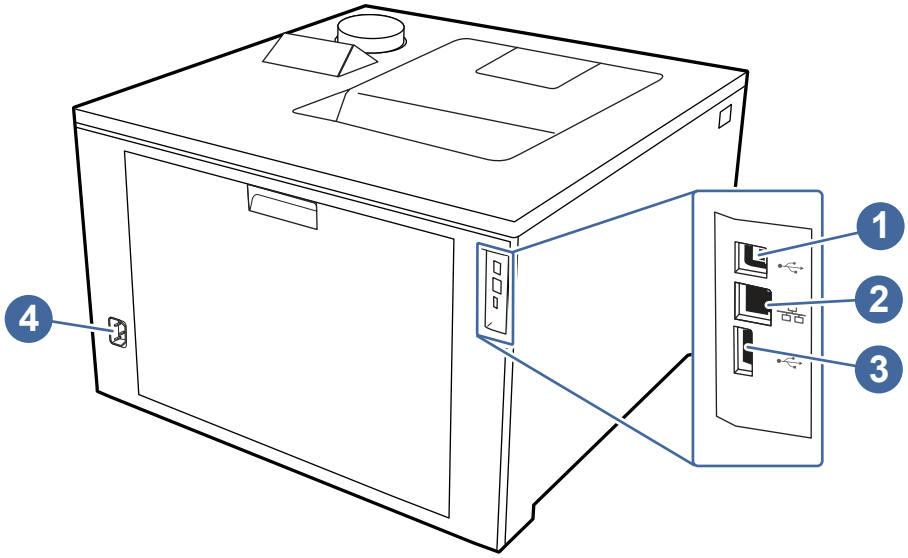
Figure 3-17 External plug and port locations (SFP)



Item	Description
1	USB interface port used for connecting the printer via USB
2	Ethernet port
3	USB port (for job storage and private printing)
4	Power connection

External plug and port locations (MFP)

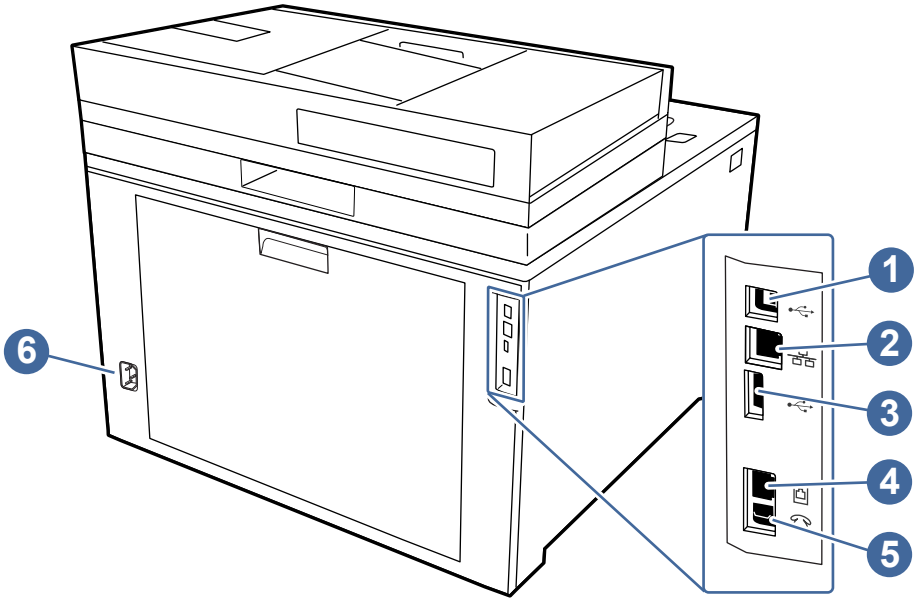Figure 3-18 External plug and port locations (MFP)




Item	Description
1	USB interface port used for connecting the printer via USB
2	Ethernet port
3	USB port (for job storage and private printing)
4	Fax "line in" port (for attaching the fax phone line to the printer) NOTE: Fax models only.
5	Telephone "line out" port (for attaching an extension phone, answering machine, or other device) NOTE: Fax models only.
6	Power connection

Diagrams: Locations of major assemblies

View printer major component locations diagrams.


Main assemblies (base printer)

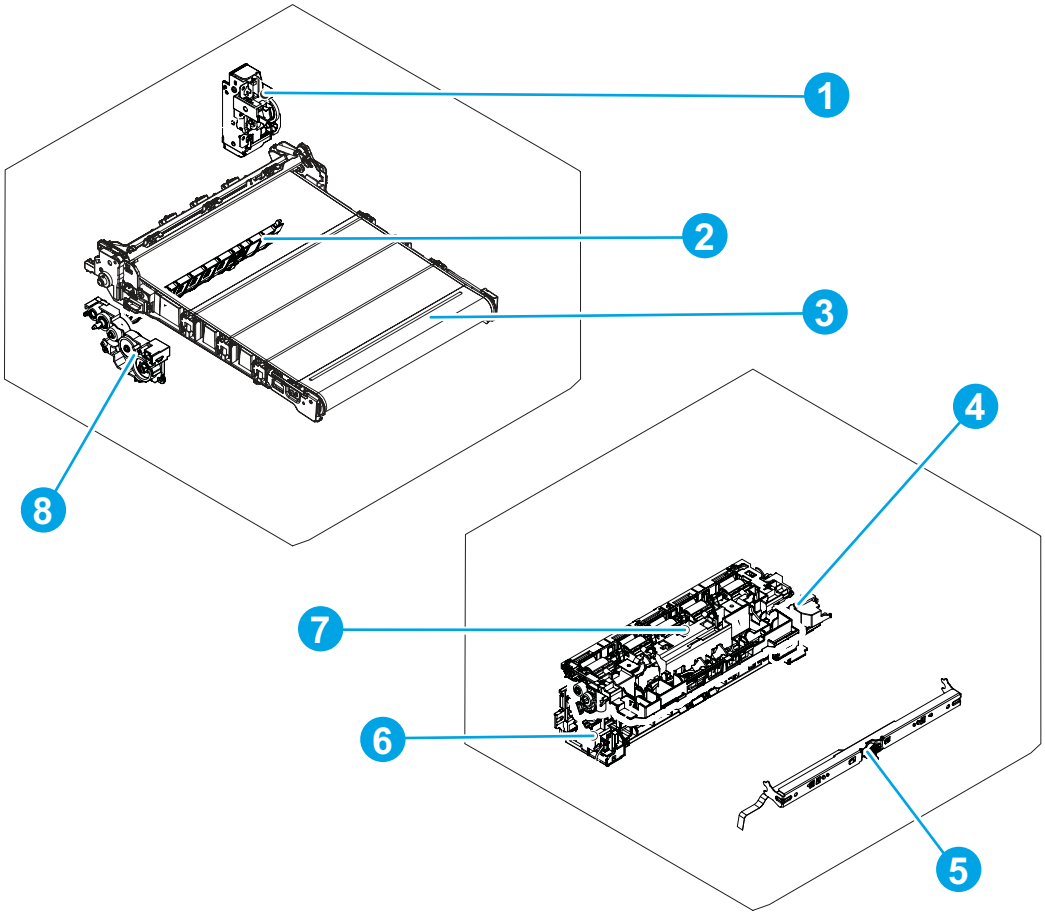Figure 3-19 Main assemblies (base printer; 1 of 2)



Item	Description	Item	Description
1	Duplex drive assembly	5	Registration density sensor assembly
2	Duplex upper guide assembly	6	Feed lower guide assembly
3	ITB assembly	7	Feed upper guide assembly
4	Lifter drive assembly	8	Pickup drive assembly

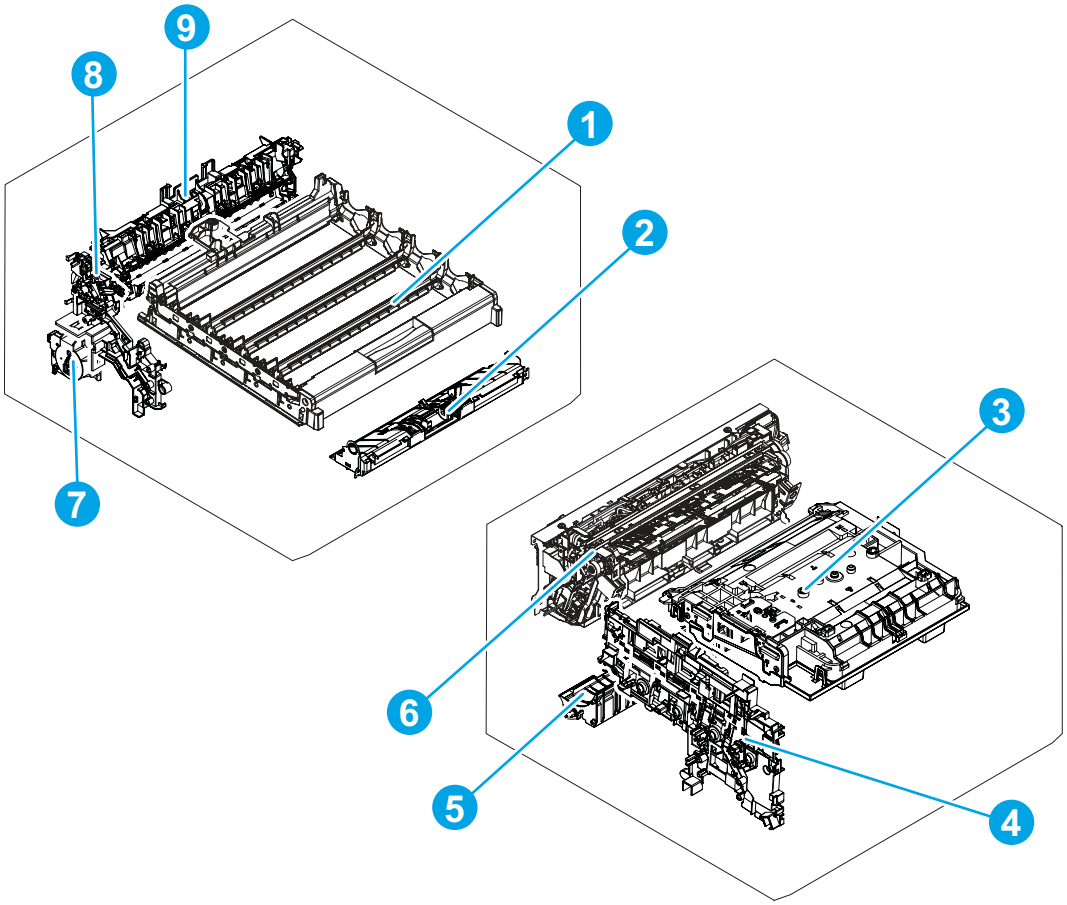
Figure 3-20 Main assemblies (base printer; 2 of 2)



Item	Description	Item	Description
1	Cartridge tray assembly	6	Fuser
2	MP lower guide assembly	7	Duplex re-pickup clutch assembly
3	Laser scanner assembly	8	Interlock holder assembly
4	PCA holder assembly	9	T2 assembly
5	Duplex guide assembly		

Rollers and pads (base printer)

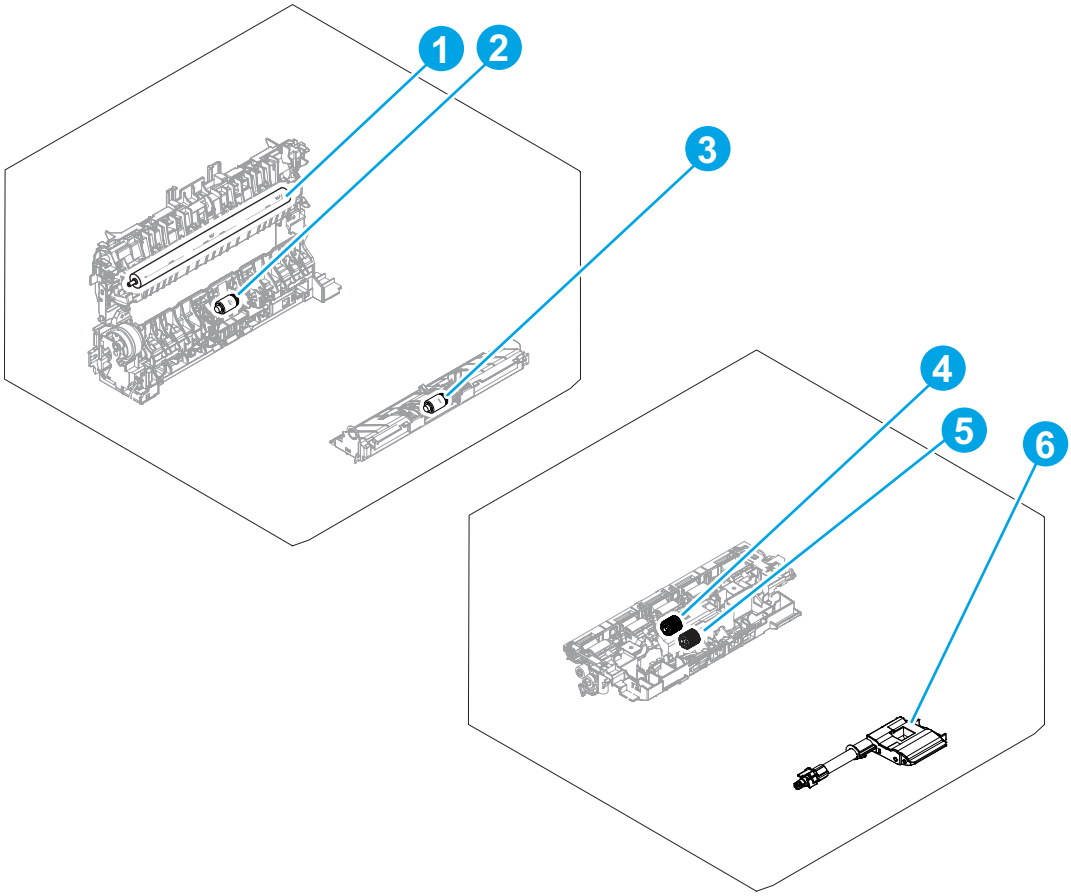
Figure 3-21 Rollers and pads (base printer)



Item	Description	Item	Description
1	T2 roller	4	Tray 2 feed roller
2	Tray 2 separation roller	5	Tray 2 pickup roller
3	Tray 1 separation roller	6	Tray 1 pickup roller assembly


Motors and fans (base printer)

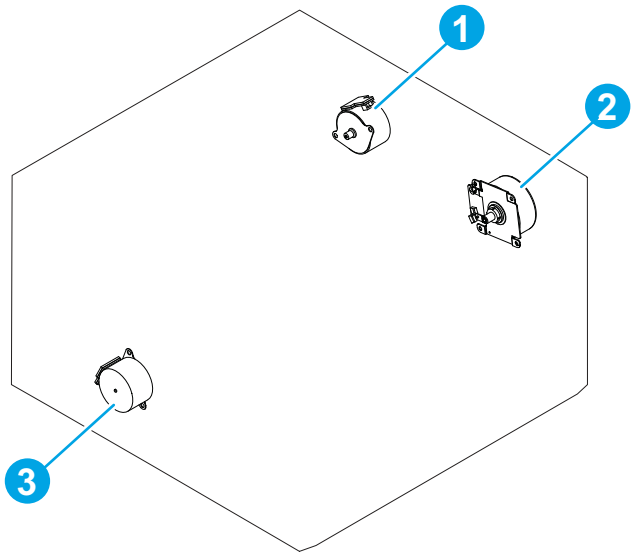Figure 3-22 Motors (base printer)



Item	Description
1	Fuser motor (M2)
2	Drum motor (M1)
3	Feed motor (M3)

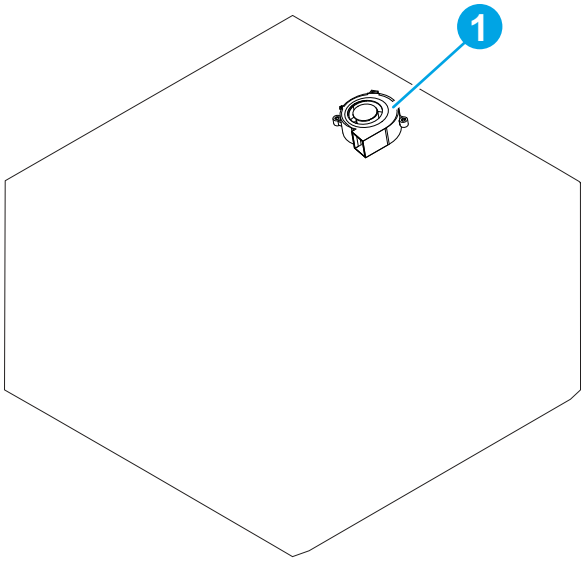
Figure 3-23 Fans (base printer)



Item	Description
1	Cartridge fan (FM1)

Printed circuit assemblies (PCAs; base printer)

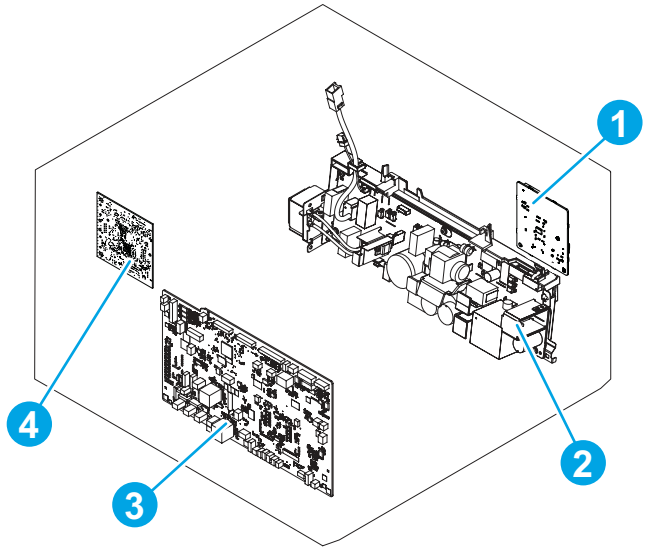
Figure 3-24 PCAs (base printer)



Item	Description
1	Fuser motor PCA
2	Low-voltage power supply (LVPS)
3	Engine controller PCA
4	Formatter PCA


Major assemblies (550-sheet paper feeder)

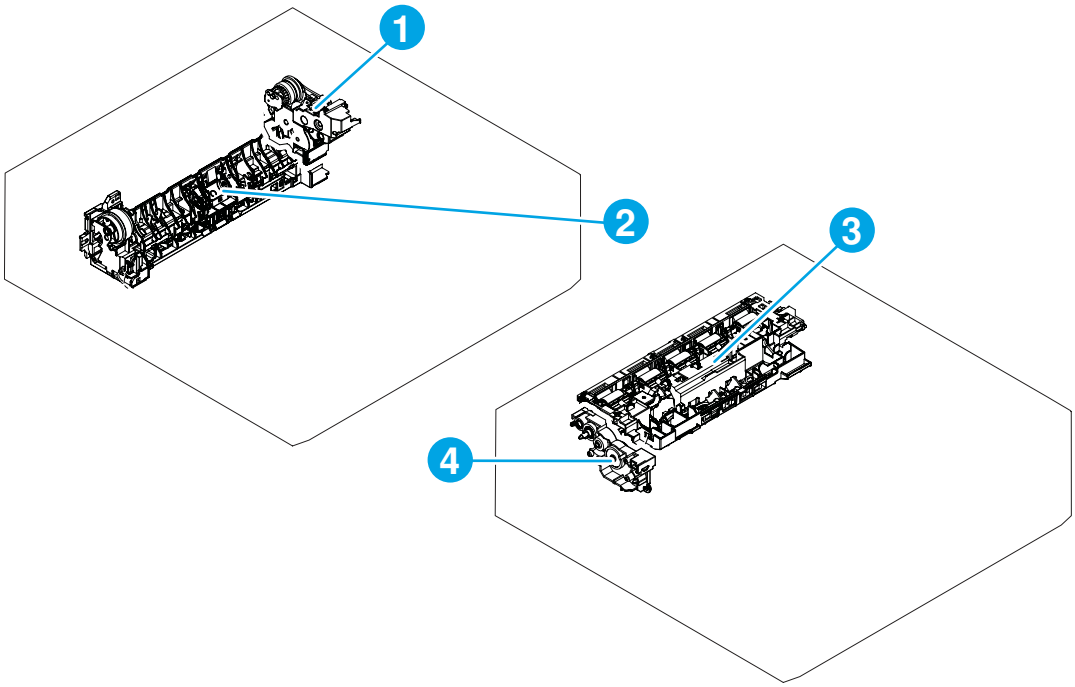Figure 3-25 Major assemblies (550-sheet paper feeder; 1 of 2)



Item	Description
1	Lifter drive assembly
2	Feed lower guide assembly
3	Feed upper guide assembly
4	Pickup drive assembly

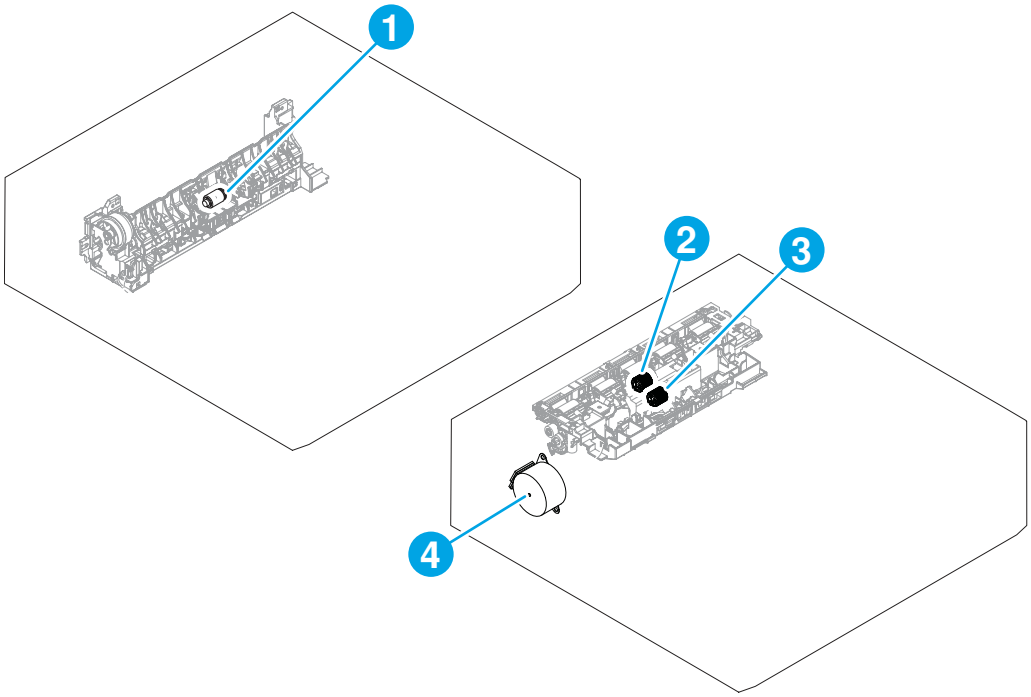
Figure 3-26 Major assemblies (550-sheet paper feeder; 2 of2)



Item	Description
1	Separation roller
2	Feed roller
3	Pickup roller
4	Tray 3 feed motor

Printed circuit assemblies (PCAs; 550-sheet paper feeder)

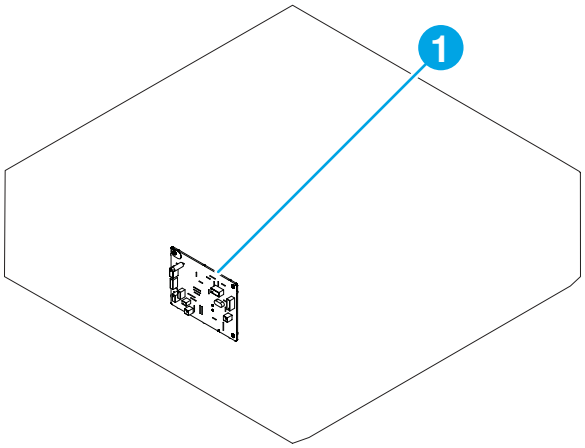Figure 3-27 PCAs (550-sheet paper feeder)



Item	Description
1	PF controller PCA

Internal test and information pages

Learn about printer test and information pages.

Configuration Report


Print and find printer information on the Configuration Report.

NOTE: This page might differ between MFP and SFP printers.

Print a Configuration Report

1. Open the following menus:
   - Menu
   - Tools
   - Status Reports
2. Select the Configuration Report item.
3. Do one of the following:
   - **MFP**: Touch the **Print** button to print the page.
   - **SFP**: Navigate to and select the **Print** item at the top of the menu to print the page.

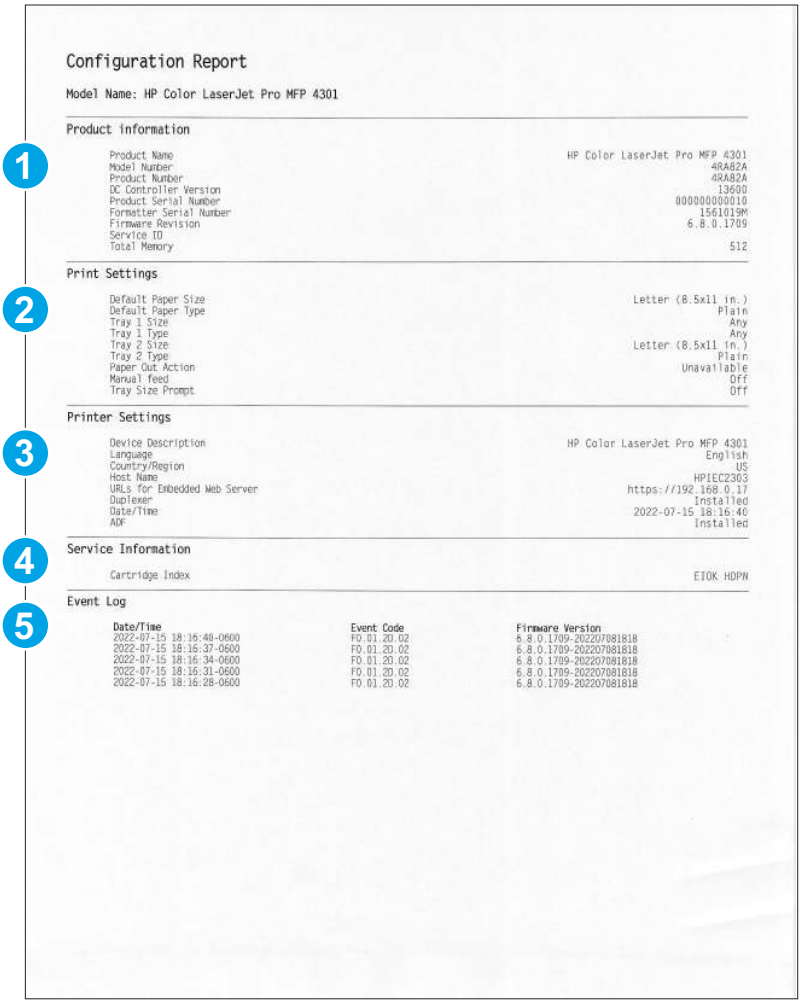Figure 3-28 Sample MFP Configuration Report



Item	Description
1	Printer information
2	Print Settings
3	Printer Settings
4	Service Information
5	Event Log

Certain information, such as the firmware revision, the EWS IP address, and the most recent event log entries, are especially helpful while servicing the printer.

Table 3-3 Important information on the Configuration Report

Type of information	Specific information	Configuration Report location
Firmware Serial Number	Firmware information	Product information
Firmware Revision	Firmware information	Product information
Total Memory	Total RAM information	Product information
URLs for Embedded Web Server	IP address to access the EWS	Printer Settings

Table 3-3 Important information on the Configuration Report (continued)

Type of information	Specific information	Configuration Report location
Event-log information	Error information	Event Log

Connectivity Status Report


Print and find printer information on the Connectivity Status Report.

NOTE: This page might differ between MFP and SFP printers.

Print a Connectivity Status Report

1. Open the following menus:
   - Menu
   - Tools
   - Status Reports
2. Select the Connectivity Status Report item.
3. Do one of the following:
   - **MFP**: Touch the **Print** button to print the page.
   - **SFP**: Navigate to and select the **Print** item at the top of the menu to print the page.

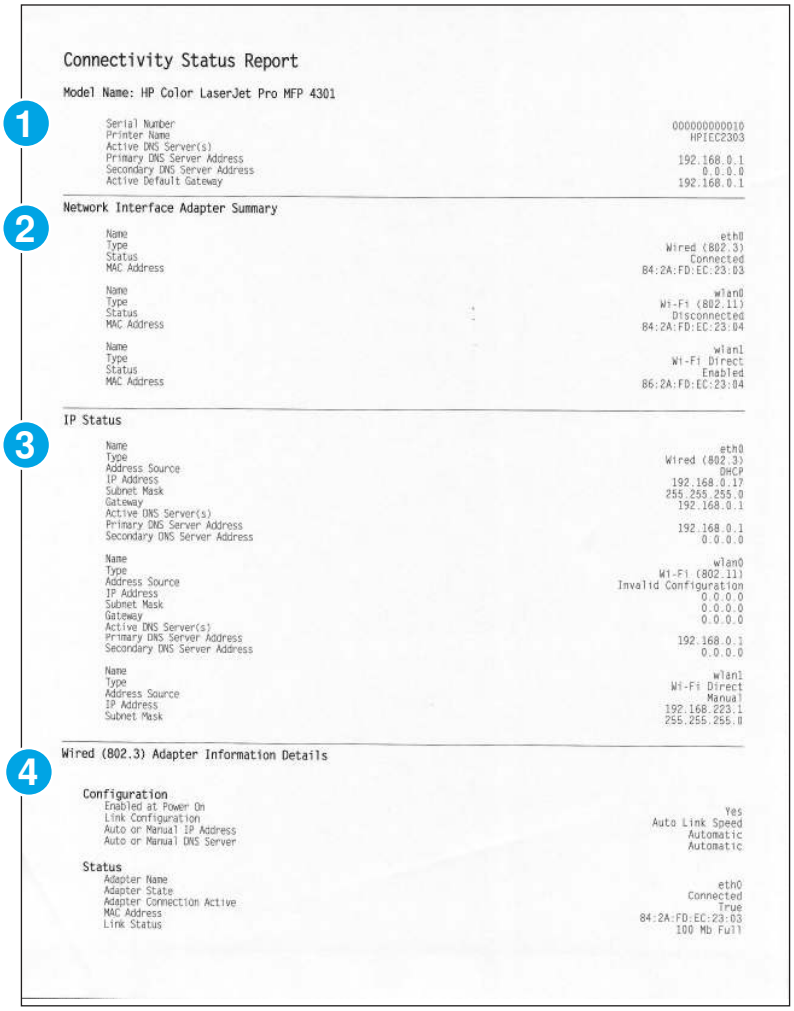Figure 3-29 Sample MFP Connectivity Status Report



Item	Description
1	Model Name (and information)
2	Network Interface Adapter Summary
3	IP Status
4	Wired (802.3) Adapter Information Details

Diagnostics Report

Print and find printer information on the Diagnostics Report.

Print a Diagnostics Report

1. Open the following menus:
   - Menu
   - Tools
   - Status Reports

2. Select the Diagnostics Report item.
3. Do one of the following:
   - **MFP**: Touch the **Print** button to print the page.
   - **SFP**: Navigate to and select the **Print** item at the top of the menu to print the page.

Figure 3-30 Sample Diagnostics Report



Item	Description
1	Calibration Information
2	Color Density

Reports menu

Learn about the control-panel Reports menu.

- **Menu** > **Tools** > **Reports** > **Status Reports**
- **MFP**: Touch the **Print** button to print the page.
- **SFP**: Navigate to and select the **Print** item at the top of the menu to print the page.

Table 3-4 Reports menu

Report	Description
Network Security Report	Printer network information. For example, information about 802.1x and certificates.
Usage Report	Printer usage information. For example, information about calculated equivalent impressions (by type) and scan counts by destination (MFP only).
Scan to Network Folder Setup (MFP only)	Printer scan to network location information. For example, information about what's needed before you begin and using the printer home page (EWS) for scanning to a network folder setup.
Wi-Fi Quick Start Guide	Printer wi-fi printing setup information. For example, information about different methods to setup wi-fi printing and how to test the installation.
Diagnostics Report	Printer diagnostic information. For example, information about the calibration and color density..
HP Supplies Status Report	Printer supplies information. For example, information about cartridge status and how to order supplies.
Scan to Email Setup (MFP only)	Printer scan to email information. For example, information about what's needed before you begin and using the printer home page (EWS) for scanning to email setup.
Web Access Test Report	Printer web access information For example, information about errors, gateway and DNS testing, and the current configuration.
Configuration Report	Printer information. For example, information about the installed firmware revision, total installed memory, and the Embedded Web Server (EWS) IP address.
Wi-Fi Direct Report	Printer wi-fi information. For example, information about how to print using wi-fi direct with different operating systems.
Connectivity Status Report	Printer connectivity information. For example, information about the IP status and wired adapter details.
Job Log	Printer job log information. For example, information about the user, job name, and date for printer jobs.
Wi-Fi Metrics Data Report	Printer wi-fi metrics data information. For example, information about connectivity details, signal strength, and the IP address usage history.
Web Services Information page	Printer web-services information. For example, information about the HP Smart feature and printing from a mobile device.
Scan to Computer Setup (MFP only)	Printer scan to computer information. For example, information about setting up the HP software.
Wi-Fi Network Test Results	Printer wi-fi network test information. For example, information about errors/solutions, diagnostic results, and current configuration.
Network Configuration Report	Printer network configuration information. For example, information about IPV4/IPV6 settings, security settings, and automatic firmware updates.
Event Log	Printer error log information. For example, information about the date/time, type, and description of the error.

Menu (SFP)

Learn about the control-panel menu sub-menus.

To access the menus, select Menu on the control-panel Home screen.

Info menu (SFP)

Learn about the control-panel Info menu.

To access the sub-menu: **Menu** > **Info**.

Table 3-5 Info menu

Menu item	First level	Description
Print Details		Select this item to print a Configuration Report.
Wi-Fi Details: [STATUS]	[STATUS]	Select Print Details to print a Network Configuration Report.
	Band Frequency	Select Settings to go to the Wi-Fi settings menu.
	Network Name	• Status
	Host Name	• Wi-Fi Setup Wizard
	Bonjour Name	• Wi-Fi Protected Setup
	IP Address	• Wi-Fi Details
	IPv6 Status	• IPv4: (toggle on/off and set the configuration method - DHCP/Auto IP/Manual)
	MAC Address	• 5 GHz Band Frequency: (toggle on/off)
	Print Details	
	Settings	
Ethernet Details: [STATUS]	[STATUS]	Select Print Details to print a Network Configuration Report.
	Host Name	Select Settings to go to the Ethernet settings menu.
	Bonjour Name	• Ethernet Details
	IP Address	• IPv4:
	IPv6 Status	• IPv6:
	MAC Address	• Link Speed
	Print Details	
	Settings	
Wi-Fi Direct: [STATUS]	[STATUS]	Select Settings to go to the Wi-Fi Direct settings menu.
	Wi-Fi Direct Name	• Status: (toggle on/off)
	Connection Method	• View Details
	Devices Connected	• Connection Method (Automatic/Manual)
	Settings	
Firmware Version:		Displays the installed firmware version identification number.

Status menu (SFP)

Learn about the control-panel Status menu.

To access the sub-menu: **Menu** > **Status**.

Table 3-6 Status menu

Menu item	Description
Status Jobs	Displays the status of print jobs.
Job Log	View the job log list. Select Job Log Print to print the log.
Messages	View any current printer messages. For example. Network Connection Unavailable displays if the printer is not connected to a network.

Print menu (SFP)

Learn about the control-panel Print menu.

To access the sub-menu: **Menu** > **Print**.

Table 3-7 Print menu

Menu item	Description
Print from USB	Print from a list of available files on a USB storage device (connected to the walk-up USB port).
Job Storage	Print from a list of available files on a USB storage device (connected to the rear USB port). NOTE: This feature must be enabled from the printer home page (EWS).

Supplies menu (SFP)

Learn about the control-panel Supplies menu.

To access the sub-menu: **Menu** > **Supplies**.

Table 3-8 **Supplies menu**

Menu item	First level	Description
Estimated Levels	Estimated Levels [Cartridge number] Print Details (Select this item to print an HP Supplies Status Report) Settings	Displays a graphical representation of each toner cartridges toner level. Select a cartridge level bar, and then press down on the dial to select it and display the following: • Low Warnings Thresholds (set a percentage of remaining toner that triggers the warning) • Very Low Behavior (select from Continue, Prompt to Continue, or Stop for the black and color cartridges) • Store Supply Usage Data (toggle on/off) • Cartridge Protection (toggle on/off) **NOTE:** Enabling cartridge protection is permanent. • Authorized HP Cartridges Policy (toggle on/off)
Transfer Kit: [STATUS]		Displays the status of the printer transfer kit.
Get Help		Displays HP Plus Information.
Settings	Low Warnings Thresholds Very Low Behavior Store Supply Usage Data Cartridge Protection **NOTE:** Enabling cartridge protection is permanent. Authorized HP Cartridges Policy	Use the Low Warnings Thresholds item to set a percentage of remaining toner that triggers the warning. Use the Very Low Behavior item to set the cartridge low behavior. Select from Continue, Prompt to Continue, or Stop for the black and color cartridges. Use the Store Supply Usage Data item to enable or disable this option. Use the Cartridge Protection item to enable this option **NOTE:** Enabling cartridge protection is permanent. Use this Authorized HP Cartridges Policy item to enable or disable this option.

Trays menu (SFP)

Learn about the control-panel Trays menu.

To access the sub-menu: **Menu** > **Trays**.

Table 3-9 **Trays menu**

Menu item	First level	Description
Tray 1: [SIZE]	Paper Size Paper Type	Select form a list of available paper size/types.
Tray 2: [SIZE]	Paper Size Paper Type	Select form a list of available paper size/types.

Settings menu (SFP)

Learn about the control-panel Settings menu.

To access the sub-menu: **Menu** > **Settings**.

Table 3-10 Settings menu

Menu item	First level	Second level	Description
General	Date and Time	Set Date	Set the date and time.
		Set Time	**NOTE:** Select Apply to save the settings.
General	Energy	Sleep	Set the printer power management behavior.
		Shutdown	
		Disable Shutdown	
General	[LANGUAGE]		Chose from a list of available languages.
General	Quiet Mode		Toggle the setting on/off.
General	Inactivity Timeout		Set the amount of inactivity time before the printer goes to sleep.
General	[COUNTRY/ REGION]		Chose from a list of available country/regions.
General	Jam Recovery:	Automatic	Set the printer jam recovery behavior.
		On	
		Off	
Network Settings	Wi-Fi	Status: [STATUS]	Use the Status: [STATUS] item to toggle Wi-Fi on/off.
		Wi-Fi Setup Wizard	Use the Wi-Fi Setup Wizard item to quickly connect to available Wi-Fi routers.
		Wi-Fi Protected Setup	Use the Wi-Fi Protected Setup item to setup up a Wi-Fi connection using the WPS function of a router.
		Wi-Fi Details	Use the Wi-Fi Details item to print a Network Configuration Report.
		IPv4: [STATUS]	Use the IPv4: [STATUS] item to toggle the option on/off and set the configuration method (DHCP/Auto IP/Manual).
		5 GHz Band Frequency: [STATUS]	Use the 5 GHz Band Frequency: [STATUS] item to toggle the option on/off.

Table 3-10 Settings menu (continued)

Menu item	First level	Second level	Description
Network Settings	Ethernet Settings	Ethernet Details IPv4: IPv6: Link Speed	Use the Ethernet Details item to display: • [STATUS] • Host Name • Bonjour Name • IP Address CAUTION: Changing the IP address removes the printer from the network. • IPv6 Status • Print Details (print a Network Configuration Report) Use the IPv4: or IPv6: item to toggle the setting on/off and to set the configuration method (DHCP/Auto IP/Manual). CAUTION: Changing the IP address removes the printer from the network. Use the Link Speed item to select the link speed form a list of available speeds.
Network Settings	Wi-Fi Direct	[STATUS] View Details [Connection Method]	Use the [STATUS] item to toggle Wi-Fi Direct on/off. Use the View Details item to display: • [STATUS] • Wi-Fi Direct Name • [Connection Method] • Wi-Fi Direct Password (not readable) • Devices Connected Use the [Connection Method] item to choose between an Automatic or Manual connection.
Network Settings	Bluetooth Low Energy	On Off	Use the Bluetooth Low Energy item to toggle the setting on/off. NOTE: Bluetooth Low Energy is an ultra-low power wireless technology that provides connections between the printer and other devices. This feature is enabled by default.
Network Settings	Host Name		Use the Host Name item to set a unique host name.
Network Settings	Bonjour Name		Use the Bonjour Name item to set a unique bonjour name. NOTE: After changing the Bonjour Name, anyone connected to the printer will need to reconnect
Network Settings	Proxy		Use the Proxy item to toggle proxy settings on/off.
Network Settings	Security	Disable Firewall Reset 802.1x Authentication Reset Security	Use the Disable Firewall item to enable or disable firewall protection. Select Yes or No to activate the Reset 802.1x Authentication item. Use the Reset Security item to restore security defaults.

Table 3-10 **Settings menu (continued)**

Menu item	First level	Second level	Description
Network Settings	Network Reports	Print Network Settings Network Security Connectivity Status Page	Select the appropriate item to print the report.
Network Settings	Restore Network Settings		Use the Restore Network Settings item to restore network setting defaults. **CAUTION:** This item restores all network settings to original values including proxy settings and the administrator password for the Embedded Web Server (EWS).
Printer Update	Printer Updates Allow Upgrades:	Auto Update Notify	Use this item to set firmware update behavior (HP recommends using the Auto Update setting). **NOTE:** This printer uses dynamic security measures to block cartridges using a non-HP chip. Periodic firmware updates maintain the effectiveness of these measures and might block cartridges that previously worked. The printer is intended to work only with new or reused cartridges that have a new or reused HP chip.
Events and Notifications			Displays a list of events or notifications if available.
Tray Settings	Manual Feed Size/Type Prompt Paper Out Action		Use the Manual Feed item to toggle this option on/off Use the Size/Type Prompt to enable a displayed prompt for tray size and type (Display/Do Not Display). Use the Paper Out Action item to set the paper out behavior. Set the Auto Continue Time-Out (set a specific time period) and Auto Continue Action (cancel or override prompt) items.
Supplies	Low Warnings Thresholds (set a percentage of remaining toner that triggers the warning) Very Low Behavior (select from Continue, Prompt to Continue, or Stop for the black and color cartridges) Store Supply Usage Data (toggle on/off) Cartridge Protection (toggle on/off) Authorized HP Cartridges Policy (toggle on/off)		Use the Low Warnings Thresholds item to set a percentage of remaining toner that triggers the warning. Use the Very Low Behavior item to select from Continue, Prompt to Continue, or Stop for the low cartridge behavior. Use the Store Supply Usage Data item to toggle the option on/off. Use the Cartridge Protection item to toggle the option on/off. **NOTE:** Enabling cartridge protection is permanent. Use the Authorized HP Cartridges Policy item to toggle the option on/off.

Table 3-10 Settings menu (continued)

Menu item	First level	Second level	Description
Security	Device Announcement Agent		Use the Device Announcement Agent item to toggle the option on/off. **NOTE:** When enabled , the printer uses the Device Announcement Agent to locate the Security Manager server, and then requests secure communications.

Tools menu (SFP)

Learn about the control-panel Tools menu.

To access the sub-menu: **Menu** > **Tools**.

Table 3-11 Tools menu

Menu item	First level	Second level	Description
Troubleshooting	Print Quality	Cleaning Page	Use the Cleaning Page item to perform a cleaning operation. Select Print to start the process. **NOTE:** The cleaning process takes a few minutes to complete.
Troubleshooting	Print Quality	Color Calibration	Choose from the following: • Calibrate Now Perform a calibration now. • Power On Calibration Choose a time interval for a calibration to begin after the printer power is turned on • Time-Based Calibration Choose a time interval between calibrations from a list.

Table 3-11 Tools menu (continued)

Menu item	First level	Second level	Description
Maintenance	Restore Settings	Reset Printer Supply Region Reset User Settings Reset User Data Restore All Factory Defaults	Use the Reset Printer Supply Region item to automatically reset the printer supply region. Select Reset to begin the process or select Cancel to exit without resetting. Use the Reset User Settings item to reset any customer unique settings to factory defaults. Select Restore to begin the process or select Cancel to exit without resetting. Use the Reset User Data item to reset any customer unique data to factory defaults. Select Restore to begin the process or select Cancel to exit without resetting. Use the Restore All Factory Defaults item to reset all configured settings to factory defaults. Select Restore to begin the process or select Cancel to exit without resetting. **NOTE:** All configured settings are reset including: • Administrator passwords • Network configurations • Stored jobs (if available) • HP Workpath licenses (if available) • Web Services account information
Maintenance	Firmware	View Details Check for Update Update Printer from USB	Use the View Details item to determine the currently installed firmware version number. Use the Check for Update item to automatically check for and install an available firmware upgrade. Select Yes to begin the process or select No to exit without resetting. **NOTE:** All configured settings are reset when an upgrade is installed: • Administrator passwords • Network configurations • Stored jobs (if available) • HP Workpath licenses (if available) • Selected country/region and language • Web Services account information Use the Update Printer from USB item to upgrade the firmware using the printer front USB port. For more information, go to USB flash drive (control-panel menu).
Service			To access the Service menu, enter the default service personal identification number (PIN). The default PIN for this printer is located on a on a sticker adhered to the front of the toner cartridge tray. **NOTE:** If the default PIN has been changed, contact the printer administrator.

Table 3-11 Tools menu (continued)

Menu item	First level	Second level	Description
Service	Information	Product Number Serial Number Country/Region Language: [LANGUAGE] Service Counts Firmware Version Event Log Wi-Fi Region: [COUNTRY]	Use the Product Number item to determine the printer product number. Use the Serial Number item to determine the printer serial number. Use the Country/Region Language: [LANGUAGE] item to determine the printer country/region and language setting. Use the Service Counts item to display the following page counts: • Total Service Count • Color Service Count • Mono Service Count Use the Firmware Version item to determine the currently installed firmware version number Use the Event Log item to view a list of the latest event log entries. Use the Wi-Fi Region: [COUNTRY] item to determine the Wi-Fi region setting.
Service	Service Resets	Reset User Settings Reset User Data Restore All Factory Defaults Transfer Kit Reset Reset Repair Mode	Use the Reset User Settings item to reset any customer unique settings to factory defaults. Select Proceed to begin the process or select Dismiss to exit without resetting. Use the Reset User Data item to reset any customer unique data to factory defaults. Select Proceed to begin the process or select Dismiss to exit without resetting. Use the Restore All Factory Defaults item to reset all configured settings to factory defaults. Select Proceed to begin the process or select Dismiss to exit without resetting. **NOTE:** All configured settings are reset including: • Administrator passwords • Network configurations • Stored jobs (if available) • HP Workpath licenses (if available) • Web Services account information Use the Transfer Kit Reset item to reset the transfer kit firmware counter after installing a replacement transfer kit. Select Reset to begin the process or select Cancel to exit without resetting. Use the Repair Mode item to test print using a different set of toner cartridges. Select OK to enter the mode or select Cancel to exit. Immediately after selecting OK, install one or more test cartridges in the printer. **NOTE:** The printer remains in Repair Mode until up to 75 pages have been printed using the test cartridges

Table 3-11 Tools menu (continued)

Menu item	First level	Second level	Description
Service	System Configuration	Serial Number	Use the Serial Number item to restore/change the printer serial number if necessary. Select Set to set the number.
		Service ID	Use the Service ID item to display the service ID number.
		Ethernet MAC Address [ALPHNUMNERIC]	Use the Ethernet MAC Address item to change the Ethernet MAC address.
		Wi-Fi MAC Address [ALPHNUMNERIC]	Use the Wi-Fi MAC Address item to change the Wi-Fi MAC address.
		Change	Use the Change item to change the current boot mode.
Service	Connectivity	Connectivity Status Page	Use the Connectivity Status Page item to print a Connectivity Status Page
		Connectivity Diagnostics	Use the Connectivity Diagnostics item to print a Wi-Fi Network Test Results page.
		Wi-Fi Metrics Data Report	Use the Wi-Fi Metrics Data Report item to print a Wi-Fi Metrics Data Report.
Service	Service Tests	Dial Test	Use the Dial Test item to test the control-panel rotary dial. Select Start to begin, and then follow the prompts on the display.
		Display Test	Use the Display Test item to test the control-panel display. Select Proceed to begin an internal test. If the message **Test Passed** displays, select **Cancel** to exit.
		Walk-up USB Port Test	Use the Walk-up USB Port Test item to test the front USB port. Insert a USB storage device in the front USB port, and then select Proceed to begin. If the message **USB Device Connected** displays, the test was successful.

Menu (MFP)

Learn about the control-panel menu sub-menus.

To access the menus, select Menu on the control-panel Home screen.

Info menu (MFP)

Learn about the control-panel Info menu.

To access the sub-menu: **Menu** > **Info**.

Table 3-12 Info menu

Menu item	First level	Description
Printer	Printer Information [NAME/ SERIALNUMBER]	Use the Printer item to view printer information. • Printer name • Printer serial number

Table 3-12 Info menu (continued)

Menu item	First level	Description
Connectivity	Wi-Fi Ethernet Wi-Fi Direct	Use the Connectivity item to view the following information: • Wi-Fi status and host name • Ethernet status and host name • Wi-Fi Direct status

Jobs menu (MFP)

Learn about the control-panel Jobs menu.

To access the sub-menu: **Menu** > **Jobs**.

Table 3-13 Jobs menu

Menu item	Description
IN PROGRESS	View a list of current print jobs.
History	View a list of past print jobs.

Supplies menu (MFP)

Learn about the control-panel Supplies menu.

To access the sub-menu: **Menu** > **Supplies**.

Table 3-14 Supplies menu

Menu item	First level	Description
Cartridges	Estimated Levels	Displays a graphical representation of each toner cartridges toner level. Select a cartridge level bar to display the following: • Cartridge warnings (if applicable • Cartridge number Select Print to print a HP Supplies Status Report or X to exit. **NOTE:** Select More Info to display HP Plus Information.
Transfer Kit		Displays the status of the printer transfer kit.

Paper menu (MFP)

Learn about the control-panel Paper menu.

To access the sub-menu: **Menu** > **Paper**.

Table 3-15 **Paper menu**

Menu item	First level	Second level	Description
Tray 1 [GRAPHICAL REPRESENTATION]	(setup icon)	Manual Feed Prompt	Use the Manual Feed Prompt item to select Tray 1 feed behavior.
		Manual Feed	Toggle the Manual Feed item on/off.
		Size/Type Prompt	Toggle the Size/Type Prompt item on/off.
		Paper Out Action	Use the Paper Out Action item to select and configure: • Auto Continue Time-Out (select from a list of time periods) • Auto Continue Action – Override Size and Type – Cancel
Tray 1 [GRAPHICAL REPRESENTATION]	Modify	Size Type	Select form a list of available paper size/types.
Tray 2 [GRAPHICAL REPRESENTATION]	(setup icon)	Manual Feed Prompt	Use the Manual Feed Prompt item to select Tray 1 feed behavior.
		Manual Feed	Toggle the Manual Feed item on/off.
		Size/Type Prompt	Toggle the Size/Type Prompt item on/off.
		Paper Out Action	Use the Paper Out Action item to select and configure: • Auto Continue Time-Out (select from a list of time periods) • Auto Continue Action – Override Size and Type – Cancel
Tray 2 [GRAPHICAL REPRESENTATION]	Modify	Size Type	Select form a list of available paper size/types.

Settings menu (MFP)

Learn about the control-panel Settings menu.

To access the sub-menu: **Menu** > **Settings**.

Table 3-16 **Settings menu**

Menu item	First level	Second level	Description
General	Date and Time	Time Zone	Set the time zone, date and time.
		Set Date	**NOTE:** Select Save to save the settings.
		Set Time	

Table 3-16 Settings menu (continued)

Menu item	First level	Second level	Description
General	Energy	Sleep Inactivity Shutdown Disable Shutdown	Set the printer power management behavior.
General	Language [LANGUAGE]		Chose from a list of available languages.
General	Quiet Mode		Toggle the setting on/off.
General	Inactivity Timeout		Set the amount of inactivity time before the printer goes to sleep.
General	Country/Region [COUNTRY/REGION]		Chose from a list of available country/regions.
General	Jam Recovery [SETTING]	Automatic On Off	Set the printer jam recovery behavior.
Network Settings	Wi-Fi	Wi-Fi Print Start Guide Wi-Fi Setup Wizard Wi-Fi Protected Setup View Details Wi-Fi Test Report IPv4 IPv6 5 GHz Band Frequency Configuration Summary	Use the Wi-Fi item to toggle this option on/off. Use the Print Start Guide item to print a getting started guide (select Print). Use the Wi-Fi Setup Wizard item to quickly connect to available Wi-Fi routers (select Start). Use the Wi-Fi Protected Setup item to setup up a Wi-Fi connection using the WPS function of a router (select Start). Use the View Details item to view configuration settings or print a Network Configuration Report (select Print Details to print the report). Use the Wi-Fi Test Report item to print a test report (select Print). Use the IPv4 or IPv6 item to change IPv# settings. For example, IPV# Configuration, DNS Configuration Method, and Primary DNS settings. **CAUTION:** Changing the IP address removes the printer from the network. Use the 5 GHz Band Frequency item to toggle the option on/off. Use the Configuration Summary item to view a summary of configuration settings (select Print Details to print the summary).

Table 3-16 Settings menu (continued)

Menu item	First level	Second level	Description
Network Settings	Ethernet Settings	View Details (select Print Details to print the details) IPv4: IPv6: Link Speed Configuration Summary	Use the View Details item to display: • [STATUS] • Host Name • Bonjour Name • IP Address • IPv6 Status • MAC Address (print a Network Configuration Report) Use the IPv4 or IPv6 item to change IPv# settings. For example, IPV# Configuration, DNS Configuration Method, and Primary DNS settings. **CAUTION:** Changing the IP address removes the printer from the network. Use the Link Speed item to select the link speed form a list of available speeds. Use the Configuration Summary item to view a summary of configuration settings (select Print Details to print the summary).
Network Settings	Wi-Fi Direct	Wi-Fi Direct View Details Wi-Fi Direct [NAME] Channel [#] Connection Method [CONNECTIONMETHOD]	Use the Wi-Fi Direct item to toggle this option on/off. Use the View Details item to display: • [STATUS] • Wi-Fi Direct Name • [Connection Method] • Wi-Fi Direct Password • Devices Connected Use the Wi-Fi Direct item to change the Wi-Fi Direct Name. Use the Channel item to change the channel setting. Use the Connection Method item to choose an Automatic or Manual connection.
Network Settings	Bluetooth Low Energy		Use the Bluetooth Low Energy item to toggle the setting on/off. **NOTE:** Bluetooth Low Energy is an ultra-low power wireless technology that provides connections between the printer and other devices. This feature is enabled by default.
Network Settings	AirPrint		Use the AirPrint item to toggle this option on/off.
Network Settings	IPv4		Use the IPv4 item to toggle this option on/off.
Network Settings	IPv6		Use the IPv6 item to toggle this option on/off.
Network Settings	Host Name		Use the Host Name item to set a unique host name.

Table 3-16 Settings menu (continued)

Menu item	First level	Second level	Description
Network Settings	Bonjour Name		Use the Bonjour Name item to set a unique bonjour name. **NOTE:** After changing the Bonjour Name, anyone connected to the printer will need to reconnect
Network Settings	Proxy Settings [##.##.###.###]		Use the Proxy item to set: • Toggle the option on/off • Proxy Type – Configuration Script – Manual • Proxy Server (change the proxy server IP address) Select Apply to save the settings.
Network Settings	Security	Disable Firewall	Use the Disable Firewall item to enable or disable firewall protection.
		Reset 802.1x Authentication	Select Yes or No to reset the Reset 802.1x Authentication item.
		Reset Security	Use the Reset Security item to restore security defaults. Select Reset to continue or Cancel to exit.
		Announcement Agent	Use the Announcement Agent item to toggle the option on/off. **NOTE:** When enabled , the printer uses the Device Announcement Agent to locate the Security Manager server, and then requests secure communications.
Network Settings	Network Reports	Network Configuration Report	Select Print to print the report.
		Network Security Report	
		Wi-Fi Test Report	
Network Settings	Restore Network Settings	Yes	Use the Restore Network Settings item to restore network setting defaults. **CAUTION:** This item restores all network settings to original values including proxy settings and the administrator password for the Embedded Web Server (EWS).
		No	
Printer Update	Allow Upgrades:	Auto Update (Recommended)	Use this item to set firmware update behavior (HP recommends using the Auto Update setting). **NOTE:** Firmware updates can improve, enhance, or extend your printer's functionality and features, protect against security threats, and serve other purposes.
		Notify	
Tray Settings	Manual Feed Prompt		Use the Manual Feed Prompt item to select manual feed behavior.
	Manual Feed		Toggle the Manual Feed item on/off.
	Size/Type Prompt		Toggle the Size/Type Prompt item on/off.
	Paper Out Action		Use the Paper Out Action item to set the paper out behavior. Set the Auto Continue Time-Out (set a specific time period) and Auto Continue Action (cancel or override prompt) items.

Table 3-16 Settings menu (continued)

Menu item	First level	Second level	Description
Fax Settings	Fax Setup	Fax Header Name	Us the Country/Region and Fax Header Name items to set the country/region where the printer is installed, and the Fax header test. To finish the fax setup process, select Next to answer ta series of questions to complete the fax setup process. NOTE: If required, a prompt will indicate a distinctive ring setting is required.
Fax Settings	Fax Send	Fax Dialing Scan and Fax method Fax Number Confirmation Error Correction Mode Overlay Fax Header Billing Code Fax Notifications	Use the Fax Dialing item to set the following: • Redial on Error (use a slider bar to set sensitivity) • Redial on No Answer (use a slider bar to set sensitivity) • Redial on Busy (use a slider bar to set sensitivity) • Redial Interval (use a slider bar to set interval) • Fax Send Speed (choose from Slow (9600 bps), Medium (14400 bps), or Fast (33600 bps)) • Pulse Dialing Mode (toggle on/off) • Dialing Prefix (enter a dialing prefix if one is required) Use the Scan and Fax method item to toggle this option on/off. Use the Error Correction Mode item to toggle this option on/off. Use the Overlay Fax Header item to toggle this option on/off. Use the Billing Code item to toggle this option on/off. Use the Fax Notifications to choose from Do not notify, Notify when job completes, or Notify only if job fails.

Table 3-16 Settings menu (continued)

Menu item	First level	Second level	Description
Fax Settings	Fax Receive	Auto Answer	Use the Auto Answer item to toggle this option on/off.
		Rings to Answer	Use the Rings to Answer item to set the number of rings before the printer answers for a fax.
		Ring Volume	Use the Ring Volume to choose from a Low, High, or Off ring volume.
		Distinctive Ring	Use the Distinctive Ring item to choose from a list of distinctive fax rings.
		Error Correction Mode	Use the Error Correction Mode item to toggle this option on/off.
		2-Sided Fax Printing	Use the 2-Sided Fax Printing item to toggle this option on/off.
		Stamp Received Faxes	Use the Stamp Received Faxes item to toggle this option on/off.
		Fit to Page	Use the Fit to Page item to toggle this option on/off.
		Paper Tray	Use the Paper Tray to choose from Tray 1, Tray 2, or Automatic fax delivery bins.
		Fax Notifications	Use the Fax Notifications to choose from Do not notify, Notify when job completes, or Notify only if job fails.
		Junk Fax Blocking	Use the Junk Fax Blocking item to add phone numbers to block from receiving a fax from.
		Fax Receive Speed	Use the Fax Receive Speed item to (choose from Slow (9600 bps), Medium (14400 bps), or Fast (33600 bps).
		Detect Dial Tone	Use the Detect Dial Tone item to toggle this option on/off.
Fax Settings	Fax Forwarding	Fax Forwarding	Use the Fax Forwarding item to toggle this option on/off.
		Fax Forward + Print	Use the Fax Forward + Print item to toggle this option on/off.
		Enter the Fax Number	Use the Enter the Fax Number item to enter the phone number where the fax should be forwarded.
Fax Settings	Fax Archive		Follow the instructions on the control-panel display to configure the Fax Archive item.
Supplies	Low Warnings Thresholds		Use the Low Warnings Thresholds item to set a percentage of remaining toner that triggers the warning.
	Very Low Behavior		Use the Very Low Behavior item to select from Continue, Prompt to Continue, or Stop for the low cartridge behavior.
	Store Supply Usage Data		Use the Store Supply Usage Data item to toggle the option on/off.
	Cartridge Protection		Use the Cartridge Protection item to toggle the option on/off. **NOTE:** Enabling cartridge protection is permanent.
	Authorized HP Cartridges Policy		Use the Authorized HP Cartridges Policy item to toggle the option on/off.

Tools menu (MFP)

Learn about the control-panel Tools menu.

To access the sub-menu: **Menu** > **Tools**.

Table 3-17 Tools menu

Menu item	First level	Second level	Description
Troubleshooting	Print Quality	Cleaning Page	Use the Cleaning Page item to perform a cleaning operation. Select Print to start the process. **NOTE:** The cleaning process takes a few minutes to complete.
Troubleshooting	Print Quality	Color Calibration	Choose from the following: • Calibrate Now Perform a calibration now. • Power On Calibration Choose a time interval for a calibration to begin after the printer power is turned on • Time-Based Calibration Choose a time interval between calibrations from a list.
Troubleshooting	Fax	Fax T.30 Trace Report Fax Text Report Clear Fax Log/ Memory PBX Ring Detect	Use the Fax T.30 Trace Report item to select from: • Never automatically print • Print after every fax • Print only after sending faxes • Print only after receiving faxes • Print only after problems sending faxes • Print only after problems receiving faxes • Print after any fax problems Use the Fax Text Report item to print a Fax Test Report. Use the Clear Fax Log/Memory item to clear the log and memory. Use the PBX Ring Detect to toggle this option on/off. **NOTE:** Enabling PBX Mode prevents false detection of extension phones being picked up if the voltage changes between rings.

Table 3-17 Tools menu (continued)

Menu item	First level	Second level	Description
Maintenance	Restore Settings	Reset Printer Supply Region Reset User Settings Reset User Data Restore All Factory Defaults	Use the Reset Printer Supply Region item to automatically reset the printer supply region. Select Reset to begin the process or select Cancel to exit without resetting. Use the Reset User Settings item to reset any customer unique settings to factory defaults. Select Restore to begin the process or select Cancel to exit without resetting. Use the Reset User Data item to reset any customer unique data to factory defaults. Select Restore to begin the process or select Cancel to exit without resetting. Use the Restore All Factory Defaults item to reset all configured settings to factory defaults. Select Restore to begin the process or select Cancel to exit without resetting. **NOTE:** All configured settings are reset including: • Administrator passwords • Network configurations • Stored jobs (if available) • HP Workpath licenses (if available) • Web Services account information
Maintenance	Firmware	Check Update Printer from USB	Use the Firmware item to determine the currently installed firmware version number. Use the Check item to automatically check for and install an available firmware upgrade. **NOTE:** All configured settings are reset when an upgrade is installed: • Administrator passwords • Network configurations • Stored jobs (if available) • HP Workpath licenses (if available) • Selected country/region and language • Web Services account information Use the Update Printer from USB item to upgrade the firmware using the printer front USB port. For more information, go to USB flash drive (control-panel menu).
Service			To access the Service menu, enter the default service personal identification number (PIN). The default PIN for this printer is located on a on a sticker adhered to the front of the toner cartridge tray. **NOTE:** If the default PIN has been changed, contact the printer administrator.

Table 3-17 Tools menu (continued)

Menu item	First level	Second level	Description
Service	Information	Product Number Serial Number Country/Region Language Firmware Version Event Log Wi-Fi Region	Use the Product Number item to determine the printer product number. Use the Serial Number item to determine the printer serial number. Use the Country/Region Language: [LANGUAGE] item to determine the printer country/region and language setting. Use the Firmware Version item to determine the currently installed firmware version number Use the Event Log item to view a list of the latest event log entries. Use the Wi-Fi Region: [COUNTRY] item to determine the Wi-Fi region setting.
Service	Service Resets	Reset User Settings Reset User Data Restore All Factory Defaults Transfer Kit Reset Repair Mode	Use the Reset User Settings item to reset any customer unique settings to factory defaults. Select Proceed to begin the process or select Dismiss to exit without resetting. Use the Reset User Data item to reset any customer unique data to factory defaults. Select Proceed to begin the process or select Dismiss to exit without resetting. Use the Restore All Factory Defaults item to reset all configured settings to factory defaults. Select Proceed to begin the process or select Dismiss to exit without resetting. **NOTE:** All configured settings are reset including: • Administrator passwords • Network configurations • Stored jobs (if available) • HP Workpath licenses (if available) • Web Services account information Use the Transfer Kit Reset item to reset the transfer kit firmware counter after installing a replacement transfer kit. Select Reset to begin the process or select Cancel to exit without resetting. Use the Repair Mode item to test print using a different set of toner cartridges. Select OK to enter the mode or select Cancel to exit. Immediately after selecting OK, install one or more test cartridges in the printer. **NOTE:** The printer remains in Repair Mode until up to 75 pages have been printed using the test cartridges

Table 3-17 Tools menu (continued)

Menu item	First level	Second level	Description
Service	System Configuration	Serial Number Service ID Ethernet MAC Address [ALPHNUMNERIC] Wi-Fi MAC Address [ALPHNUMNERIC] Boot Mode	Use the Serial Number item to restore/change the printer serial number if necessary. Select Set to set the number. Use the Service ID item to display the service ID number. Use the Ethernet MAC Address item to change the Ethernet MAC address. Use the Wi-Fi MAC Address item to change the Wi-Fi MAC address. Use the Boot Mode item to change the current boot mode.
Service	Fax Diagnostics	Hook Operations Generate Random Data Generate Dialing Tones/Pulses Generate/Dial Phone Number Generate Single Modem Tone Fax Transit Signal Loss Ring Settings Fax Parameters Show All Fax Locations	Use the Hook Operations item to choose from Go On Hook or Go Off Hook and view Line Current and Line Voltage values. Use the Generate Random Data item to select from a list of speeds and then select the Start button to begin. Use the Generate Dialing Tones/Pulses item to select from: • Pulse Burst • Tone Burst • Continuous Tone • Last Digits – Use the Select Any item to select the digits. Select the Start button to begin. Use the Generate/Dial Phone Number item to select either Tone or Pulse, and then enter a Fax Number. Select the Start button to begin. Use the Generate Single Modem Tone item to choose from: • 1100 Hz • 1300 Hz • 1800 Hz • 2100 Hz Select the Start button to begin. Use the Fax Transit Signal Loss item to add an Enter Transmit Level (0 to 30) value, and then select Proceed to begin. Use the Ring Settings item to select either Off or On. If rings are enabled, use the + or - buttons to set the Ring Frequency and Ring Interval values. Use the Fax Parameters item to set a Parameter Number. Select the Save button to save the setting. Use the Show All Fax Locations item to toggle this option on/off.

Table 3-17 Tools menu (continued)

Menu item	First level	Second level	Description
Service	Connectivity	Connectivity Status Page	Use the Connectivity Status Page item to print a Connectivity Status Page
		Connectivity Diagnostics	Use the Connectivity Diagnostics item to print a Wi-Fi Network Test Results page.
		Wi-Fi Metrics Data Report	Use the Wi-Fi Metrics Data Report item to print a Wi-Fi Metrics Data Report.
Service	Service Tests	Scan Motor Test	Use the Scan Motor Test item to rotate the scan motor through a cycle. Select the Start button to begin.
		Continuous Flatbed Scan	Use the Continuous Flatbed Scan item to continuously scan a page from the flatbed.
		Continuous Copy	Place a page on the flatbed, and then select the Proceed button. The printer continuously scans and prints the page until the Dismiss button is selected.
		Display Test	Use the Continuous Copy item to continuously copy a page from the flatbed.
		Walk-up USB Port Test	Place a page on the flatbed, and then select the Proceed button. The printer continuously copies and prints the page until the Dismiss button is selected.
			Use the Display Test item to test the control-panel display. Select Proceed to begin (the display screen changes each time the Proceed button is selected).
			Use the Walk-up USB Port Test item to test the front USB port. Insert a USB storage device in the front USB port, and then select Start to begin. If the message **USB Device Connected** displays, the test was successful.

Power on troubleshooting

Learn about power on troubleshooting.

Power-on checks

Learn about power-on checks.

The basic printer functions should start up when the printer is connected into an electrical outlet and the power switch is pushed to the on position. If the printer does not start, use the information in this section to isolate and solve the problem.

If the control panel display remains blank, random patterns display, or asterisks remain on the control panel display, perform power-on checks to find the cause of the problem.

Power on troubleshooting overview

Learn about general power on troubleshooting.

During normal operation, a cooling fan begins to spin briefly after the printer power is turned on. Place a hand over the fan intake vents located on the right-side cover. When the fan is correctly operating, air passing into the printer is felt. Lean close to the printer to hear the fan operating. If the fan is operating, the dc side of the power supply is functioning.

After the fan is operating, the main motor turns on (unless the top cover is open, a jam condition is sensed, or the paper-path sensors are damaged). Visually and audibly determine that the main motor is turned on.

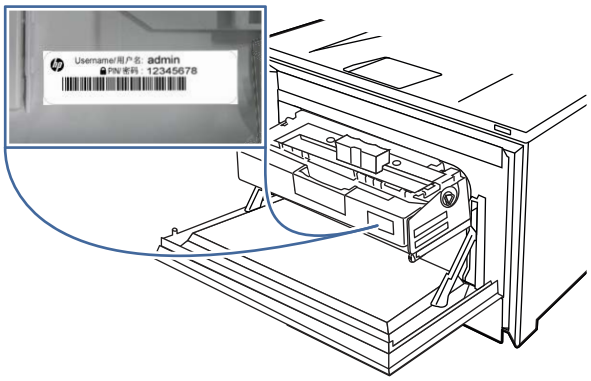
If the fan and main motor are operating correctly, the next troubleshooting step is to isolate print engine, formatter, and control panel problems. Perform an engine test. If the formatter is damaged, it might interfere with the engine test. If the engine-test page does not print, try removing the formatter, and then performing the engine test again. If the engine test is then successful, the problem is almost certainly with the formatter, the control panel, or the cable that connects them.

Troubleshooting power-on or blank control panel problems

If the printer is not powering on correctly, use the following steps to begin troubleshooting the problem.

IMPORTANT: Access to the Embedded Web Server (EWS) requires a personal identification number (PIN). The default PIN for this printer is located on a sticker adhered to the front of the toner cartridge tray. Use this PIN to open the EWS when prompted.

The default PIN (password) can be changed in the EWS (**Settings** > **Security** > **Password Settings**).



1. Verify that power is available to the printer. If the printer is plugged into a surge protector or uninterruptible power supply (UPS), remove it. Plug the printer directly into a known operating wall receptacle (make sure that the wall receptacle provides the correct voltage and current for the printer).

   NOTE: Unplug any other devices on the same circuit that the printer is using.

2. Try another known operating wall receptacle and a different power cord.
3. To eliminate a thermal switch issue, unplug the power cord and leave it unplugged for over 20 minutes. Re-attach the power cord, and then turn the power on again.
4. During normal operation, a cooling fan or fans begin to spin briefly after the printer power is turned on. Place a hand over the cover vent or vents to feel air passing out of the printer. Lean close to the printer to hear the fan or fans operating.

   NOTE: Operational fans, motors, and control-panel lights indicate the following:

   - AC power is present at the printer.
   - The power supply is providing either or both 24 Vdc and 5 Vdc voltages.
   - The DC controller microprocessor is functioning.

5. If the printer powers on, but the control panel is blank, make sure that the control-panel display wire harness or harnesses and flat flexible cable or cables (FFCs) are connected.

NOTE: If the printer has frozen while in Sleep mode or Sleep delay, loading a document in the document feeder or pressing a control-panel button should cause the printer to wake up from Sleep mode or Sleep delay.

If the control panel is not responding, or if it appears black or blank, try the following:

a. Turn the printer power off, and then on again.

b. Verify that the system is correctly functioning by printing a test page. Does the test page print correctly?

Is the printer HP Embedded Web Server (EWS) accessible?

c. Verify that the control panel is correctly functioning. If it is not, turn the printer off and reseat the control-panel assembly cable connections at the control-panel assembly and the formatter.

d. Try upgrading the firmware. If the firmware upgrade fails to resolve the problem, and the printer still freezes while in Sleep mode or Sleep delay, elevate the case.

e. If the error persists and the EWS functions correctly, replace the control-panel assembly.

6. If normal start-up noises are not heard, turn the printer off, and then remove any installed accessories.

7. Turn the printer on, and then listen for start-up noises. If normal start-up noises are heard, the problem might be with an accessory.

8. Perform an engine test.

NOTE: To print using an HP Plus printer, the printer must have genuine original HP toner cartridges installed, must have an ongoing internet connection and an active HP Plus account (for more information, go to hp.com/plus).

9. If the engine test page prints, the print engine is operating normally. Replace the formatter. The **formatter and ECU/DCC must be paired** by using a special HP Android application.

CAUTION: Under **NO** circumstances should a formatter from a different printer be installed during the repair or troubleshooting processes.

10. If after replacing the formatter normal start-up noises are still not heard, replace the ECU/DCC. The **formatter and ECU/DCC must be paired** by using a special HP Android application.

11. If the print engine appears to be correctly operating (the engine test page successfully printed) and the control panel is still blank, replace the power supply.

Troubleshooting an unresponsive printer

If the printer powers up normally and the control panel displays correctly, but the printer appears unresponsive to print jobs, use the following steps to troubleshoot the issue.

1. The control panel should be in a ready or sleep state. If an error message displays, resolve the error. Resolve any supply issues.

2. For network connection errors, verify that the network port is active and that the cables are securely seated, or a Wi-Fi signal is present.

   a. Check the network cable connections between the printer and the computer or network port. Make sure that the connections are secure.

   b. Make sure that the cables are not faulty by trying different cables, if possible.

3. Check the network LEDs (callout 1) to see if they indicate any issues.

NOTE: The figure below is representational only. Network LED location varies by printer.

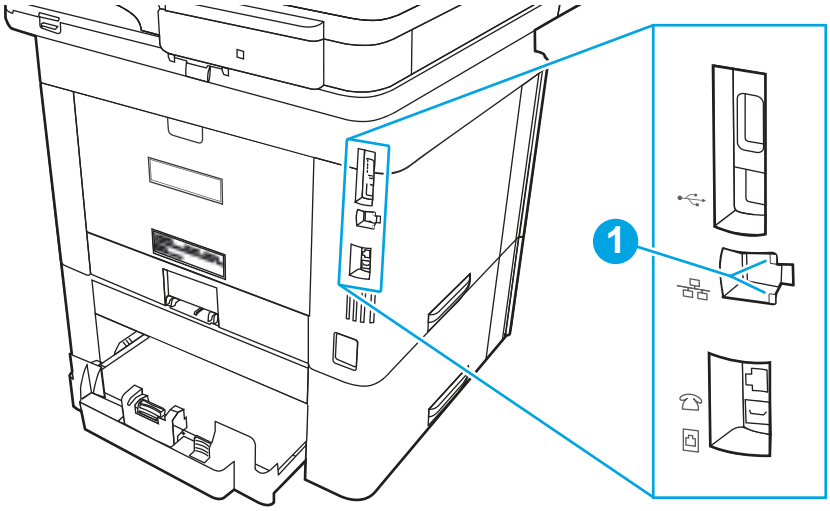


Table 3-18 **Network LEDs**

LED light pattern	Description
	Solid green light and flashing yellow light indicates a successful network connection.
	No lights on indicates a faulty network connection. Disconnect and reconnect the cable to the port. In the Network Settings Menu, verify the link settings and make sure that the port is enabled.

4. Use one of the following options to print a configuration report and printer status report.

NOTE: To print using an HP Plus printer, the printer must have genuine original HP toner cartridges installed, must have an ongoing internet connection and an active HP Plus account (for more information, go to hp.com/plus).

Print a configuration report

a. Open the following menus:

- Menu
- Tools
- Status Reports

b. Select the Configuration Report item.

c. Do one of the following:

- **MFP**: Touch the **Print** button to print the page.
- **SFP**: Navigate to and select the **Print** item at the top of the menu to print the page.

NOTE: This page might differ between MFP and SFP printers.

5. Check to see if there is a newer version of the firmware available (find the currently installed version on the Configuration Report). If there is, update the firmware.

NOTE: If firmware updates are enabled on the printer, go to the control panel navigate to Menu > Tools > Maintenance > Firmware, and then select one of the following:

- Check for Update (SFP)
- Check (MFP)

If an update is available, it will be automatically installed. If the latest firmware is already installed, a message appears stating the most current updates have been installed.

If the event log on the Configuration Report shows a recent error, resolve the problem.

6. Verify that the correct print driver for this printer is installed. Check the program to make sure that the print driver for this printer is used. The print driver can be downloaded from support.hp.com.

7. Print a short document from a different program that has worked in the past. If this solution works, the problem is with the program. If this solution does not work (the document does not print), complete these steps:

a. Try printing the job from another computer that has the printer software installed.

b. If the printer is connected to the network, connect the printer directly to a host computer with a USB cable. Redirect the printer to the correct port, or reinstall the software (make sure to select the new connection type).

For more information about troubleshooting an unresponsive printer and about troubleshooting connectivity issues, see the "Performance and connectivity troubleshooting" section of the Service manual.

Engine diagnostics

Learn about internal engine diagnostics that help in troubleshooting print quality, paper path, noise, assembly, and timing issues.

Engine test


Learn about troubleshooting the printer using the engine test diagnostic.

NOTE: To print using an HP Plus printer, the printer must have genuine original HP toner cartridges installed, must have an ongoing internet connection and an active HP Plus account (for more information, go to hp.com/plus).

When the engine test is performed, a test page with lines prints if the engine is functioning correctly.

- Depress and hold the cartridge door release button, and then open and close the cartridge door four times within a one and one-half (1.5) second time period to print a simplex engine test page.
- Depress and hold the cartridge door release button, and then open and close the cartridge door five times (or more) within a one and one-half (1.5) second time period to print a duplex engine test page.

Figure 3-31 Sample engine test page



Defeating interlocks

Learn about defeating printer interlocks.

NOTE: A SFP printer is shown in this section. However, the procedure is correct for all printer models.

Different tests can be used to isolate different types of issues. For assembly or noise isolation, run the diagnostic test when the toner cartridge door or rear door is open.

Defeating the door interlocks allows observation of the paper pick operation.

Defeat the cartridge door interlock

1. Open the cartridge door.
2. Insert a folded piece of paper into the slot.

TIP: Fold a stiff piece of paper, for example a business card or index card, into a strip, and insert the strip into the slot for the front door logic switch.

Figure 3-32 Defeat the cartridge door interlock




Defeat the rear door interlock

1. Open the rear door.
2. Insert a folded piece of paper into the slot.

TIP: Fold a stiff piece of paper, for example a business card or index card, into a strip, and insert the strip into the slot for the front door logic switch.

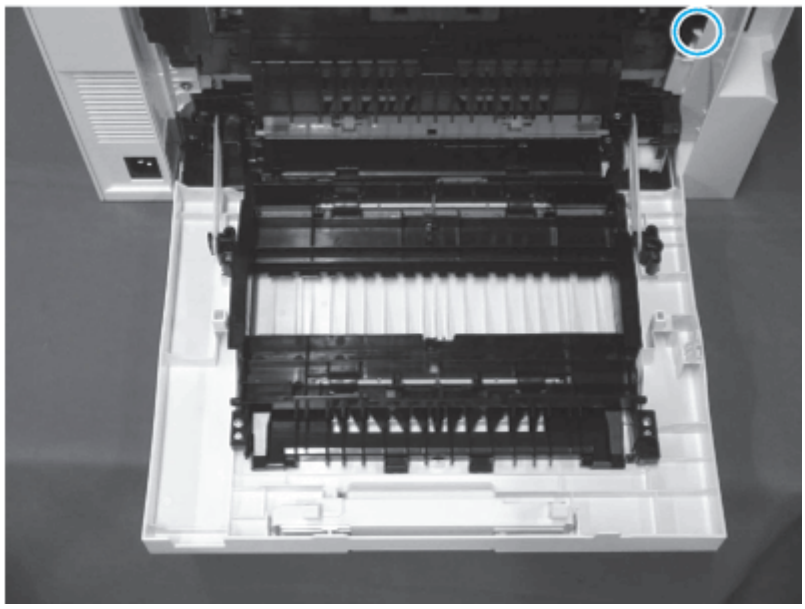Figure 3-33 Defeat the rear door interlock



LED Diagnostics (formatter)

Learn about troubleshooting the printer using formatter LEDs.

Network LEDs (network models only)

The formatter has two network port LEDs. When the printer is connected to a properly working network through a network cable, the amber LED indicates network activity, and the green LED indicates the link status.

A blinking amber LED indicates network traffic. If the green LED is off, a link has failed. For link failures, check all of the network cable connections. In addition, try to manually configure the network card link speed setting by using the printer control panel.

Change the Link Speed setting

1. Open the following menus:
   - Menu
   - Settings
   - Network (MFP)

     Network Settings (SFP)
   - Ethernet (MFP)

     Ethernet Settings (SFP)
   - Link Speed
2. Select from a list of link speed options.

Use the solve problems checklist

If the printer is not correctly functioning, complete the steps (in the order given) in the following checklist.

If the printer fails a checklist step, follow the corresponding troubleshooting suggestions for that step. If a checklist step resolves the problem, skip the remaining checklist items.

1. Make sure that the printer is set up correctly.
   a. Check the power-cable connections.
   b. Make sure that the line voltage is correct for the printer power configuration. See the label that is on the printer for voltage requirements. If you are using a power strip and its voltage is not within specifications, plug the printer directly into the wall. If it is already plugged into the wall, try a different outlet.
2. Check the cable connections.
   a. Check the cable connection between the printer and the computer. Make sure that the connection is secure.
   b. Make sure that the cable itself is not faulty, by using a different cable if possible.
   c. Check the network connection: Make sure that the network light is lit. The network light is next to the network port on the back of the printer.

      If the printer remains unable to connect to the network, uninstall and then reinstall the printer. If the error persists, contact a network administrator.
3. Check to see if any messages appear on the control panel.

4. Make sure that the paper you are using meets specifications.
5. Make sure that the paper is loaded correctly in the input tray.
6. Make sure that the printer software is installed correctly.
7. Verify that you have installed the printer driver for this printer, and that you are selecting this printer from the list of available printers.
8. Print a configuration page.

NOTE: To print using an HP Plus printer, the printer must have genuine original HP toner cartridges installed, must have an ongoing internet connection and an active HP Plus account (for more information, go to hp.com/plus).

   a. Open the following menus:
      - Menu
      - Tools
      - Status Reports
   b. Select the Configuration Report item.
   c. Do one of the following:
      - **MFP**: Touch the **Print** button to print the page.
      - **SFP**: Navigate to and select the **Print** item at the top of the menu to print the page.

   After printing the configuration page, check the following

   a. If the page does not print, verify that the input tray contains paper and that the paper is properly loaded.
   b. Make sure that each toner cartridges are installed correctly.
   c. If the page jams in the printer, clear the jam.
   d. If the print quality is unacceptable, complete the following steps:
      - Verify that the print settings are correct for the paper you are using.
      - Solve print-quality problems.
9. Print a small document from a different program that has printed in the past. If this solution works, then the problem is with the program you are using. If this solution does not work (the document does not print), complete these steps:
   a. Try printing the job from another computer that has the printer software installed.
   b. Check the cable connection. Direct the printer to the correct port, or reinstall the software, selecting the connection type you are using.

Control panel troubleshooting

If the control panel is not responding normally or has display issues, use the following procedures to troubleshoot the issues.

Control-panel diagnostics

Learn about control-panel diagnostics.

Control-panel diagnostics (SFP)

1. Open the following menus:
   - Menu
   - Tools
   - Service
2. Enter the default service personal identification number (PIN)

   The default PIN for this printer is located on a on a sticker adhered to the front of the toner cartridge tray.

> **NOTE:** If the default PIN has been changed, contact the printer administrator.

3. Open the Service Tests menu, and then select from the following diagnostics:
   - Dial Test

     Use the Dial Test item to test the control-panel rotary dial. Select Start to begin, and then follow the prompts on the display.
   - Display Test

     Use the Display Test item to test the control-panel display. Select Proceed to begin an internal test. If the message **Test Passed** displays, select **Cancel** to exit.

Control-panel diagnostics (MFP)

1. Open the following menus:
   - Menu
   - Tools
   - Service
2. Enter the default service personal identification number (PIN)

   The default PIN for this printer is located on a on a sticker adhered to the front of the toner cartridge tray.

> **NOTE:** If the default PIN has been changed, contact the printer administrator.

3. Open the Service Tests menu, and then select from the following diagnostics:
   - Display Test

     Use the Display Test item to test the control-panel display. Select Proceed to begin (the display screen changes each time the Proceed button is selected).

Control panel messages document (CPMD)

Learn about the printer control panel messages document (CPMD).

NOTE: A complete CPMD is not included in this service manual.

You can use the error code look-up tool from product home page.

Error codes (types and structure)

Error codes and control-panel messages display on the printer control panel to indicate the current printer status or situations that might require action. Error codes are numerical, or alphanumerical, and have a set structure with six characters (example: 13.WX.YZ).

- The first two characters are numeric and represent the system component that is causing the error. For example, in error code `10.22.15`, **10** = **Supplies** for HP LaserJets.
- The remaining four characters (W, X, Y, and Z values) further define the error.

The CPMD is a comprehensive list of error codes, diagnostic and troubleshooting steps to clear or resolve the error, and other helpful information such as service mode pins and part numbers.

The CPMD is continually updated and republished with the latest information for the following error codes.

Table 3-19 **ERROR CODES: The first two characters**

Error code	System Component	System Error Description
10.WX.YZ	Supplies	Supply error or supply memory error.
11.WX.YZ	Real-time clock	Internal error with the clock on the formatter.
13.WX.YZ	Jam	Paper jam or open door jam error.
20.WX.YZ	Printer memory	Insufficient memory or buffering error.
21.WX.YZ	Page	Page complexity causing a decompression error when trying to process job.
30.WX.YZ	Scanner	Flatbed scanner error occurring inside the unit.
31.WX.YZ	Document feeder	Document feeder, scanner, or jam error.
33.WX.YZ	Security	Backup, Disk, EFI BIOS, Firmware integrity (SureStart), or Trusted Platform Module (TPM) notification or error.
40.WX.YZ	Input/Output (I/O)	Partition manager, secure erase, or USB accessory error.
41.WX.YZ	Fuser, Laser scanner, or Paper path	Miscellaneous error including general and misprint or mismatch errors typically involving (but not limited to) the fuser, the laser scanner, or the paper path.
46.WX.YZ	Engine	Engine communication error.
50.WX.YZ	Fuser	Fuser error.
51.WX.YZ	Laser scanner	Laser scanner beam error.
52.WX.YZ	Laser scanner	Laser scanner startup error.

Table 3-19 ERROR CODES: The first two characters (continued)

Error code	System Component	System Error Description
54.WX.YZ	Sensor	Sensor error (not jam related).
55.WX.YZ	DC controller	DC controller communication error.
56.WX.YZ	Paper handling	Paper input/output or accessory error.
57.WX.YZ	Fan	Fan error.
58.WX.YZ	Sensor	Engine sensor failure.
59.WX.YZ	Motor	Motor error.
60.WX.YZ	Tray motor error	Tray lifting or pick up error.
65.WX.YZ	Connector	Output accessory connection error.
66.WX.YZ	Output accessory	Output accessory error.
67.WX.YZ	Input accessory	Input accessory connection error
69.WX.YZ	Duplexer	Duplexer error.
F0.WX.YZ.ZZ	Firmware related error	Firmware relate errors This can include any of the following Firmware error types: • System • Connectivity • Scanner • Security • Job • Send • IOT

Printer service information

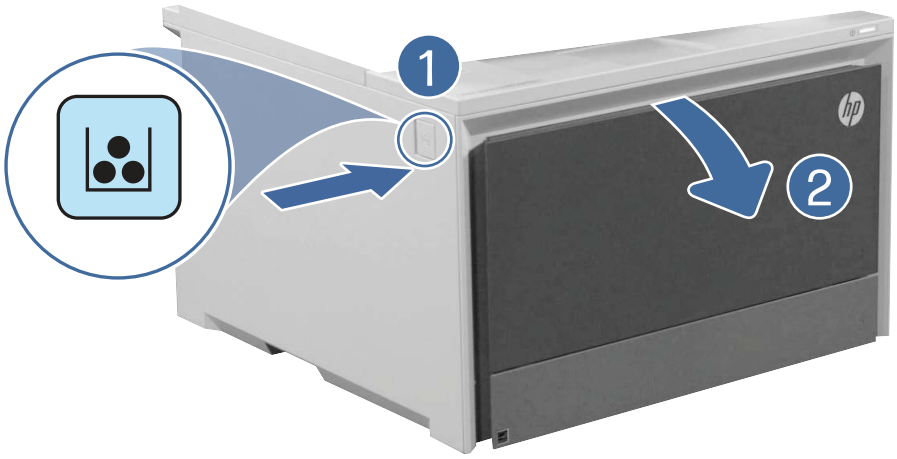
Use the PIN code to access the Service menu.

Service mode PIN number:

HP Color LaserJet Pro 4201, 4202, 4203, HP Color LaserJet Pro MFP 4301, 4302, 4303: The default PIN for this printer is located on a sticker adhered to the front of the toner cartridge tray.

Locate the factory default PIN

1. Press the release button to open the front door.



2. Locate the label attached to the cartridge tray to view the factory default credentials (**Username** and **PIN**).



3. Close the front door.



NOTE: When possible, always update the printer firmware to the latest available version at HP.com as part of the troubleshooting performed for any of the following errors.

If the default PIN has been changed, contact the printer administrator.

Solve paper handling problems

Review the following information to solve paper handling problems.

Clear paper jams (SFP)

Use the procedures in this section to clear jammed paper from the printer paper path.


NOTE: To avoid tearing the paper, pull the jammed paper out slowly and gently.

Figures in this section are representational only. The actual printer being serviced might look slightly different depending on the model and installed accessories.

Paper jam locations

Jams can occur in these locations.

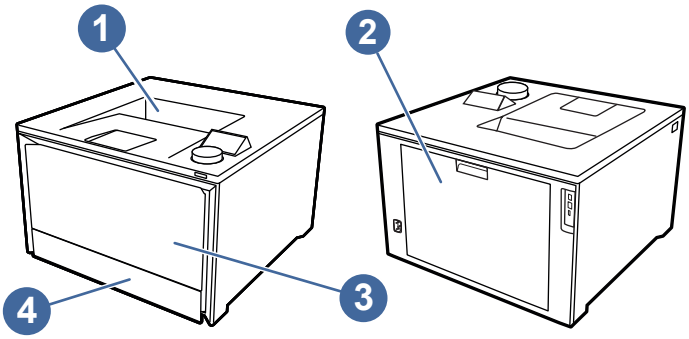Figure 3-34 Paper jam locations



Number	Description
1	Output bin
2	Rear door/Duplexer
3	Tray 1
4	Tray 2

Help animations for clearing paper jams

Learn about printer jam clearing help animations.

Clearing jam help animations are available on the control panel.

To view an animation, open the following menus:

- Menu
- Help
- How to Videos

Experiencing frequent or recurring paper jams?

Follow the steps to solve problems with frequent paper jams. If the first step does not resolve the problem continue with the next step until you have resolved the problem.

NOTE: To print using an HP Plus printer, the printer must have genuine original HP toner cartridges installed, must have an ongoing internet connection and an active HP Plus account (for more information, go to hp.com/plus).

1. If paper has jammed in the printer, clear the jam and then print a configuration page to test the printer.
2. Check that the tray is configured for the correct paper size and type on the printer control panel. Adjust paper settings if necessary.
   a. Open the following menus:
      - Menu
      - Trays
   b. Verify that the tray is correctly configured for the paper size and type.

3. Turn the printer off, wait 30 seconds, and then turn it on again.
4. Print a cleaning page to remove excess toner from inside the printer.
    a. **SFP**: Open the following menus:
        - Menu
        - Tools
        - Troubleshooting
        - Print Quality Tools
        - Cleaning Page
    b. Navigate to and select the Print item in the menu list, and then press the dial to select it and print the report.
    a. **MFP**: Open the following menus:
        - Menu
        - Tools
        - Troubleshooting
        - Print Quality Tools
    b. Touch the Cleaning Page item. A cleaning page prints.
5. Print a configuration page to test the printer.
    a. Open the following menus:
        - Menu
        - Tools
        - Status Reports
    b. Select the Configuration Report item.
    c. Do one of the following:
        - **MFP**: Touch the **Print** button to print the page.
        - **SFP**: Navigate to and select the **Print** item at the top of the menu to print the page.

13.02 Jam error in Tray 1

Use the following procedure to clear paper jams in Tray 1.

Recommended action for customers

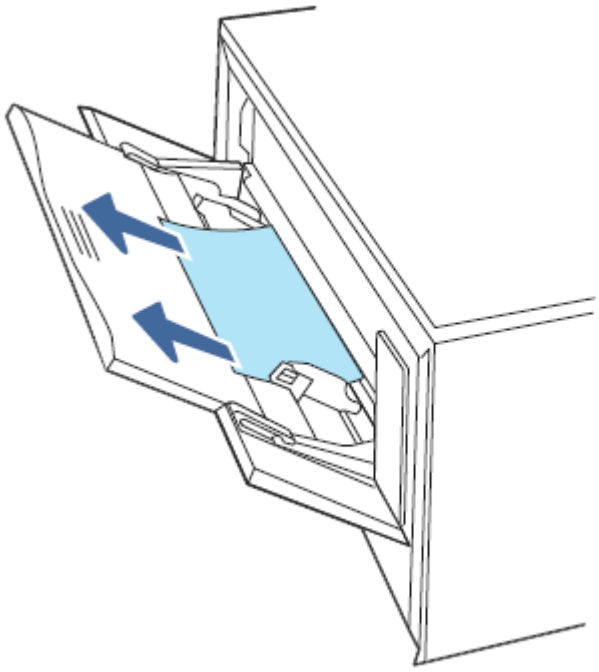
When a jam occurs, the control panel displays a message that assists in clearing the jam.

- **13.02.yz Paper jam in Tray 1**


Y and Z are variables and can be any of the following 0-9 or A-F.

View a video of how to clear a jam in Tray 1


1. If you can see the jammed sheet in Tray 1, remove the jammed sheet by pulling it straight out.



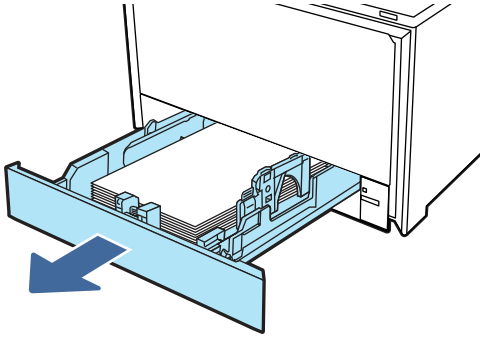
2. If you cannot see the jammed sheet, close Tray 1, and then remove Tray 2.




3. At the right side of the Tray 2 cavity, press the tab to lower the tray plate, and then remove any paper. Remove the jammed sheet by gently pulling it straight out.




4. Push the tray plate back up into place.



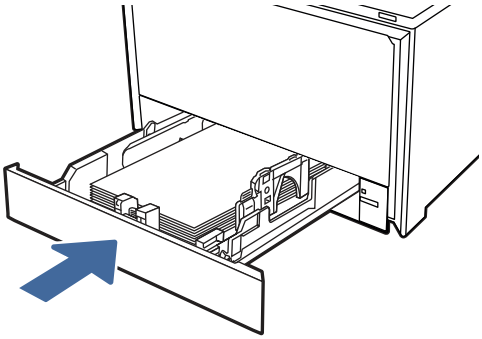
5. Reinstall Tray 2.



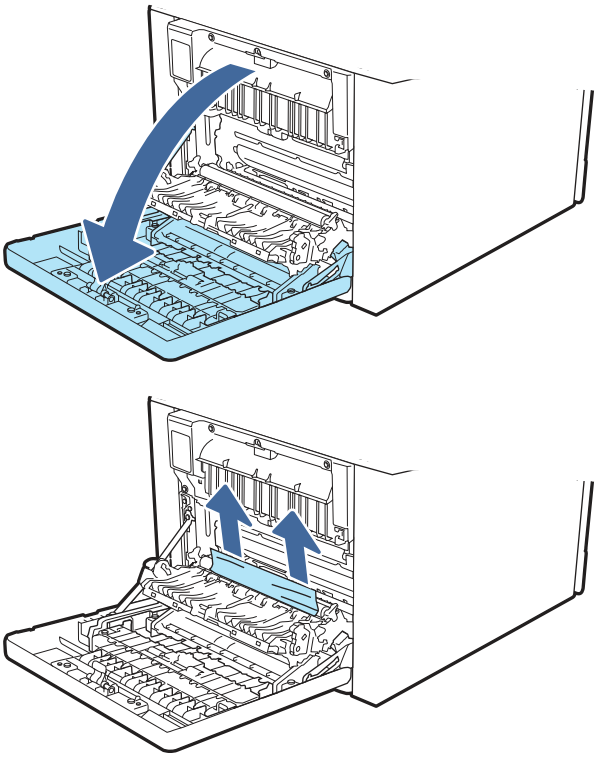
6. Open the rear door and look for and clear any paper present or obstructions in the paper path.



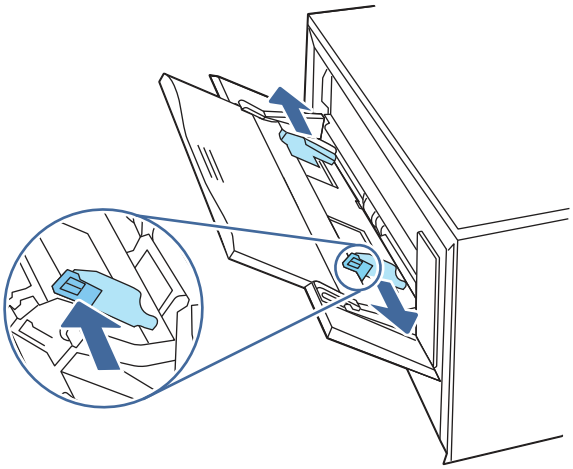7. Make sure the type and quality of the paper being used meets the HP specifications for the printer.
8. Reopen Tray 1 and load paper into the tray. Ensure the tray guides are set to the correct paper size.



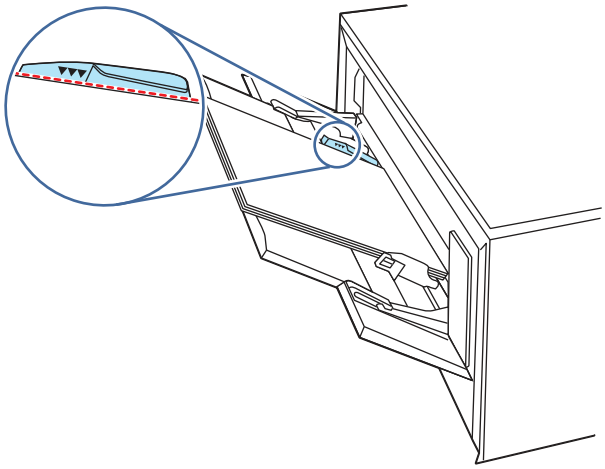9. Ensure the tray is not overfilled. Paper should be below the 3 triangles in the following image.



10. If the error persists, contact your HP-authorized service or support provider, or contact customer support at www.hp.com/go/contactHP.

13.03 Jam error in Tray 2

Use the following procedure to check for a paper jam in Tray 2.

Recommended action for customers

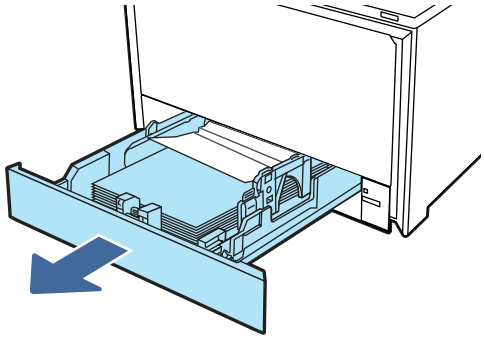
When a jam occurs, the control panel displays a message that assists in clearing the jam.

- **13.03.yz Paper jam in Tray 2**


Y and Z are variables and can be any of the following 0-9 or A-F.

View a video of how to clear a jam in Tray 2


1. Pull the tray completely out of the printer.



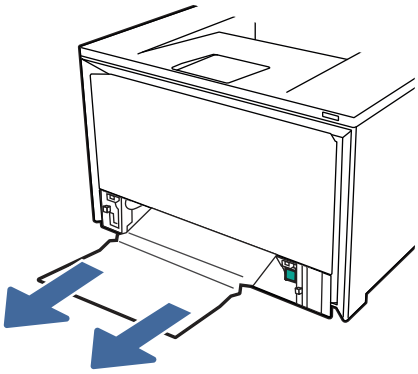2. Remove any jammed or damaged sheets of paper.




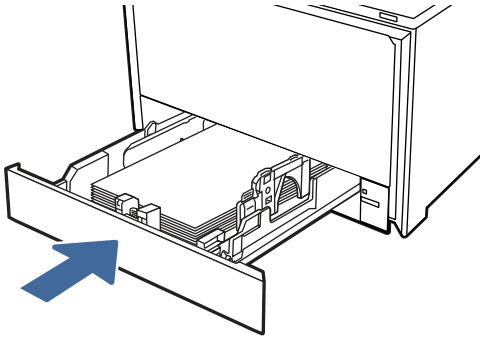
3. Reinsert and close Tray 2.




NOTE: When reinserting the paper, make sure the paper guides are adjusted properly for the paper size.

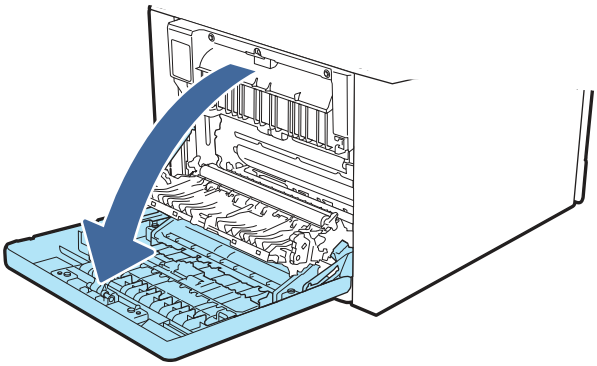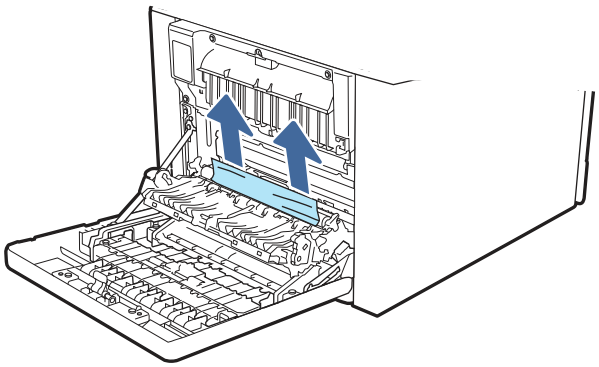4. Open the rear door and look for and clear any paper present or obstructions in the paper path.





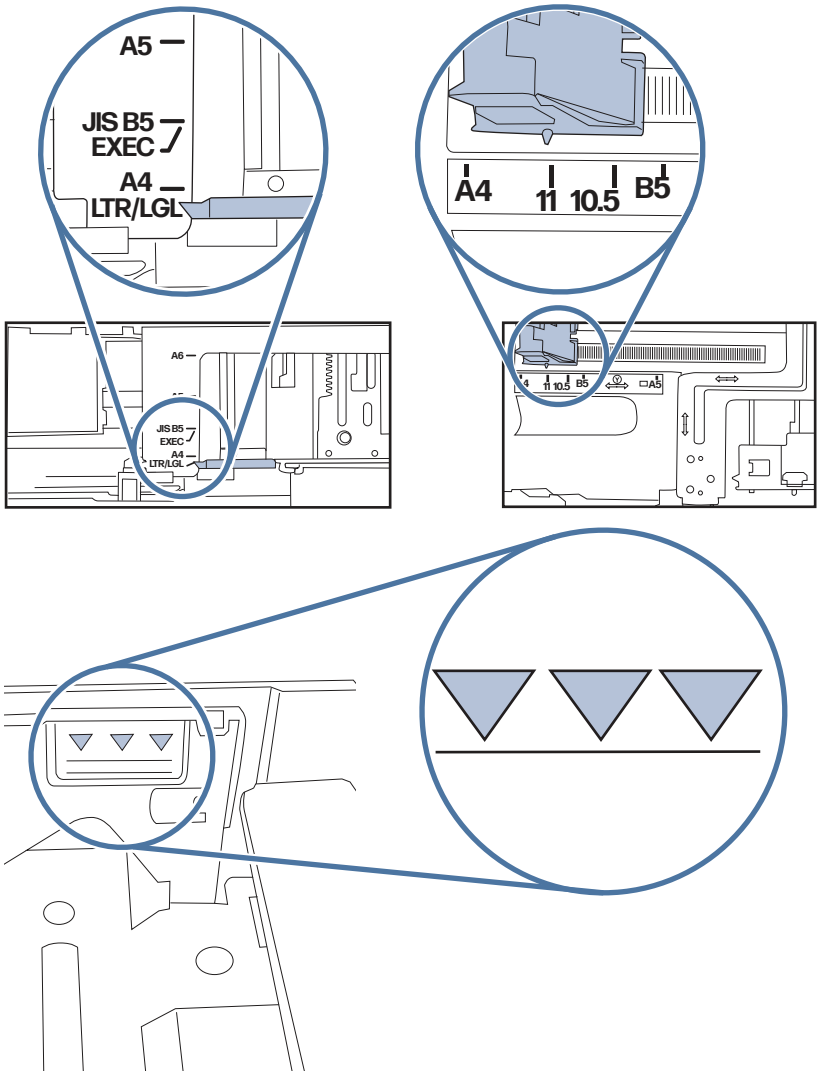5. Ensure the type and quality of the paper being used meets the HP specifications for the printer.
6. If the error persists, ensure that the tray width and length guides are set to the correct paper size for the paper being installed into the tray and that the tray is not over filled above the fill mark (line below 3 triangles). See following images.



7. If the error persists, contact your HP-authorized service or support provider, or contact customer support at www.hp.com/go/contactHP.

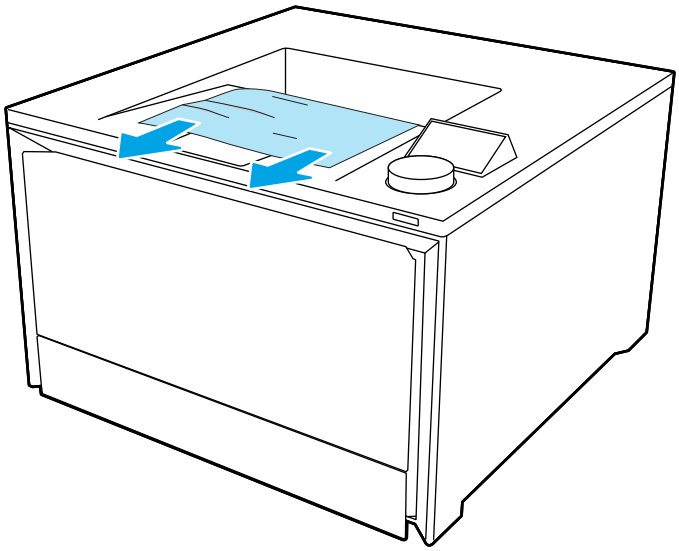
13.10.yz, 13.11.yz, 13.13.yz Jam error in the output bin

Use the following procedure to check for paper in all possible jam locations related to the output bin.

Recommended action for customers

When a jam occurs, the control panel displays an error message that assists in clearing the jam.

- If paper is visible in the output bin, grasp the leading edge and remove it.



13.08, 13.09, 13.14, or 13.15 Jam error in the rear door

Use the following procedure to check for paper in all possible jam locations inside the rear door.

Recommended action for customers

When a jam occurs, the control panel displays a message that assists in clearing the jam.

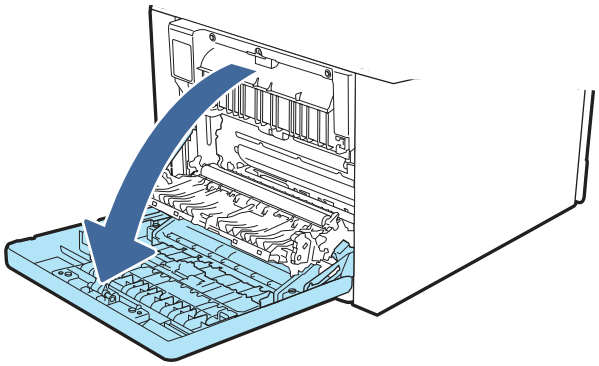
- **13.08.yz Paper jam in rear door**
- **13.09.yz Paper jam in rear door**
- **13.14.yz Paper jam in rear door**
- **13.15.yz Paper jam in rear door**

Y and Z are variables and can be any of the following 0-9 or A-F.

View a video of how to clear a jam in the rear door

1. Check the output area of the printer. If paper is extruding out slowly pull it out of the printer.


2. At the rear of the printer, open the rear door.




3. Remove any jammed or damaged sheets of paper from the read door of the printer..


CAUTION: The fuser is located above the rear door, and it is hot. Do not attempt to reach into the area above the rear door until the fuser is cool.

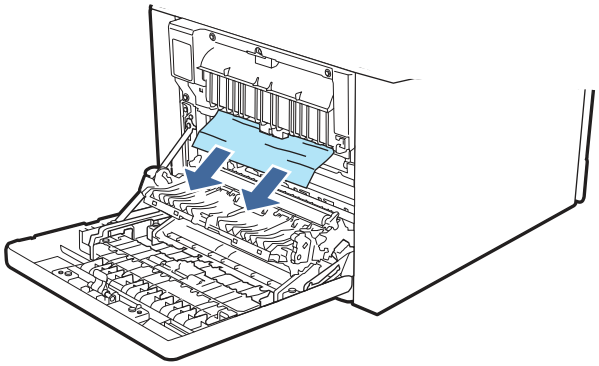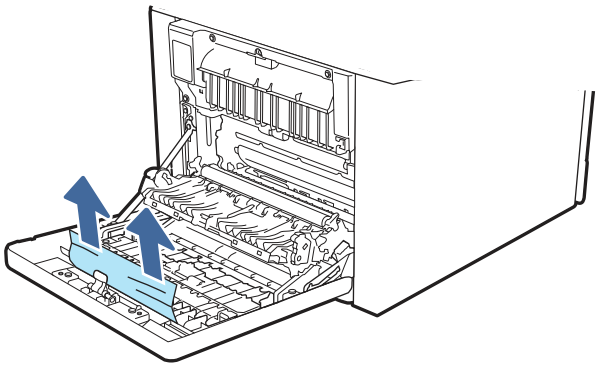NOTE: Check all places paper inside the rear door for paper.





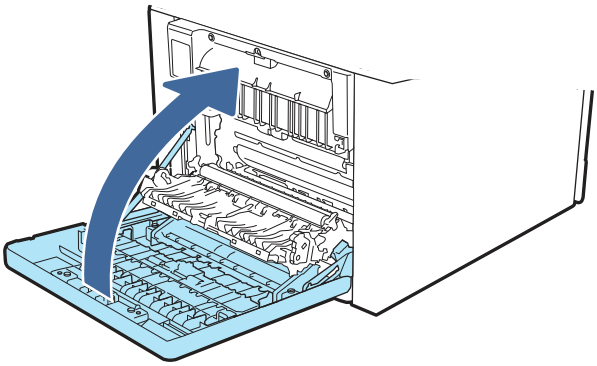4. Close the rear door.



5. If the error persists, ensure the type and quality of the paper being used meets the HP specifications for the printer.
6. If the error persists, contact your HP-authorized service or support provider, or contact customer support at www.hp.com/go/contactHP.

Jam error in the fuser output

Use the following procedure to check for paper in all possible jam locations in the fuser area.

Recommended action for customers

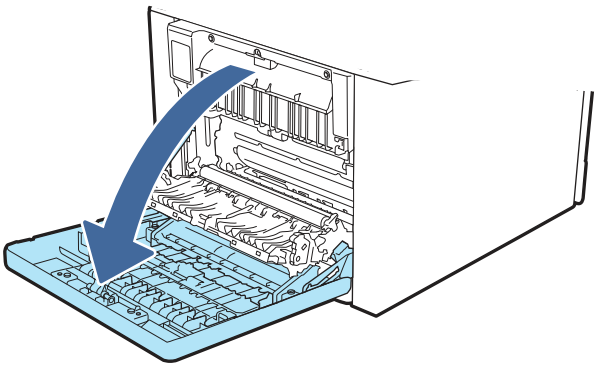
When a jam occurs, the control panel displays a message that assists in clearing the jam.

- **Jam in rear door**


⚠ **CAUTION:** The fuser can be hot while the printer is in use. Wait for the fuser to cool before handling it.

View a video of how to clear a jam in the fuser area


1. Open the rear door.



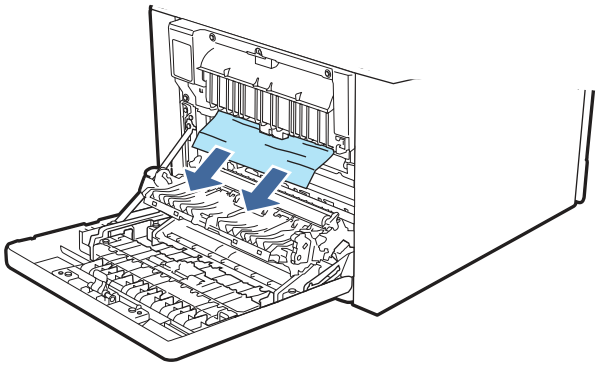2. Gently pull out any jammed paper from the rollers in the rear door area.



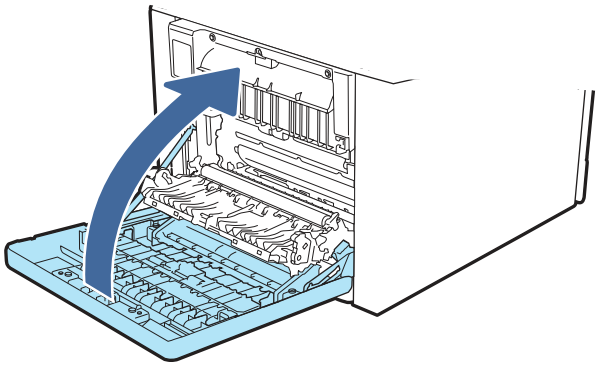3. Close the rear door.



4. If the error persists, ensure the type and quality of the paper being used meets the HP specifications for the printer.
5. If the error persists, contact your HP-authorized service or support provider, or contact customer support at www.hp.com/go/contactHP.

Change jam recovery

Use the following procedure to change jam recovery from the control panel.

1. Open the following menus:
   - Menu
   - Settings
   - General
   - Jam Recovery
2. Choose from the following settings:
   - Automatic
   - On
   - Off

Clear paper jams (MFP)

Use the procedures in this section to clear jammed paper from the printer paper path.


NOTE: To avoid tearing the paper, pull the jammed paper out slowly and gently.

Figures in this section are representational only. The actual printer being serviced might look slightly different depending on the model and installed accessories.

Paper jam locations

Jams can occur in these locations.

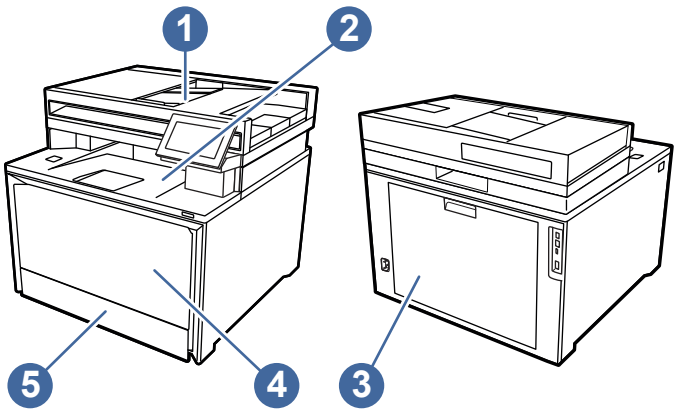Figure 3-35 Jam locations



Number	Description
1	Document feeder
2	Output bin
3	Rear door/Duplexer
4	Tray 1
5	Tray 2

Help animations for clearing paper jams

Learn about printer jam clearing help animations.

Clearing jam help animations are available on the control panel.

To view an animation, open the following menus:

- Menu
- Help
- How to Videos

Experiencing frequent or recurring paper jams?

Follow the steps to solve problems with frequent paper jams. If the first step does not resolve the problem continue with the next step until you have resolved the problem.

NOTE: To print using an HP Plus printer, the printer must have genuine original HP toner cartridges installed, must have an ongoing internet connection and an active HP Plus account (for more information, go to hp.com/plus).

1. If paper has jammed in the printer, clear the jam and then print a configuration page to test the printer.
2. Check that the tray is configured for the correct paper size and type on the printer control panel. Adjust paper settings if necessary.
   a. Open the following menus:
      - Menu
      - Trays
   b. Verify that the tray is correctly configured for the paper size and type.
3. Turn the printer off, wait 30 seconds, and then turn it on again.
4. Print a cleaning page to remove excess toner from inside the printer.
   a. **SFP**: Open the following menus:
      - Menu
      - Tools
      - Troubleshooting
      - Print Quality Tools
      - Cleaning Page
   b. Navigate to and select the Print item in the menu list, and then press the dial to select it and print the report.
   a. **MFP**: Open the following menus:
      - Menu
      - Tools
      - Troubleshooting
      - Print Quality Tools
   b. Touch the Cleaning Page item. A cleaning page prints.
5. Print a configuration page to test the printer.
   a. Open the following menus:
      - Menu
      - Tools
      - Status Reports
   b. Select the Configuration Report item.


c. Do one of the following:

- **MFP**: Touch the **Print** button to print the page.
- **SFP**: Navigate to and select the **Print** item at the top of the menu to print the page.

Paper jam locations

Jams can occur in these locations.

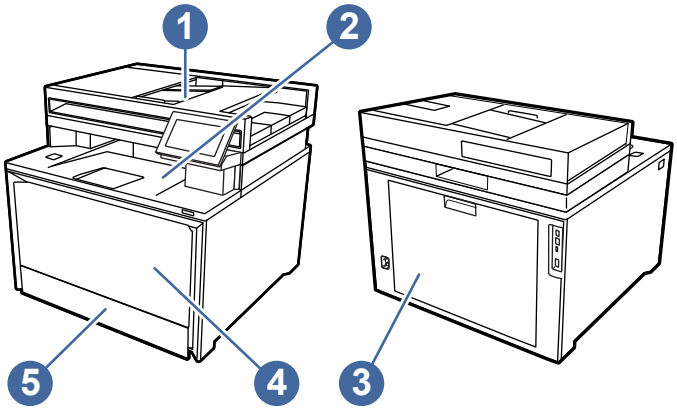Figure 3-36 **Jam locations**



Number	Description
1	Document feeder
2	Output bin
3	Rear door/Duplexer
4	Tray 1
5	Tray 2

13.02 Jam error in Tray 1

Use the following procedure to clear paper jams in Tray 1.

Recommended action for customers

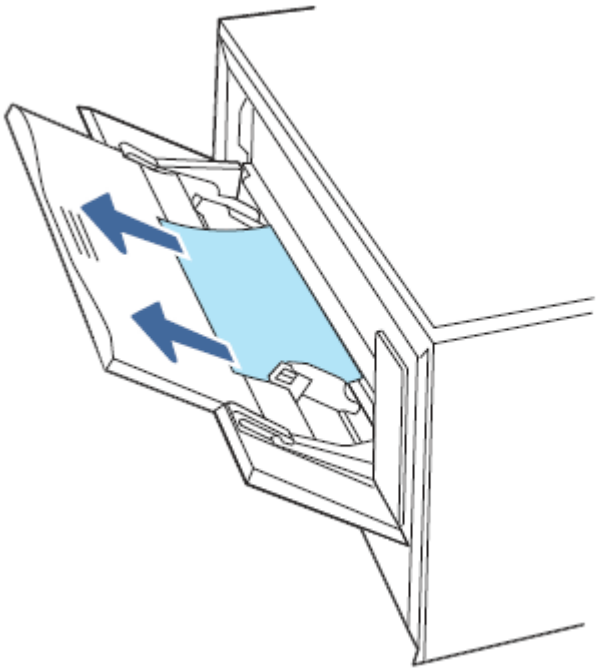
When a jam occurs, the control panel displays a message that assists in clearing the jam.

- **13.02.yz Paper jam in Tray 1**


Y and Z are variables and can be any of the following 0-9 or A-F.

View a video of how to clear a jam in Tray 1


1. If you can see the jammed sheet in Tray 1, remove the jammed sheet by pulling it straight out.



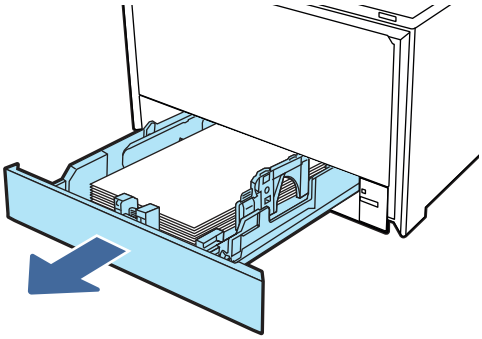
2. If you cannot see the jammed sheet, close Tray 1, and then remove Tray 2.




3. At the right side of the Tray 2 cavity, press the tab to lower the tray plate, and then remove any paper. Remove the jammed sheet by gently pulling it straight out.




4. Push the tray plate back up into place.




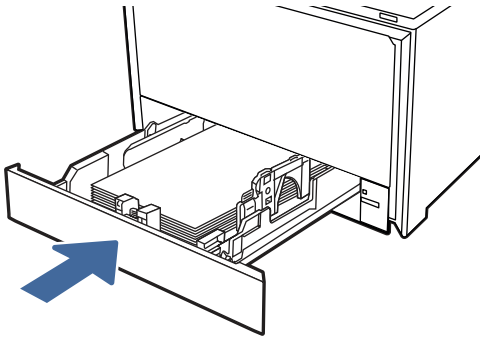5. Reinstall Tray 2.




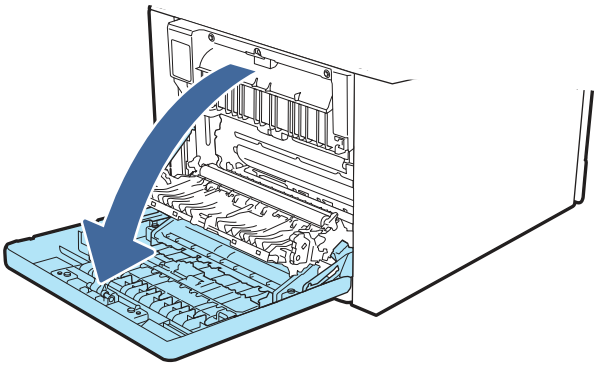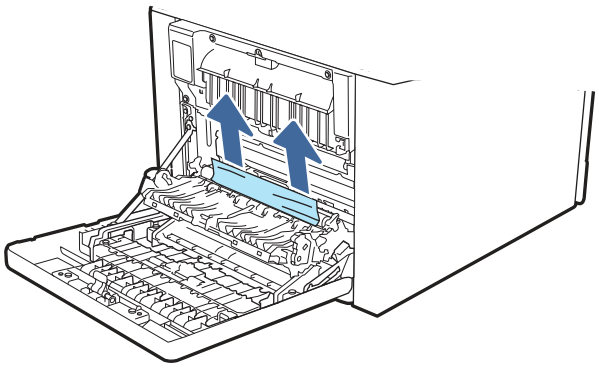6. Open the rear door and look for and clear any paper present or obstructions in the paper path.






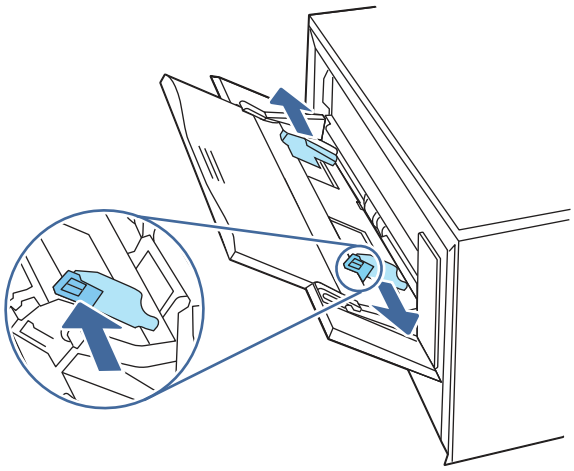7. Make sure the type and quality of the paper being used meets the HP specifications for the printer.
8. Reopen Tray 1 and load paper into the tray. Ensure the tray guides are set to the correct paper size.



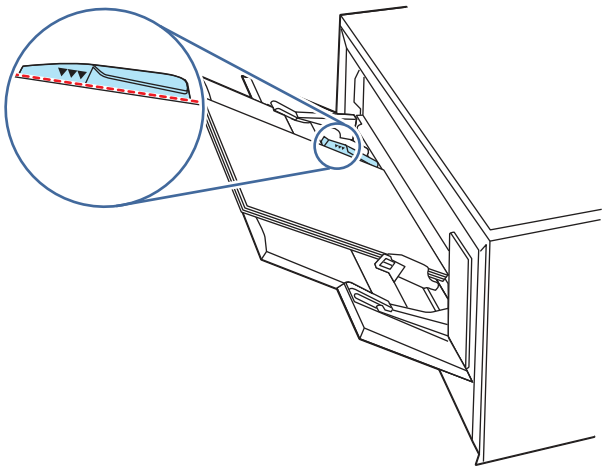9. Ensure the tray is not overfilled. Paper should be below the 3 triangles in the following image.



10. If the error persists, contact your HP-authorized service or support provider, or contact customer support at www.hp.com/go/contactHP.

13.03 Jam error in Tray 2

Use the following procedure to check for a paper jam in Tray 2.

Recommended action for customers

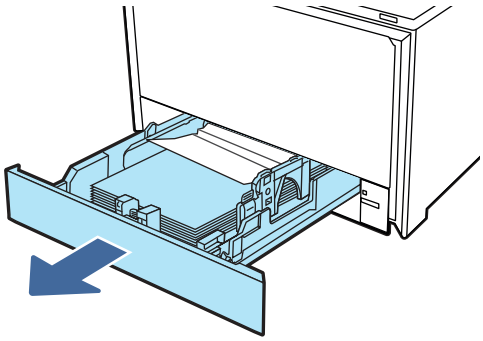
When a jam occurs, the control panel displays a message that assists in clearing the jam.

- **13.03.yz Paper jam in Tray 2**


Y and Z are variables and can be any of the following 0-9 or A-F.

View a video of how to clear a jam in Tray 2


1. Pull the tray completely out of the printer.



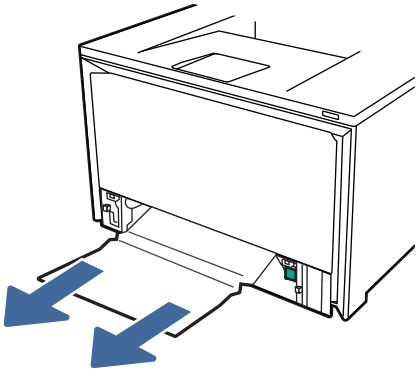2. Remove any jammed or damaged sheets of paper.




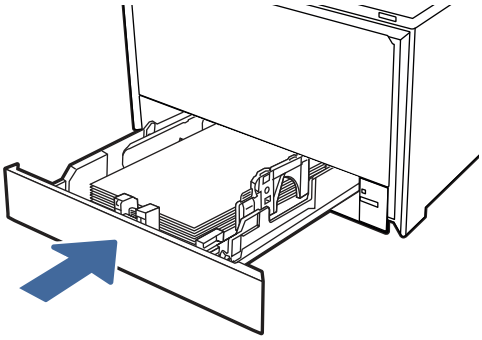
3. Reinsert and close Tray 2.



NOTE: When reinserting the paper, make sure the paper guides are adjusted properly for the paper size.

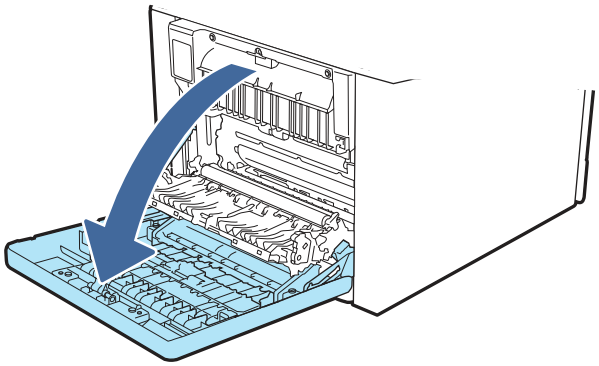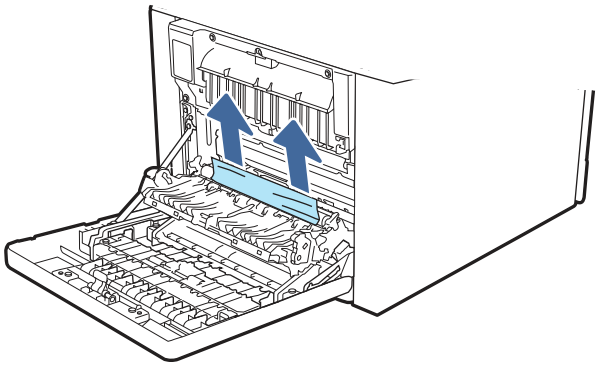
4. Open the rear door and look for and clear any paper present or obstructions in the paper path.





5. Ensure the type and quality of the paper being used meets the HP specifications for the printer.

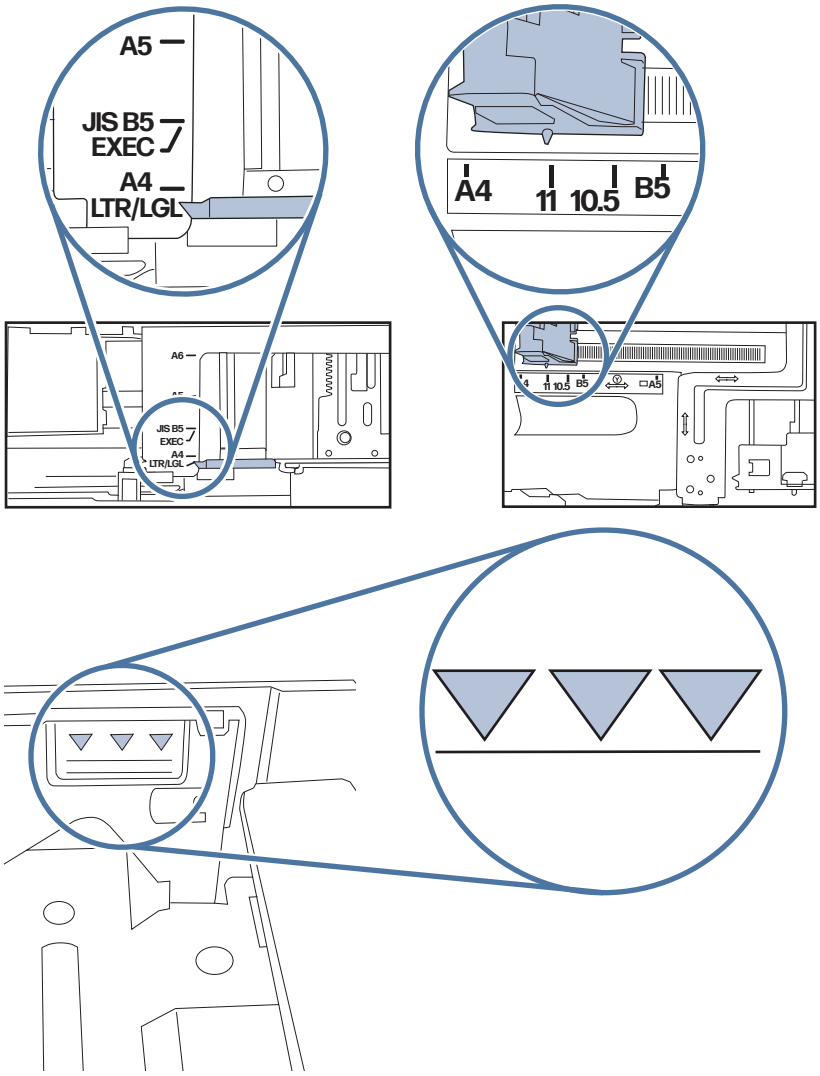6. If the error persists, ensure that the tray width and length guides are set to the correct paper size for the paper being installed into the tray and that the tray is not over filled above the fill mark (line below 3 triangles). See following images.



7. If the error persists, contact your HP-authorized service or support provider, or contact customer support at www.hp.com/go/contactHP.

13.10.yz, 13.11.yz, 13.13.yz Jam error in the output bin

Use the following procedure to check for paper in all possible jam locations related to the output bin.

Recommended action for customers

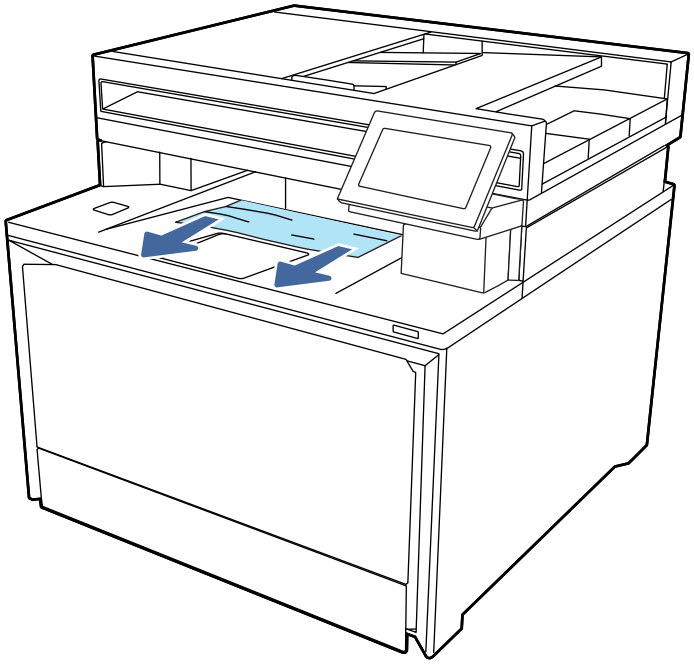
When a jam occurs, the control panel displays an error message that assists in clearing the jam.

- **13.10.yz Paper jam in output bin**
- **13.11.yz Paper jam in output bin**
- **13.13.yz Paper jam in output bin**

Y and Z are variables and can be any of the following 0-9 or A-F.

View a video of how to clear a jam in the output bin

- If paper is visible in the output bin, grasp the leading edge and remove it.



13.08, 13.09, 13.14, or 13.15 Jam error in the rear door

Use the following procedure to check for paper in all possible jam locations inside the rear door.

Recommended action for customers

When a jam occurs, the control panel displays a message that assists in clearing the jam.

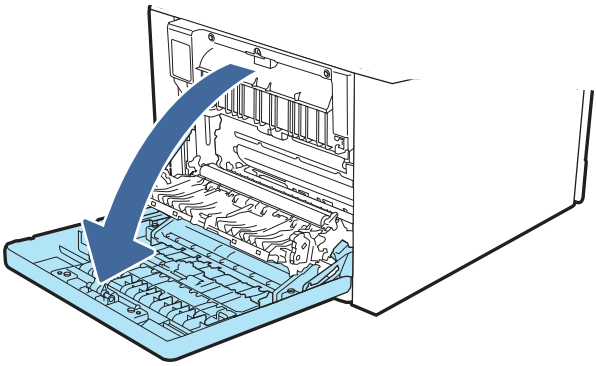
- **13.08.yz Paper jam in rear door**
- **13.09.yz Paper jam in rear door**
- **13.14.yz Paper jam in rear door**
- **13.15.yz Paper jam in rear door**

Y and Z are variables and can be any of the following 0-9 or A-F.

View a video of how to clear a jam in the rear door

1. Check the output area of the printer. If paper is extruding out slowly pull it out of the printer.


2. At the rear of the printer, open the rear door.




3. Remove any jammed or damaged sheets of paper from the read door of the printer..


CAUTION: The fuser is located above the rear door, and it is hot. Do not attempt to reach into the area above the rear door until the fuser is cool.

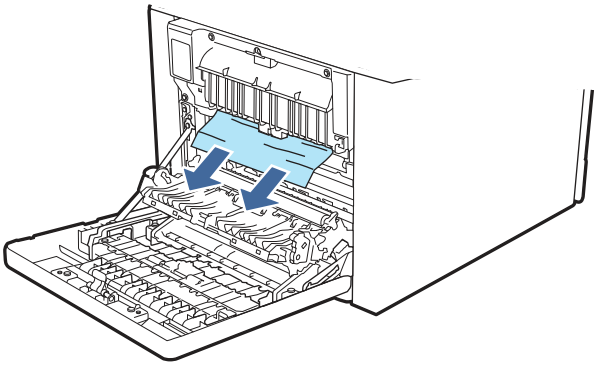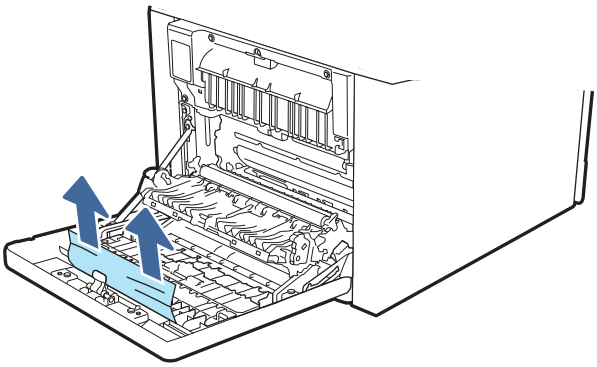NOTE: Check all places paper inside the rear door for paper.





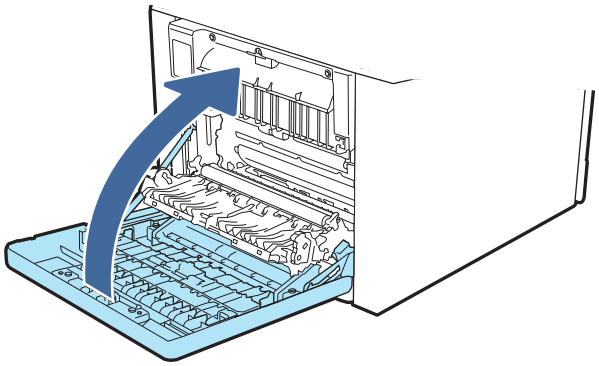4. Close the rear door.



5. If the error persists, ensure the type and quality of the paper being used meets the HP specifications for the printer.
6. If the error persists, contact your HP-authorized service or support provider, or contact customer support at www.hp.com/go/contactHP.

Jam error in the fuser output

Use the following procedure to check for paper in all possible jam locations in the fuser area.

Recommended action for customers

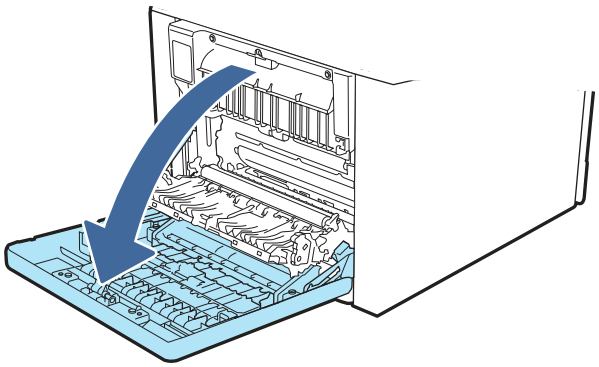
When a jam occurs, the control panel displays a message that assists in clearing the jam.

- **Jam in rear door**


⚠ **CAUTION:** The fuser can be hot while the printer is in use. Wait for the fuser to cool before handling it.

View a video of how to clear a jam in the fuser area


1. Open the rear door.



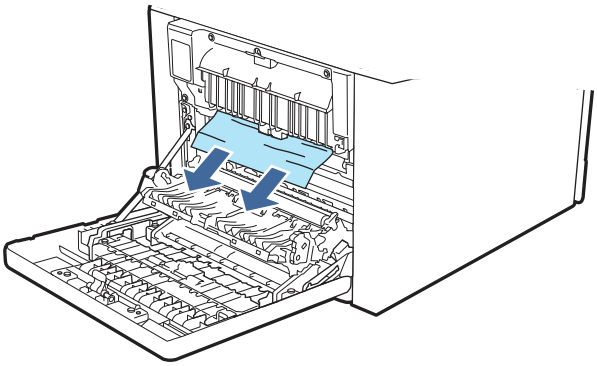2. Gently pull out any jammed paper from the rollers in the rear door area.



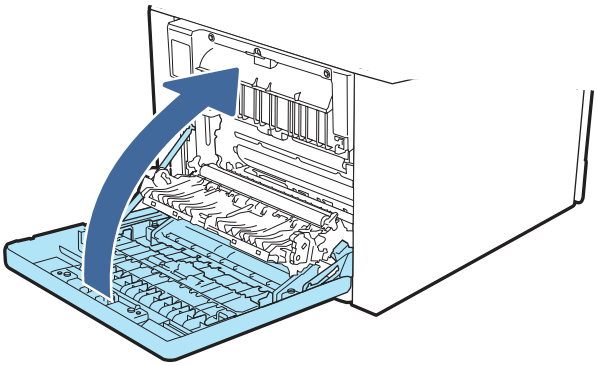3. Close the rear door.



4. If the error persists, ensure the type and quality of the paper being used meets the HP specifications for the printer.
5. If the error persists, contact your HP-authorized service or support provider, or contact customer support at www.hp.com/go/contactHP.

Change jam recovery

Use the following procedure to change jam recovery from the control panel.

1. Open the following menus:
   - Menu
   - Settings
   - General
   - Jam Recovery
2. Choose from the following settings:
   - Automatic
   - On
   - Off

Printer feeds incorrect page size

Review the following information when the printer feeds an incorrect page size.

NOTE: To print using an HP Plus printer, the printer must have genuine original HP toner cartridges installed, must have an ongoing internet connection and an active HP Plus account (for more information, go to hp.com/plus).

Table 3-20 Printer feeds incorrect page size

Cause	Solution
The correct size paper is not loaded in the tray.	Load the correct size paper in the tray.
The correct size paper is not selected in the software program or printer driver.	Confirm that the settings in the software program and printer driver are correct, because the software program settings override the printer driver and control panel settings, and the printer driver settings override the control panel settings.
The correct size paper for the tray is not selected in the printer control panel.	From the control panel, select the correct size paper for the tray.
The paper size is not configured correctly for the tray.	Print a configuration page to determine the paper size for which the tray is configured.
The guides in the tray are not against the paper.	Verify that the paper guides are touching the paper.

Printer pulls from incorrect tray

Review the following information when the printer pulls from an incorrect tray.

NOTE: To print using an HP Plus printer, the printer must have genuine original HP toner cartridges installed, must have an ongoing internet connection and an active HP Plus account (for more information, go to hp.com/plus).

Table 3-21 Printer pulls from incorrect tray

Cause	Solution
A driver for a different printer is in use.	Use a driver for this printer.
The specified tray is empty.	Load paper in the specified tray.
The paper size is not configured correctly for the input tray.	Print a configuration page or use the control panel to determine the paper size for which the tray is configured.
The guides in the tray are not against the paper.	Verify that the guides are touching the paper.

Printer will not duplex or duplexes incorrectly (duplex models)

Review the following information when the printer will not duplex or duplexes incorrectly.

Table 3-22 Printer will not duplex (print 2-sided jobs) or duplexes incorrectly

Cause	Solution
The duplex job is trying to use unsupported paper.	Verify that the paper is supported for duplex printing.
The printer driver is not set up for duplex printing.	Set up the printer driver to enable duplex printing.

Table 3-22 **Printer will not duplex (print 2-sided jobs) or duplexes incorrectly (continued)**

Cause	Solution
The first page is printing on the back of preprinted forms or letterhead.	Load preprinted forms and letterhead in Tray 1 with the letterhead or printed side down, with the top of the page leading into the printer. For Tray 2-X, load the paper printed side up with the top of the page toward the right of the printer.
The printer model does not support automatic 2-sided printing.	The printer model does not support automatic 2-sided printing.

Paper does not feed from Tray 2-X

Review the following information when the paper does not feed from Tray 2-X.

NOTE: To print using an HP Plus printer, the printer must have genuine original HP toner cartridges installed, must have an ongoing internet connection and an active HP Plus account (for more information, go to hp.com/plus).

Table 3-23 **Paper does not feed from Tray 2-X**

Cause	Solution
The correct size paper is not loaded.	Load the correct size paper.
The input tray is empty.	Load paper in the input tray.
The correct paper type for the input tray is not selected in the printer control panel.	From the printer control panel, select the correct paper type for the input tray. Trays configured for a paper type with a specific weight range will not match a print job that specifies an exact weight, even if the specified weight is within the weight range.
Paper from a previous jam has not been completely removed.	Open the printer and remove any paper in the paper path. Closely inspect the fuser area for jams.
None of the optional trays appear as input tray options.	The optional trays only display as available if they are installed. Verify that any optional trays are correctly installed. Verify that the printer driver has been configured to recognize the optional trays.
An optional tray is incorrectly installed.	Print a configuration page to confirm that the optional tray is installed. If not, verify that the tray is correctly attached to the printer.
The paper size is not configured correctly for the input tray.	Print a configuration page or use the control panel to determine the paper size for which the tray is configured.
The guides in the tray are not against the paper.	Verify that the guides are touching the paper.

Output is curled or wrinkled

Review the following information when the output is curled or wrinkled.

Table 3-24 **Output is curled or wrinkled**

Cause	Solution
Paper does not meet the specifications for this printer.	Use only paper that meets the HP paper specifications for this printer. Non-recycled, 75 g/m2 (20 lb) paper is optimal for office use.

Table 3-24 Output is curled or wrinkled (continued)

Cause	Solution
The correct paper type for the input tray is not selected in the printer control panel.	From the printer control panel, select the correct paper type for the input tray. Trays configured for a paper type with a specific weight range will not match a print job that specifies an exact weight, even if the specified weight is within the weight range.
Paper is damaged or in poor condition.	Remove paper from the input tray and load paper that is in good condition.
The printer is operating in an excessively humid environment.	Verify that the printing environment is within humidity specifications.
The print job consist of large, solid-filled areas.	Large, solid-filled areas can cause excessive curl. Try using a different pattern.
Paper used was not stored correctly and might have absorbed moisture.	Remove paper and replace it with paper from a fresh, unopened package. Store paper in a plastic bag to protect it from humidity.
Paper has poorly cut edges.	Remove paper, flex it, rotate it 180 degrees or turn it over, and then reload it into the input tray. Do not fan paper. If the problem persists, replace the paper.
The specific paper type was not configured for the tray or selected in the software.	Configure the software for the paper (see the software documentation). Configure the tray for the paper.
The paper has previously been used for a print job.	Do not re-use paper.

The printer does not pick up paper

If the printer does not pick up paper from the tray, try these solutions.

NOTE: Tray 1 and Tray 2 are optimal for paper pickup when using special paper or media other than 20lb plain paper. For Tray 1 and Tray 2 the printer increases the number of attempts to pick up a page, which increases the reliability of successfully picking the page from the tray and decreases the possibility of a mispick jam.

HP recommends using Tray 1 or Tray 2 if the printer is experiencing excessive or reoccurring jams from trays other than Tray 1 and Tray 2, or for print jobs that require media other than 20lb plain paper.

1. Open the printer and remove any jammed sheets of paper.
2. Load the tray with the correct size of paper for the job.
3. Make sure the paper size and type are set correctly on the printer control panel.
4. Make sure the paper guides in the tray are adjusted correctly for the size of paper. Adjust the guides to the appropriate indentation in the tray.
5. Check the printer control panel to see if the printer is waiting for an acknowledgment to the feed the paper manually prompt. Load paper, and continue.
6. The rollers above the tray might be contaminated. Clean the rollers with a lint-free cloth dampened with warm water.

The printer picks up multiple sheets of paper

If the printer picks up multiple sheets of paper from the tray, try these solutions.

1. Remove the stack of paper from the tray and flex it, rotate it 180 degrees, and flip it over. *Do not fan the paper*. Return the stack of paper to the tray.
2. Use only paper that meets HP specifications for this printer.
3. Use paper that is not wrinkled, folded, or damaged. If necessary, use paper from a different package.
4. Make sure the tray is not overfilled. If it is, remove the entire stack of paper from the tray, straighten the stack, and then return some of the paper to the tray.
5. Make sure the paper guides in the tray are adjusted correctly for the size of paper. Adjust the guides to the appropriate indentation in the tray.
6. Make sure the printing environment is within recommended specifications.
7. The tray pick and/or feed rollers might be contaminated. Clean the rollers with a lint-free cloth dampened with warm water.

The document feeder jams, skews, or picks up multiple sheets of paper (MFP)

Learn about MFP document feeder paper handling problems.

Review the following information when the document feeder jams, skews, or picks up multiple sheets of paper.

- Check to see if there are areas on the page that might have had staples removed. This can cause jams and/or mispicks.
- The original might have something on it, such as staples or self-adhesive notes that must be removed.
- Check that all rollers are in place and correctly installed.
- Make sure that the top document-feeder cover is closed.
- The pages might not be placed correctly. Straighten the pages and adjust the paper guides to center the stack.
- The paper guides must be touching the sides of the paper stack to work correctly. Make sure that the paper stack is straight, and the guides are against the paper stack.
- The document feeder input tray or output bin might contain more than the maximum number of pages. Make sure the paper stack fits below the guides in the input tray and remove pages from the output bin.
- Verify that there are no pieces of paper, staples, paper clips, or other debris in the paper path.
- Clean the document-feeder rollers and the separation pad. Use compressed air or a clean, lint-free cloth moistened with warm water. If misfeeds still occur, replace the rollers.
- Use the control panel menus to check the status of the document-feeder kit and replace it if necessary.

Paper does not feed automatically

Review the following information when the paper does not feed automatically.

NOTE: To print using an HP Plus printer, the printer must have genuine original HP toner cartridges installed, must have an ongoing internet connection and an active HP Plus account (for more information, go to hp.com/plus).

Table 3-25 Paper does not feed automatically

Cause	Solution
Manual feed is selected in the software program.	Load Tray 1 with paper, or, if the paper is loaded, press the OK button.
The correct size paper is not loaded.	Load the correct size paper.
The input tray is empty.	Load paper into the input tray.
Paper from a previous jam has not been completely removed.	Open the printer and remove any paper in the paper path.
The paper size is not configured correctly for the input tray.	Print a configuration page or use the control panel to determine the paper size for which the tray is configured.
The guides in the tray are not against the paper.	Verify that the rear and width paper guides are touching the paper.

Image-quality troubleshooting

Learn about image-quality troubleshooting.

Use the information in this topic to troubleshoot and resolve image-quality (what you see on the final printed page) problems including copy-quality, print-quality, and color problems (color printers only).

Various printer hardware problems can cause image-quality defects. This topic is a guide to the steps used to isolate the specific areas of the printer that are causing image-quality defects on the printed page, and to provide solutions to resolve those image-quality defects.

Image-quality problems are defined as:

- **Print-quality (PQ) problems**: PQ problems are associated with the print engine (printer base) of an MFP printer (single function non MFP image-quality problems are always PQ defects). PQ defects appear on pages that are **printed** by the print engine and not fed through an integrated scanner assembly (ISA).
- **Copy-quality (CQ) problems**: CQ problems are associated with the integrated-scanner assembly (ISA) portion of an MFP printer. CQ defects appear on pages that are **copied** using the document feeder or flatbed glass.

If the print defect is already known to be a PQ or CQ problem, skip to the appropriate troubleshooting topic listed below. Otherwise, follow the steps in the next section below to get started troubleshooting image-quality problems.

- **Print-quality (PQ) problems**: See Print-quality troubleshooting.
- **Copy-quality (CQ) problems**: See Copy-quality troubleshooting.

Get started troubleshooting image-quality problems

Print a demonstration page to identify the defect as a PQ (print engine) or CQ (ISA) problem.

NOTE: If the image defect appears on the printed demonstration page, the issue is a print-quality (PQ) problem (associated with the print engine and not the document feeder or flatbed glass) and not a CQ problem.

Make sure that the demonstration page is printed on **plain paper**.

Enterprise printers

1. Select **Reports** > **Other pages**.
2. Select Demonstration Page.

Pro printers

1. At the printer, scroll to or select Setup.
2. Go to Reports, and then select Demonstration Page.

Does the demonstration page show any image-quality defects?

- **Yes**: If defects appear on the printed demonstration page the issue is PQ related. See Print-quality troubleshooting.
- **No**: If defects does not appear on the printed demonstration page the issue is CQ related. See Copy-quality troubleshooting.

Print-quality troubleshooting

Learn about the print-quality troubleshooting.

NOTE: Print-quality (PQ) problems are associated with the print engine (printer base) of an MFP printer (single function non MFP image-quality problems are always PQ defects). PQ defects appear on pages that are **printed** by the print engine and not feed through an integrated scanner assembly (ISA).

Repetitive image defect ruler

Review the following information about a repetitive image defect ruler.

When troubleshooting the source of some print image defects, one solution is to identify if it is a repetitive defect (does the print quality defect appear multiple times on the printed page?). If this is the case, use a ruler to measure occurrences of repetitive image defects to help solve image-quality problems. For more information, see Using a ruler to measure between repetitive defects.

Use a ruler to measure occurrences of repetitive image defects to help solve image-quality problems. Place the ruler next to the first occurrence of the defect on the page. Find the distance between identical defects and use the table below to identify the component that is causing the defect.

CAUTION: Do not use solvents or oils to clean rollers. Instead, rub the roller with a lint-free cloth. If dirt is difficult to remove, rub the roller with a lint-free cloth that has been dampened with water.

NOTE: The primary charging roller, photosensitive drum, and developer roller cannot be cleaned because they are internal assemblies in the toner cartridge or imaging drum. If one of these assemblies is causing the defect, replace the toner cartridge.

The primary fuser sleeve unit or pressure roller cannot be cleaned because they are internal assemblies in the fuser. If one of these assemblies is causing the defect, replace the fuse

TIP: To make a printer specific repetitive defect ruler, use a metric ruler to transfer the measurements in the table below to a transparency or the edge of a piece of paper—clearly label each ruler mark with the associated defective assembly.

Table 3-26 Repetitive defects

Assembly	Distance between defects	Notes
Developer roller	23.2 mm (0.91 in)	Appears as dropouts.
Primary charging roller	24.5 mm (0.96 in)	Appears as dropouts.
Resupply roller	30.6 mm (1.20 in)	
Registration roller	49 mm (1.9 in)	Appears as dirt on the page.
Secondary transfer roller and Station Pitch	51.8 mm (2.03 in)	Appears as dropouts or dirt on the back of the page.
Fuser roller	57.5 mm (2.26 in)	Appear as dirt on the page.
Pressure roller	63 mm (2.5 in)	Appears as dropouts or dirt on the back of the page.
Photosensitive drum	64.6 mm (2.54 in)	Appear as dirt or appears as dropouts.

Use a ruler to measure between repetitive defects

The figures in this section show color repetitive defect pages. However, the process for measuring repetitive defects is valid for mono pages.

1. Identify a repetitive defect on the page.


TIP: Print a cleaning page to see if that resolves the defect.

NOTE: Some printers allow loading Letter and A4 media in short-edge-first or long-edge-first orientation in the paper trays. When measuring repetitive defects, make sure to place the ruler at the leading edge of the page. This is the edge of the page that feeds into the printer first.

The example pages below show the following types of repetitive defects.

- Lines (callout 1)
- Smudges (callout 2)
- Dots or spots (callout 3)

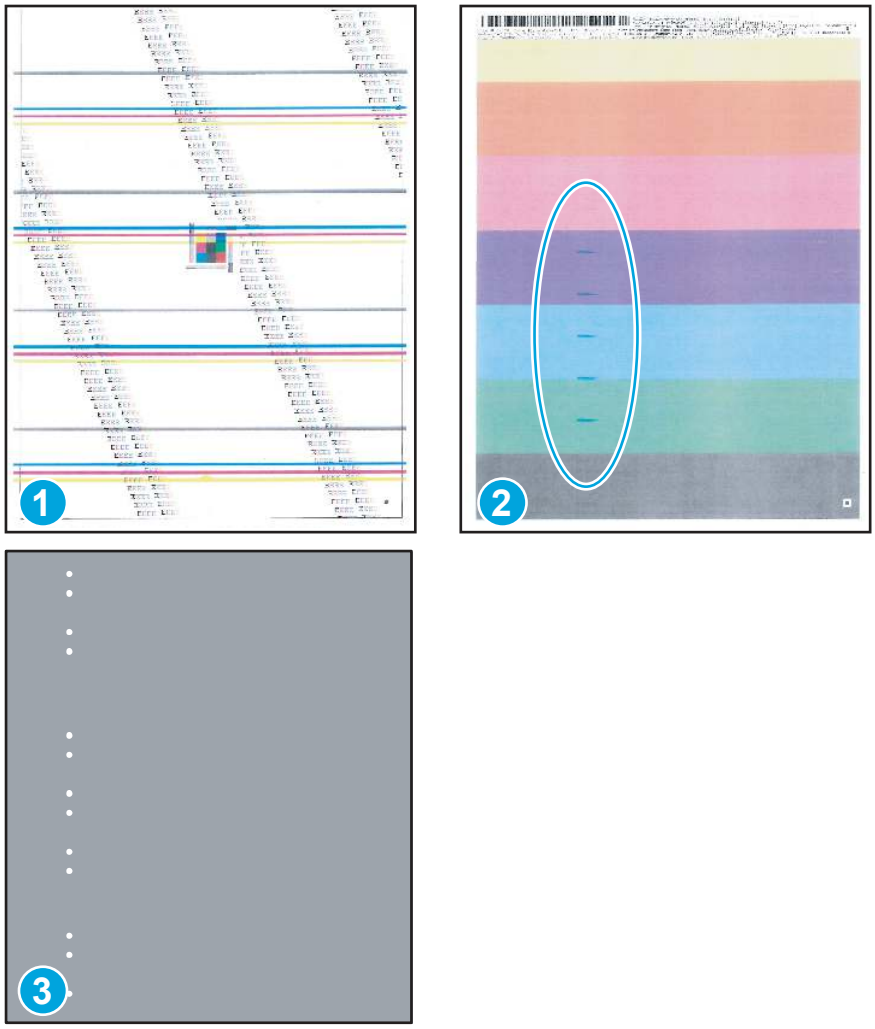
Figure 3-37 Examples of repetitive defects



NOTE: These are examples only, other types of repetitive defects might appear on a page.


2. Position a metric ruler on the page with the “zero” ruler mark at one occurrence of the defect (callout 1).

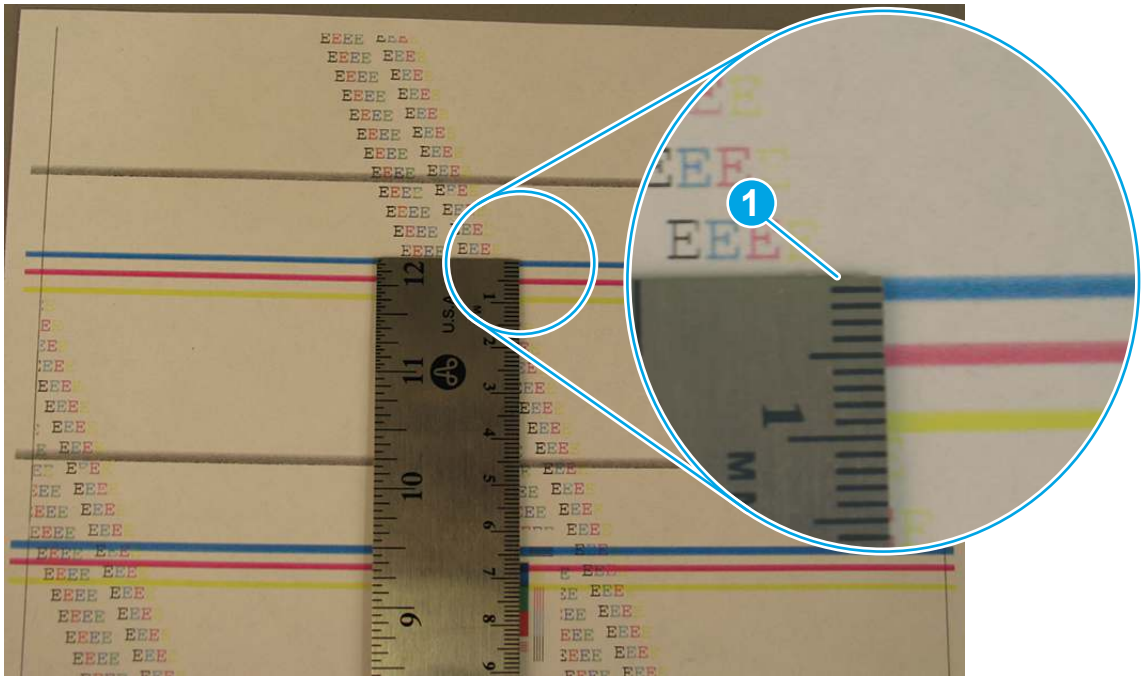Figure 3-38 Place the ruler on the page



3. Locate the next occurrence of the defect (callout 1).

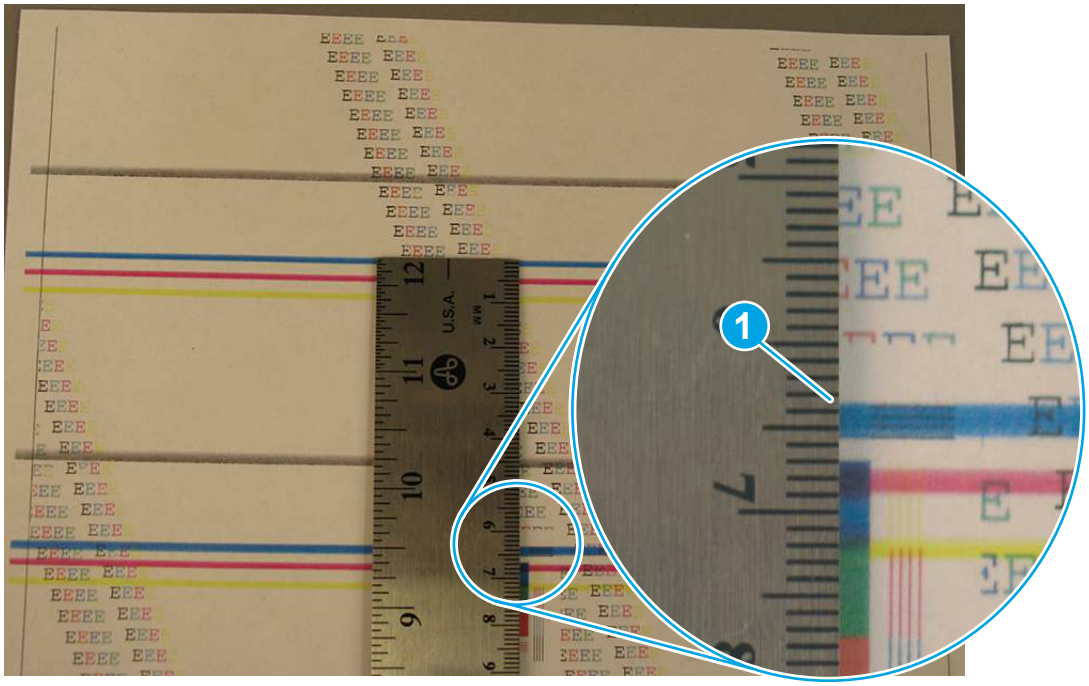
Figure 3-39 Locate the next repetitive defect



4. Measure the distance (in millimeters) between the two occurrences (callout 1), and then use the Repetitive defects table to determine the defective assembly.

TIP: Always measure from and to the same point on the defects. For example, if the ruler is "zeroed" at the top edge of a defect, measure to the top edge of the next occurrence of that defect.

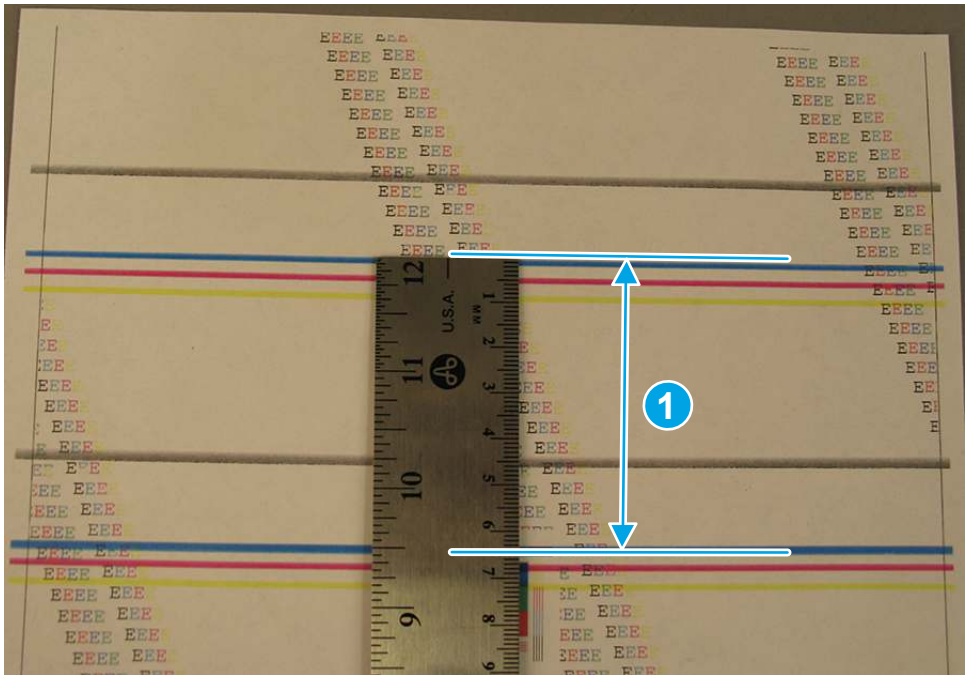Figure 3-40 Determine the defective assembly



Print from a different software program

Try printing from a different software program.

If the page prints correctly, the problem is with the software program from which you were printing.

Check the paper-type setting for the print job

Check the paper type setting when printing from a software program and the printed pages have smears, fuzzy or dark print, curled paper, scattered dots of toner, loose toner, or small areas of missing toner.

Check the paper type setting on the control panel

Check the paper type setting on the printer control panel, and change the setting as needed.

1. Open the following menus:
   - Menu
   - Trays (SFP)

     Paper (MFP)
2. Do one of the following:
   - **SFP**: Select Tray 1 > Paper Type.

- **MFP**: Select Tray 1 > Modify Type.

Check the paper type setting (Windows)

Check the paper type setting for Windows, and change the setting as needed.

NOTE: The print driver settings will override any control panel settings.

1. From the software program, select the **Print** option.
2. Select the printer, and then click the **Properties** or **Preferences** button.
3. Click the **Paper/Quality** tab.
4. From the **Paper Type** drop-down list, click the **More...** option.
5. Expand the list of **Type is:** options.
6. Expand the category of paper types that best describes your paper.
7. Select the option for the type of paper you are using, and click the **OK** button.
8. Click the **OK** button to close the **Document Properties** dialog box. In the **Print** dialog box, click the **OK** button to print the job.

Check the paper type setting (macOS)

Check the paper type setting for macOS, and change the setting as needed.

1. Click the **File** menu, and then click the **Print** option.
2. In the **Printer** menu, select the printer.
3. Click **Show Details** or **Copies & Pages**.
4. Open the menus drop-down list, and then click the **Paper/Quality** menu.
5. Select a type from the **Media Type** drop-down list.
6. Click the **Print** button.

Check toner-cartridge status

Follow these steps to check the estimated life remaining in the toner cartridges and if applicable, the status of other replaceable maintenance parts.

Step one: Print the Supplies Status Page

The supplies status page indicates the cartridge status.

TIP: Use the following menus as an alternate method of checking the supplies status:

- SFP: **Menu** > **Supplies** > **Estimated Levels**
- MFP: **Menu** > **Supplies** > **Cartridges** > **Estimated Levels**

1. Open the following menus:
   - Menu
   - Tools

- Reports
- Status Reports

2. Select the HP Supplies Status Report item.
   - **SFP**: Navigate to and select the Print item at the top of the menu to print the page.
   - **SFP**: Touch the Print button to print the page.

Step two: Check supplies status

Check the supplies status report as follows.

1. Look at the supplies status report to check the percent of life remaining for the toner cartridges and, if applicable, the status of other replaceable maintenance parts.

   Print quality problems can occur when using a toner cartridge that is at its estimated end of life. The supplies status page indicates when a supply level is very low. After an HP supply has reached the very low threshold, HP's premium protection warranty on that supply has ended.

   The toner cartridge does not need to be replaced now unless the print quality is no longer acceptable. Consider having a replacement available to install when print quality is no longer acceptable.

   If you determine that you need to replace a toner cartridge or other replaceable maintenance parts, the supplies status page lists the genuine HP part numbers.

2. Check to see if you are using a genuine HP cartridge.

   A genuine HP toner cartridge has the word "HP" on it, or has the HP logo on it. For more information on identifying HP cartridges go to www.hp.com/go/learnaboutsupplies.

Print a cleaning page

Learn how to print a cleaning page.

NOTE: To print using an HP Plus printer, the printer must have genuine original HP toner cartridges installed, must have an ongoing internet connection and an active HP Plus account (for more information, go to hp.com/plus).

During the printing process, paper, toner, and dust particles can accumulate inside the printer and can cause print-quality issues such as toner specks or spatter, smears, streaks, lines, or repeating marks.

Print a cleaning page from a dial control panel

1. Open the following menus:
   - Menu
   - Tools
   - Troubleshooting
   - Print Quality Tools
   - Cleaning Page
2. Navigate to and select the Print item in the menu list, and then press the dial to select it and print the report.

Print a cleaning page from a touchscreen control panel

1. Open the following menus:
   - Menu
   - Tools
   - Troubleshooting
   - Print Quality Tools
2. Touch the Cleaning Page item. A cleaning page prints.

Visually inspect the toner cartridge or cartridges

Follow these steps to inspect each toner cartridge:

1. Remove the toner cartridge from the printer, and verify that the sealing tape has been removed.
2. Check the memory chip for damage.
3. Examine the surface of the green imaging drum.

> ⚠ CAUTION: Do not touch the imaging drum. Fingerprints on the imaging drum can cause print-quality problems.

4. If you see any scratches, fingerprints, or other damage on the imaging drum, replace the toner cartridge.
5. Reinstall the toner cartridge and print a few pages to see if the problem has resolved.

Check paper and the printing environment

Use the following information to check the paper selection and the printing environment.

Step one: Use paper that meets HP specifications

Some print-quality problems arise from using paper that does not meet HP specifications.

- Always use a paper type and weight that this printer supports.
- Use paper that is of good quality and free of cuts, nicks, tears, spots, loose particles, dust, wrinkles, voids, staples, and curled or bent edges.
- Use paper that has not been previously printed on.
- Use paper that does not contain metallic material, such as glitter.
- Use paper that is designed for use in laser printers. Do not use paper that is designed only for use in Inkjet printers.
- Use paper that is not too rough. Using smoother paper generally results in better print quality.

Step two: Check the environment

The environment can directly affect print quality and is a common cause of print-quality or paper-feeding issues. Try the following solutions:

- Move the printer away from drafty locations, such as open windows or doors, or air-conditioning vents.
- Make sure the printer is not exposed to temperatures or humidity outside of printer specifications.
- Do not place the printer in a confined space, such as a cabinet.
- Place the printer on a sturdy, level surface.
- Remove anything that is blocking the vents on the printer. The printer requires good air flow on all sides, including the top.
- Protect the printer from airborne debris, dust, steam, grease, or other elements that can leave residue inside the printer.

Try a different print driver

Try a different print driver when printing from a software program and the printed pages have unexpected lines in graphics, missing text, missing graphics, incorrect formatting, or substituted fonts.

Download any of the following drivers from the HP Web site: www.hp.com/support/colorlj4201-4203 or www.hp.com/support/colorlj4201-4203plus or www.hp.com/support/colorlj4301-4303 or www.hp.com/support/colorlj4301-4303plus.

Table 3-27 **Print drivers**

Driver	Description
HP PCL 6 driver	This printer-specific print driver supports Windows 7 and newer operating systems that support version 3 drivers. For a list of supported operating systems, go to www.hp.com/go/support.
HP PCL-6 driver	This product-specific print driver supports Windows 8 and newer operating systems that support version 4 drivers. For a list of supported operating systems, go to www.hp.com/go/support.
HP UPD PS driver	• Recommended for printing with Adobe software programs or with other highly graphics-intensive software programs • Provides support for printing from Postscript emulation needs, or for Postscript flash font support
HP UPD PCL 6	• Recommended for printing in all Windows environments • Provides the overall best speed, print quality, and printer feature support for most users • Developed to align with Windows Graphic Device Interface (GDI) for best speed in Windows environments • Might not be fully compatible with third-party and custom software programs that are based on PCL 5

Troubleshoot image defects

Review examples of image defects and steps to resolve these defects.

Table 3-28 Image defects table quick reference


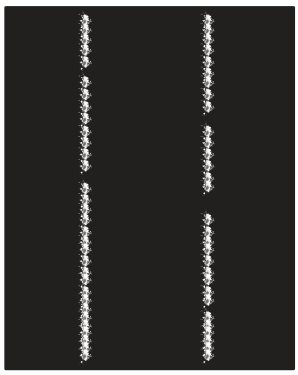
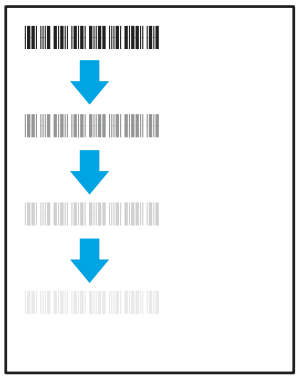
Defect	Defect	Defect
Table 3-36 Light print 	Table 3-34 Gray background or dark print 	Table 3-31 Blank page - No print 
Table 3-30 Black page 	Table 3-29 Banding defects 	Table 3-38 Streak defects 
Table 3-33 Fixing/fuser defects 	Table 3-35 Image placement defects 	Table 3-32 Color plane registrations defects (color models only) 

Table 3-28 Image defects table quick reference (continued)

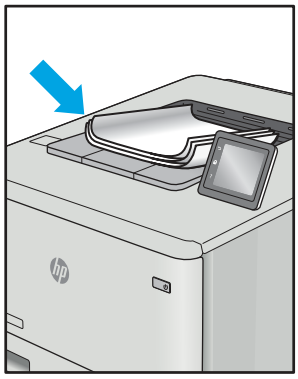
Defect	Defect	Defect
Table 3-37 Output defects 		

Image defects, no matter the cause, can often be resolved using the same steps. Use the following steps as a starting point for solving image defect issues.

1. Reprint the document. Print quality defects can be intermittent in nature or can go away completely with continued printing.
2. Check the condition of the cartridge or cartridges. If a cartridge is in a **Very Low** state (it has passed the rated life), replace the cartridge.
3. Make sure that the driver and tray print mode settings match the media that is loaded in the tray. Try using a different ream of media or a different tray. Try using a different print mode.
4. Make sure the printer is within the supported operating temperature/humidity range.
5. Make sure that the paper type, size, and weight are supported by the printer. See the printer support page at support.hp.com for a list of the supported paper sizes and types for the printer.

NOTE: The term "fusing" refers to the part of the printing process where toner is affixed to paper.

The following examples depict letter-size paper that has passed through the printer with the short edge first.

Table 3-29 Banding defects


Sample	Description	Possible solutions
	Dark or light lines which repeat down the length of the page, and are wide-pitch and/or impulse bands. They might be sharp or soft in nature. The defect displays only in areas of fill, not in text or sections with no printed content.	1. Reprint the document. 2. Try printing from another tray. 3. Replace the cartridge. 4. Use a different paper type. 5. **Enterprise models only**: From the Home screen on the printer control panel, go to the Adjust Paper Types menu, and then choose a print mode that is designed for a slightly heavier media than what you are using. This slows the print speed and might improve the print quality. 6. If the issue persists, go to support.hp.com.

Table 3-30 Black page

Sample	Description	Possible solutions
	The entire printed page is black.	1. Visually inspect the cartridge to check for damage. 2. Make sure that the cartridge is installed correctly. 3. Replace the cartridge. 4. If the issue persists, go to support.hp.com.

Table 3-31 Blank page - No print


Sample	Description	Possible solutions
	The page is completely blank and contains no printed content.	1. Make sure that the cartridges are genuine HP cartridges. 2. Make sure that the cartridge is installed correctly. 3. Print with a different cartridge. 4. Check the paper type in the paper tray and adjust the printer settings to match. If necessary, select a lighter paper type. 5. If the issue persists, go to support.hp.com.

Table 3-32 Color plane registrations defects (color models only)

Sample	Description	Possible solutions
	One or more color plane(s) is not aligned with the other color planes. This registration error will typically occur with yellow.	1. Reprint the document. 2. From the printer control panel, calibrate the printer. 3. If a cartridge has reached a **Very Low** state, or the printed output is severely faded, replace the cartridge. 4. From the printer control panel use the Restore Calibration feature to reset the printer's calibration settings to the factory defaults. 5. If the issue persists, go to support.hp.com.

Table 3-33 Fixing/fuser defects

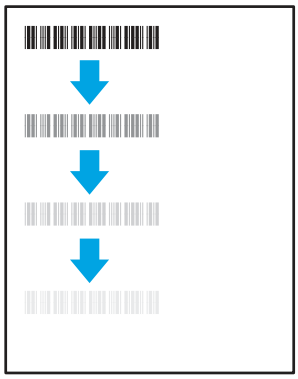
Sample	Description	Possible solutions
	Slight shadows or offsets of the image are repeated down the page. The repeated image might fade with each recurrence.	1. Reprint the document. 2. Check the paper type in the paper tray and adjust the printer settings to match. If necessary, select a lighter paper type. 3. If the issue persists, go to support.hp.com.

Table 3-33 Fixing/fuser defects (continued)

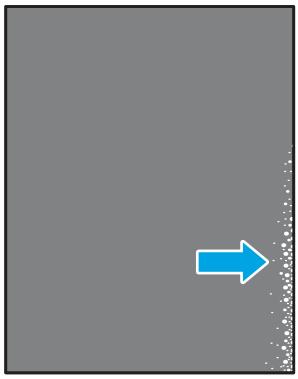
Sample	Description	Possible solutions
	Toner rubs off along either edge of the page. This defect is more common at the edges of high-coverage jobs, and on light media types, but can occur anywhere on the page.	1. Reprint the document. 2. Check the paper type in the paper tray and adjust the printer settings to match. If necessary, select a heavier paper type. 3. **Enterprise models only**: From the printer control panel, go to the Edge-to-Edge menu and then select Normal. Reprint the document. 4. **Enterprise models only**: From the printer control panel, select Auto Include Margins and then reprint the document. 5. If the issue persists, go to support.hp.com.

Table 3-34 Gray background or dark print

Sample	Description	Possible solutions
	The image or text is darker than expected and/or the background is gray.	1. Make sure that the paper in the trays has not already been run through the printer. 2. Use a different paper type. 3. Reprint the document. 4. **Mono models only**: From the Home screen on the printer control panel, go to the Adjust Toner Density menu, and then adjust the toner density to a lower level. 5. Make sure that the printer is within the supported operating temperature and humidity range. 6. Replace the cartridge. 7. If the issue persists, go to support.hp.com.

Table 3-35 Image placement defects

Sample	Description	Possible solutions
	The image is not centered, or is skewed on the page. The defect occurs when the paper is not positioned properly as it is pulled from the tray and moves through the paper path.	1. Reprint the document. 2. Remove the paper and then reload the tray. Make sure that all the paper edges are even on all sides. 3. Make sure that the top of the paper stack is below the tray-full indicator. Do not overfill the tray. 4. Make sure that the paper guides are adjusted to the correct size for the paper. Do not adjust the paper guides tightly against the paper stack. Adjust them to the indentations or markings in the tray. 5. If the issue persists, go to support.hp.com.

Table 3-36 Light print

Sample	Description	Possible solutions
	The printed content is light or faded on the entire page.	1. Reprint the document. 2. Remove the cartridge, and then shake it to redistribute the toner. Reinsert the toner cartridges into the printer and close the cover. For a graphical representation of this procedure, see *Replace the toner cartridges*. 3. **Mono models only**: Make sure that the EconoMode setting is disabled, both at the printer control panel and in the print driver. 4. Make sure that the cartridge is installed correctly. 5. Print a Supplies Status Page and check the life and usage of the cartridge. 6. Replace the cartridge. 7. If the issue persists, go to support.hp.com.

Table 3-37 Output defects

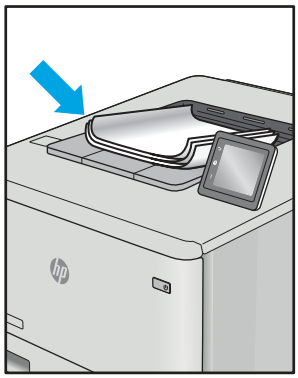
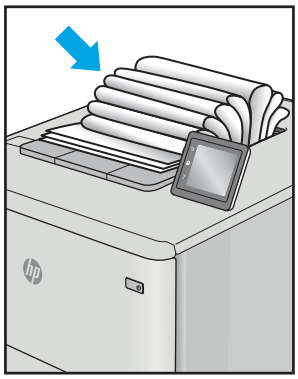
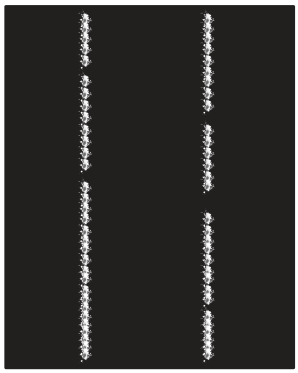
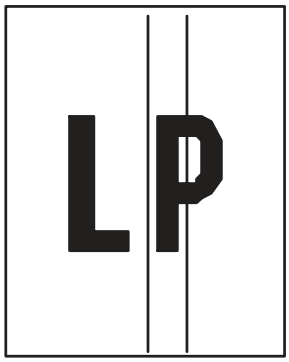
Sample	Description	Possible solutions
	Printed pages have curled edges. The curled edge can be along the short or long side of the paper. Two types of curl are possible: • **Positive curl:** The paper curls toward the printed side. The defect occurs in dry environments or when printing high-coverage pages. • **Negative curl:** The paper curls away from the printed side. The defect occurs in high-humidity environments or when printing low-coverage pages.	1. Reprint the document. 2. **Positive curl**: From the printer control panel, select a heavier paper type. The heavier paper type creates a higher temperature for printing. **Negative curl**: From the printer control panel, select a lighter paper type. The lighter paper type creates a lower temperature for printing. Try storing the paper in a dry environment prior to use, or use freshly opened paper. 3. Print in duplex mode. 4. If the issue persists, go to support.hp.com.
	The paper does not stack well in the output tray. The stack might be uneven, skewed, or the pages might be pushed out of the tray and onto the floor. Any of the following conditions can cause this defect: • Extreme paper curl • The paper in the tray is wrinkled or deformed • The paper is a non-standard paper type, such as envelopes • The output tray is too full	1. Reprint the document. 2. Extend the output bin extension. 3. If the defect is caused by extreme paper curl, refer to the troubleshooting steps for "Output curl." 4. Use a different paper type. 5. Use freshly opened paper. 6. Remove the paper from the output tray before the tray gets too full. 7. If the issue persists, go to support.hp.com.

Table 3-38 **Streak defects**

Sample	Description	Possible solutions
	Light vertical streaks that usually span the length of the page. The defect displays only in areas of fill, not in text or sections with no printed content.	1. Reprint the document. 2. Remove the cartridge, and then shake it to redistribute the toner. Reinsert the toner cartridges into the printer and close the cover. For a graphical representation of this procedure, see *Replace the toner cartridges*. 3. If the issue persists, go to support.hp.com. **NOTE:** Both light and dark vertical streaks can occur when the printing environment is outside the specified range for temperature or humidity. Refer to your printer's environmental specifications for allowable temperature and humidity levels.
	Dark vertical lines which occur down the length of the page. The defect might occur anywhere on the page, in areas of fill or in sections with no printed content. On color models, these lines or streaks will also be visible on the ITB cleaning page.	1. Reprint the document. 2. Remove the cartridge, and then shake it to redistribute the toner. Reinsert the toner cartridges into the printer and close the cover. For a graphical representation of this procedure, see *Replace the toner cartridges*. 3. Print a cleaning page. 4. Check the toner level in the cartridge. 5. If the issue persists, go to support.hp.com.

Copy-quality troubleshooting

Learn about copy-quality troubleshooting.

NOTE: Copy-quality (CQ) problems are associated with the integrated-scanner assembly (ISA) portion of an MFP printer. CQ defects appear on pages that are **copied** using the document feeder or flatbed glass.

Identify the location and type of the CQ problem

Resolving CQ problems involves isolating the defect to the document feeder or flatbed glass. Comparing printed output between the document feeder and the flatbed glass might determine the ISA location that is causing the CQ defect.

NOTE: If a CQ defect appears on printed output from both the document feeder **and** the flatbed glass, carefully inspect the original source for a print-quality (PQ) problem.

Document feeder isolation test

1. Mark a printed page in a way that clearly identifies it as the source document used in this isolation procedure.
2. Place the source page in the document feeder, and then make a copy.
3. Mark the copied output page to clearly identify it as output from the document feeder.
4. Compare the original and copied pages. Defects appearing on the copied page are caused by a problem in the document feeder.

Flatbed isolation test

1. Mark a printed page in a way that clearly identifies it as the source document used in this isolation procedure.
2. Place the source page on the flatbed glass, and then make a copy.
3. Mark the copied output page to clearly identify it as output from the flatbed.
4. Compare the original and copied pages. Defects appearing on the copied page are caused by a problem in the flatbed.


Check the scanner glass for dirt and smudges

Learn about solving copy-quality debris problems.


Over time, specks of debris might collect on the scanner glass and document feeder white plastic backing, which might cause print defects. Use the following procedure to clean the scanner if the printed pages have streaks, unwanted lines, black dots, poor print quality, or unclear text.

View a video of cleaning the document feeder glass and flatbed glass.


1. Press the power button to turn the printer off, and then disconnect the power cable from the electrical outlet.



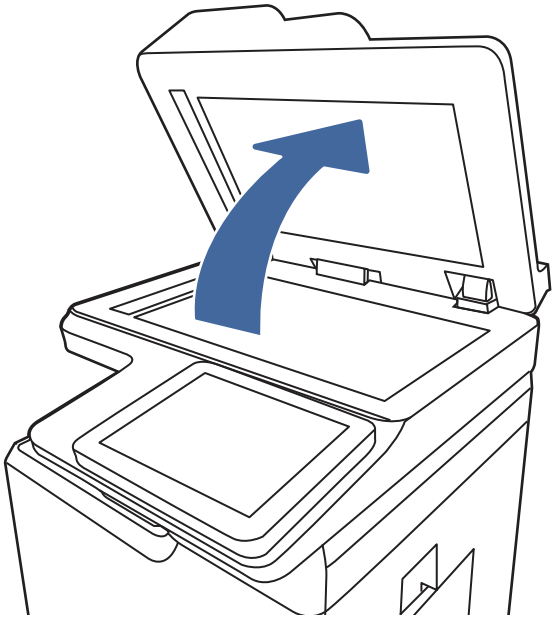2. Open the scanner lid.



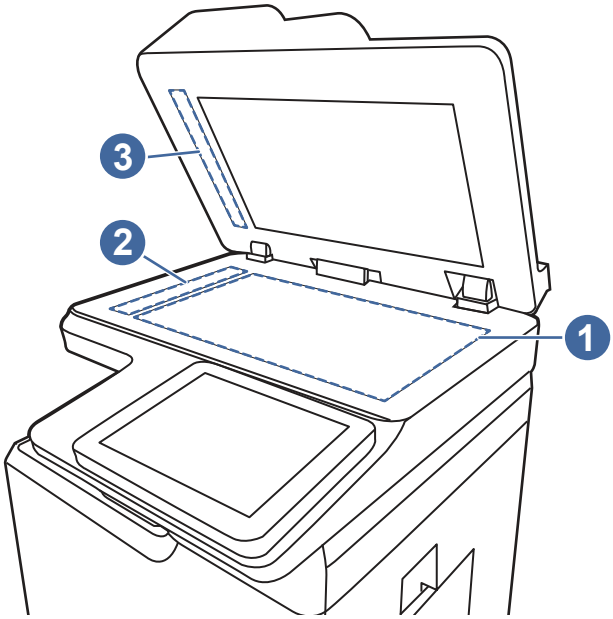3. Clean the scanner glass (callout 1) and the document feeder strips (callout 2, callout 3) with a soft cloth or sponge that has been moistened with nonabrasive glass cleaner.




⚠ **CAUTION:** Do not use abrasives, acetone, benzene, ammonia, ethyl alcohol, or carbon tetrachloride on any part of the printer; these can damage the printer. Do not place liquids directly on the glass or platen. They might seep and damage the printer.

NOTE: If you are having trouble with streaks on copies when you are using the document feeder, be sure to clean the small strips of glass on the left side of the scanner (callout 2, callout 3).

4. Dry the glass and white plastic parts with a chamois or a cellulose sponge to prevent spotting.

5. Connect the power cable to an outlet, and then press the power button to turn the printer on.



Vertical lines, bands, or streaks

Learn about vertical lines, bands, or streaks copy-quality problems.

Vertical lines or streaks appear on copies and/or scans in the same direction that the paper feeds when copying and/or scanning from the document feeder. Lines or streaks might be visible on the front and/or the back side of the page. Copies and/or scans from the flatbed glass look normal. Printouts also look normal.

The line or streak might be black or in color, and can also be present on fax or digital send output (for example, when using Scan to folder or Scan to email features.

NOTE: HP has determined that **99%** of all lines and streaks on copies made by feeding the original documents through the document feeder are caused by **debris on the document feeder glass strip**. Even small specks can cause the light reflected off the original to be distorted, resulting in a line, streak, or smudge on copies or scans made from the document feeder.

Even if the document feeder glass strip and/or flatbed glass has been wiped clean, the defect might persist. Persistent vertical lines, bands, or streaks when copying from the document feeder might mean that the debris causing the print quality are not readily visible and cannot be removed with a quick cleaning.

Use the procedures below to resolve persistent lines, bands, or streak copy-quality (CQ) problems.

Locate debris and thoroughly clean the document feeder glass

1. Place a blank sheet of paper in the document feeder and mark an **X** in the lower right corner as shown.

Figure 3-41 Load the document feeder



2. Press the Start button to make a copy of the blank page.
3. Place the copied paper face-up on the flatbed glass with the **X** located as shown.


NOTE: Make sure the upper left corner of the copy is aligned with the upper left corner of the flatbed glass.

Figure 3-42 Place the copy on the flatbed



4. Follow the line or streak on the paper to the area on the document feeder glass that is causing the CQ problem.

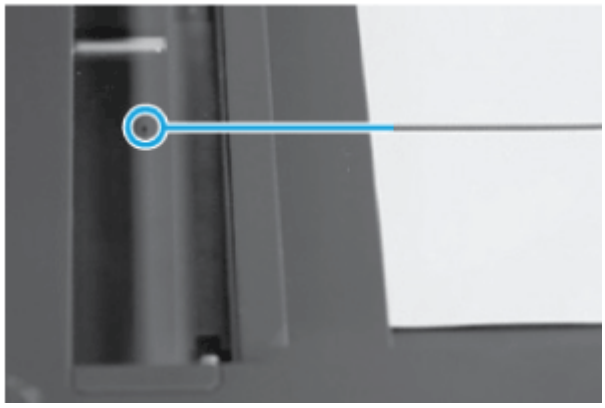Figure 3-43 Identify the CQ defect location



5. Use a fingernail to loosen any stubborn debris.

⚠ **WARNING!** Use only a fingernail. Other objects can scratch the document feeder glass.

Clean this specific area again (with a lint-free cloth dampened with water), and then dry the glass with a soft, lint-free cloth.

Figure 3-44 Clean the glass



6. Make another copy or scan to determine if the defect is gone.

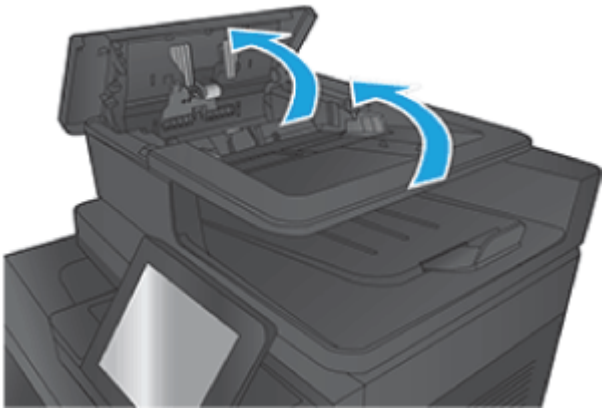
Clean the duplexer scanner glass (model specific)

NOTE: Not all MFP printers use a background selector for duplex printing.

If a *Side 2 Background Selector* cannot be located for the printer (it might not include one) skip this procedure.

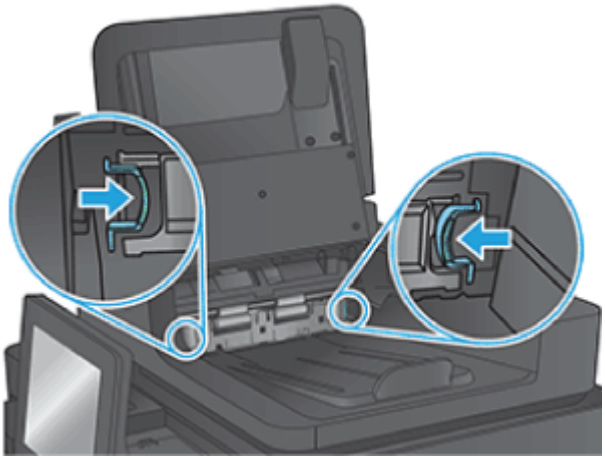
1. Release the latch and open the document feeder jam-access door.

   Figure 3-45 Open the jam-access door

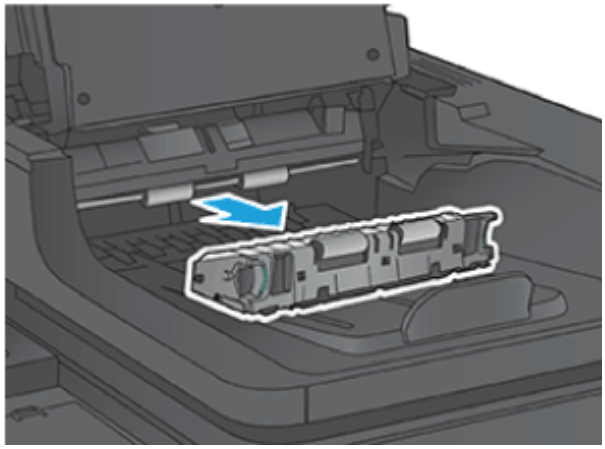
2. Unlock the Side 2 Background Selector by pressing and holding both green tabs inward towards each other.

   Figure 3-46 Release the Side 2 Background Selector

3. While holding the green tabs, pull out and remove the Side 2 Background Selector.


Figure 3-47 Remove the Side 2 Background Selector



4. Rotate the top to reveal the white and black backside reflector (circled in blue).

NOTE: If the white and black areas do not come clean, wipe the surface thoroughly with a damp cloth again. Dry the area with a soft, dry cloth to prevent spotting.

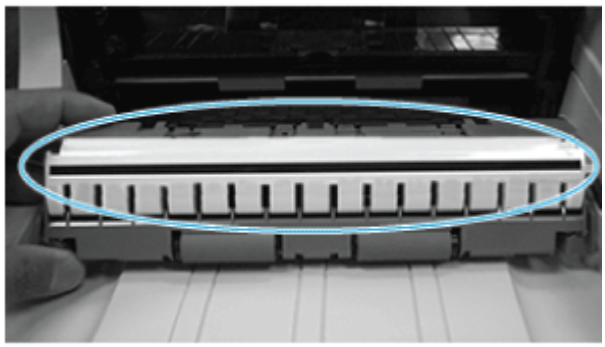Figure 3-48 Locate the backside reflector



5. With the background selector removed from the document feeder, clean the inside of the scan module.

6. In the back area from where the background selector was removed, locate the Side 2 Scan Module glass found under the top area.

NOTE: The glass surface of the Side 2 Scan module sits horizontally flat and might not be easily viewable.

7. Use a soft, lint-free cloth moistened with water and apply pressure upwards behind the rollers to clean the Side 2 Scan Module Glass, making sure to that the entire width of the glass is cleaned from left to right.

NOTE: If needed, lens cleaner or non-abrasive glass cleaner can be applied to the cloth before cleaning the glass. Spray only onto the cloth and not directly onto the glass or device. Do not spray water or glass cleaner on the glass as it can seep under it and possibly damage the printer. Do not

use abrasives, acetone, benzene, ethyl alcohol, or carbon tetrachloride on the glass; these can damage it and/or leave residue on the glass resulting in degraded copy/scan quality.

8. Reverse the removal steps to reinstall the Side 2 Background Selector.
9. Make another copy or scan to determine if the defect is gone.

Modify printer settings to improve scan or copy quality

Learn about printer settings to improve scan or copy quality.

A color calibration can improve color registration scan or copy quality.

Perform a color calibration

1. Open the following menus:
   - Menu
   - Tools
   - Troubleshooting
   - Print Quality
2. Choose form the following settings:
   - Calibrate Now

   NOTE: HP recommends selecting the Calibrate Now item to immediately improve color registration scan or copy quality.

   - Power On Calibration
   - Time-Based Calibration

Light or faint copies (color models)

Learn how to resolve light or faint copy-quality problems.

Are you attempting to copy or scan highlighted text?

NOTE: When digitally sending or copying highlighted images or text objects, the image might appear lighter than expected or does not show up at all with certain brands/types of highlighter pens.

Highlighters come in bright, often fluorescent colors. Fluorescent highlighter inks tend to reflect more light than that which is absorbed by the paper source. This reflection might cause the image to not show up as well as non-fluorescent colors depending upon the scanner/MFP being used.

The most common color for highlighters is yellow, but many other colors are also found such as pink, blue, green, orange, and purples. Yellow is often the preferred color to use when making a photocopy as it tends to not produce as much of a shadow on copies or scans.

There are different color and ink properties depending upon the brand of highlighters used. Due to these differences, scanning of the images might vary greatly from not being seen at all to changing colors (for example, orange highlighter might appear brown in the copy or scan or yellow highlighter might appear green).

Does the printer have the latest firmware version installed?

To verify the currently installed firmware revision and upgrade the firmware if necessary, go to Firmware upgrades.

Performance and connectivity troubleshooting

Learn about performance and connectivity troubleshooting.

Solve performance problems

Review the following information and procedures to solve performance problems.

NOTE: Tray 1 and Tray 2 are optimal for paper pickup when using special paper or media other than 75-80gsm (20lb) plain paper. For Tray 1 and Tray 2 the printer increases the number of attempts to pick up a page, which increases the reliability of successfully picking the page from the tray and decreases the possibility of a mis-pick jam.

HP recommends using Tray 1 or Tray 2 if the printer is experiencing excessive or reoccurring jams from trays other than Tray 1 and Tray 2, or for print jobs that require media other than 75-80gsm (20lb) plain paper.

Factors affecting print performance

Review the following information about factors affecting print performance.

NOTE: To print using an HP Plus printer, the printer must have genuine original HP toner cartridges installed, must have an ongoing internet connection and an active HP Plus account (for more information, go to hp.com/plus).

Table 3-39 Solve performance problems

Problem	Cause	Solution
Pages print but are totally blank.	The document might contain blank pages.	Check the original document to see if content is present on all of the pages.
Pages print but are totally blank.	The printer might be malfunctioning.	To check the printer, print a Configuration page.
Pages print but are totally blank.	Make sure that the printer is not feeding multiple pages (especially if very thin paper is used).	Make sure that the paper meets HP specifications for this printer. For a complete list of specific HP-brand paper that this printer supports, go to www.hp.com/support/colorlj4201-4203 or www.hp.com/support/colorlj4201-4203plus or www.hp.com/support/colorlj4301-4303 or www.hp.com/support/colorlj4301-4303plus.
Pages print very slowly. NOTE: Some software programs process print jobs slowly.	Heavier paper types can slow the print job.	Print on a different type of paper.
Pages print very slowly. NOTE: Some software programs process print jobs slowly.	Complex pages can print slowly.	Proper fusing might require a slower print speed to ensure the best print quality.

Table 3-39 **Solve performance problems (continued)**

Problem	Cause	Solution
Pages print very slowly. NOTE: Some software programs process print jobs slowly.	Large batches, narrow paper, and special paper such as gloss, transparency, cardstock, and HP Tough Paper can slow the print job.	Print in smaller batches, on a different type of paper, or on a different size of paper.
Pages did not print.	The printer might not be pulling paper correctly.	Make sure paper is loaded in the tray correctly.
Pages did not print.	The paper is jamming in the printer.	Clear the jam.
Pages did not print.	The USB cable might be defective or incorrectly connected.	• Disconnect the USB cable at both ends and reconnect it. • Try printing a job that has printed in the past. • Try using a different USB cable.
Pages did not print.	Other devices are running on the host computer.	The printer might not share a USB port. If an external hard drive or network switchbox is connected to the same port as the printer, the other device might be interfering with the printer. To connect and use the printer, disconnect the other device or use two USB ports on the host computer.
Pages did not print.	The print job might not have arrived at the printer.	Check the printer status queue. Also, the Printing message should appear on the control panel display.

Print speeds

Print speed is the number of pages that print in one minute. Print speed depends on different engine-process speeds or operational pauses between printed pages during normal printer operation. Factors that determine the print speed of the printer include the following:

- Page formatting time

  The printer must pause for each page to be formatted before it prints. Complex pages take more time to format, resulting in reduced print speed. However, most jobs print at full engine speed.

- Media size

  Legal-size media reduces print speed because it is longer than the standard Letter- or A4-size media. A reduce print speed is used when printing on narrow media to prevent the edges of the fuser from overheating.

- Media mode

  Some media types require a reduced print speed to achieve maximum print quality on that media. For example, glossy, heavy, and specialty media (for example, envelopes or photos) require a reduced print speed. To maximize the print speed for special media types, make sure that the correct media type in the print driver is selected.

- Printer temperature

To prevent printer damage, print speed is reduced if the printer reaches a specific internal temperature (thermal slow down). The starting temperature of the printer, ambient environment temperature, and the print job size effect the number of pages that can be printed before the printer reduces the print speed. Thermal slow down reduces print speed by printing four pages and then pausing for an amount of time before printing continues.

- Other print speed reduction factors

  Other factors (especially during large print jobs) that can cause reduced print speeds include:

  – Density control sequence; occurs every 150 pages and takes about 120 seconds

The printer does not print

If the printer does not print at all, try the following solutions.

NOTE: To print using an HP Plus printer, the printer must have genuine original HP toner cartridges installed, must have an ongoing internet connection and an active HP Plus account (for more information, go to hp.com/plus).

1. Make sure the printer is turned on and that the control panel indicates it is ready.
   - If the control panel does not indicate the printer is ready, turn the printer off and then on again.
   - If the control panel indicates the printer is ready, try sending the job again.
2. If the control panel indicates the printer has an error, resolve the error and then try sending the job again.
3. Make sure the cables are all connected correctly. If the printer is connected to a network, check the following items:
   - Check the bottom LED next to the network connection on the printer. If the network is active, the light is green.
   - Make sure that a network cable and not a phone cord is used to connect to the network.
   - Make sure the network router, hub, or switch is turned on and that it is working correctly.
4. Install the HP software for the printer. Using generic printer drivers can cause delays clearing jobs from the print queue.
5. From the list of printers on your computer, right-click the name of this product, click **Properties**, and open the **Ports** tab.
   - If a network cable is used to connect to the network, make sure the printer name listed on the **Ports** tab matches the one on the printer configuration page.
   - If a USB cable is used, and the printer is connected to a wireless network, make sure the box is checked next to **Virtual printer port for USB**.
6. If a personal firewall system on the computer is used, it might be blocking communication with the printer. Try temporarily disabling the firewall to see if it is the source of the problem.
7. If the host computer or the printer is connected to a wireless network, low signal quality or interference might be delaying print jobs.

The printer prints slowly

If the printer prints, but it seems slow, try the following solutions.

1. Make sure the computer meets the minimum specifications for this printer. For a list of specifications, go to this Web site: www.hp.com/support/colorlj4201-4203 or www.hp.com/support/colorlj4201-4203plus or www.hp.com/support/colorlj4301-4303 or www.hp.com/support/colorlj4301-4303plus.
2. When the printer is configured to print on some paper types, such as heavy paper, the printer prints more slowly so it can correctly fuse the toner to the paper. If the paper type setting is not correct for the type of paper you are using, change the setting to the correct paper type.
3. If the host computer or the printer is connected to a wireless network, low signal quality or interference might be delaying print jobs.

Solve wired network problems

Review the following information and procedures to solve wired network problems.

Introduction

Learn about solving wired network problems.

Certain types of problems can indicate there is a network communication problem. These problems include the following issues:

- The periodic loss of ability to communicate with the printer
- The printer cannot be found during driver installation
- A periodic failure to print

Check the items in this topic to verify that the printer is communicating with the network. Before beginning, print a configuration page from the printer control panel and locate the printer IP address that is listed on this page.

NOTE: To print using an HP Plus printer, the printer must have genuine original HP toner cartridges installed, must have an ongoing internet connection and an active HP Plus account (for more information, go to hp.com/plus).

Poor physical connection

Use the following procedure when the printer has a poor physical connection.

1. Verify that the printer is attached to the correct network port using a cable of the correct length.
2. Verify that cable connections are secure.
3. Look at the network port connection on the back of the printer, and verify that the amber activity light and the green link-status light are lit.
4. If the problem continues, try a different cable or port on the hub.

The computer is using the incorrect IP address for the printer

Use the following procedure when the computer is using the incorrect IP address for the printer.

1. Open the printer properties and click the **Ports** tab. Verify that the current IP address for the printer is selected. The printer IP address is listed on the printer configuration page.

   NOTE: To print a configuration page using an HP Plus printer, the printer must have genuine original HP toner cartridges installed, must have an ongoing internet connection and an active HP Plus account (for more information, go to hp.com/plus).

2. If you installed the printer using the HP standard TCP/IP port, select the box labeled **Always print to this printer, even if its IP address changes**.
3. If you installed the printer using a Microsoft standard TCP/IP port, use the hostname instead of the IP address.
4. If the IP address is correct, delete the printer and then add it again.

The computer is unable to communicate with the printer

Use the following procedure when the computer is unable to communicate with the printer.

1. Test network communication by pinging the network.
   a. Open a command-line prompt on your computer.
      - For Windows, click **Start**, click **Run**, type `cmd`, and then press Enter.
      - For macOS, go to **Applications**, then **Utilities**, and open **Terminal**.
   b. Type `ping` followed by the IP address for your printer.
   c. If the window displays round-trip times, the network is working.
2. If the ping command failed, verify that the network hubs are on, and then verify that the network settings, the printer, and the computer are all configured for the same network.

The printer is using incorrect link and duplex settings for the network

HP recommends leaving these settings in automatic mode (the default setting). If you change these settings, you must also change them for your network.

New software programs might be causing compatibility problems

Verify that any new software programs are correctly installed and that they use the correct print driver.

The computer or workstation might be set up incorrectly

Use the following procedure when the computer or workstation might be set up incorrectly.

1. Check the network drivers, print drivers, and the network redirection settings.
2. Verify that the operating system is configured correctly.

The printer is disabled, or other network settings are incorrect

Use the following procedure when the printer is disabled, or other network settings are incorrect.

1. Review the configuration page to check the status of the network protocol. Enable it if necessary.



NOTE: To print a configuration page using an HP Plus printer, the printer must have genuine original HP toner cartridges installed, must have an ongoing internet connection and an active HP Plus account (for more information, go to hp.com/plus).

2. Reconfigure the network settings if necessary.

4 Removal and replacement

When servicing the printer, several items must be considered to ensure a successful repair and to avoid damage to the printer or personal injury. Learn about these considerations and find detailed instructions for removing and replacing printer parts.

Safety and support guidelines when using the printer

Learn how to use your printer safely and review the information required when contacting HP support for printer assistance.

Safety precautions

Follow these safety protocols when handling or repairing the printer.

Product safety classification: This is a Safety Class I product, which means it has a protective earth terminal. This terminal must be connected to earth ground.

IMPORTANT: Before operation or repair, check the product and review this manual for safety warnings and instructions. Safety warnings for specific procedures are located at appropriate places in the manual.

WARNING: Hazardous voltages exist within the product.

NOTE: HP recommends that only qualified personnel trained in working with high voltage power equipment should service this unit.

Follow these precautions always:

NOTE: If you do not want to disassemble and repair the printer yourself, contact your local HP Service Representative for service, see Contact HP Support section.

Warnings and Cautions

To ensure the proper use of the printer and to prevent the printer from being damaged, follow the warning and caution symbols marked in this guide. See Conventions used in this guide.

Electrical precautions

- **Power cord instructions**
  - Make sure your power source is adequate for the product voltage rating. The voltage rating is on the product label.

Typically, the product uses either 110-127 Vac or 220-240 Vac and 50/60 Hz. Depending on a product, the voltage usage might change (100-127 Vac, for example). It is recommended to refer your product manual for the specified voltage.

- Connect the power cord between the product and a grounded AC outlet.

  CAUTION: To prevent damage to the product, use only the power cord that is provided with the product.

  Do not damage, cut, or repair the power cord. A damaged power cord can cause fire or electric shock. Replace a damaged power cord with an HP-approved power cord.

- Unplug the power cord when disassembling or assembling the printer.

  The printer utilizes a power switch (button) that is turned "ON" or "OFF". Be aware that electricity may flow on the primary side of the printer even when the printer is "OFF".

- Power off the printer and unplug the power cord and fax cord (if available) from the electrical outlet in any of the following cases:

  - When removing product enclosure or covers from the printer or when accessing internal parts of a printer.
  - If there is smoke or an unusual smell coming from the printer.
  - A piece of metal or a liquid (not part of cleaning and maintenance routines) touches internal parts of the printer.
  - During an electrical storm (with thunder and/or lightning).
  - During an electrical power failure.

Electrostatic Discharge (ESD) precautions

Electrostatic discharge (ESD) can damage electronic components inside your printer.

Use these guidelines to protect sensitive parts against damage from electrostatic discharge.

- Touch a metal object that is not painted and is grounded.
- Leave electronic parts such as a memory chip in the bag it was shipped in until you are ready to perform the installation.
- ESD wrist straps can also be used to help release excess electrostatic charge.

  - **CAUTION:** 

    Some parts are sensitive to electrostatic discharge (ESD). Look for the ESD reminder when removing printer parts.

    Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly.

- Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

Handling toner

HP recommends that you wear gloves when handling toner cartridges and toner system components.

Do not expose toner or toner cartridge to fire or any heat source.

Keep imaging unit and/or toner cartridge away from children. The toner powder contained in the imaging unit and toner cartridge may be harmful, and if swallowed, you should contact a doctor.

Lifting equipment

Follow the recommendations for lifting or moving your printer.

The printed inbox guides and support documentation available on support.hp.com for your printer model will provide the lifting requirements to avoid injury and to safely move the printer.

NOTE: Do not attempt to lift heavy equipment without assistance.

Safety measures during disassembling or reassembling

IMPORTANT: Before disassembling or reassembling a printer, be sure to unplug its power cord from the electrical outlet.

NOTE: Assembly is the reverse of disassembly unless otherwise specified.

- During disassembly, reassembly, or transportation of a printer, remove the toner cartridge as necessary.
- Only fuses with the required rated current, voltage, and specified type (normal blow, time delay, etc.) should be used.

  Do not use repaired fuses or short-circuited fuse holders. Doing so, could cause a shock or fire hazard.
- Capacitors inside this product may hold a hazardous charge even if the product has been disconnected from its power source.
- Do not disable safety functions (Interlocks or safety circuits). Safety will not be assured leading to a safety hazard and potential injury.
- Note the length, diameters, and locations of screws as you remove them. When reassembling the printer, be sure to use them in their original locations.
- As a best practice safety rule, do not run the printer with any parts removed.

Ingestion hazards

This product may contain a button cell or coin battery that is not intended to be replaced.

- A swallowed button cell or coin battery can cause internal chemical burns in as little as two (2) hours.

  Death or serious injury can occur if ingested.
- Keep new and used batteries out of reach of children. Used batteries may cause severe injury or death.

Seek immediate medical attention if a battery is suspected to be swallowed or inserted inside any part of the body. Call a local poison control center for treatment information.

- Remove and immediately recycle or dispose of used batteries according to local regulations and keep away from children. Do not dispose of batteries in household trash or incinerate.

Laser radiation hazards

The printer is certified as a Class 1 laser product.

WARNING: Using controls, adjusting or performing procedures other than those specified in the user guide could result in exposure to hazardous radiation. Do not disassemble the laser/scanner unit as the laser beam can injure your eyes. An invisible laser beam is emitted within the laser/scanner unit.

Mechanical hazards

The printer has moving parts that could cause injury. To avoid personal injury, take the following precautions when working close to the printer.

- Keep your clothes and body away from the printer's moving parts.
  - Avoid wearing dangling jewelry or other hanging objects around the printer as it might be caught by moving parts and lead to injury.
  - Keep long hair tied up and away from the paper feed mechanism.
  - Ensure the sleeves or gloves do not get caught in the printer's moving parts.
- Avoid standing close to the fans as it could cause injury and could also affect print quality (by obstructing the air flow).
- Do not touch gears or moving rolls during printing.
- Do not operate the printer when having enclosure covers removed or interlock switches bypassed.
- The product may have internal sharp edges.

  Make sure the wiring does not come into contact with sharp edges, burrs, or other pointed parts. Current can leak, leading to a risk of electrical shock or fire hazard.
- During and after repair, check internal electrical wiring for squeezing, sheaths and any damage.
- – Make sure that all screws, components, wiring, connectors and so forth that were removed, have been reinstalled in the original location.
  - Do not allow any metal parts such as clips, staples and screws to fall into the printer. This could potentially short internal circuits and cause an electrical shock hazard.
  - Do not allow liquids (except those used in HP cleaning kits) to touch the internal parts of the printer. Doing so may cause fire, electric shock, or other serious hazards.

Thermal hazards

Caution: Inspection before repair for fuser

The area around the fuser unit may be hot. Wait for a few minutes until the fuser assembly cools down.

Contact HP Support

HP offers phone support to assist you for printer issues. Ensure to read the following information before contacting HP Support.

Before contacting HP Support

Before contacting support, consider checking the resources available on HP Customer Support.

1. Go to HP Customer Support (https://support.hp.com) to locate your product support page.
2. Review the documents for troubleshooting before contacting HP.

Information required when contacting HP Support

If you call an HP support representative for assistance, ensure you have the following information for HP support to answer your questions quickly:

- **Product model**: Note the printer model, product number, and serial number you are using. The product number and the serial number are typically found on the label at the back of the product.
- **Error code**: If there is an error code or message displaying on the printer control panel, note the error code and message.
- **Computer (operating system)**: Provide the name of the computer/computer operating system you are using.
- Any **special equipment or software** you are using (for example, spoolers, networks, switch-boxes, modems or special software drivers).
  - The type of interface used on your product (USB or network).
  - The software and driver name and firmware version number that you are currently using.
- **Printer service information**: You can obtain the printer service information from the Embedded Web Server (EWS). If you need to send this information by email, download it as a file from your browser, and send the file.

NOTE: Depending on your printer firmware version, the menu items in the EWS might vary.

1. Open a Web browser on your computer, and then enter the IP address of your printer to access the Embedded Web Server.
2. Click **Support** > **Service support** > **Service information** > **Display**.

Phone support

HP phone support is available on the HP support website. For assistance, go to one of the following websites:

- https://support.hp.com/contact or
- https://support.hp.com/contact/help/printer or
- https://www.hp.com/us-en/contact-hp/contact.html.

Removal and replacement strategy

The printer uses a field repair strategy. Defective parts are diagnosed and replaced at the Field Replaceable Unit (FRU) assembly level. Follow basic safety precautions to avoid injury or printer damage. Learn about the tools required to service the printer and the types of fasteners used.

Introduction

Learn the overall process for troubleshooting failures and replacing parts, as well as items of note related to installing and tracking printer supplies

Repair normally begins by using the printer internal diagnostics and the following two-step process:

1. Isolate the problem to the major system (for example, the network, the server, or the printer).
2. Identify the cause of failures according to the troubleshooting section in the printer service manual, and follow the disassembly procedures to replace the defective parts or the consumable parts.

After locating a faulty part, the printer can usually be repaired at the assembly level by replacing the field replaceable unit (FRUs). HP does not support replacement of components on the printed circuit assemblies (PCAs).

The user replaces supplies (cartridges) as they are depleted. Additional instructions about other user-replaceable parts are provided in this section.

The printer tracks the amount of use on the customer-replaceable supplies by keeping a page count. The printer prompts the user to replace certain items when a supply is depleted or a specific number of pages have been printed.

Swapping supplies between products might be necessary in some test scenarios. However, this might cause a misrepresentation of supply life values, and is not recommended.

Considerations during removal and replacement

Understand the items to take into account when removing and replacing parts.

This chapter describes the FRUs.

Reinstalling FRUs is generally the reverse of removal. Notes are included to provide directions for difficult or critical replacement procedures.

HP does not support repairing individual subassemblies or troubleshooting at the PCA component level.

⚠ **WARNING!** Never operate or service the printer with the protective cover removed from the laser scanner assembly. The reflected beam, although invisible, can cause damage to the eyes.

The sheet-metal parts can have sharp edges. Be careful when handling sheet-metal parts.

Turn the printer off, wait five seconds, and then remove the power cord before attempting to service the printer. **If this warning is not followed, severe injury can result as well as damage to the printer**. The power must be on for certain functional checks during troubleshooting. However, the power cord must be disconnected during parts removal. AC voltage is still present inside the printer when the power switch is in the off position. The power cord must be disconnected before servicing the printer.

⚠ **CAUTION:** Incorrectly routed or loose wire harnesses or flat flexible cables (FFCs) might interfere with other internal components or assemblies and can be damaged, pinched, or frayed. Make sure that wire harnesses are correctly routed and retained when installing assemblies.

Do not bend or fold the FFCs during removal or installation.

Do not expose the toner cartridges or imaging drums to strong light even for a short time.

IMPORTANT: When an assembly is removed that includes a rating plate, tag, or a printer code label, make sure to transfer the plate, tag, or code label to the replacement assembly.

Do not replace the formatter, DC controller, memory PCA (island of data), eMMC PCA, or hard-disk drive (HDD) simultaneously during a single printer servicing. Doing so might cause the printer to become unstable or inoperable.

When replacing the formatter, make sure that all accessories installed on the formatter, such as the fax PCA, hard disk drive, trusted platform module, and DIMM, are removed from the defective formatter and installed on the replacement formatter. Make sure that the formatter is a new service part that has not been installed in a different device.

NOTE: During assembly removal and replacement, or if the printer is moved, remove the toner cartridges, the imaging drums, and the toner collection unit.

Toner is a non-poisonous substance composed of plastic and a small number of colored components. If toner gets on the skin or clothing, wipe it off with dry tissue paper and wash in cold water. Hot water sets toner and it might be difficult, or impossible, to remove. Toner easily breaks down vinyl materials, so avoid letting toner contact vinyl.

TIP: Some figures might show assemblies removed or installed that have not yet been removed or installed at that specific step. However, the procedures are correct for this printer and the target assembly. Always thoroughly read the instructions that accompany each figure.

Electrostatic discharge

Learn how to protect sensitive parts against damage from electrostatic discharge.

CAUTION: Some parts are sensitive to electrostatic discharge (ESD). Look for the ESD reminder when removing printer parts. Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly.

Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.


Required tools

Find information about the tools required to remove and replace parts on the printer.

- #2 Phillips screwdriver with a magnetic tip
- Small, flat-blade screwdriver
- Needle-nose pliers
- ESD strap (if one is available)
- Penlight

CAUTION: Always use a #2 Phillips screwdriver (callout 1). Do not use a Pozidriv screwdriver (callout 2) or any motorized screwdriver. These can damage screws or screw threads.

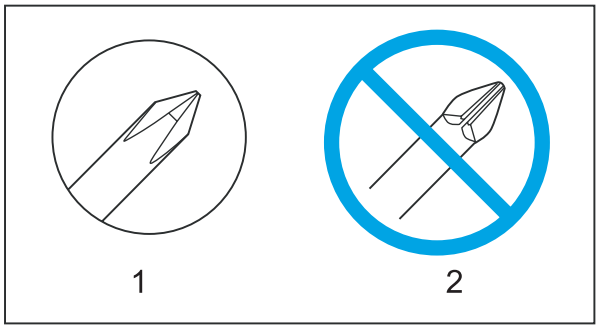Figure 4-1 Screwdrivers



Fasteners used in this printer

Learn about the different types of screws used in the printer and the importance of installing the correct type of screw in the correct location when replacing a part.

⚠ WARNING! Make sure that assemblies are replaced with the correct screw type. Using the incorrect screw (for example, substituting a long screw for the correct shorter screw) can cause damage to the printer or interfere with printer operation. Do not intermix screws that are removed from one assembly with the screws that are removed from another assembly.

NOTE: To install a self-tapping screw, first turn it counterclockwise to align it with the existing thread pattern, and then carefully turn it clockwise to tighten. Do not overtighten. If a self-tapping screw hole becomes stripped, repair the screw hole or replace the affected assembly.

Always take note of the length, diameter, color, type, and location of each removed screw. Make sure that screws are installed in their original location during reinstallation.

Types of screws used in the printer

- Screw, BH M3x10
- Screw, D, M3x6
- Screw, D, M3x8
- Screw, Tapping, Truss Head, M4x10
- Screw, W/Washer
- Screw, W/Washer, M3x10
- Screw, W/Washer D, M3x8

Service approach

Follow these steps before and after performing service on the printer to prevent damage to the printer and ensure that the repair was successful.

Before performing service

Follow these steps before performing any type of service on the printer.

⚠ WARNING! Turn the printer off, wait five seconds, and then remove the power cord before attempting to service the printer. **If this warning is not followed, severe injury can result as well as damage to the**

printer. The power must be on for certain functional checks during troubleshooting. However, the power cord must be disconnected during parts removal. AC voltage is still present inside the printer when the power switch is in the off position. The power cord must be disconnected before servicing the printer.

1. Turn the printer off using the power button.
2. Unplug the power cable and interface cable or cables.
3. Place the product on an ESD workstation or mat, or use an ESD strap (if one is available). If an ESD workstation, mat, or strap is not available, ground yourself by touching the sheet-metal chassis before touching an ESD-sensitive part.
4. Remove the toner cartridges and imaging drums. Place a sheet of paper over the imaging drums to protect them from excessive light exposure.
5. Remove all paper from the trays.
6. Remove the tray(s).

After performing service

Follow these steps after performing service on the printer.

1. Verify that you have completed the necessary reassembly steps.
2. Reinstall the tray(s).
3. Return all paper to the trays.
4. Reinstall the toner cartridges and imaging drums.
5. Plug in the power cable and interface cable or cables.
6. Turn the printer on using the power button.
7. Verify that the expected start-up sounds occur.

Print quality test

Ensure that the print quality is acceptable after performing printer repairs.

Use the printer internal print quality pages to help diagnose and solve print-quality problems. For more information, see the troubleshooting section in the service manual.

NOTE: To get further assistance in print quality troubleshooting, go to www.hp.com/support/colorlj4201-4203 or www.hp.com/support/colorlj4201-4203plus or www.hp.com/support/colorlj4301-4303 or www.hp.com/support/colorlj4301-4303plus. Select **Troubleshooting**, select **Print**, and then select **Print Quality**.

Document feeder / scanner

Learn about document feeder and scanner parts removal and replacement.

Field-replaceable units (FRUs)

Learn about FRU parts removal and replacement.

Covers, panels, and doors

Learn about covers, panels, and doors removal and replacement.

Removal and replacement: ADF top cover (with rollers)

Learn about document feeder top cover.

Mean time to repair: 5 minutes

Service level: Easy

Before performing service

Turn the printer power off

- Disconnect the power cable.

> ⚠ **WARNING!** To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-1 Part information

Part number	Part description
4RA80-67006	ADF top cover assembly (includes rollers)

Required tools

- Small flat-blade screwdriver

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test

Print any pages necessary to make sure the printer is functioning correctly.

1. Remove the document feeder top cover

Follow the procedure below to remove and replace the document feeder top cover.

> **NOTE:** The document feeder top cover includes the rollers.


1. Open the document feeder top cover.

Figure 4-2 Open the cover




2. Release the cover retainer clip.

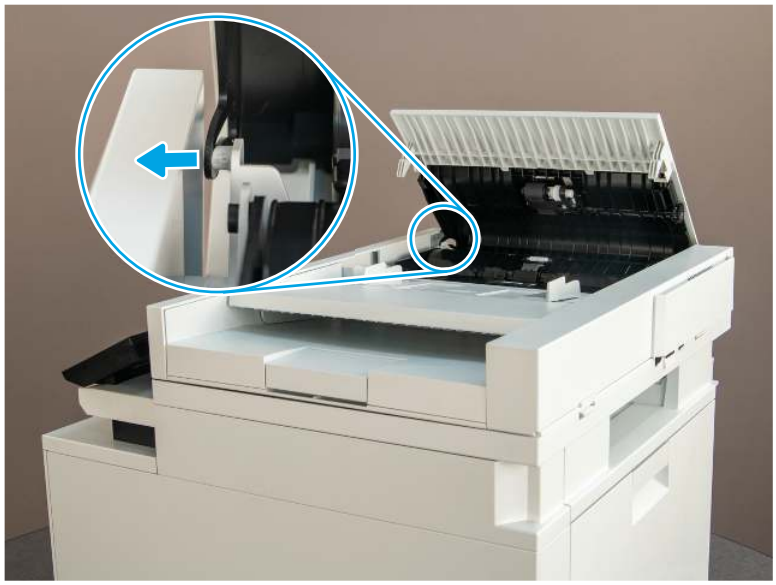Figure 4-3 Release the clip




3. Pull straight up on each hinge clip to release them.

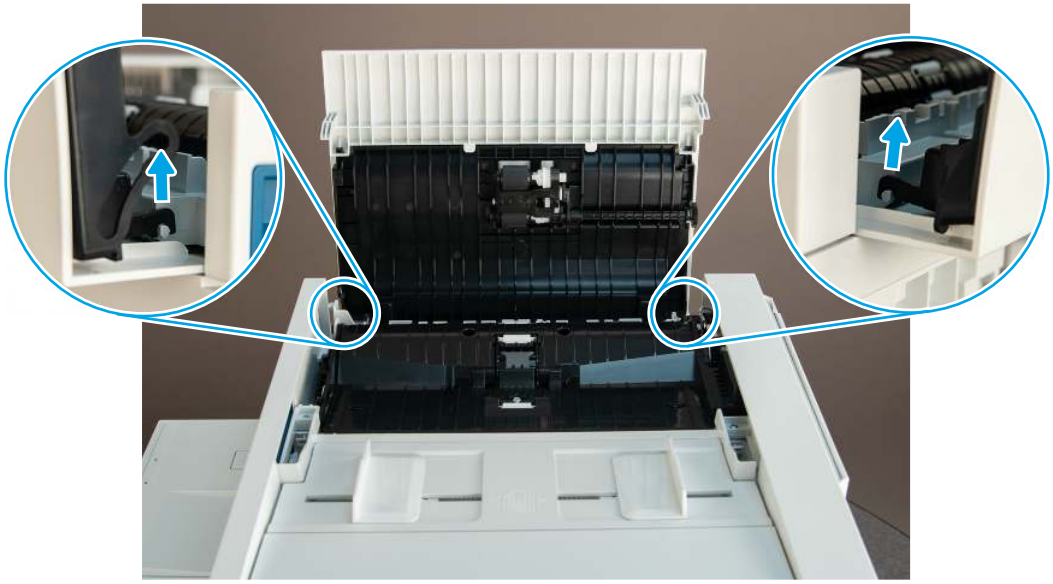Figure 4-4 Release the hinge clips



4. Remove the document feeder cover.

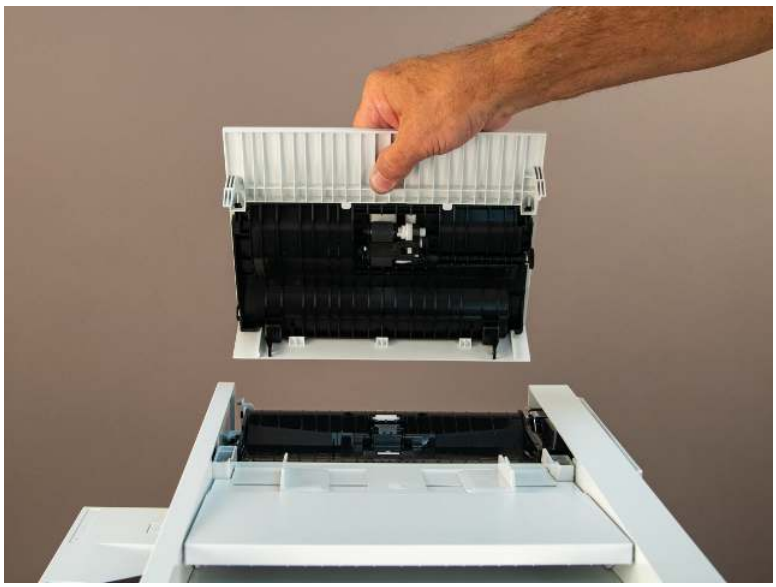Figure 4-5 Remove the cover



2. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: 

Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.

Internal parts and assemblies

Learn how to remove and replace the printer internal parts and assemblies.

Removal and replacement: Integrated scanner assembly (ISA) lift assembly and slider pin (MFP)

Learn about ISA lift assembly and slider pin removal.

Mean time to repair: 4 minutes

Service level: Easy

Before performing service

Turn the printer power off

- Disconnect the power cable.

WARNING! To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-2 **Part information**

Part number	Part description
B3Q10-60128	ISA lift assembly
B3Q10-40041	ISA lift slider pin

Required tools

- No special tools are required to remove or install this assembly.

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test

No post service test is available for this assembly.

1. Remove the ISA lift assembly (MFP)

Follow the procedure below to remove and replace the ISA lift assembly (MFP).

⚠ **CAUTION:** Firmly grasp the ISA while performing the steps in this task. The ISA hinges are not captive in the top cover mounting bosses when the lift assembly is detached.

Do not allow the ISA to slip off of the top cover.

1. Open the ISA, release one tab (callout 1), and then rotate the ISA slider pin (callout 2) towards the front of the printer to release it.

Figure 4-6 Release the slider pin



2. Remove the slider pin.

Figure 4-7 **Remove the slider pin**



3. Support the ISA, and then lower the ISA lift assembly support arm to the closed position.

⚠ **CAUTION:** The ISA hinges are not captive in the top cover mounting bosses. Do not allow the ISA to slip off of the top cover.


Figure 4-8 **Lower the lift assembly arm**



4. Before proceeding, read the following caution statement.

⚠ **CAUTION:** The lift assembly support arm is spring loaded and can unexpectedly spring into the open position. To avoid injury, do not place a finger in the screw well when the support arm is in the closed position.

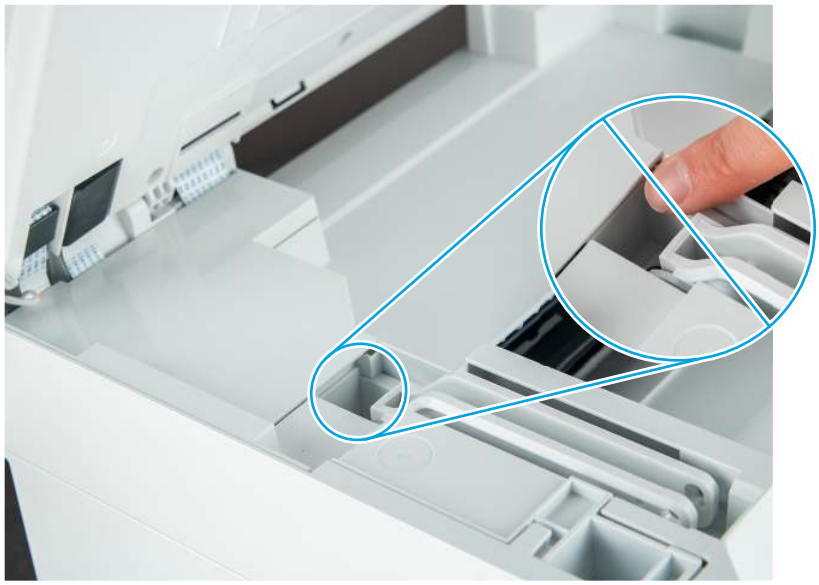Figure 4-9 Spring loaded lift assembly support arm



5. Remove one screw (callout 1).

Figure 4-10 Remove one screw



6. Remove the ISA lift assembly.

Figure 4-11 **Remove the assembly**



2. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.

Whole-unit replacement (WUR)

Learn about WUR parts removal and replacement.

Control panel (WUR)

Learn about control panel whole-unit replacement.

Removal and replacement: Control panel and FFC (SFP)

Learn about control panel and FFC (SFP) removal.

View a video of removing and replacing the control panel and FFC (SFP).

Mean time to repair: 22 minutes

Service level: Medium

Before performing service

Turn the printer power off

- Disconnect the power cable.

WARNING! To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-3 Part information

Part number	Part description
4RA89-60101	Dial control panel with display
RK3-0383-000CN	Cable, flexible flat

Required tools

- #2 Phillips screwdriver with a magnetic tip and a 152 mm (6 in) shaft length

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test

Print any pages necessary to make sure the printer is functioning correctly.


1. Remove the left cover and cartridge door button (SFP)

Follow the procedure below to remove and replace the left cover and cartridge door button (SFP).

TIP: There might be a small cover installed on the USB port located at the back of the printer. If installed, remove this cover now.


1. Remove one screw (callout 1).

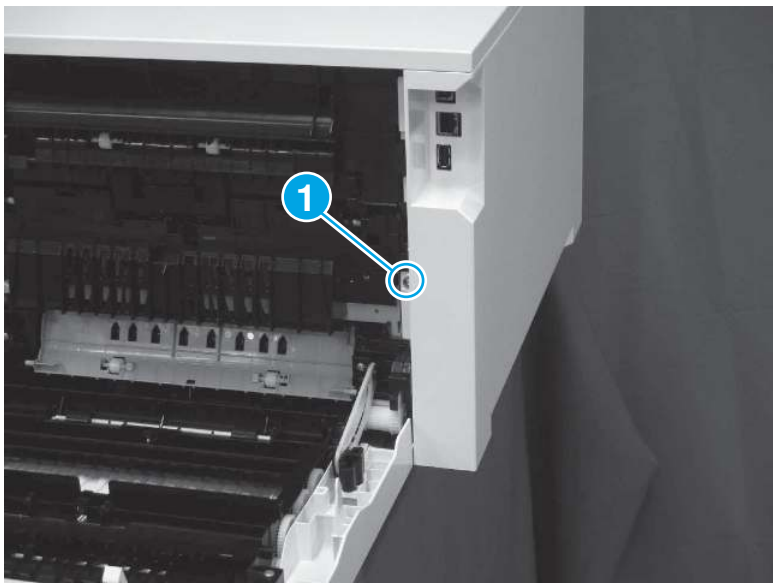Figure 4-12 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

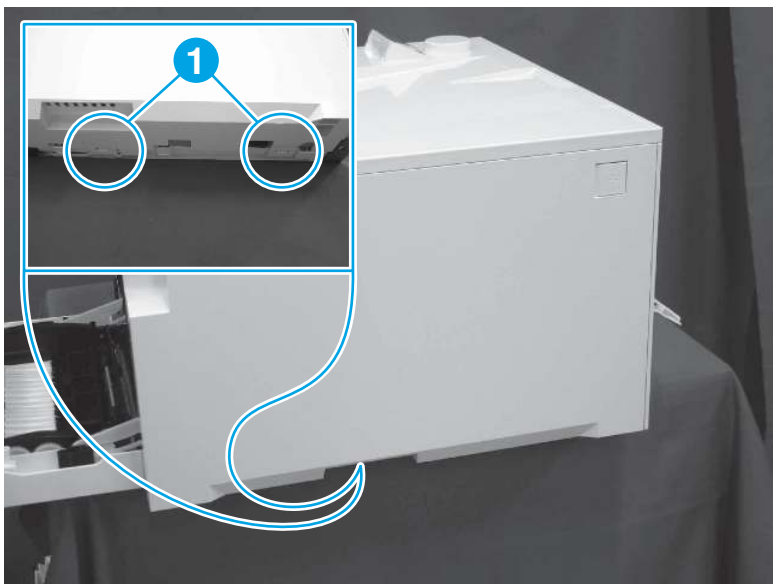Figure 4-13 Release two tabs




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

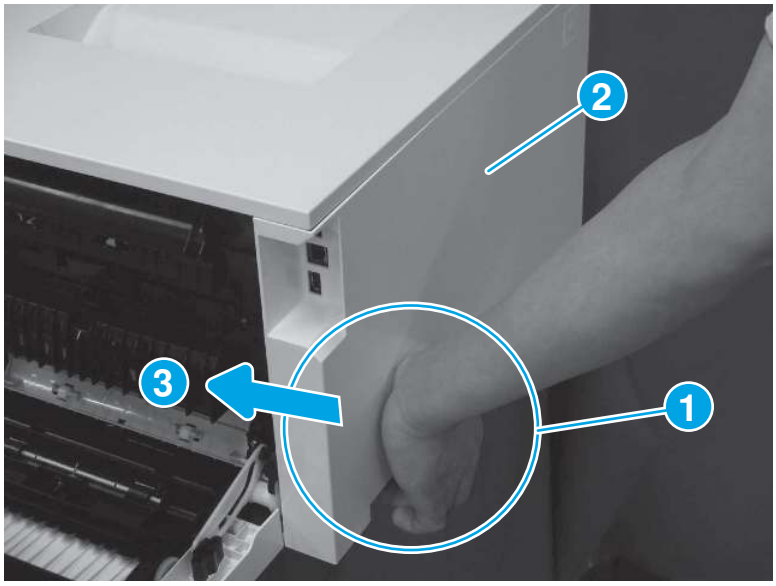Figure 4-14 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

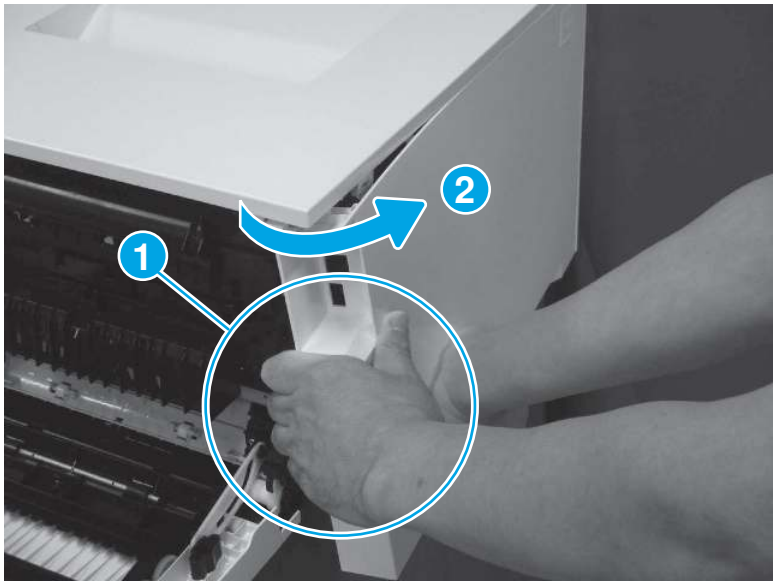Figure 4-15 Disengage the cover corner




5. Remove the left cover (callout 1).

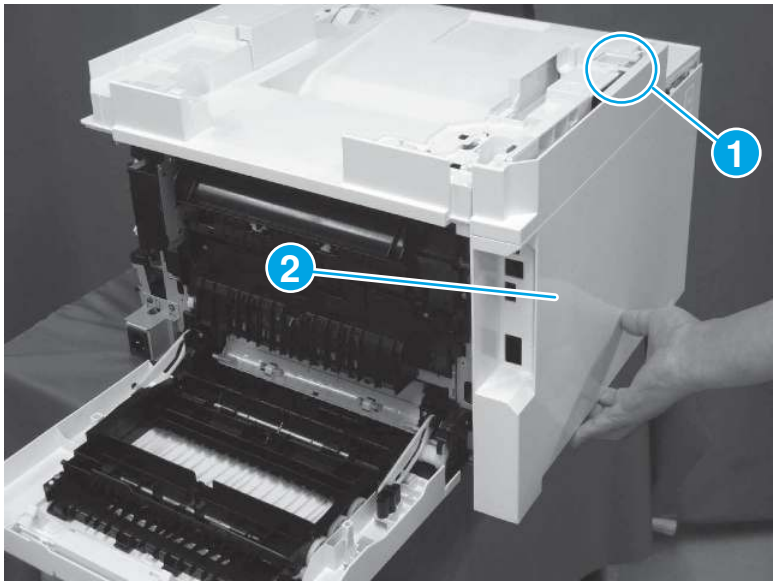Figure 4-16 **Remove the cover**



6. Release two tabs (callout 1), and then remove the cartridge door button (callout 2) and one spring (callout 3) from the left cover (callout 4).

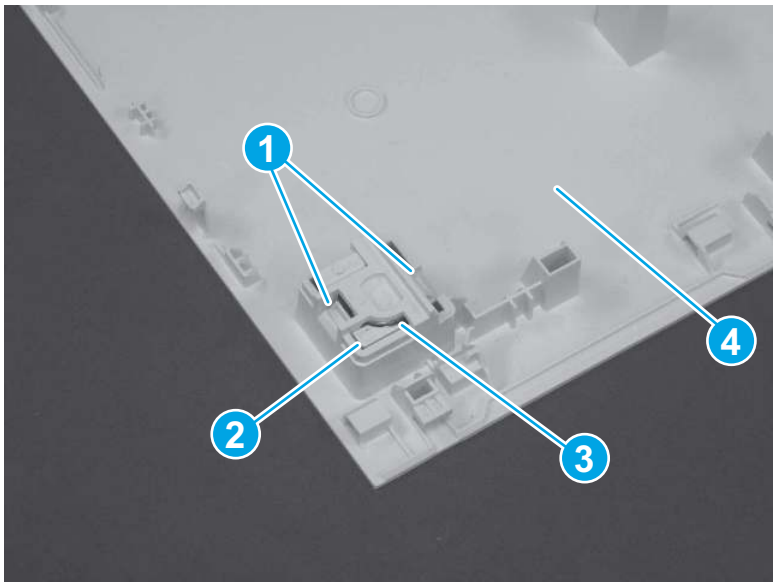Figure 4-17 **Remove the cartridge door button**




2. Remove the right cover (SFP)

Follow the procedure below to remove and replace the right cover (SFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.


1. Remove one screw (callout 1).

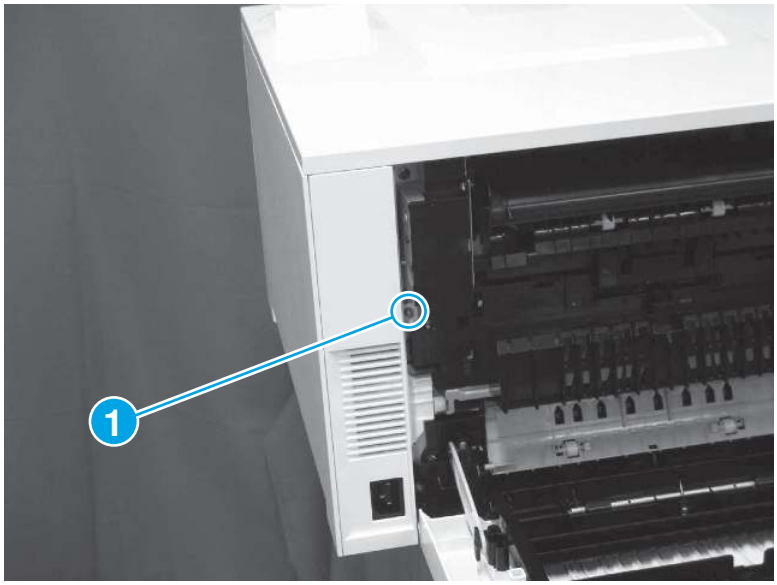Figure 4-18 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to three tabs (callout 1). Release three tabs.

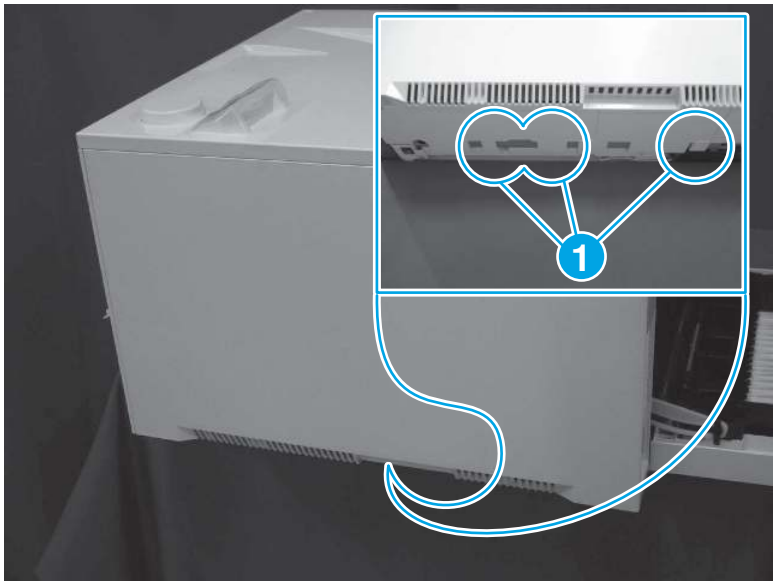Figure 4-19 Release three tabs




3. Press in on the side (callout 1) of the right cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

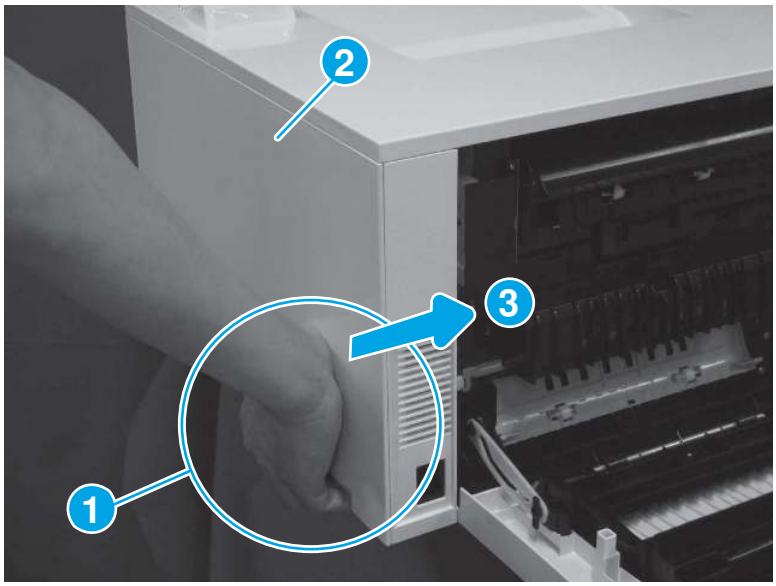Figure 4-20 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

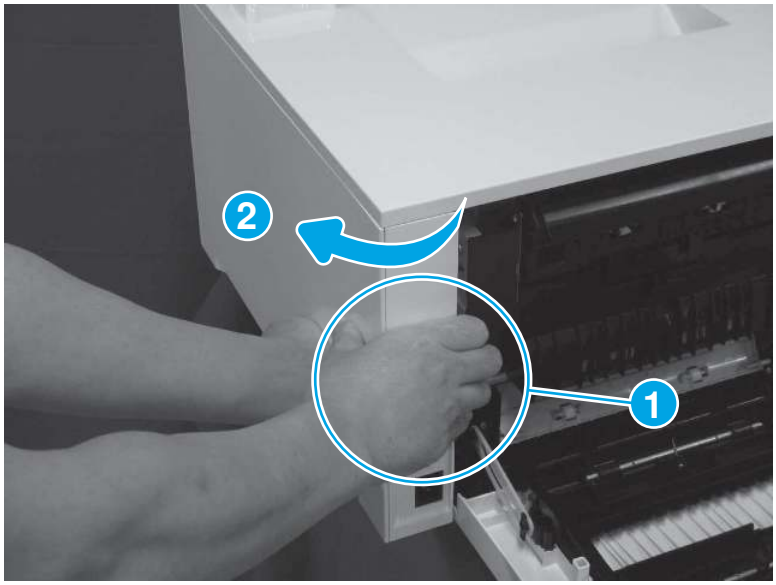Figure 4-21 Disengage the cover corner



5. Remove the right cover (callout 1).

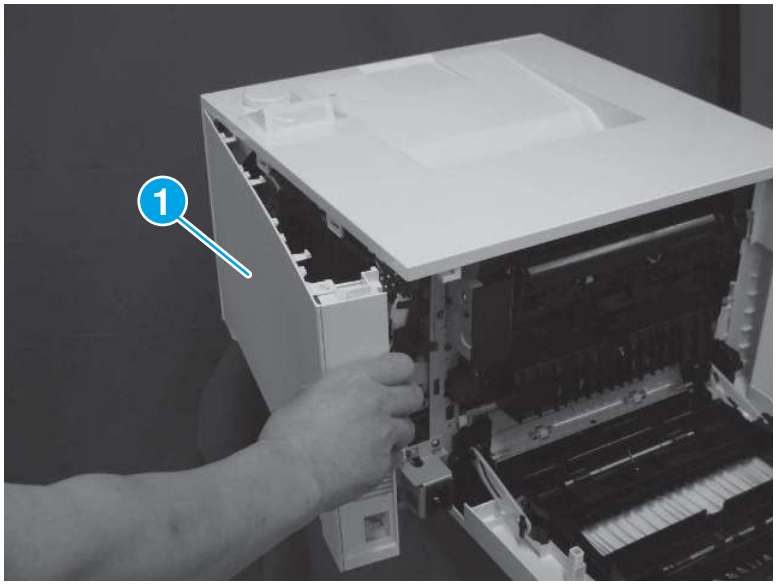Figure 4-22 Remove the cover




3. Remove the front cover (SFP)

Follow the procedure below to remove and replace the front cover.

Reinstallation tip: Make sure to follow the special installation instructions for this part or step (located after the unpack and recycle or cleaning section).

1. Remove three screws (callout 1).

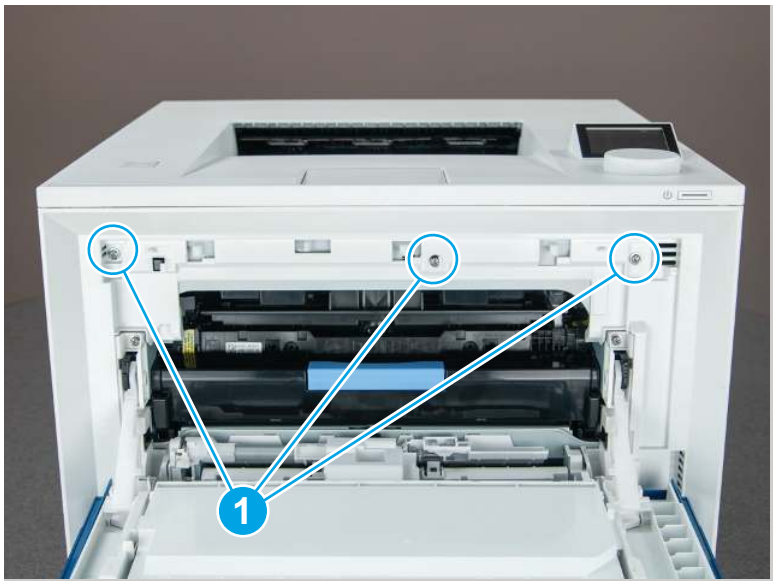
Figure 4-23 Remove three screws



2. Before proceeding, take note of the door release arm (callout 1). This arm can be easily dislodged when the cover is removed.


CAUTION: Do not lose the spring (callout 2) when removing the front cover.

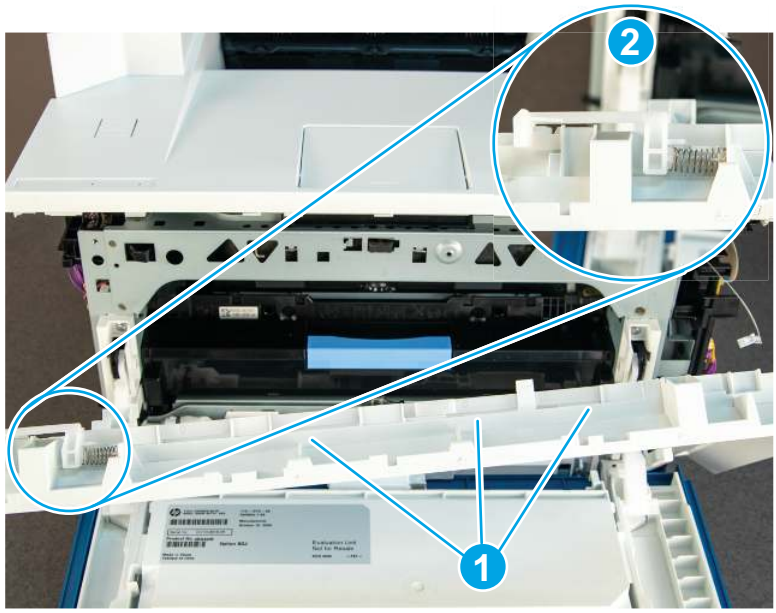Figure 4-24 Door release arm



3. Release four tabs (callout 1), and then remove the front cover (callout 2).

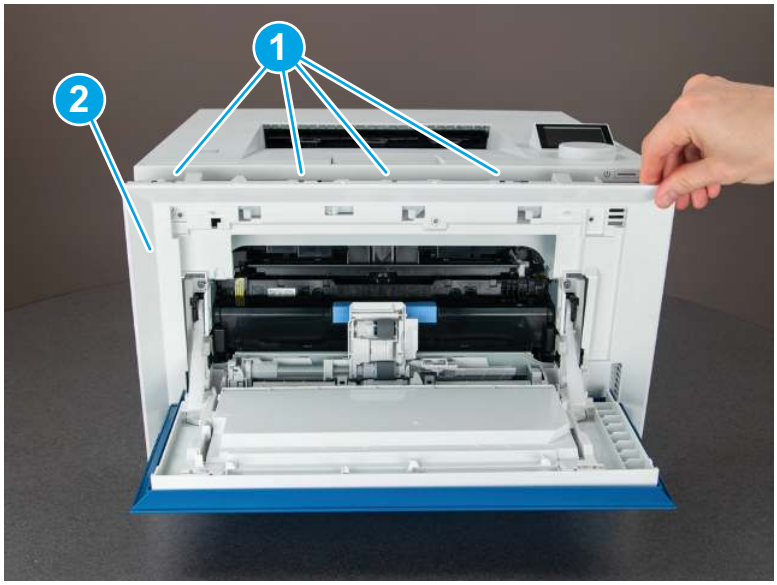Figure 4-25 Remove the cover



4. Remove the top cover (SFP)

Follow the procedure below to remove and replace the top cover (SFP).


NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.

1. **Wireless model only**: Raise and support the left side of the printer, remove one screw, and then separate the wireless PCA from the cover.

CAUTION: Do not attempt to completely remove the wireless PCA. Instead, gently move it out of the way.


TIP: To remove the screw without raising the printer, use a short-barrel screwdriver.

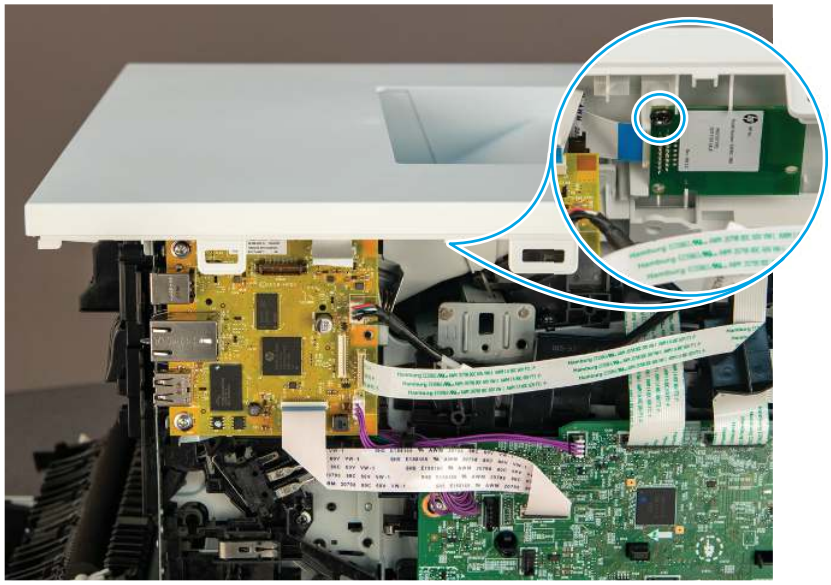Figure 4-26 Remove one screw



2. Disconnect one flat-flexible cable (FFC).

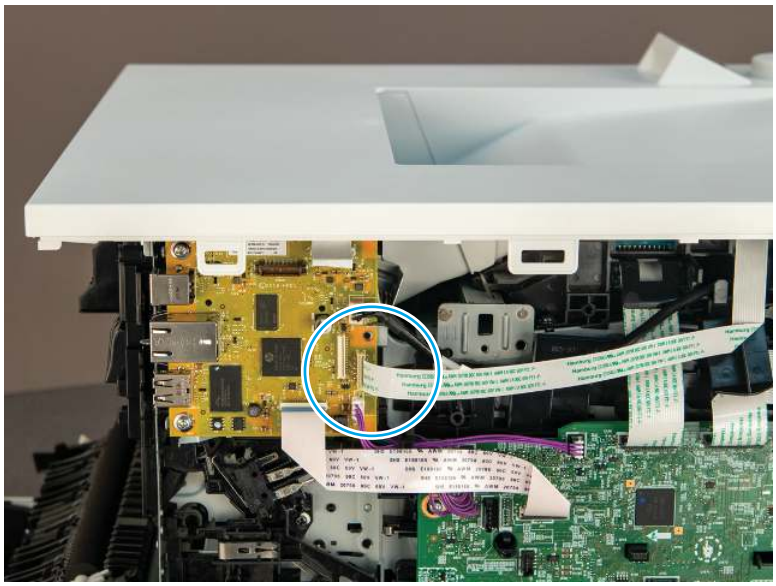Figure 4-27 Disconnect one FFC



3. Disconnect one FFC, and then remove one screw to release the ground wire.


NOTE: The front cover is shown installed in the figure below. However, this step is correct for removing the top cover.

Figure 4-28 Disconnect one FFC and remove one screw



4. Sliding the cover from the back of the printer towards the front to remove it.

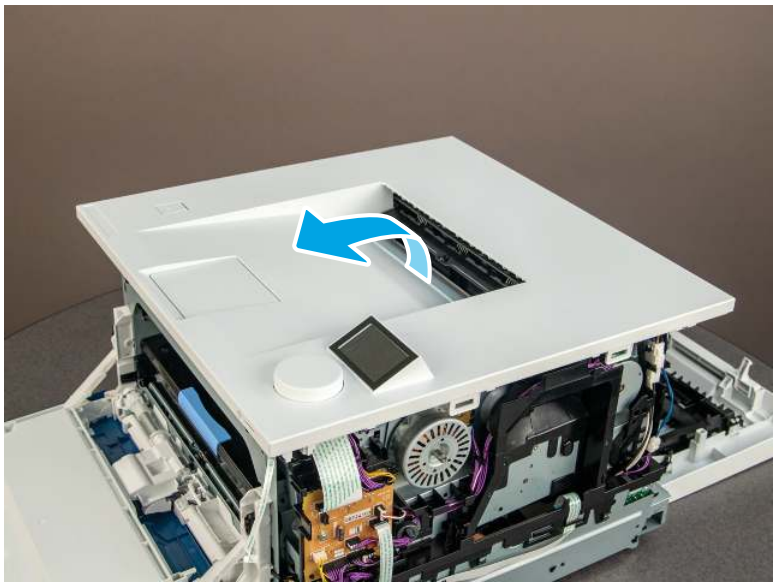Figure 4-29 Remove the cover




5. Remove the control panel and FFC (SFP)

Follow the procedure below to remove and replace the control panel and power switch (SFP).

1. Disconnect one flat-flexible cable (FFC), and then remove four screws.

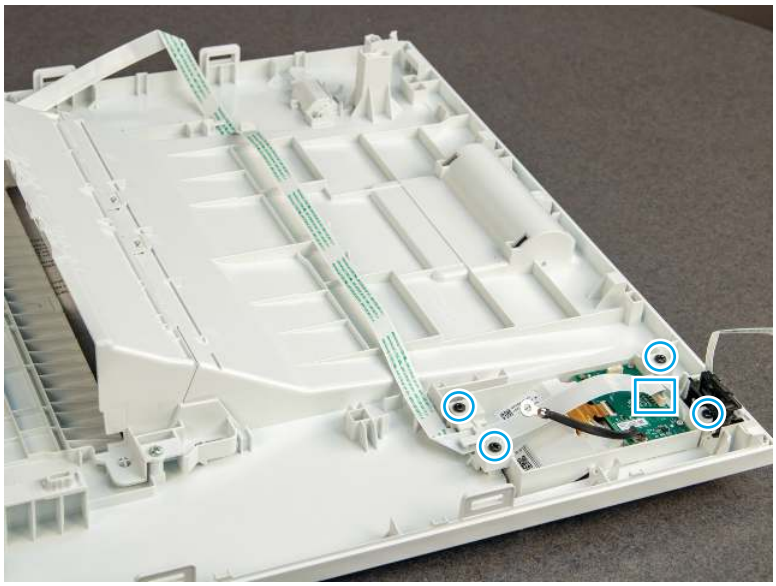Figure 4-30 **Disconnect one FFC and remove four screws**



2. Remove control panel.

NOTE: Release and remove the control panel FFC from the top cover.

Figure 4-31 **Remove the control panel**



6. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: 

Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.


7. Special installation instructions - Front cover

Follow the special instructions below to install the front cover.

NOTE: Front cover installation is **identical** for both the SFP and MFP models.


1. If the door release arm becomes dislodged when handling the cover, install it as shown below (callout 1, 2).

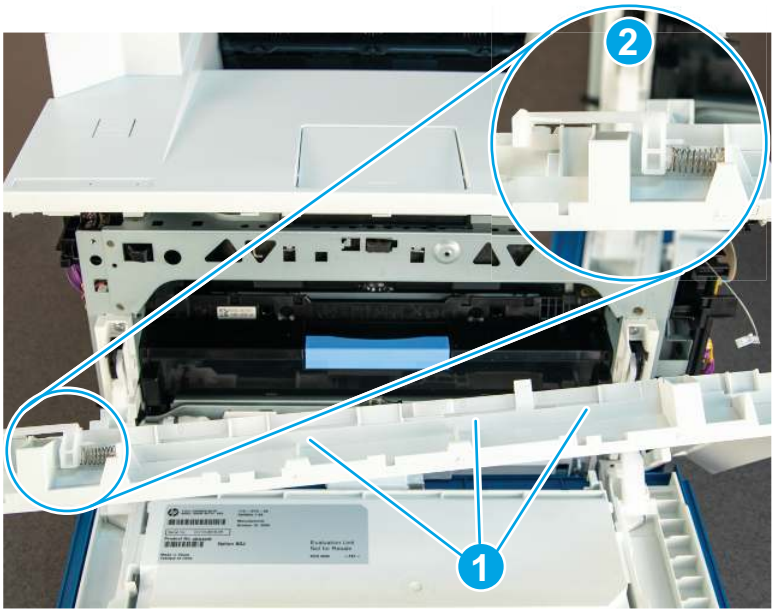Figure 4-32 Door release arm installed



2. At the right and left side of the front cover, align the holes (callout 1) in the cover with the alignment pins (callout 2) on the chassis.

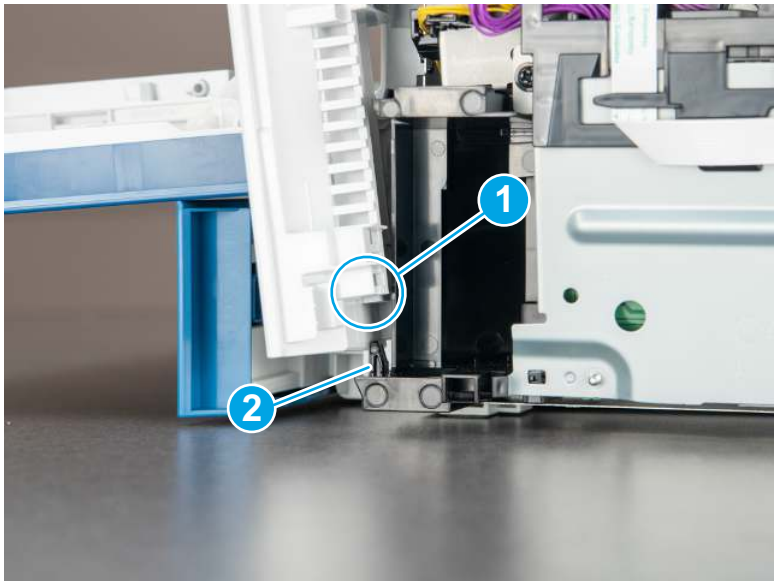
Figure 4-33 Cover alignment pins



3. Rotate the top of the cover towards the printer to install it.

IMPORTANT: Verify that the spring loaded door release button (on the left side of the cover) correctly functions.

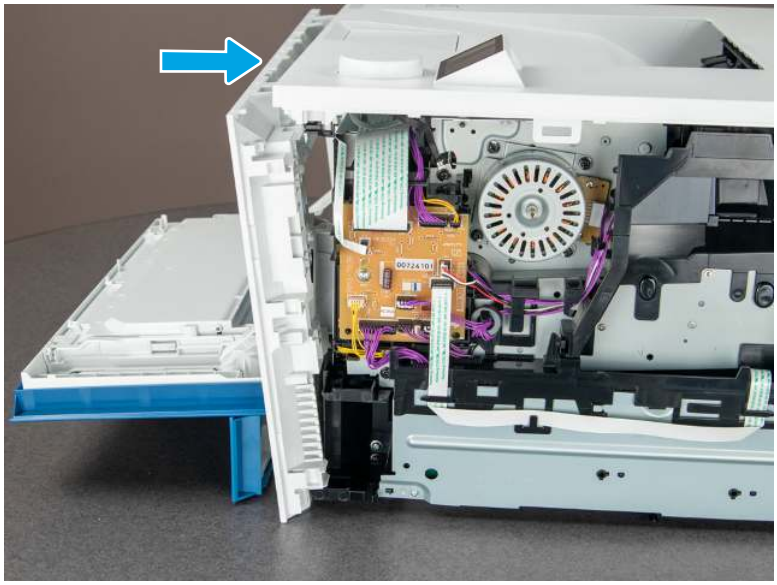Figure 4-34 Install the cover



Removal and replacement: Control panel, base cover, and base (MFP)

Learn about control panel (MFP) removal.

View a video of removing and replacing the control panel, base cover, and base (MFP).

Mean time to repair: 12 minutes

Service level: Medium

Before performing service

Turn the printer power off

- Disconnect the power cable.

WARNING! To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-4 Part information

Part number	Part description
4RA83-60101	Control panel touchscreen assembly
4RA83-40005	Control panel base
4RA83-40006	Control panel base cover
RK3-1382-000CN	Control panel flat flexible cable

Required tools

- #2 Phillips screwdriver with a magnetic tip and a 152 mm (6 in) shaft length

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test

Print any pages necessary to make sure the printer is functioning correctly.

1. Remove the control panel (MFP)

Follow the procedure below to remove and replace the control panel (MFP).

1. Open the ISA.


Figure 4-35 **Open the ISA**



2. Release one tab (callout 1), and the rotate the slider pin towards the front of the printer (callout 2) to release it. Remove the slider pin.

⚠ CAUTION: When the slider pin is removed the ISA is not captive. Do not dislodge and drop the ISA.

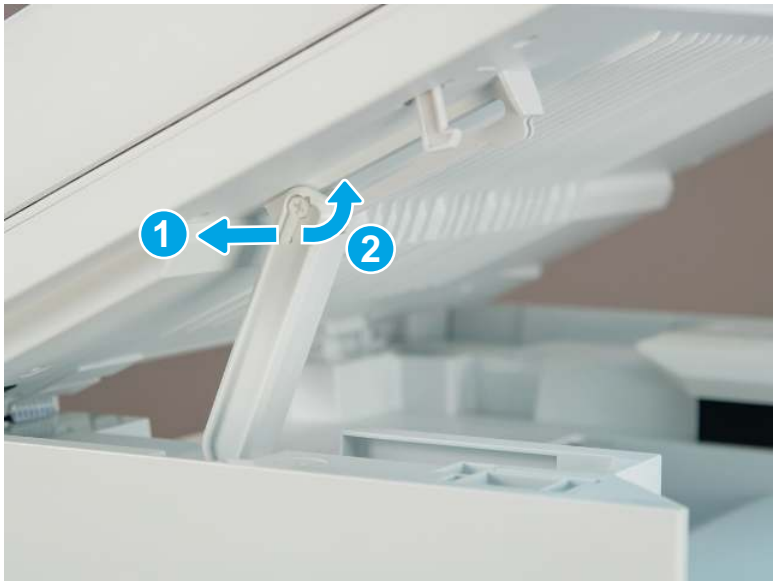Figure 4-36 Remove the slider pin




3. Support the ISA, and then remove one screw.

Figure 4-37 Remove screw



4. Reinstall the slider pin to secure the ISA.

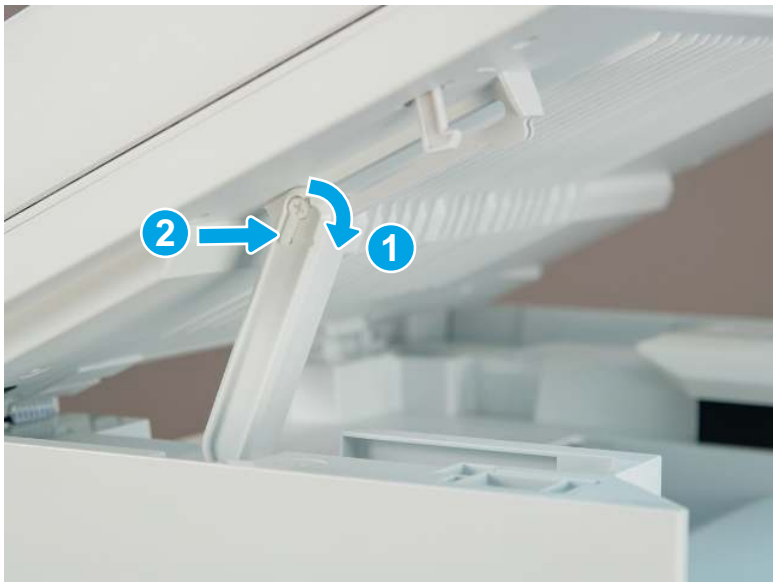Figure 4-38 Reinstall the slider pin



5. Remove two screws.

Figure 4-39 Remove two screws



6. Release one tab, rotate one end of the mount base cover up (callout 1), and then slide the cover as shown (callout 2) to remove it.

NOTE: If the mount base cover is the target service part, stop now and skip the remaining removal steps.

Figure 4-40 Remove the cover



7. Disconnect two FFCs.

NOTE: These are zero-insertion force (ZIF) connectors. To remove the FFCs, first release the locking clip on the connector, and then pull the cable straight out of the connector.

Reinstallation tip: Make sure that the line on the FFC tab is parallel with the connector body.

Figure 4-41 Disconnect two FFCs



8. Remove four screws.

NOTE: Two of the screws are self-tapping threads (black), and two of the screws are machine thread (silver).


Figure 4-42 Remove four screws



9. Lift the control panel and mount base straight up and off of the printer to release them together.

NOTE: When handling the assembly, do not lose the ferrite (callout 1).

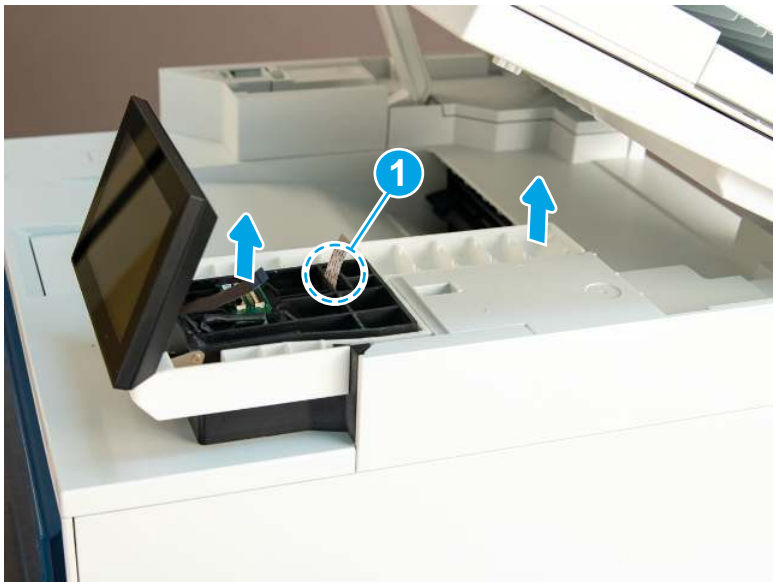Figure 4-43 Lift straight up



10. Remove control panel and mount base.


CAUTION: Control panel and base are not captive. Be careful not to drop the touchscreen.

Figure 4-44 Remove control panel and mount base



11. Rotate one end of the control panel up and away from the mount base (callout 1), and then slide it as shown (callout 2) to remove it.

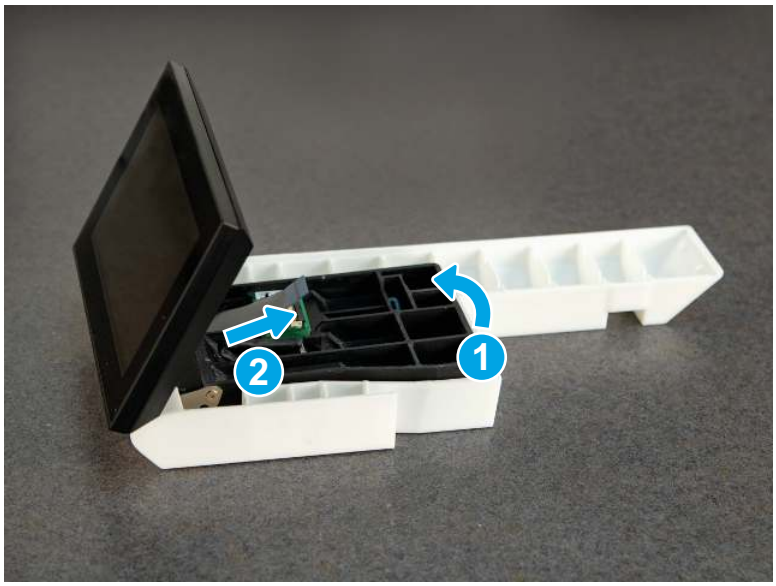Figure 4-45 Separate control panel and base



2. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: 

Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.

Integrated scanner assembly (WUR)

Learn about integrated scanner assembly (ISA) whole-unit replacement.

Removal and replacement: Integrated scanner assembly (ISA)

Learn about ISA removal.

View a video of removing and replacing the ISA.

Mean time to repair: 13 minutes

Service level: Medium

Before performing service

Turn the printer power off

- Disconnect the power cable.

WARNING! To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-5 Part information

Part number	Part description
4RA80-67002	ISA assembly duplex blue and folded FFC

Table 4-5 Part information (continued)

Part number	Part description
4RA80-67004	ISA assembly duplex gray and folded FFC
4RA80-67003	ISA assembly simplex blue and folded FFC
4RA80-67005	ISA assembly simplex gray and folded FFC

Required tools

- #2 Phillips screwdriver with a magnetic tip and a 152 mm (6 in) shaft length

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test

Print any pages necessary to make sure the printer is functioning correctly.

1. Remove the left cover (MFP)


Follow the procedure below to remove and replace the left cover (MFP).

NOTE: The following procedure is for an MFP printer only. If this assembly is being removed to gain access to dependency parts for a SFP printer, skip this step.

TIP: There might be a small cover installed on the USB port and/or the fax port located at the back of the printer. If installed, remove these covers now.


1. Remove one screw (callout 1).

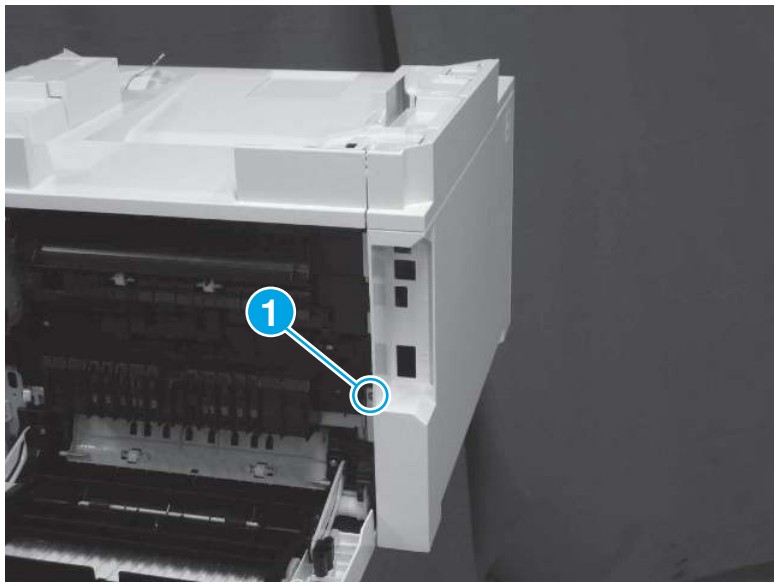Figure 4-46 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

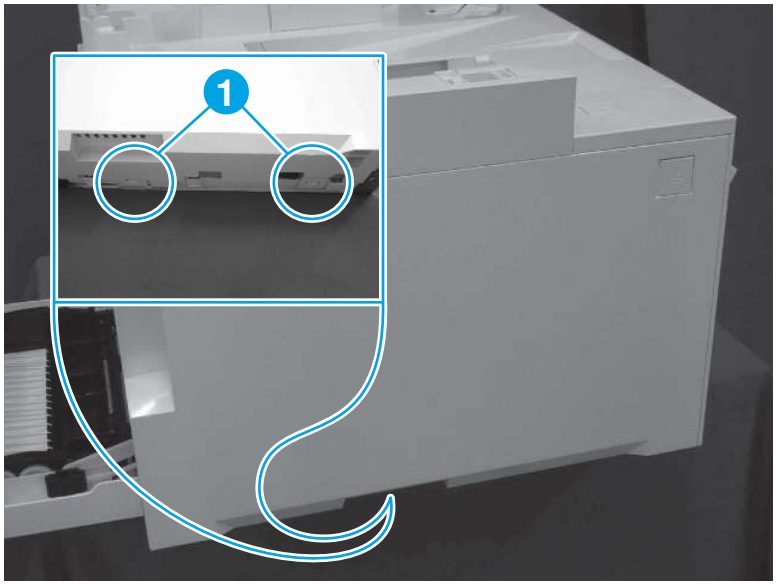Figure 4-47 Release two tabs




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

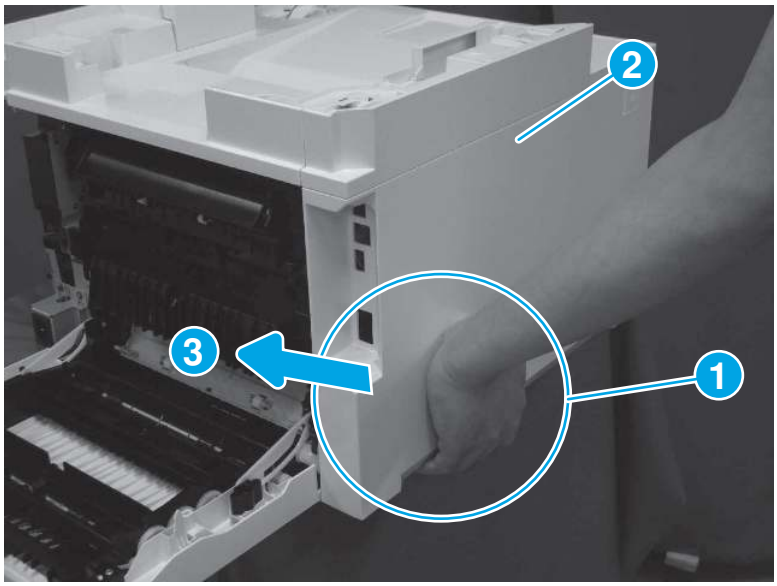Figure 4-48 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

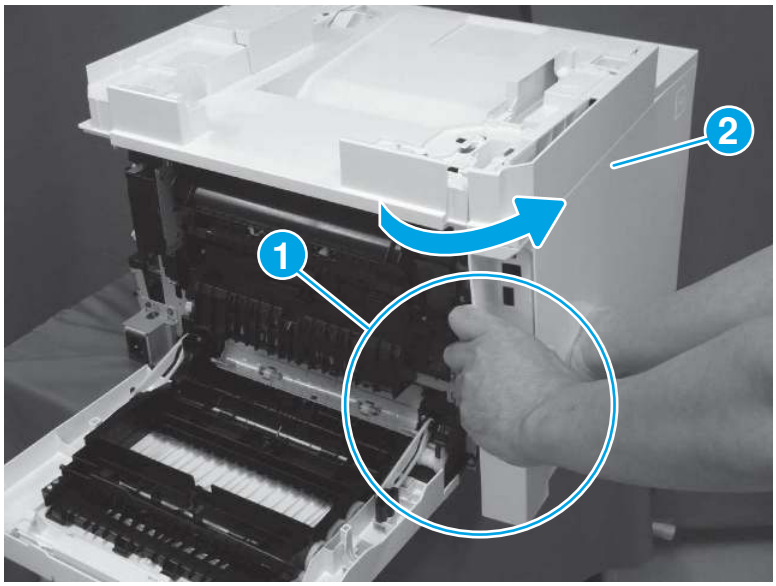Figure 4-49 Disengage the cover corner



5. Remove the left cover (callout 1).

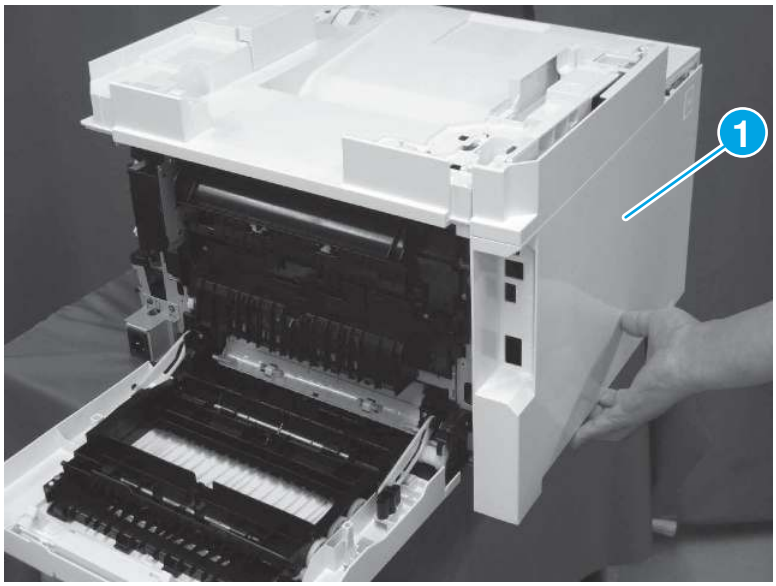Figure 4-50 Remove the cover



2. Remove the ISA (MFP)

Follow the procedure below to remove and replace the ISA.


1. Open the ISA, and then remove the ISA FFC cover (callout 1).

Figure 4-51 Remove the FFC cover



2. Disconnect three FFCs, and then remove one screw to release the ground cable.

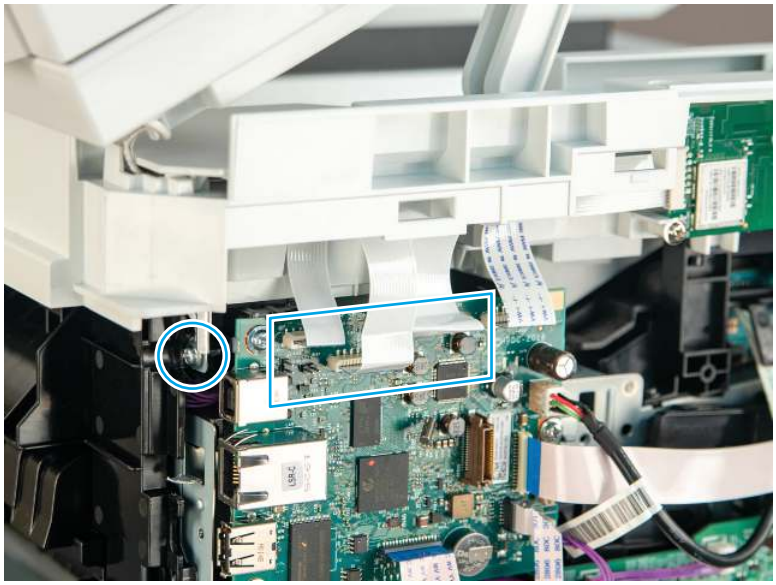Figure 4-52 Disconnect FFCs and remove screw



3. Release one tab (callout 1), and then rotate the ISA slider pin (callout 2) towards the front of the printer to release it. Remove the slider pin.


⚠ CAUTION: When the slider pin is removed, the ISA is not captive and can suddenly detach from the printer.

Figure 4-53 Remove the slider pin




4. Support the ISA, release the FFCs from the retainers, and then carefully pass the FFCs and the ground wire up through the slots in the top cover.

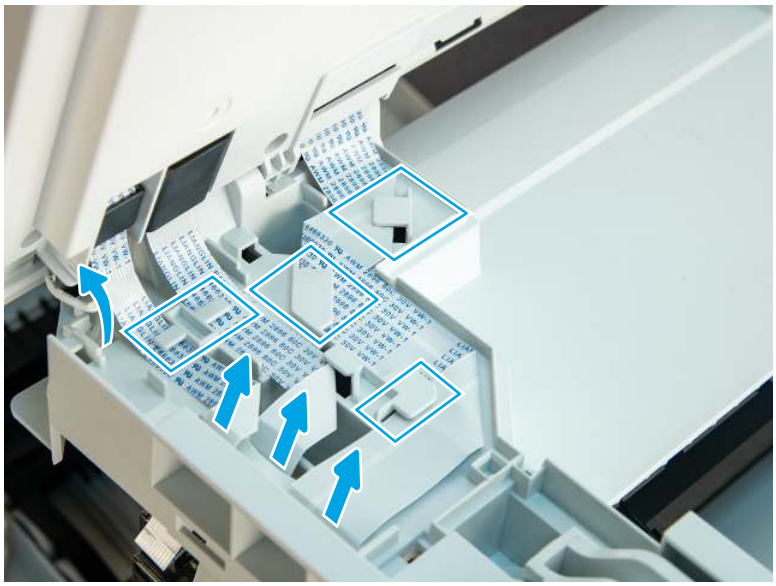Figure 4-54 Release the FFCs and ground wire



5. Slide ISA as shown below to release it.

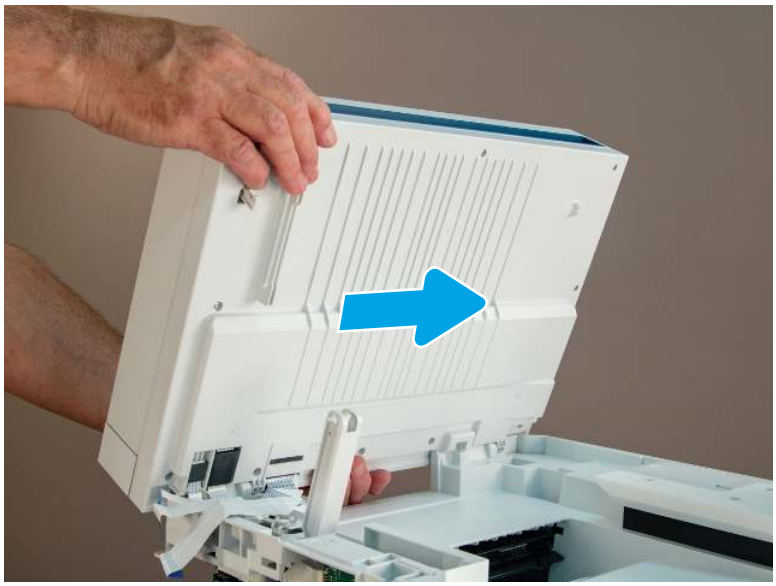Figure 4-55 Release the ISA



6. Remove the ISA.

Figure 4-56 Remove the ISA



3. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: 

Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.

Base printer

Learn about base printer parts removal and replacement.

Field-replaceable units (FRUs)

Learn about FRU parts removal and replacement.

Covers, panels, and doors

Learn about covers, panels, and doors removal and replacement.

Removal and replacement: Tray 3 cassette front cover

Learn about Tray 3 cassette front cover removal.

NOTE: A replacement Tray 3 kit only includes the cassette (not the front cover). Use this procedure to remove the tray front cover from the discarded cassette, and then install it on the replacement cassette.

Mean time to repair: 4 minutes

Service level: Easy

Before performing service

Turn the printer power off

- Disconnect the power cable.

> ⚠ **WARNING!** To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-6 Part information

Part number	Part description
28N93-67001	550-sheet paper tray **NOTE:** This is a replacement Tray 3 cassette only (no front cover).

Required tools

- Small flat-blade screwdriver

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test

Print any pages necessary to make sure the printer is functioning correctly.

1. Remove Tray 3

Follow the procedure below to remove Tray 3.

- Pull the tray out until it stops, lift the front edge up, and then remove the tray.

Figure 4-57 **Remove the tray**




2. Remove the Tray 3 cassette front cover

Follow the procedure below to remove the Tray 3 cassette front cover.

1. Turn the tray over, place it on a flat surface, and then release four tabs.


NOTE: Release the tabs from the left- to right-side as shown below.

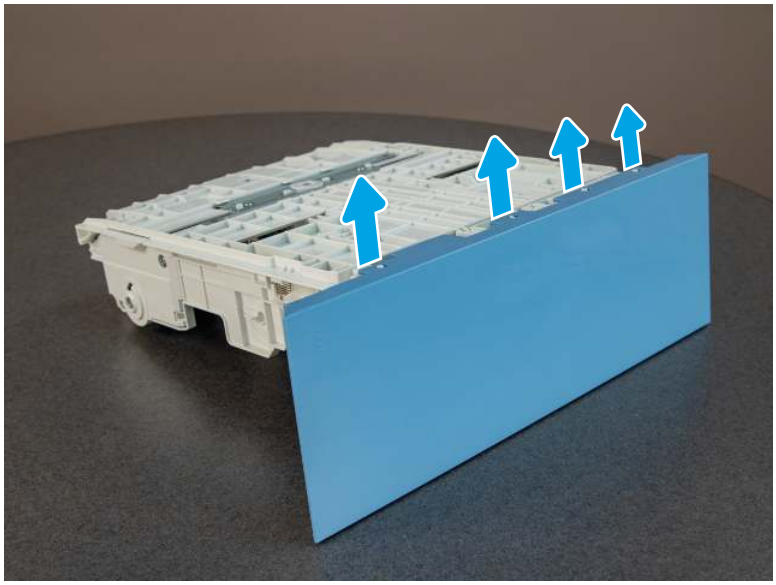Figure 4-58 **Release four tabs**



2. Rotate the bottom edge of the cover away from the cassette to remove it.

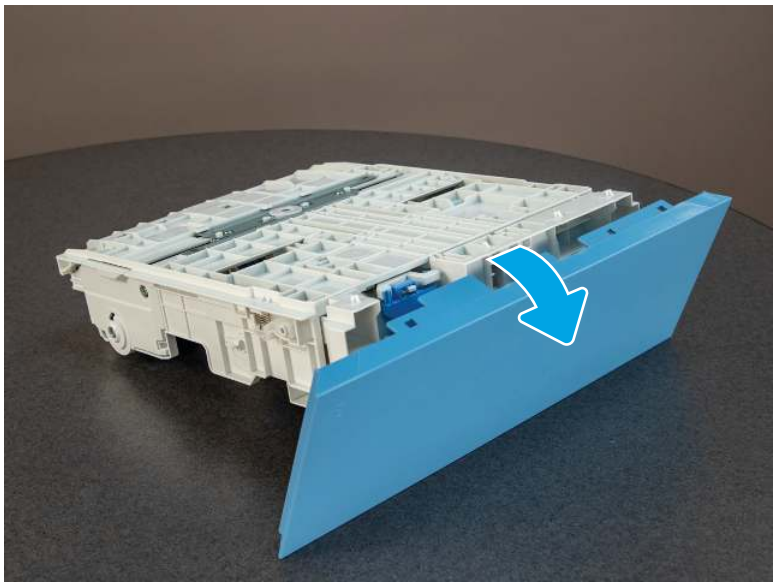Figure 4-59 Remove the cover



3. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.


NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.

4. Install the Tray 3 cassette front cover

Follow the procedure below to install the Tray 3 cassette front cover.

1. Position the top edge of the cover on the cassette with the alignment pins (on the cassette body) in the holes in the front cover.

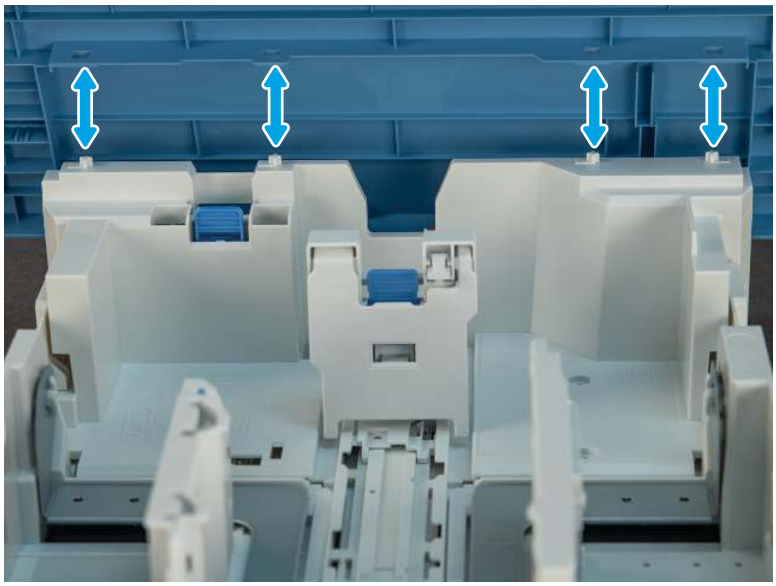
Figure 4-60 **Align holes and pins**



2. Rotate the bottom edge of the cover toward the cassette to install it.


NOTE: An audible click is heard when the bottom edge of the cover snaps onto the cassette.

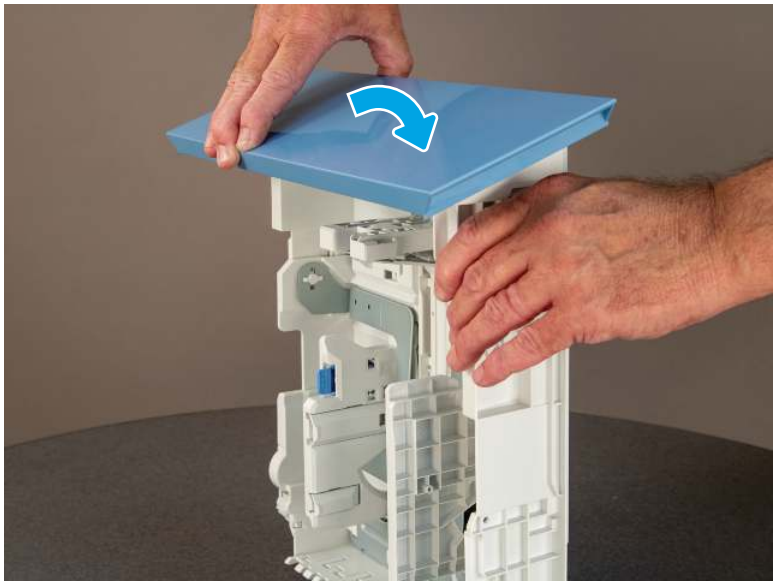Figure 4-61 Install the cover



3. Verify that the pins on the bottom edge of the cassette are fully seated in the holes on the cover.

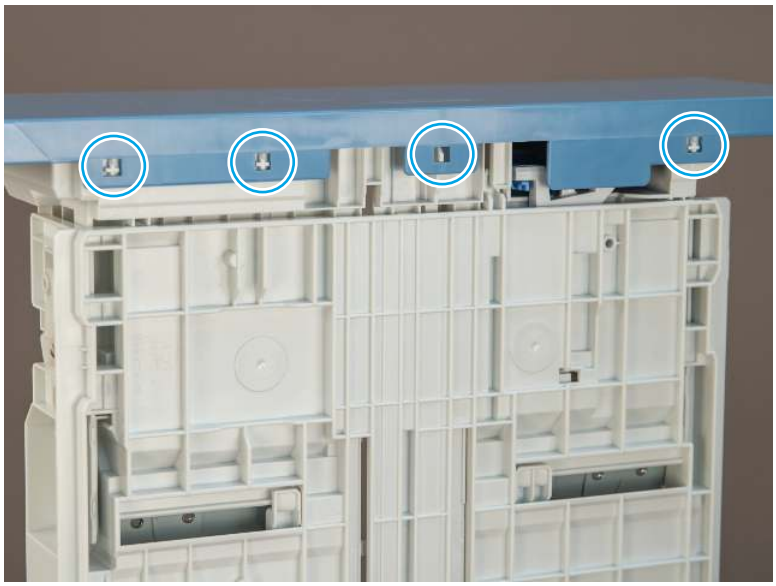Figure 4-62 Verify that the installation is correct



5. Install Tray 3

Follow the procedure below to install Tray 3.

- Install the tray.

Figure 4-63 **Install the tray**



Removal and replacement: Integrated scanner assembly (ISA) FFC cover (MFP)

Learn about ISA cable cover removal (MFP).

Mean time to repair: 2 minutes

Service level: Easy

Before performing service

Turn the printer power off

- Disconnect the power cable.

> ⚠ **WARNING!** To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-7 **Part information**

Part number	Part description
4RA80-40045	Cover, FFC

Required tools

- Small flat-blade screwdriver

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test

No post service test is available for this assembly.

1. Remove the ISA FFC cover (MFP)

Follow the procedure below to remove and replace the ISA FFC cover (MFP).

1. Open the ISA.

Figure 4-64 **Open the ISA**



2. Remove the ISA FFC cover (callout 1).

Figure 4-65 **Remove the cover**



2. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: 

Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.

Removal and replacement: Left cover and cartridge door button (SFP)

Learn about left cover and cartridge door button removal (SFP).

Mean time to repair: 4 minutes

Service level: Easy

Before performing service

Turn the printer power off

- Disconnect the power cable.

WARNING! To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-8 Part information

Part number	Part description
RC5-5450-000CN	Cover, left (SFP)
RC5-5411-000CN	Button, cartridge door

Required tools

- #2 Phillips screwdriver with a magnetic tip and a 152 mm (6 in) shaft length

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test

No post service test is available for this assembly.


1. Remove the left cover and cartridge door button (SFP)

Follow the procedure below to remove and replace the left cover and cartridge door button (SFP).

TIP: There might be a small cover installed on the USB port located at the back of the printer. If installed, remove this cover now.


1. Remove one screw (callout 1).

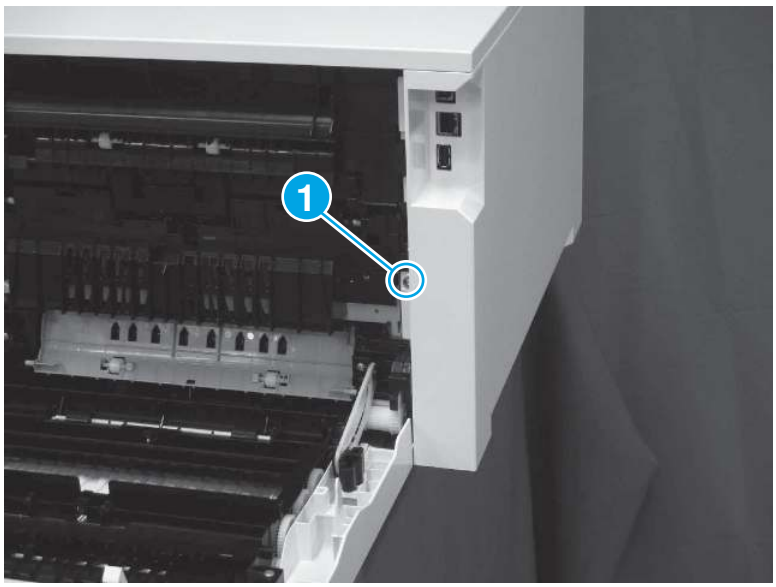Figure 4-66 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

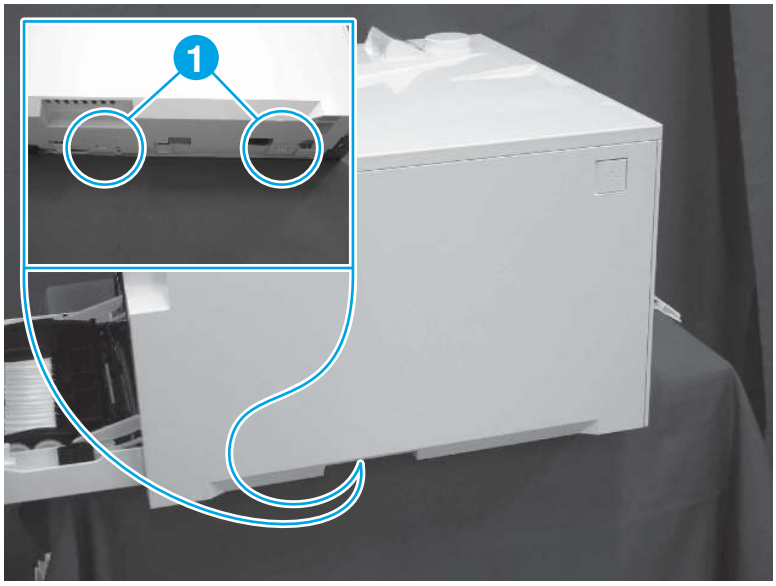Figure 4-67 **Release two tabs**




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

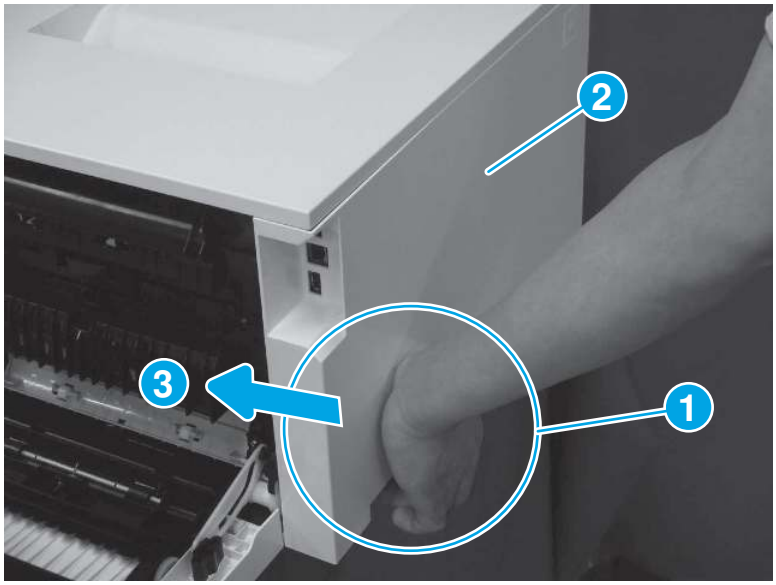Figure 4-68 **Release the rear cover corner**




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

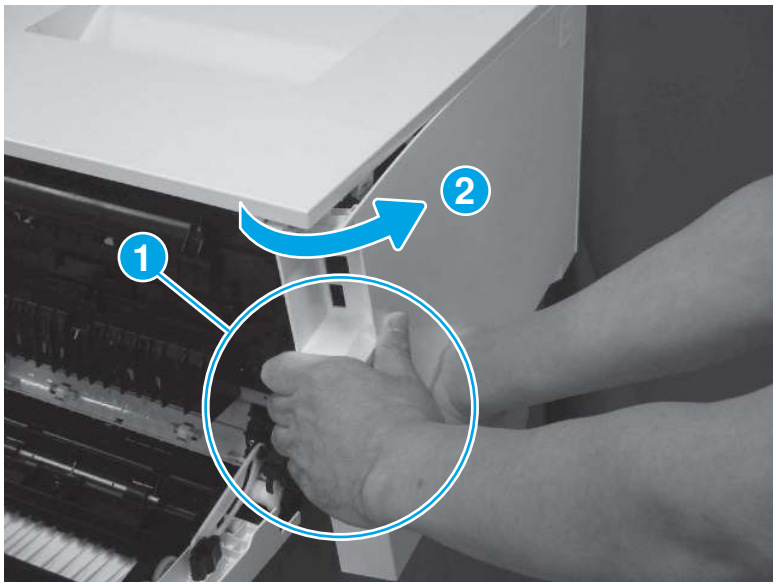Figure 4-69 Disengage the cover corner




5. Remove the left cover (callout 1).

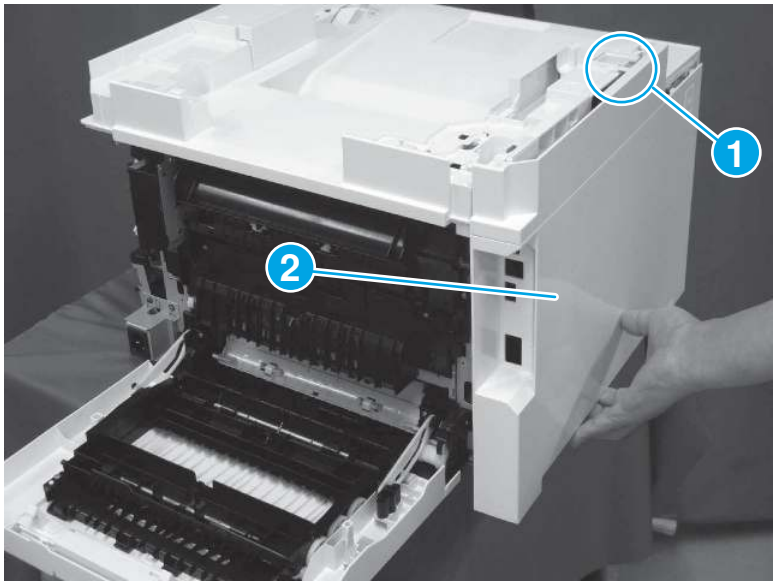Figure 4-70 Remove the cover



6. Release two tabs (callout 1), and then remove the cartridge door button (callout 2) and one spring (callout 3) from the left cover (callout 4).

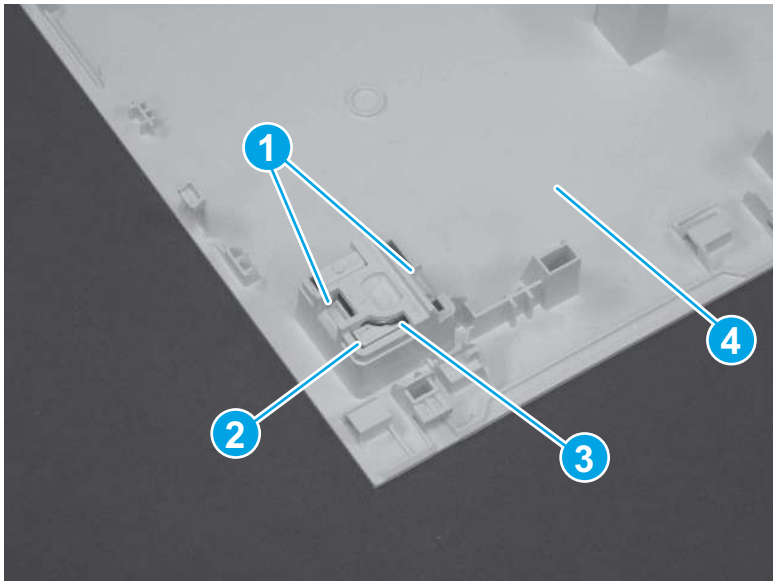Figure 4-71 Remove the cartridge door button



2. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.

Removal and replacement: Left cover and cartridge door button (MFP)

Learn about left cover and cartridge door button removal (MFP).

Mean time to repair: 4 minutes

Service level: Easy

Before performing service

Turn the printer power off

- Disconnect the power cable.

WARNING! To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-9 Part information

Part number	Part description
RC5-5462-000CN	Cover, left (MFP)
RC5-5411-000CN	Button, cartridge door

Required tools

- #2 Phillips screwdriver with a magnetic tip and a 152 mm (6 in) shaft length

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test

No post service test is available for this assembly.


1. Remove the left cover (MFP)

Follow the procedure below to remove and replace the left cover (MFP).

TIP: There might be a small cover installed on the USB port and/or the fax port located at the back of the printer. If installed, remove these covers now.


1. Remove one screw (callout 1).

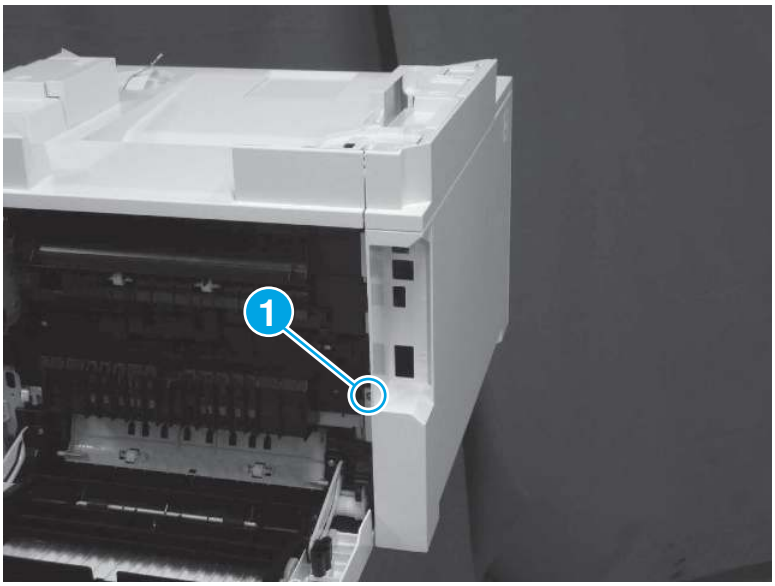Figure 4-72 **Remove one screw**




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

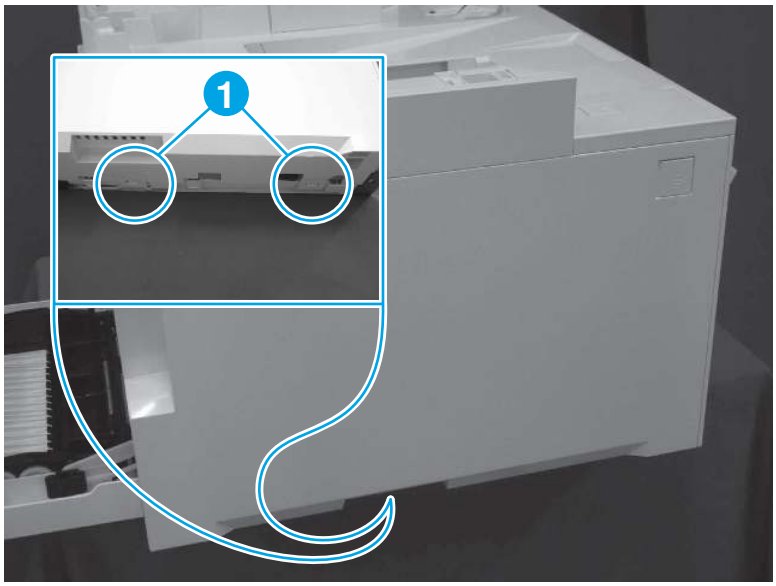Figure 4-73 **Release two tabs**




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

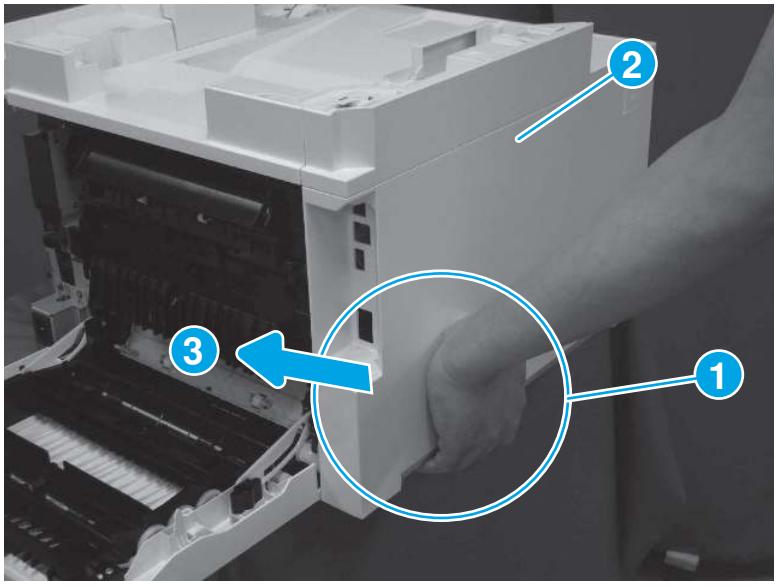Figure 4-74 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

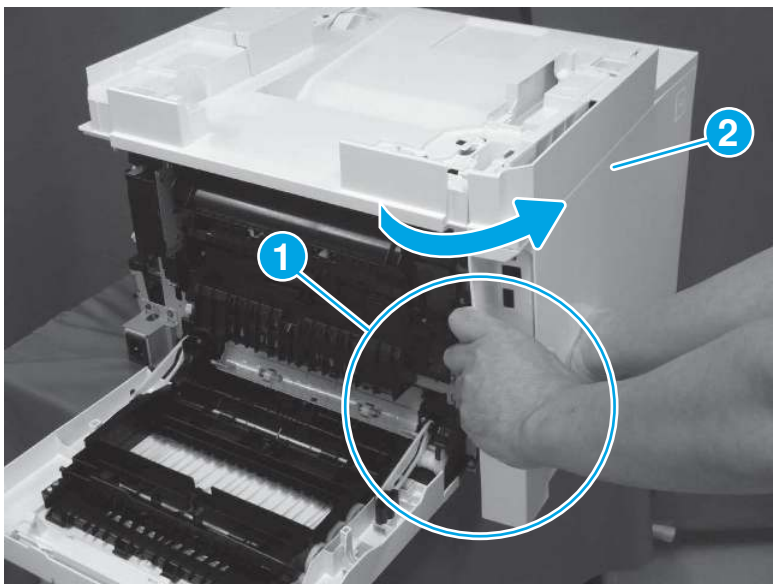Figure 4-75 Disengage the cover corner




5. Remove the left cover (callout 1).

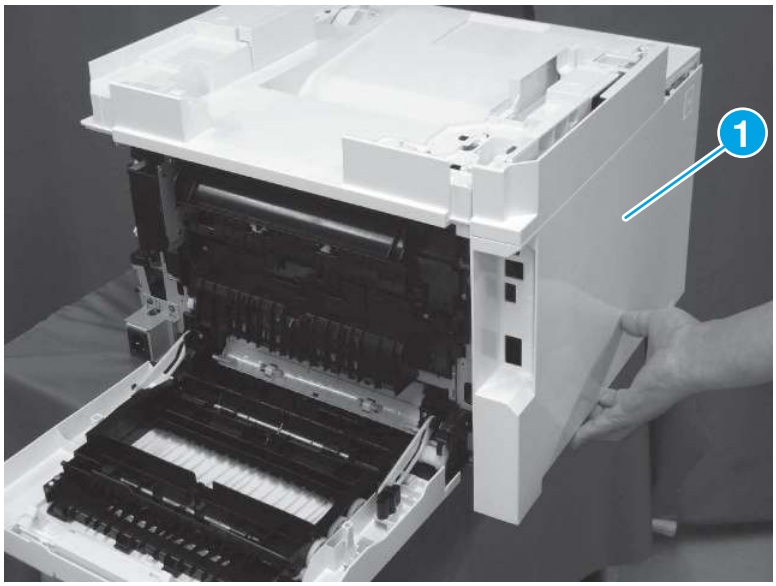Figure 4-76 **Remove the cover**



6. Release two tabs (callout 1), and then remove the cartridge door button (callout 2) and one spring (callout 3) from the left cover (callout 4).

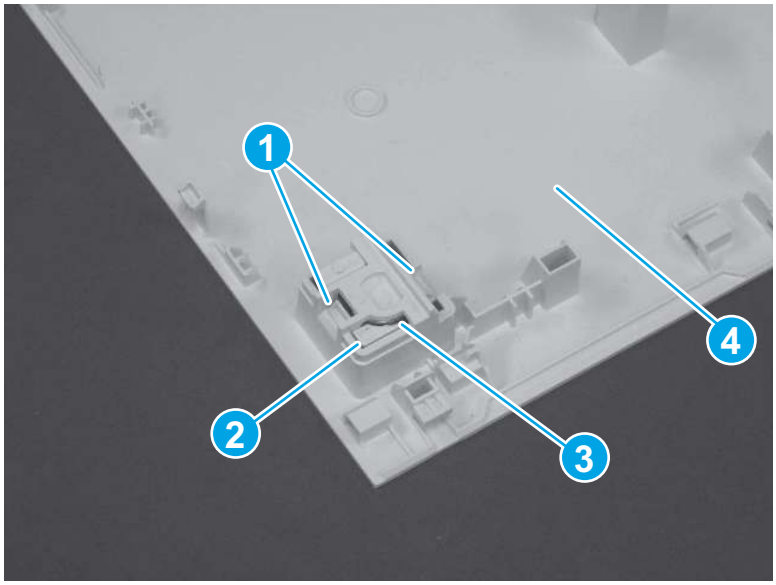Figure 4-77 **Remove the cartridge door button**



2. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: 

Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.

Removal and replacement: Right cover (SFP)

Learn about right cover removal (SFP).

Mean time to repair: 3 minutes

Service level: Easy

Before performing service

Turn the printer power off

- Disconnect the power cable.

WARNING! To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-10 Part information

Part number	Part description
RM2-2812-000CN	Cover, right (SFP)

Required tools

- #2 Phillips screwdriver with a magnetic tip and a 152 mm (6 in) shaft length

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test

No post service test is available for this assembly.


1. Remove the right cover (SFP)

Follow the procedure below to remove and replace the right cover (SFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.


1. Remove one screw (callout 1).

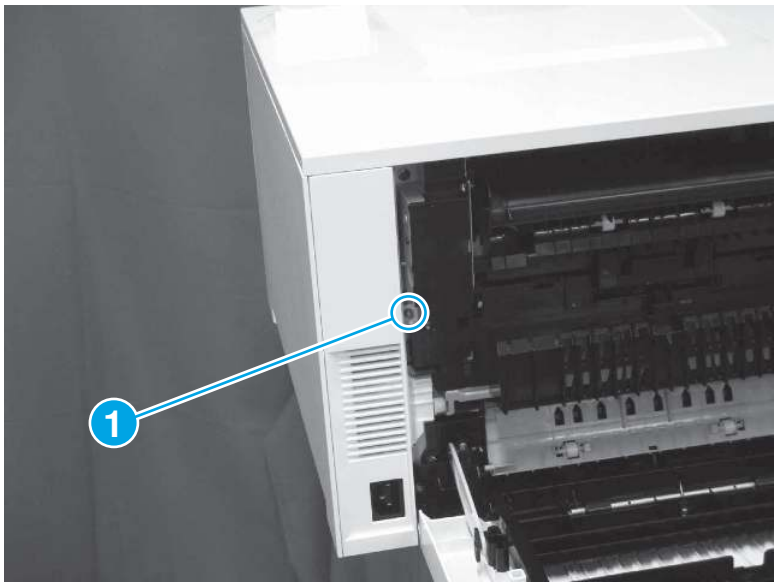Figure 4-78 **Remove one screw**




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to three tabs (callout 1). Release three tabs.

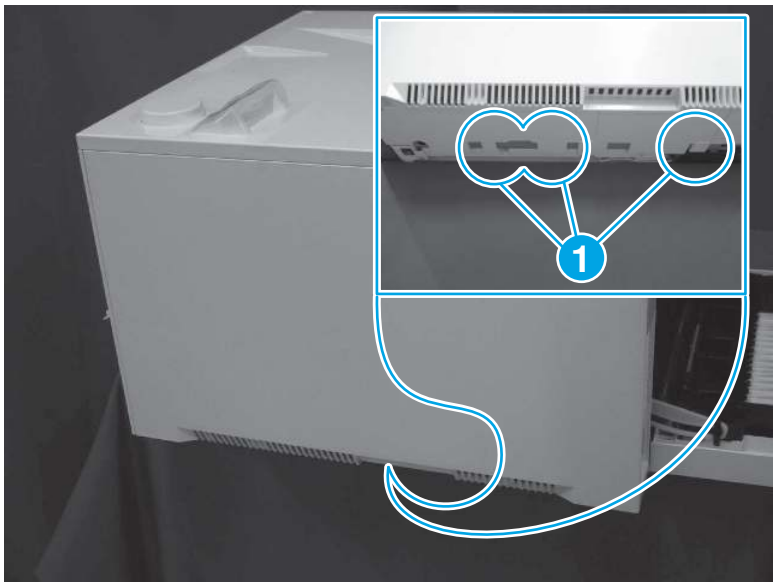Figure 4-79 Release three tabs




3. Press in on the side (callout 1) of the right cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

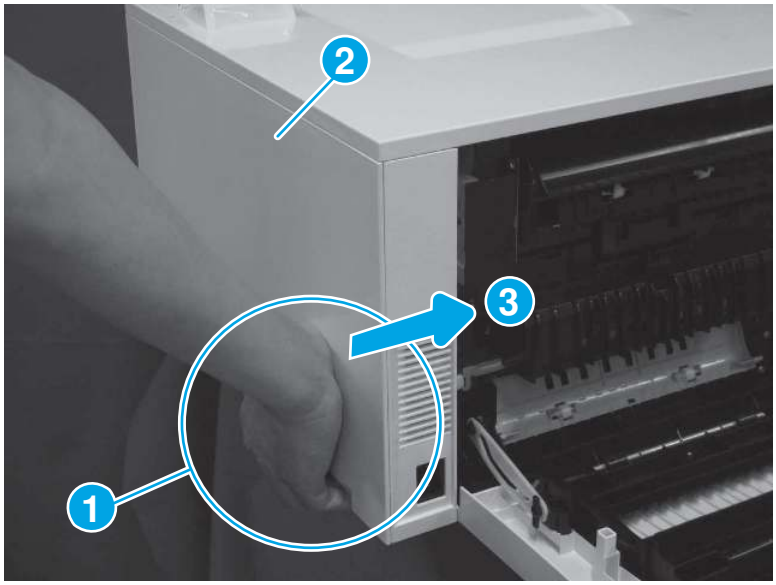Figure 4-80 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

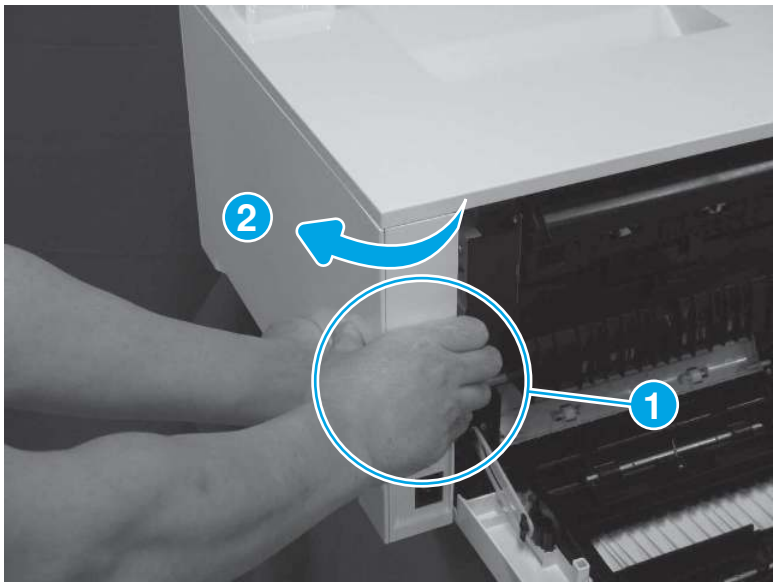Figure 4-81 Disengage the cover corner



5. Remove the right cover (callout 1).

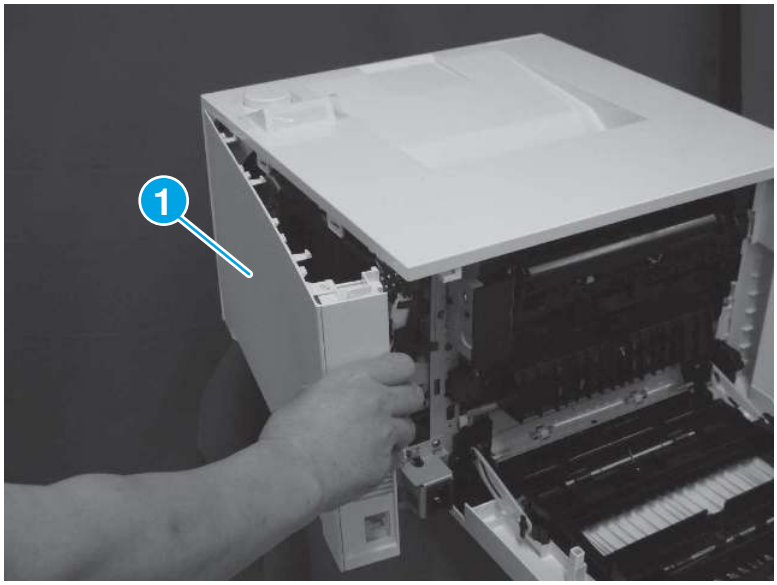Figure 4-82 Remove the cover



2. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: 

Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.

Removal and replacement: Right cover (MFP)

Learn about right cover removal (MFP).

Mean time to repair: 3 minutes

Service level: Easy

Before performing service

Turn the printer power off

- Disconnect the power cable.

WARNING! To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-11 Part information

Part number	Part description
RM2-2827-000CN	Cover, right (MFP)

Required tools

- #2 Phillips screwdriver with a magnetic tip and a 152 mm (6 in) shaft length

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test

No post service test is available for this assembly.


1. Remove the right cover (MFP)

Follow the procedure below to remove and replace the right cover (MFP).

NOTE: The following procedure is for an MFP printer only. If this assembly is being removed to gain access to dependency parts for a SFP printer, skip this step.


1. Remove one screw (callout 1).

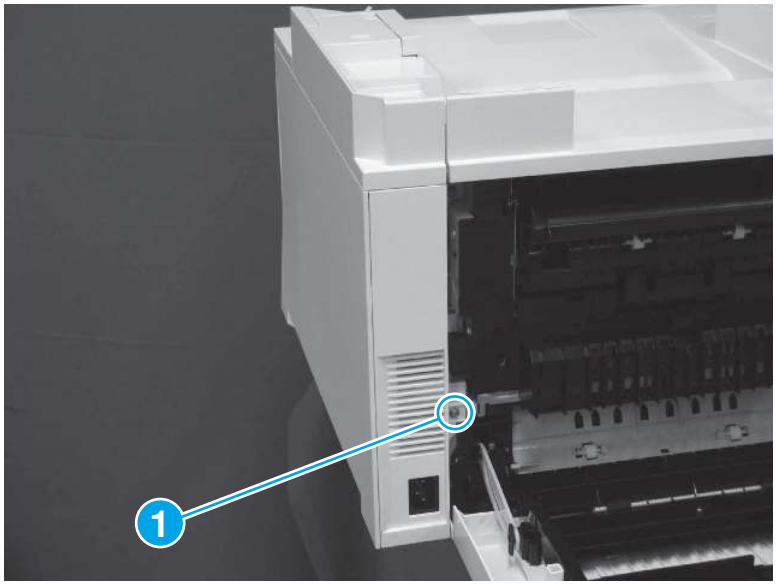Figure 4-83 **Remove one screw**




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to three tabs (callout 1). Release three tabs.

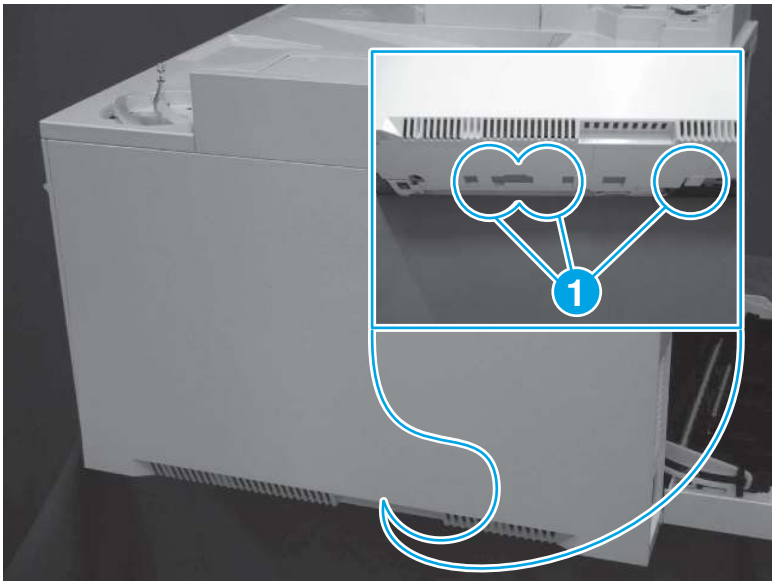Figure 4-84 Release three tabs




3. Press in on the side (callout 1) of the right cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

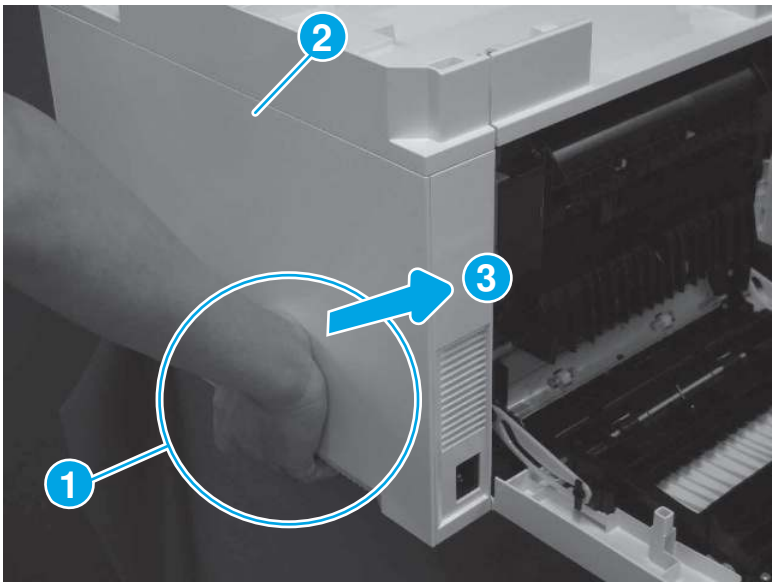Figure 4-85 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

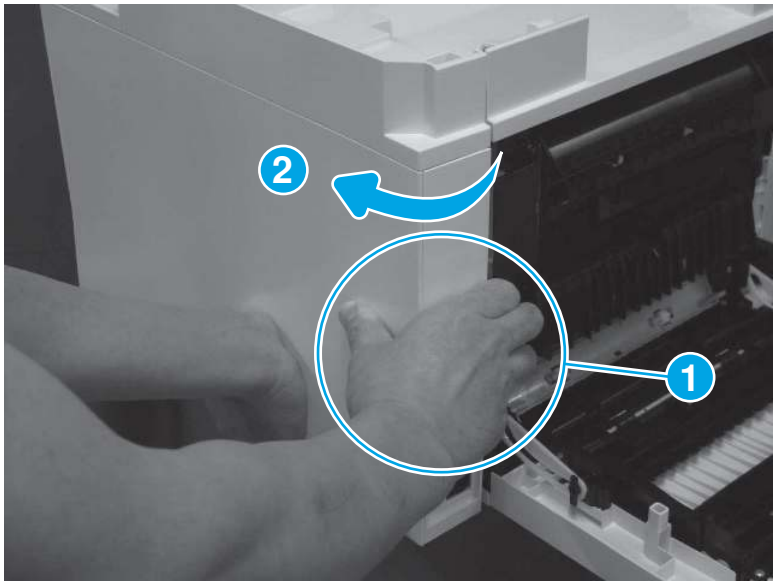Figure 4-86 Disengage the cover corner



5. Remove the right cover (callout 1).

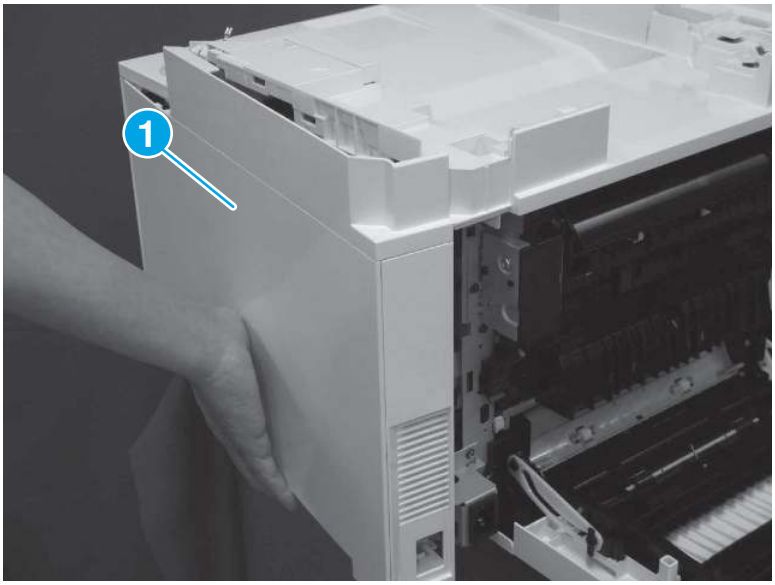Figure 4-87 Remove the cover



2. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: 

Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.

Removal and replacement: Front cover

Learn about front cover removal.

Mean time to repair: 11 minutes

Service level: Easy

Before performing service

Turn the printer power off

- Disconnect the power cable.

WARNING! To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-12 Part information

Part number	Part description
RM2-2824-000CN	Cover, front assembly

Required tools

- #2 Phillips screwdriver with a magnetic tip and a 152 mm (6 in) shaft length

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test

No post service test is available for this assembly.

1. Remove the left cover (SFP)


Follow the procedure below to remove and replace the left cover (SFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.

TIP: There might be a small cover installed on the USB port located at the back of the printer. If installed, remove this cover now.


1. Remove one screw (callout 1).

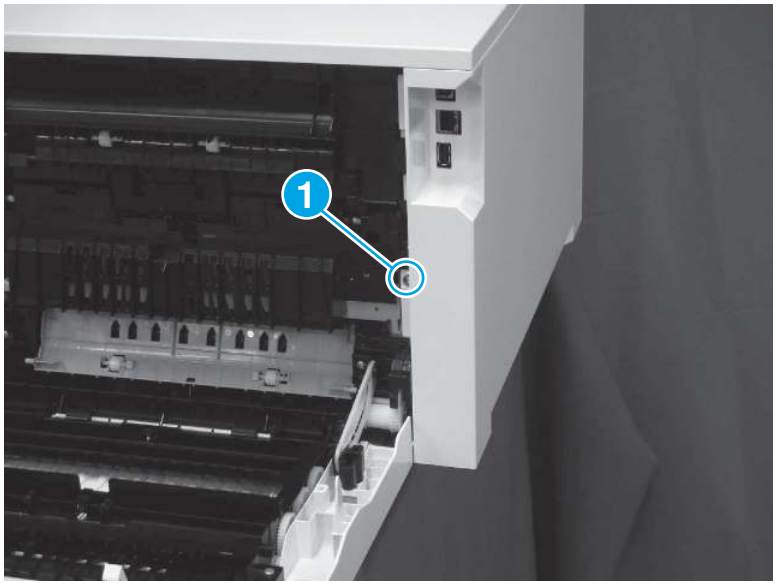Figure 4-88 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

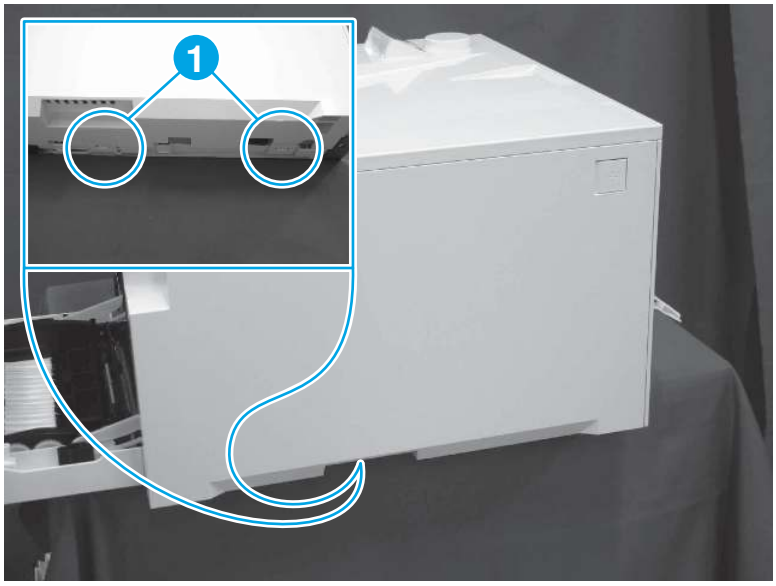Figure 4-89 Release two tabs




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

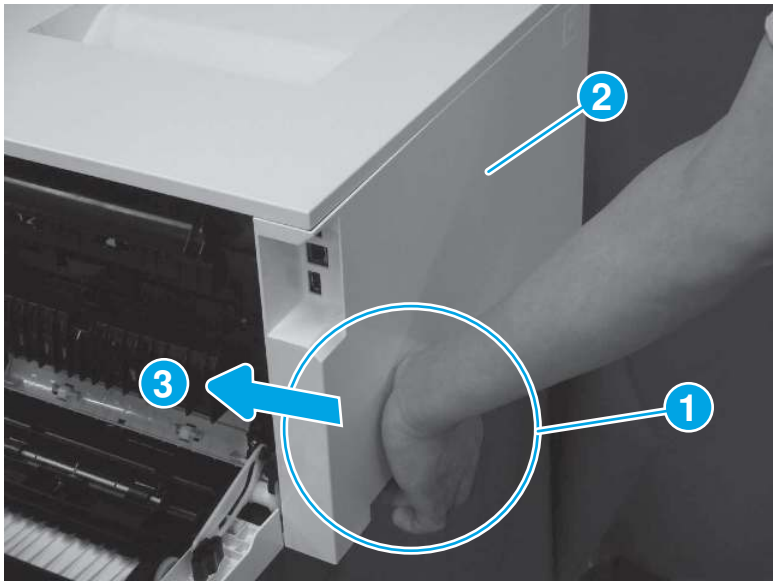Figure 4-90 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

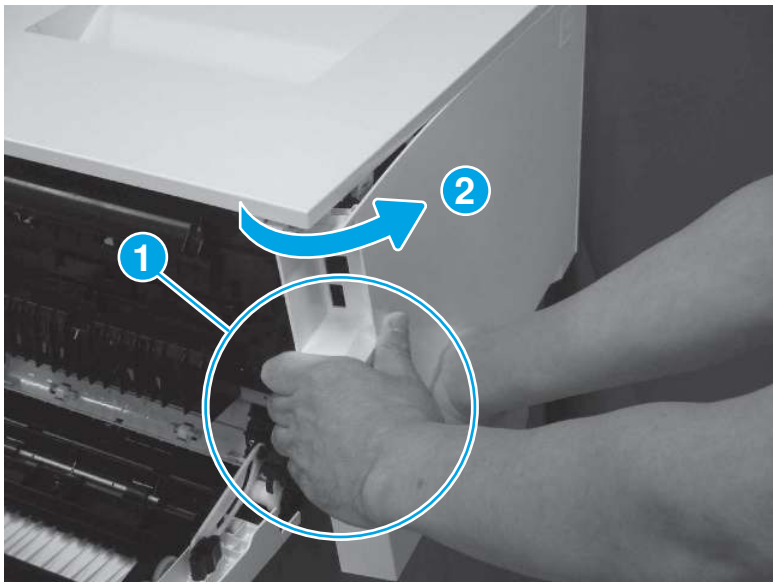Figure 4-91 Disengage the cover corner



5. Remove the left cover (callout 1).

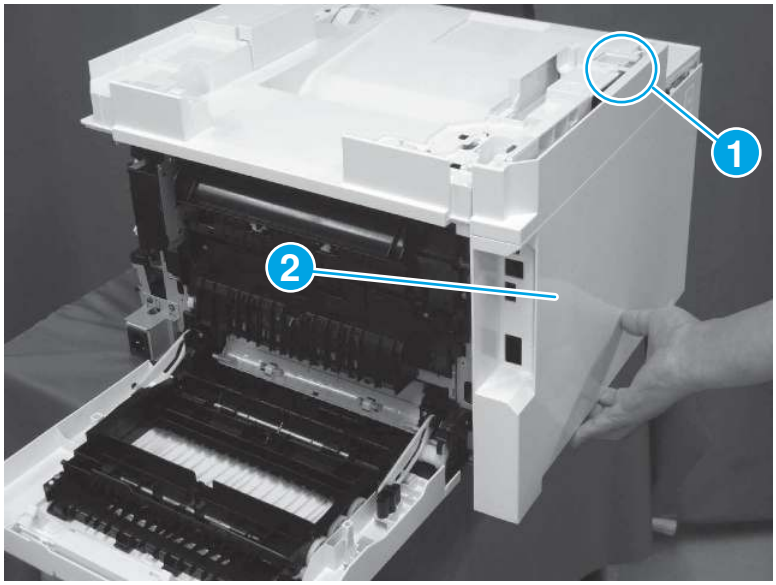Figure 4-92 Remove the cover



2. Remove the left cover (MFP)


Follow the procedure below to remove and replace the left cover (MFP).

NOTE: The following procedure is for an MFP printer only. If this assembly is being removed to gain access to dependency parts for a SFP printer, skip this step.

TIP: There might be a small cover installed on the USB port and/or the fax port located at the back of the printer. If installed, remove these covers now.


1. Remove one screw (callout 1).

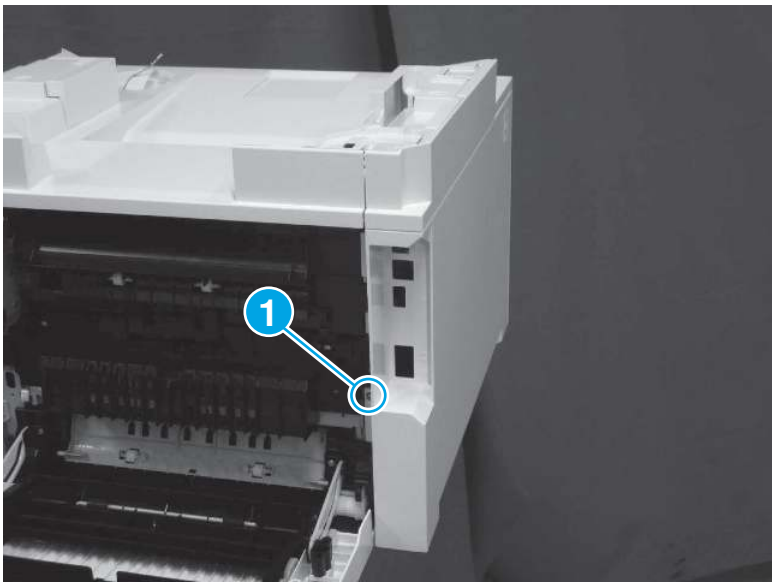Figure 4-93 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

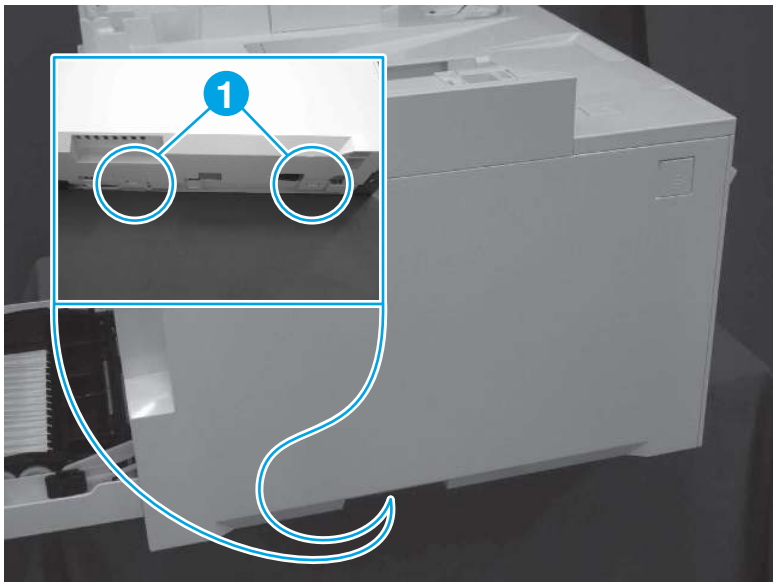Figure 4-94 Release two tabs




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

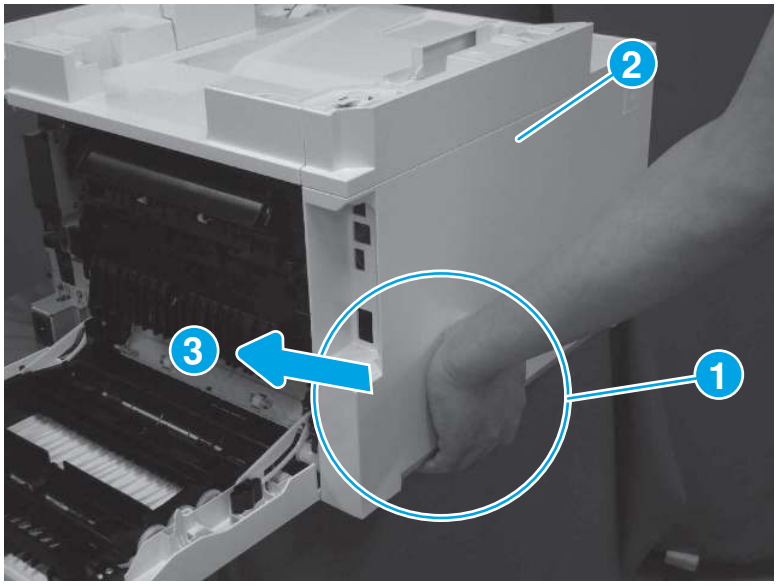Figure 4-95 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

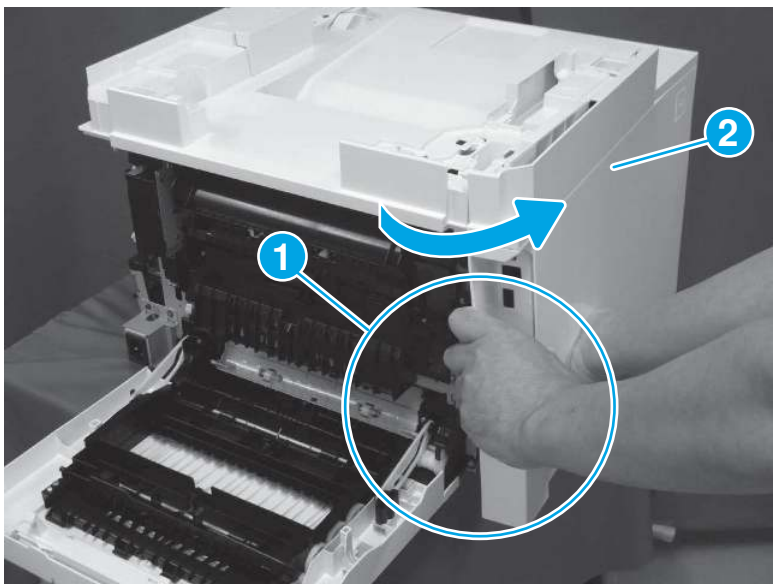Figure 4-96 Disengage the cover corner



5. Remove the left cover (callout 1).

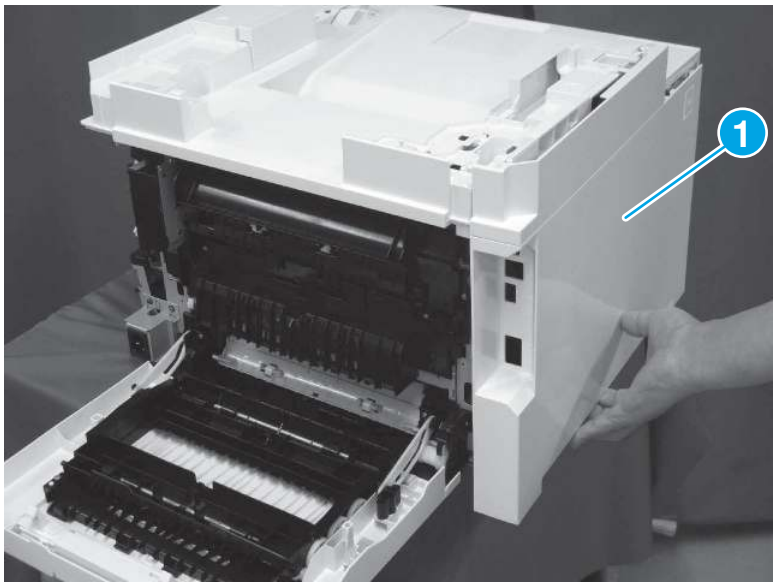Figure 4-97 Remove the cover




3. Remove the right cover (SFP)

Follow the procedure below to remove and replace the right cover (SFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.


1. Remove one screw (callout 1).

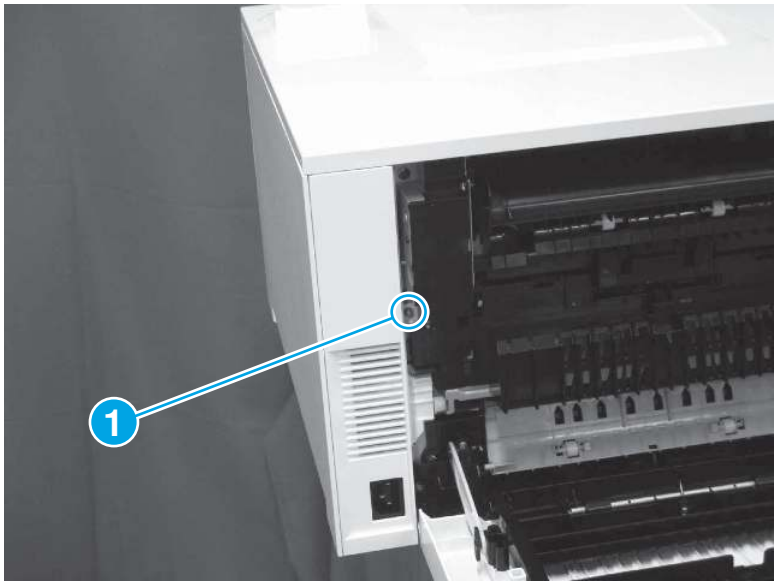Figure 4-98 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to three tabs (callout 1). Release three tabs.

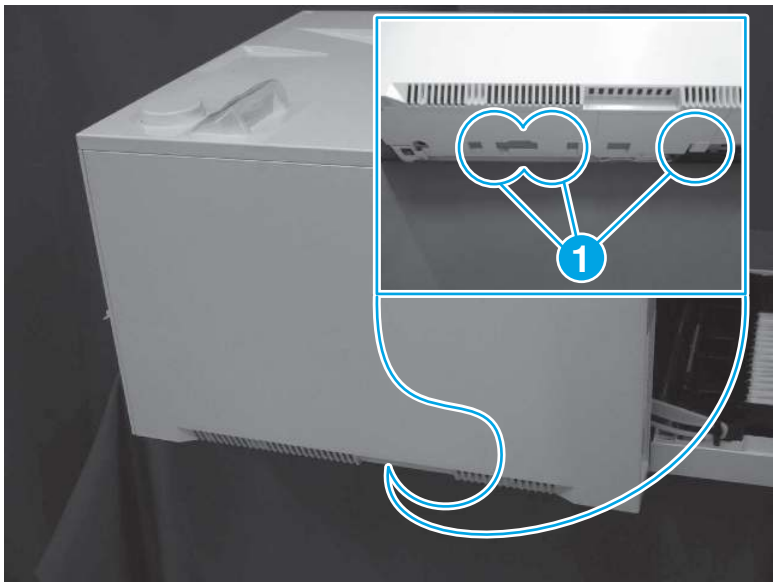Figure 4-99 **Release three tabs**




3. Press in on the side (callout 1) of the right cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

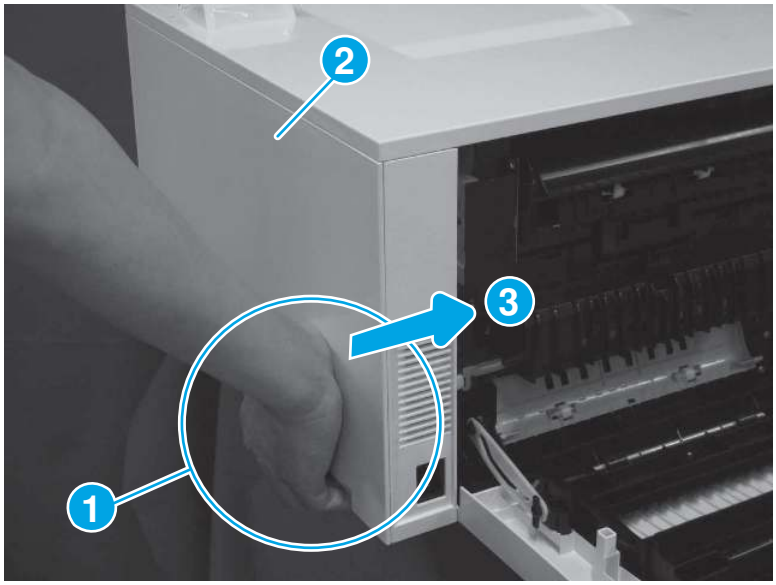Figure 4-100 **Release the rear cover corner**




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

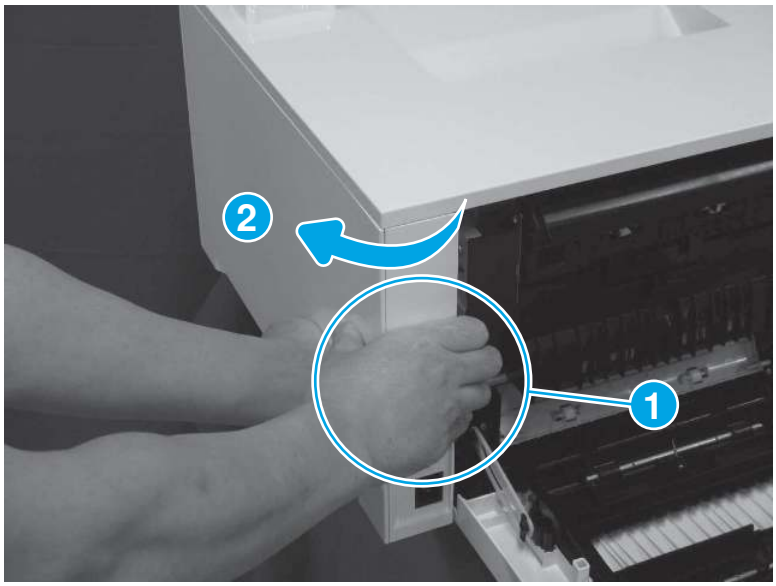Figure 4-101 Disengage the cover corner



5. Remove the right cover (callout 1).

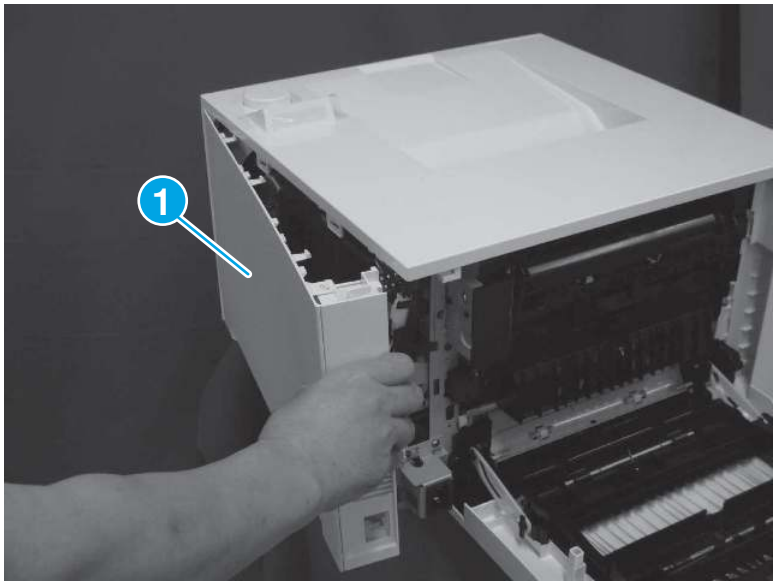Figure 4-102 Remove the cover




4. Remove the right cover (MFP)

Follow the procedure below to remove and replace the right cover (MFP).

NOTE: The following procedure is for an MFP printer only. If this assembly is being removed to gain access to dependency parts for a SFP printer, skip this step.


1. Remove one screw (callout 1).

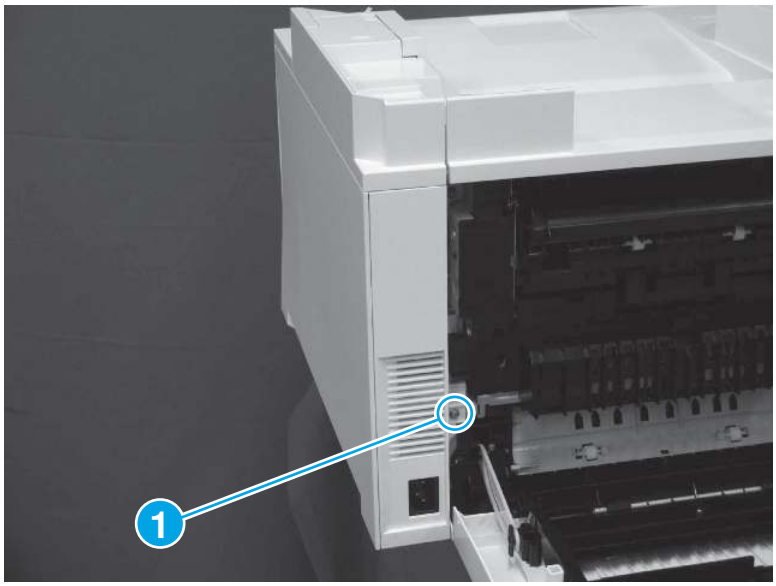Figure 4-103 **Remove one screw**




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to three tabs (callout 1). Release three tabs.

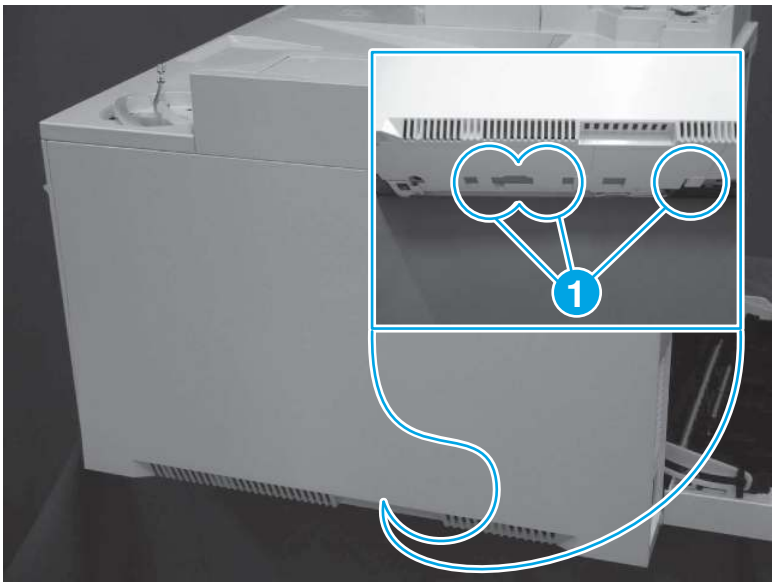Figure 4-104 **Release three tabs**




3. Press in on the side (callout 1) of the right cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

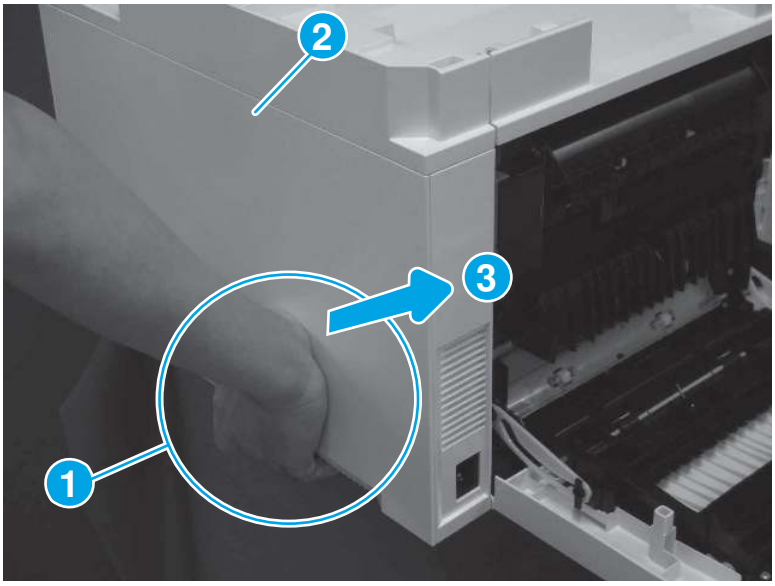Figure 4-105 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

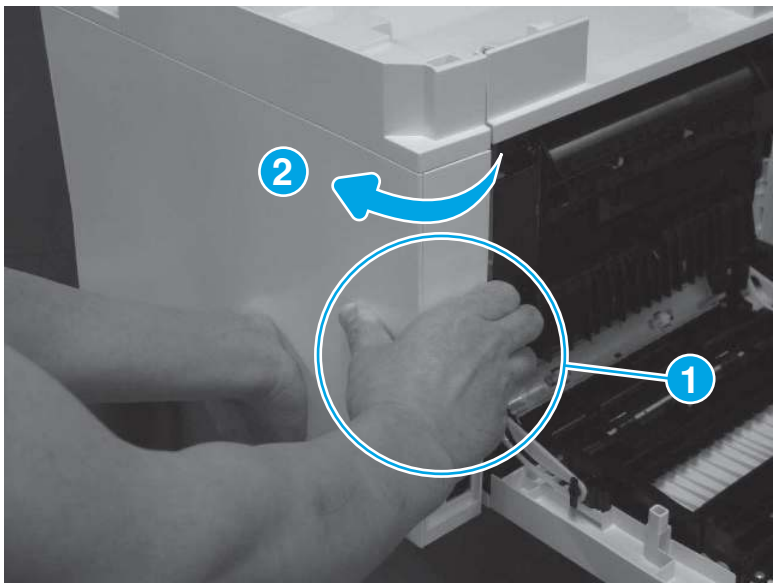Figure 4-106 Disengage the cover corner



5. Remove the right cover (callout 1).

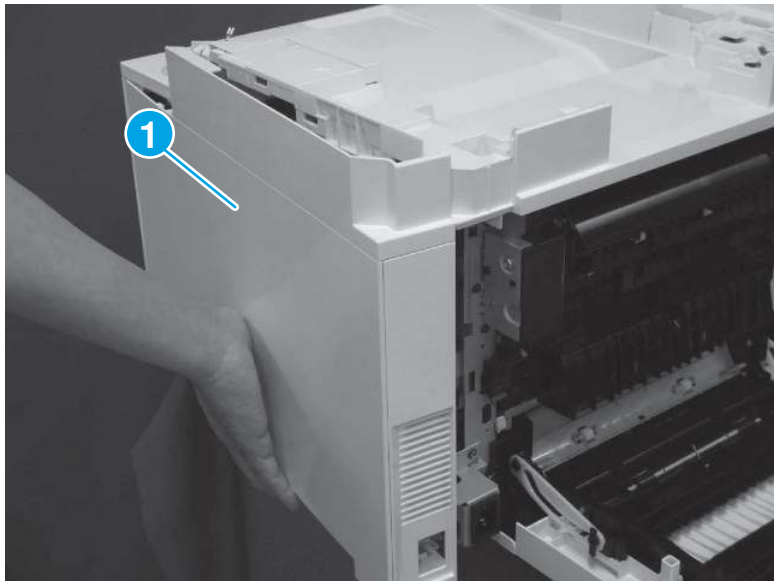Figure 4-107 **Remove the cover**



5. Remove the front cover


Follow the procedure below to remove and replace the front cover.

NOTE: Front cover removal is **identical** for both SFP and MFP models.

Reinstallation tip: Make sure to follow the special installation instructions for this part or step (located after the unpack and recycle or cleaning section).

1. Remove three screws (callout 1).

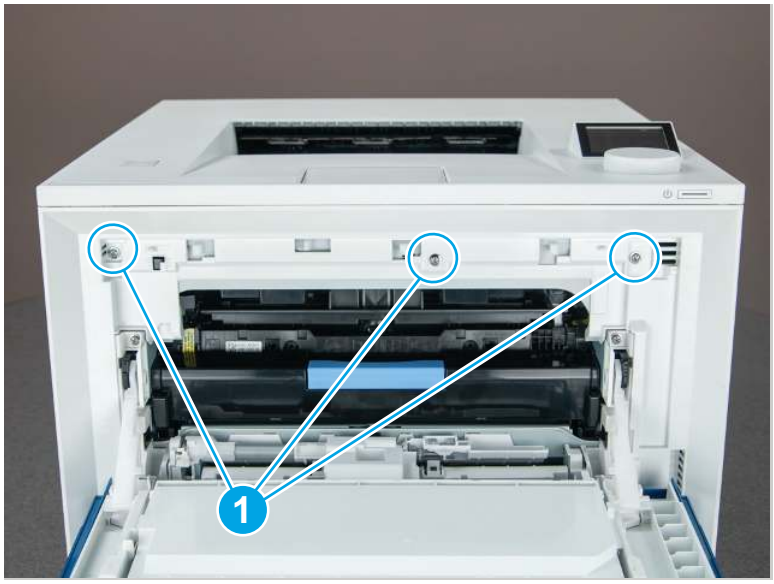
Figure 4-108 **Remove three screws**



2. Before proceeding, take note of the door release arm (callout 1). This arm can be easily dislodged when the cover is removed.


⚠ **CAUTION:** Do not lose the spring (callout 2) when removing the front cover.

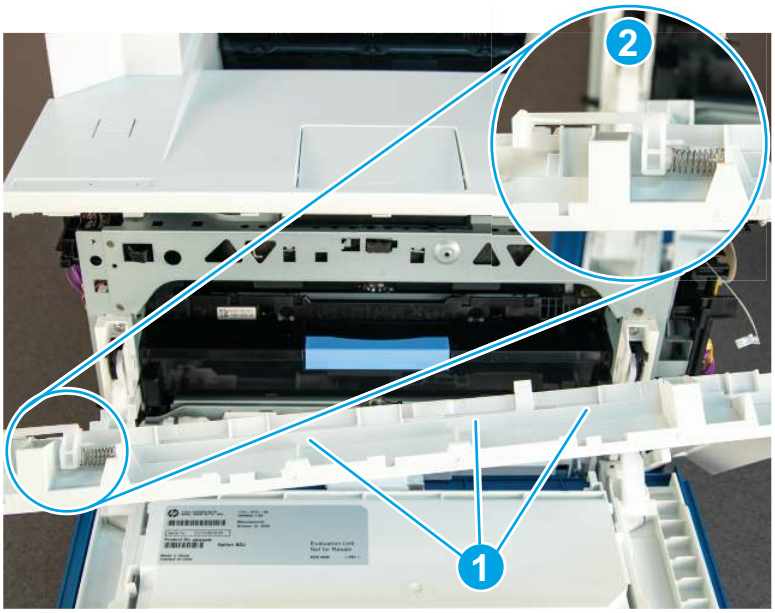Figure 4-109 **Door release arm**



3. Release four tabs (callout 1), and then remove the front cover (callout 2).

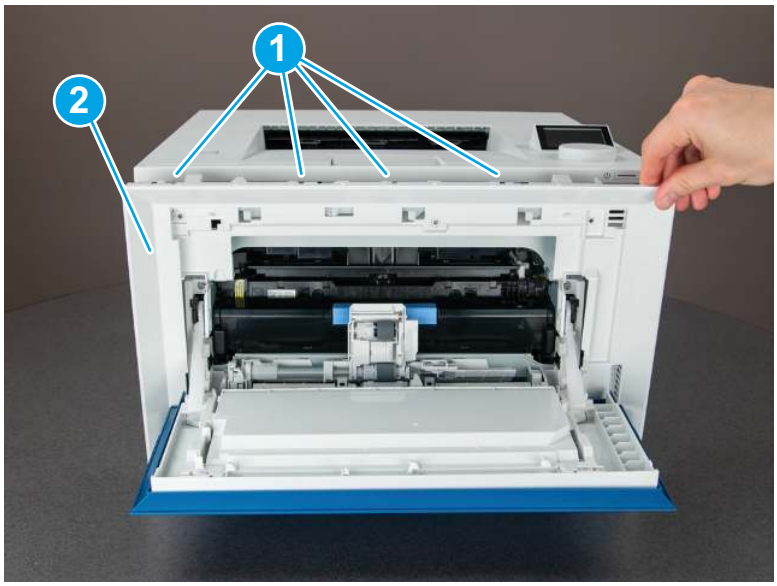Figure 4-110 **Remove the cover**



6. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: 

Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.


7. Special installation instructions - Front cover

Follow the special instructions below to install the front cover.

NOTE: Front cover installation is **identical** for both the SFP and MFP models.


1. If the door release arm becomes dislodged when handling the cover, install it as shown below (callout 1, 2).

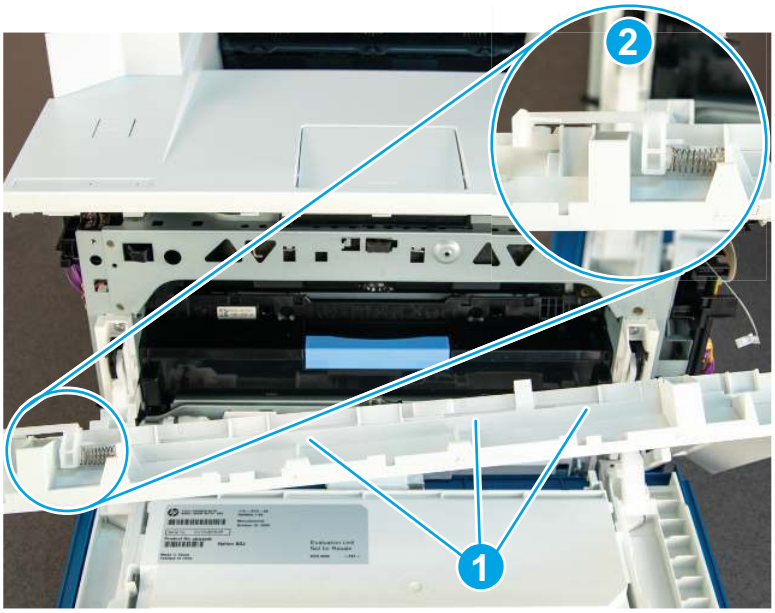Figure 4-111 Door release arm installed



2. At the right and left side of the front cover, align the holes (callout 1) in the cover with the alignment pins (callout 2) on the chassis.

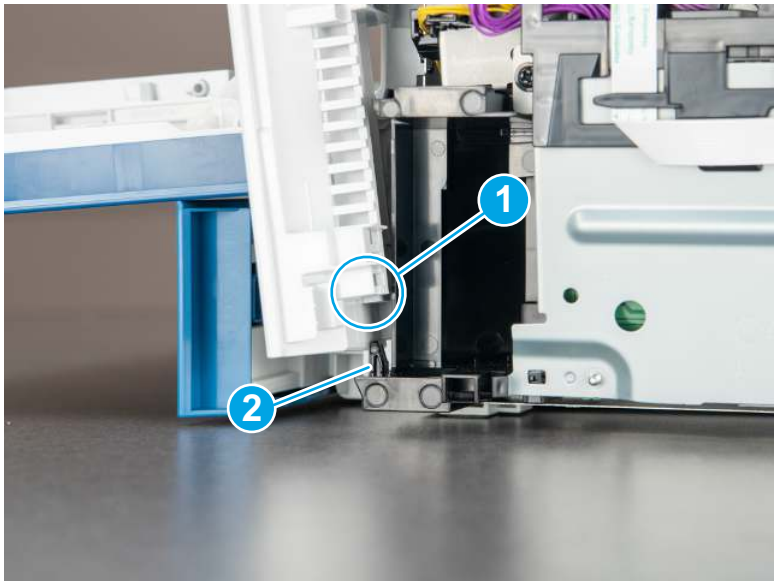
Figure 4-112 Cover alignment pins



3. Rotate the top of the cover towards the printer to install it.

IMPORTANT: Verify that the spring loaded door release button (on the left side of the cover) correctly functions.

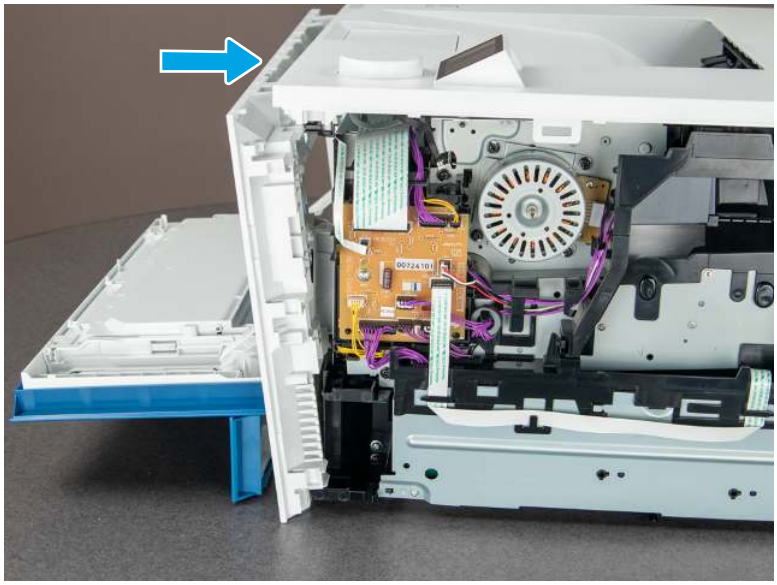Figure 4-113 Install the cover



Removal and replacement: Top cover (SFP)

Learn about top cover (SFP) removal.

Mean time to repair: 18 minutes

Service level: Medium

Before performing service

Turn the printer power off

- Disconnect the power cable.

> ⚠ **WARNING!** To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-13 Part information

Part number	Part description
RM2-2814-000CN	Cover, top assembly (SFP) (network model)
RM2-2815-000CN	Cover, top assembly (SFP) (wireless model)

Required tools

- #2 Phillips screwdriver with a magnetic tip and a 152 mm (6 in) shaft length

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test

No post service test is available for this assembly.

1. Remove the left cover (SFP)


Follow the procedure below to remove and replace the left cover (SFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.

TIP: There might be a small cover installed on the USB port located at the back of the printer. If installed, remove this cover now.


1. Remove one screw (callout 1).

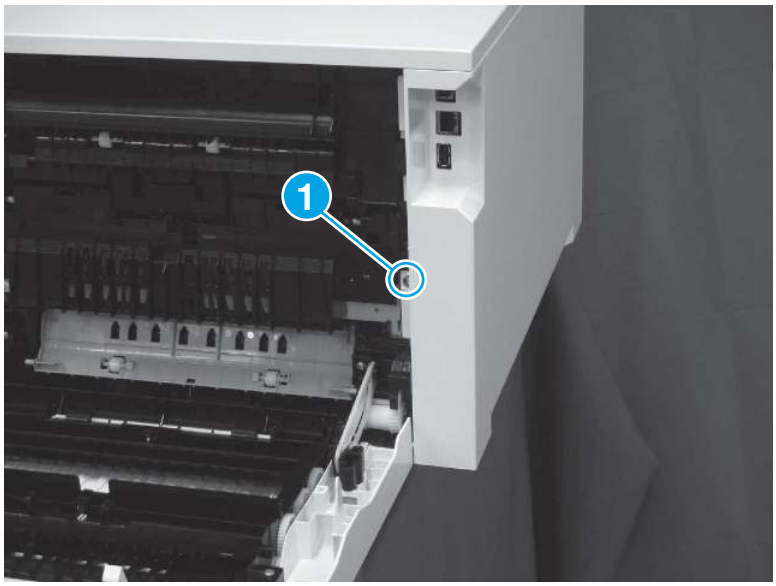Figure 4-114 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

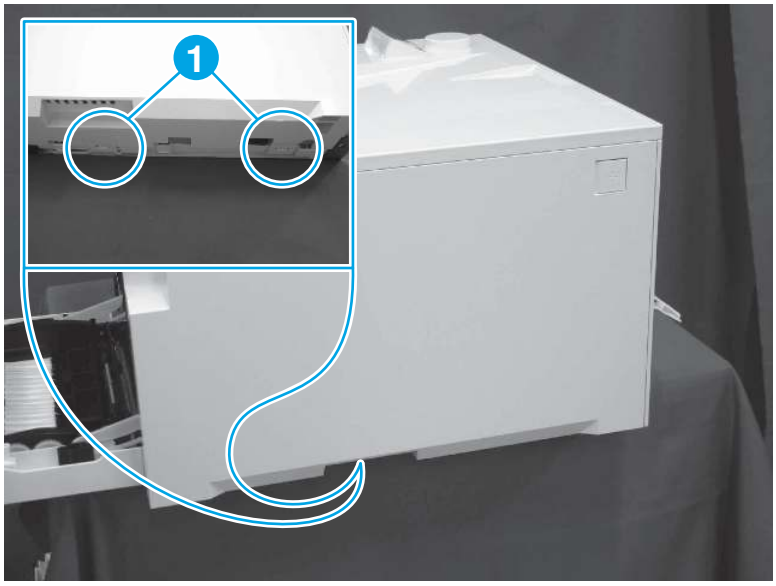Figure 4-115 **Release two tabs**




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

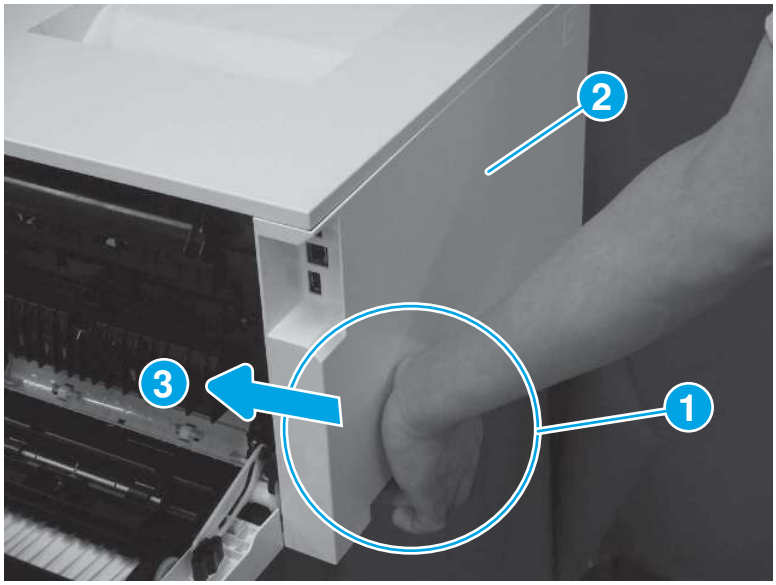Figure 4-116 **Release the rear cover corner**




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

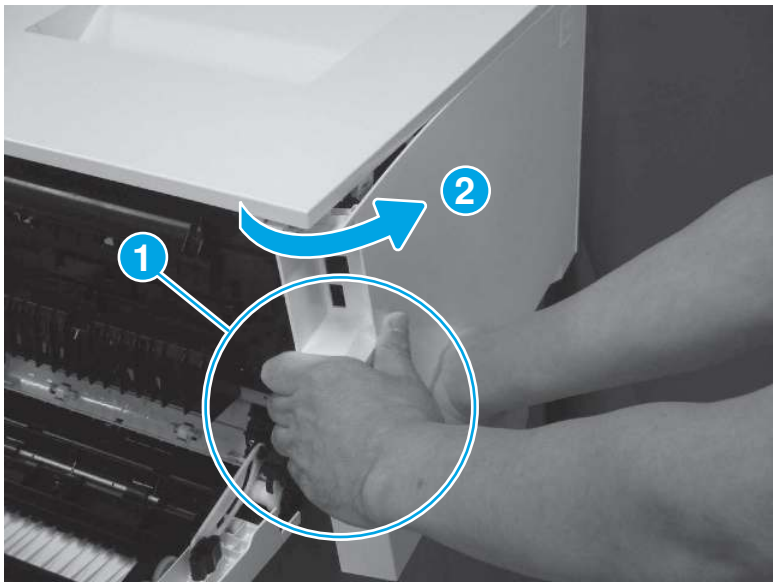Figure 4-117 Disengage the cover corner



5. Remove the left cover (callout 1).

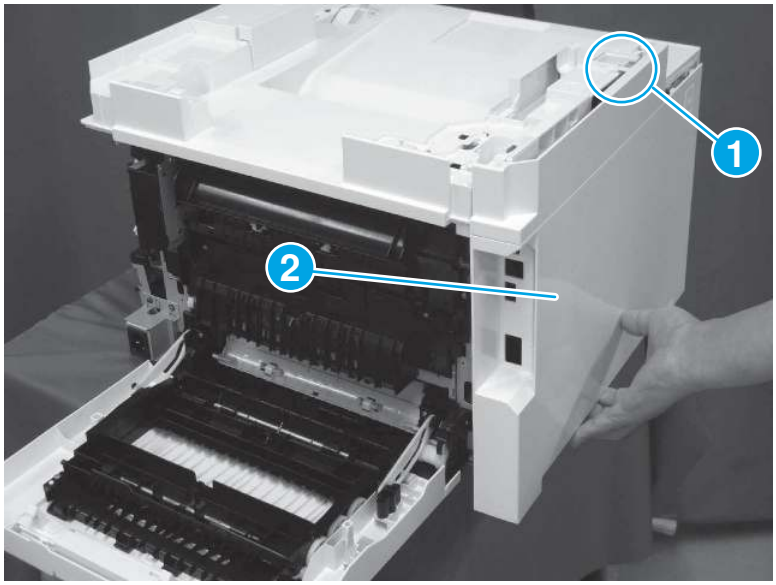Figure 4-118 Remove the cover




2. Remove the right cover (SFP)

Follow the procedure below to remove and replace the right cover (SFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.


1. Remove one screw (callout 1).

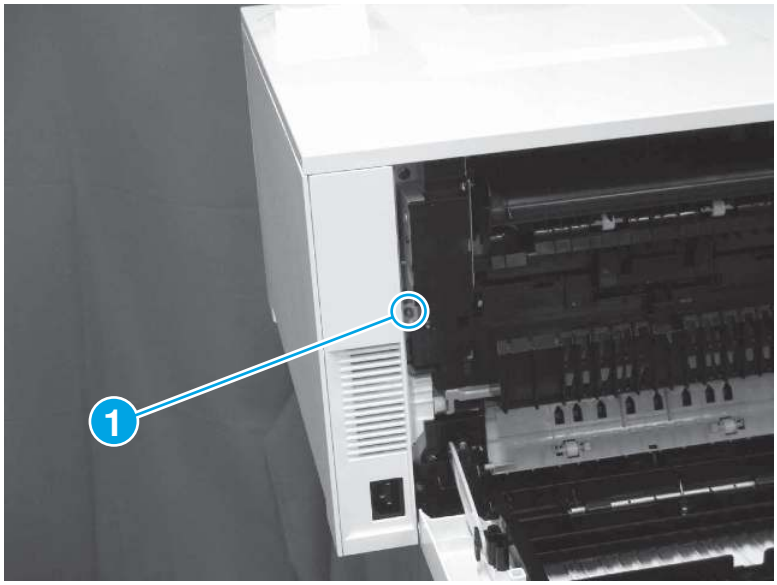Figure 4-119 **Remove one screw**




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to three tabs (callout 1). Release three tabs.

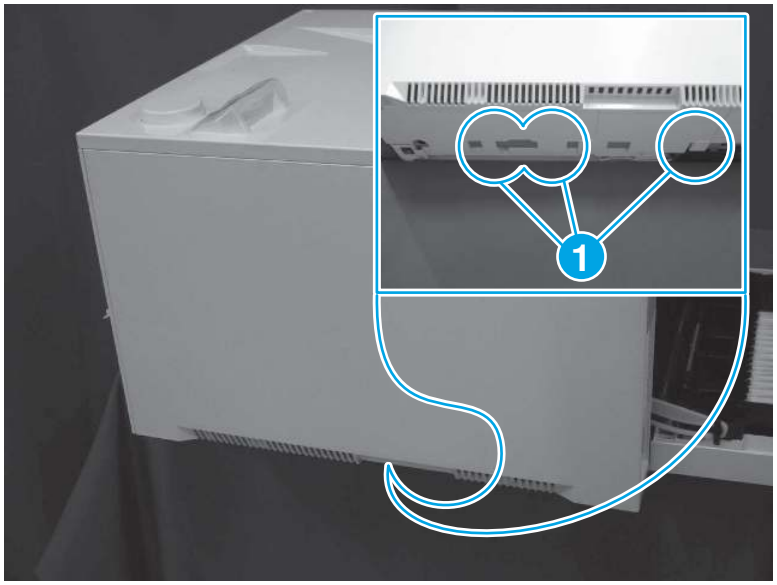Figure 4-120 **Release three tabs**




3. Press in on the side (callout 1) of the right cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

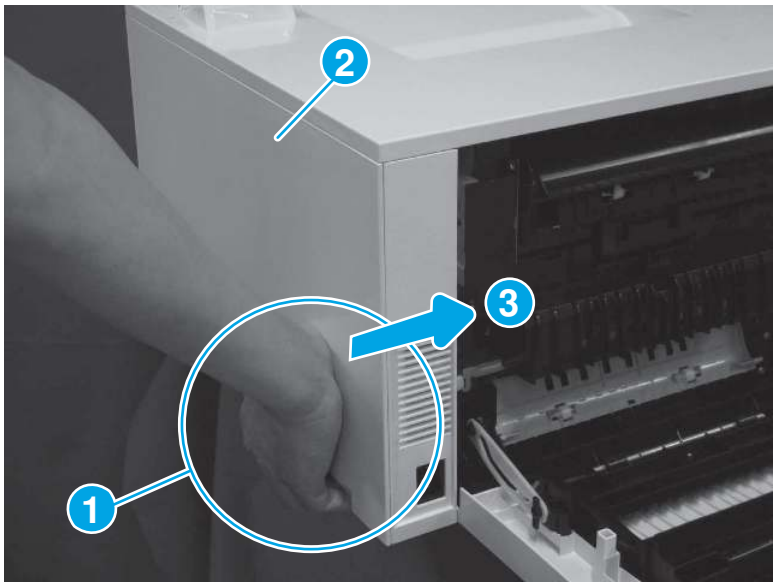Figure 4-121 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

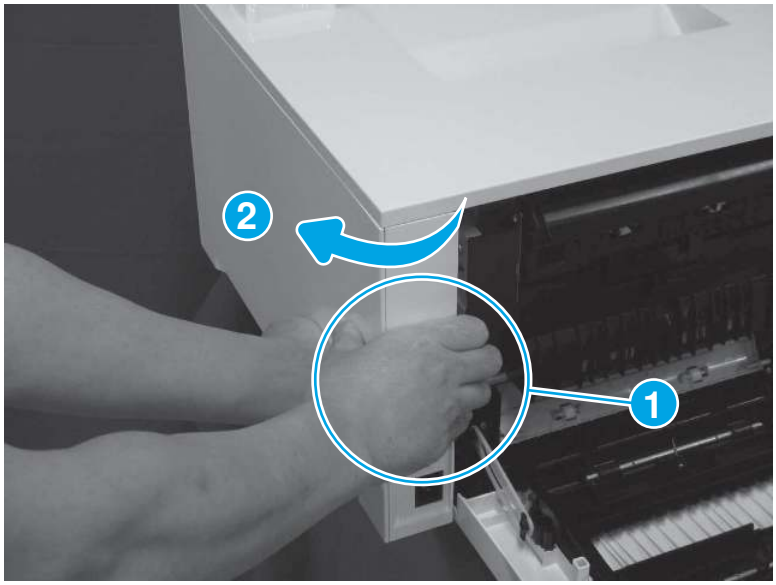Figure 4-122 Disengage the cover corner



5. Remove the right cover (callout 1).

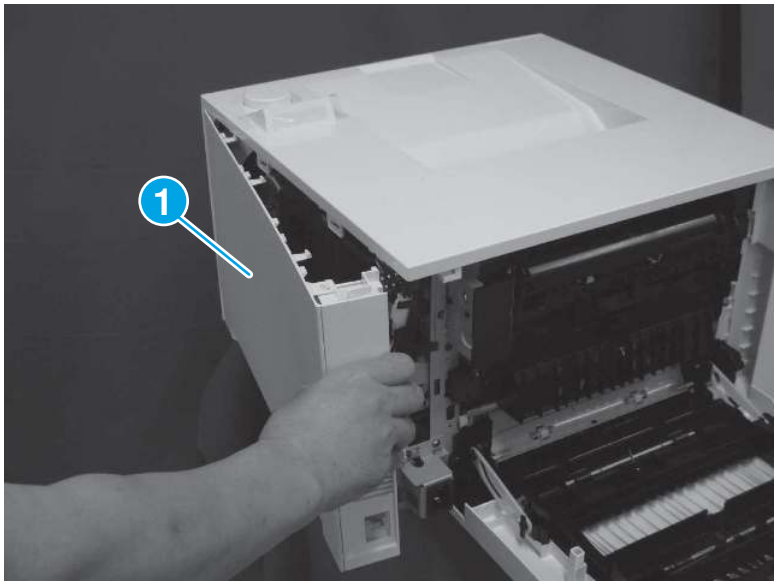Figure 4-123 Remove the cover




3. Remove the front cover (SFP)

Follow the procedure below to remove and replace the front cover.

Reinstallation tip: Make sure to follow the special installation instructions for this part or step (located after the unpack and recycle or cleaning section).

1. Remove three screws (callout 1).

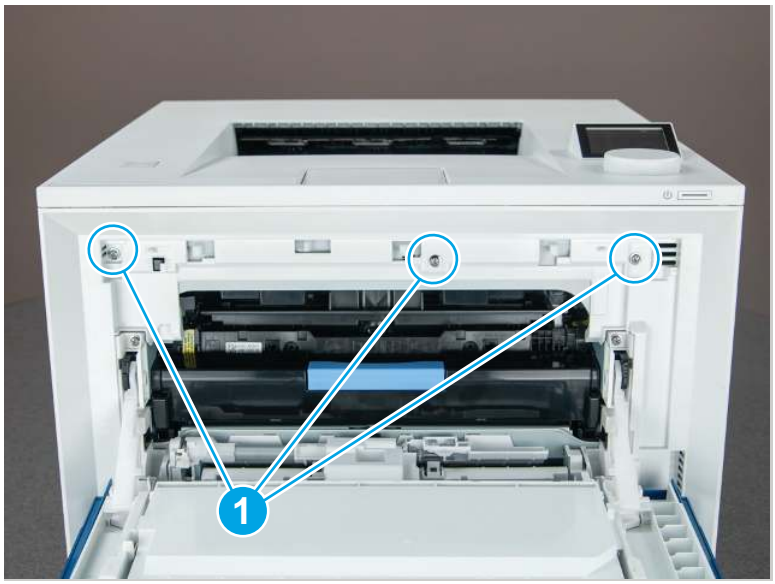
Figure 4-124 Remove three screws



2. Before proceeding, take note of the door release arm (callout 1). This arm can be easily dislodged when the cover is removed.


CAUTION: Do not lose the spring (callout 2) when removing the front cover.

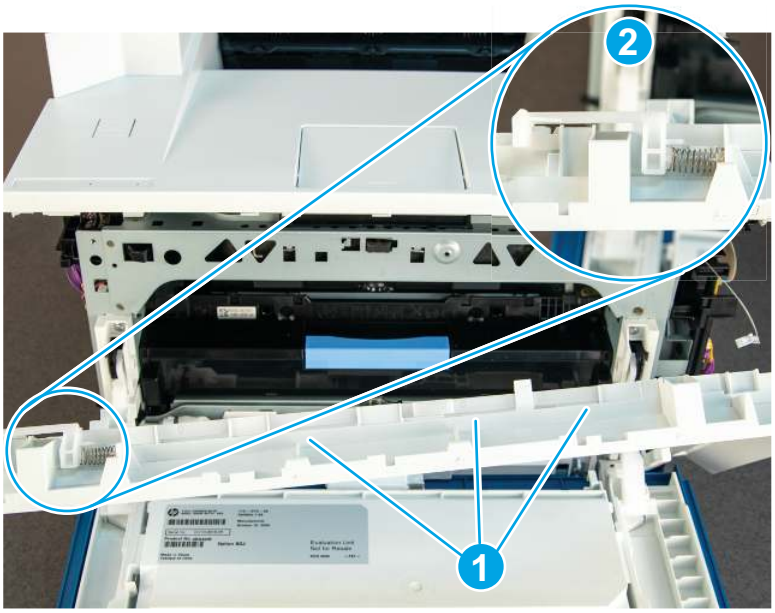Figure 4-125 Door release arm



3. Release four tabs (callout 1), and then remove the front cover (callout 2).

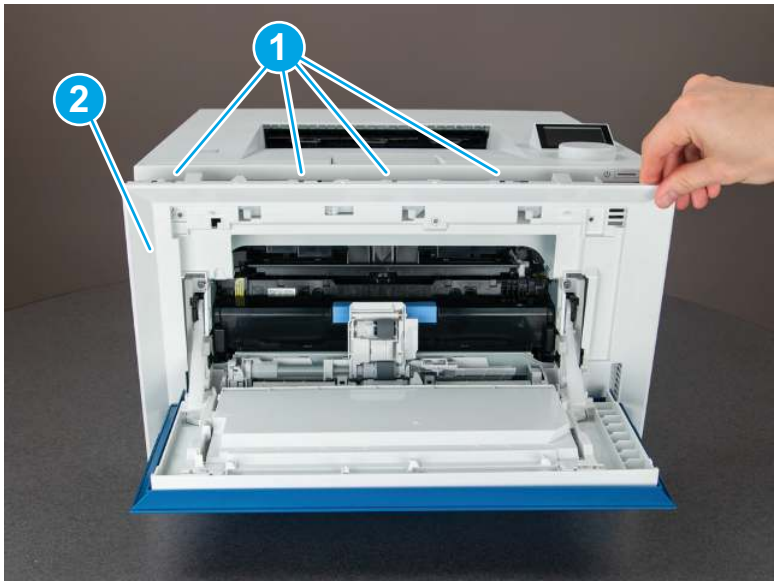Figure 4-126 Remove the cover



4. Remove the top cover (SFP)

Follow the procedure below to remove and replace the top cover (SFP).


NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.

1. **Wireless model only**: Raise and support the left side of the printer, remove one screw, and then separate the wireless PCA from the cover.

CAUTION: Do not attempt to completely remove the wireless PCA. Instead, gently move it out of the way.


TIP: To remove the screw without raising the printer, use a short-barrel screwdriver.

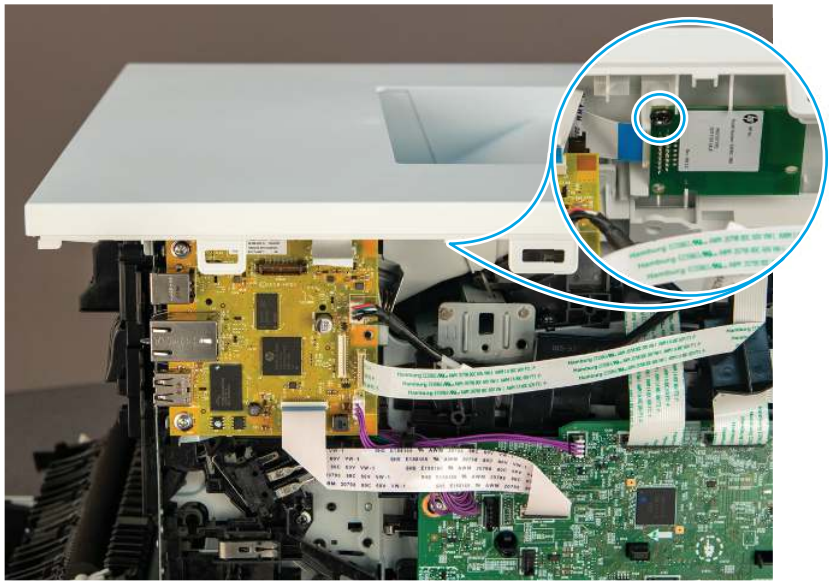Figure 4-127 Remove one screw



2. Disconnect one flat-flexible cable (FFC).

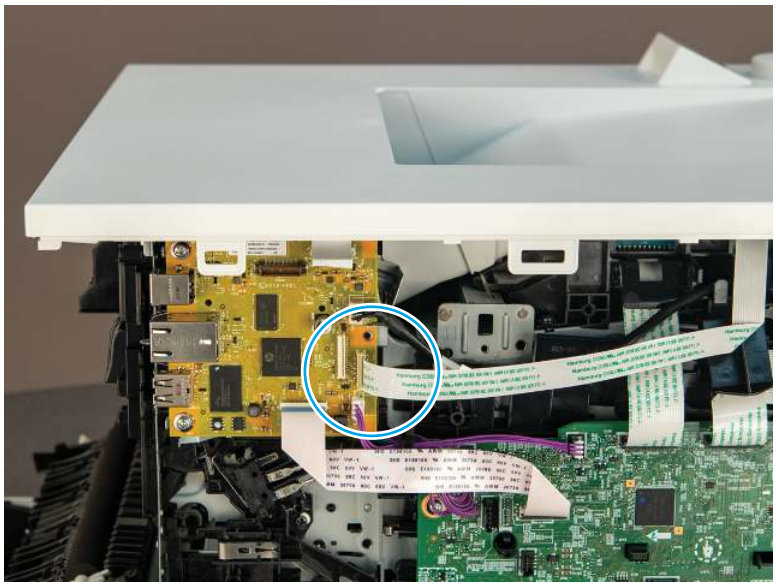Figure 4-128 Disconnect one FFC



3. Disconnect one FFC, and then remove one screw to release the ground wire.


NOTE: The front cover is shown installed in the figure below. However, this step is correct for removing the top cover.

Figure 4-129 Disconnect one FFC and remove one screw



4. Sliding the cover from the back of the printer towards the front to remove it.

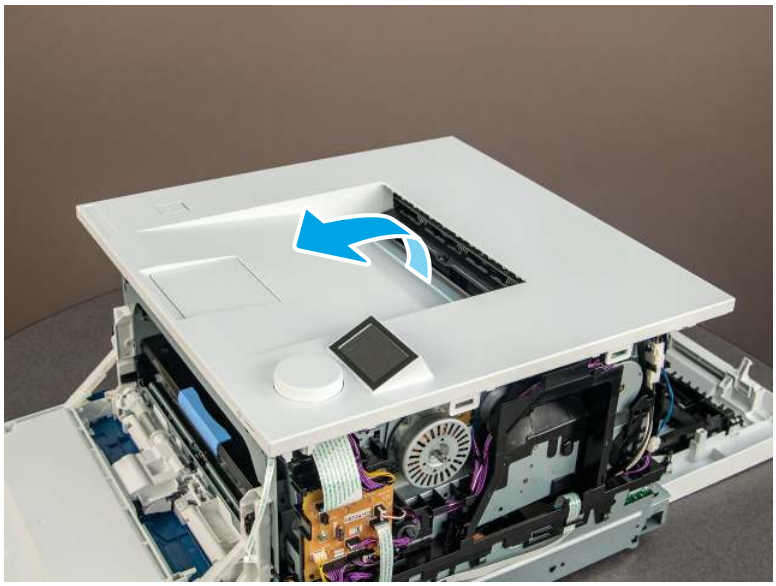Figure 4-130 Remove the cover



5. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: 

Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.


NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.

6. Special installation instructions - Top cover (SFP)

Follow the procedure below to install a **replacement** top cover (SFP).

1. The following items must be removed from the discarded top cover, and then installed on a replacement top cover.
   - **Callout 1**: Control panel FFC
   - **Callout 2**: Control panel
   - **Callout 3**: Power switch

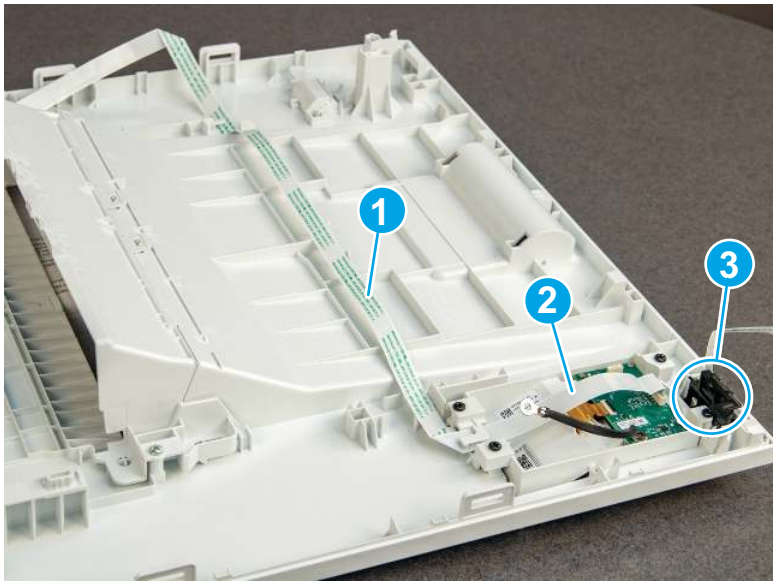Figure 4-131 Control panel FFC, control panel, and power switch



2. To remove the control panel, do the following:


   a. Disconnect one flat-flexible cable (FFC; callout 1).

   b. Remove four screws (callout 2).

   c. Remove the control panel (callout 3) from the discarded top cover (callout 4), and then install it on the replacement cover.

NOTE: Also install the control panel FFC on the replacement cover.

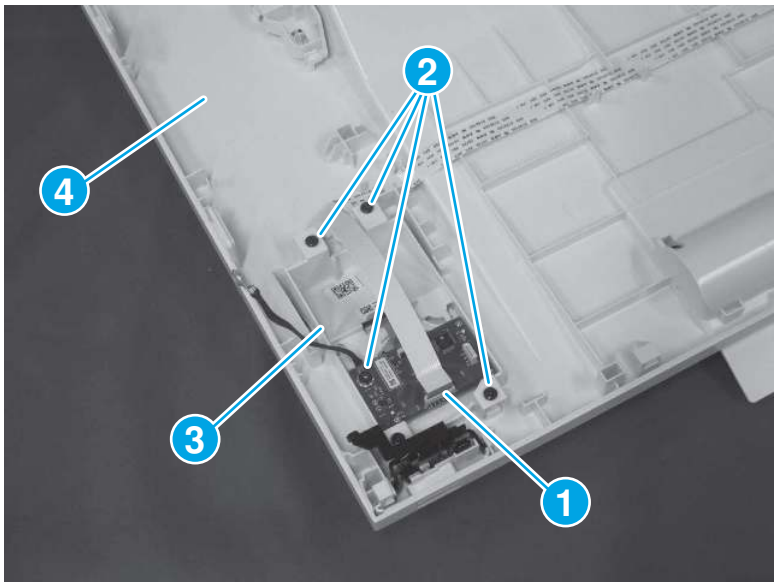Figure 4-132 Remove the control panel




3. To remove the power switch, do the following:

   a. Release two tabs (callout 2).

b. Remove the power switch PCA and the holder (callout 2) together from the top cover.

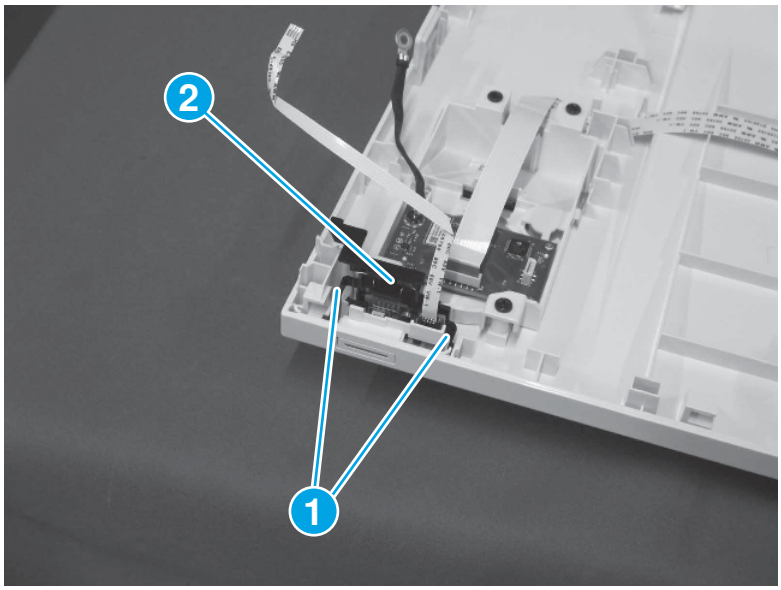Figure 4-133 **Remove the power switch**




7. Special installation instructions - Front cover

Follow the special instructions below to install the front cover.

NOTE: Front cover installation is **identical** for both the SFP and MFP models.


1. If the door release arm becomes dislodged when handling the cover, install it as shown below (callout 1, 2).

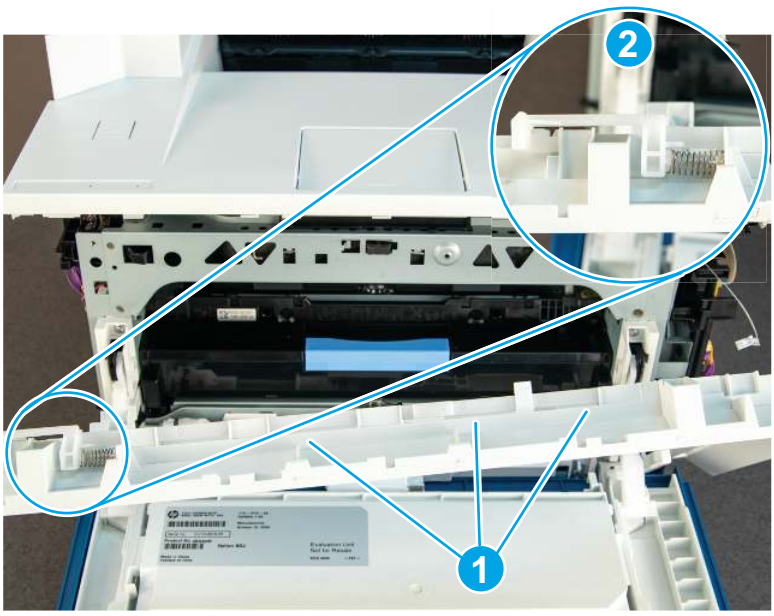Figure 4-134 **Door release arm installed**



2. At the right and left side of the front cover, align the holes (callout 1) in the cover with the alignment pins (callout 2) on the chassis.

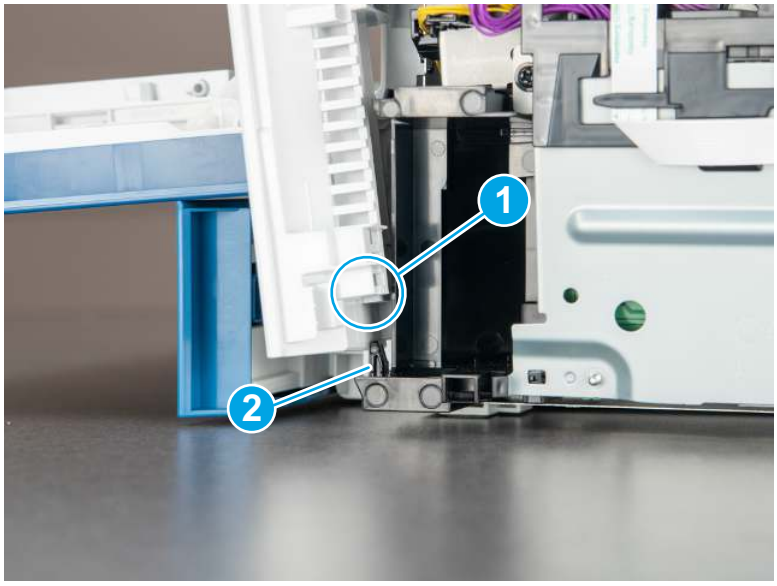
Figure 4-135 Cover alignment pins



3. Rotate the top of the cover towards the printer to install it.

IMPORTANT: Verify that the spring loaded door release button (on the left side of the cover) correctly functions.

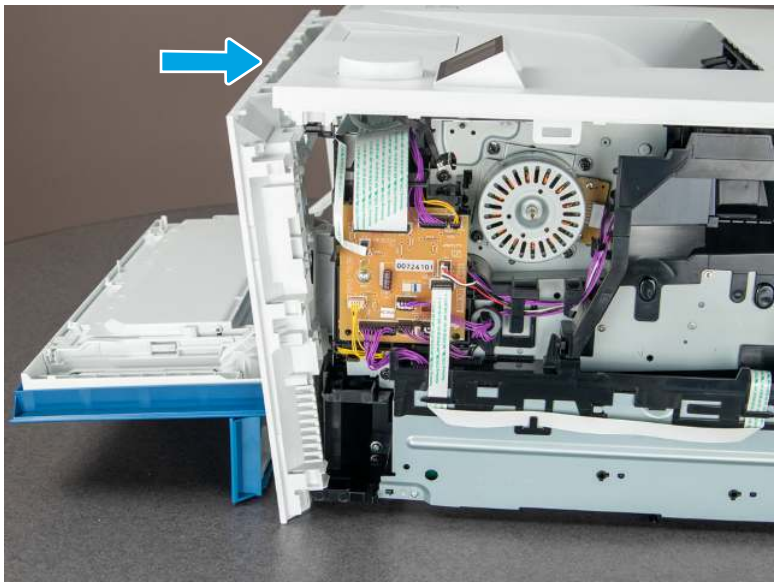Figure 4-136 Install the cover



Removal and replacement: Top cover (MFP)

Learn about top cover (MFP) removal.

Mean time to repair: 28 minutes

Service level: Medium

Before performing service

Turn the printer power off

- Disconnect the power cable.

> ⚠ **WARNING!** To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-14 Part information

Part number	Part description
RM2-2762-000CN	Cover, top assembly (MFP)

Required tools

- #2 Phillips screwdriver with a magnetic tip and a 152 mm (6 in) shaft length

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test

No post service test is available for this assembly.

1. Remove the left cover (MFP)


Follow the procedure below to remove and replace the left cover (MFP).

> **NOTE:** The following procedure is for an MFP printer only. If this assembly is being removed to gain access to dependency parts for a SFP printer, skip this step.

> **TIP:** There might be a small cover installed on the USB port and/or the fax port located at the back of the printer. If installed, remove these covers now.


1. Remove one screw (callout 1).

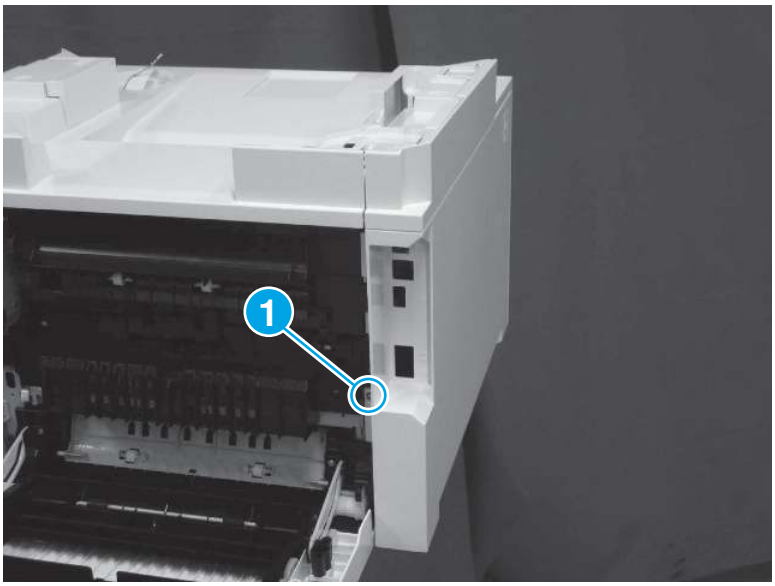Figure 4-137 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

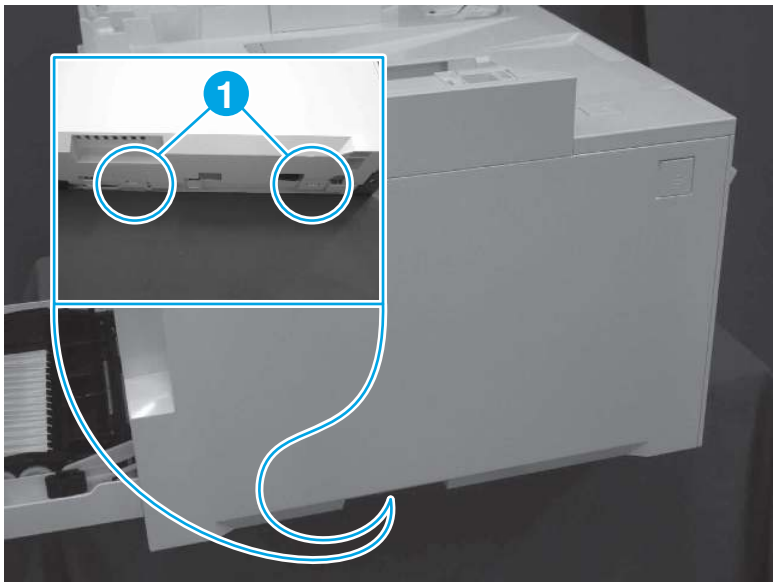Figure 4-138 Release two tabs




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

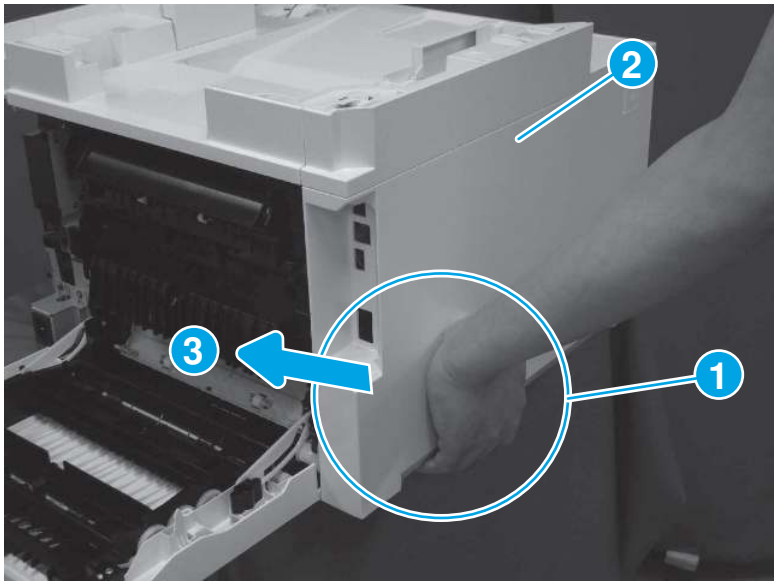Figure 4-139 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

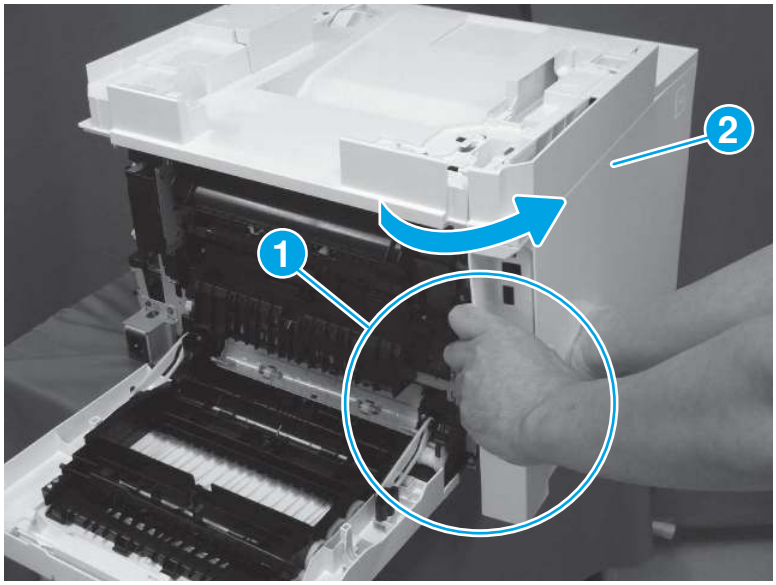Figure 4-140 Disengage the cover corner



5. Remove the left cover (callout 1).

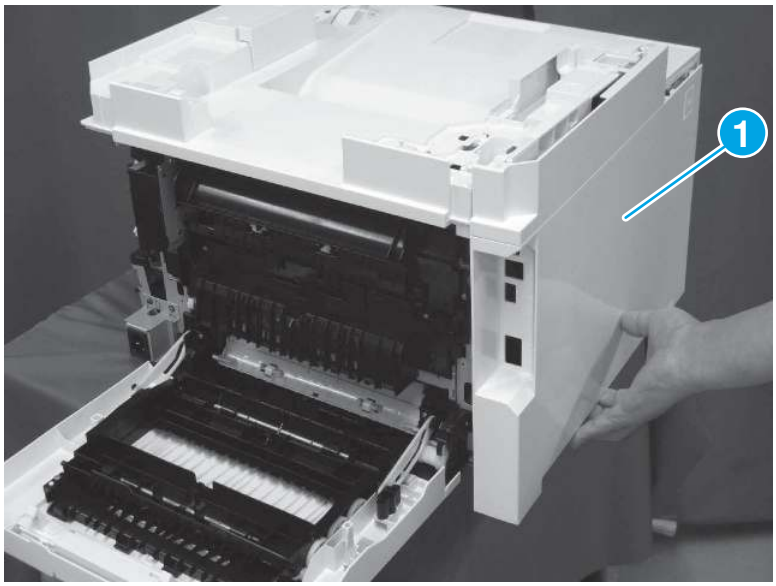Figure 4-141 Remove the cover



2. Remove the ISA (MFP)

Follow the procedure below to remove and replace the ISA.


1. Open the ISA, and then remove the ISA FFC cover (callout 1).

Figure 4-142 Remove the FFC cover



2. Disconnect three FFCs, and then remove one screw to release the ground cable.

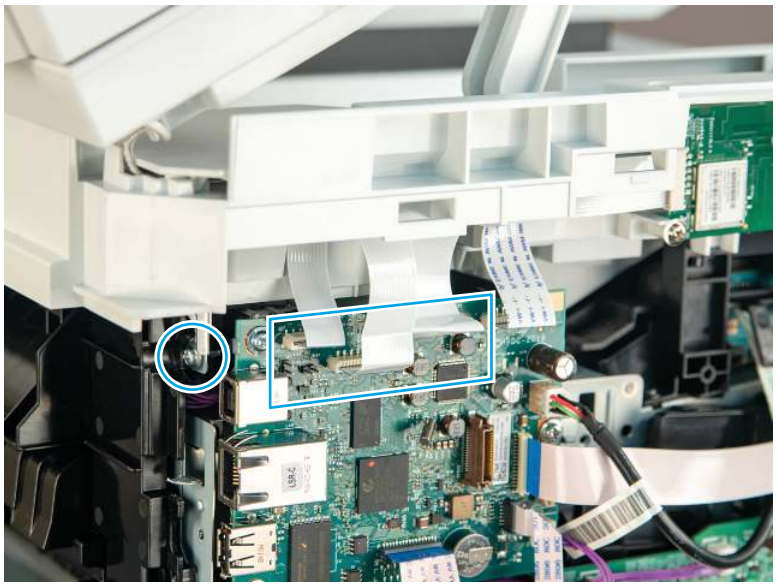Figure 4-143 Disconnect FFCs and remove screw



3. Release one tab (callout 1), and then rotate the ISA slider pin (callout 2) towards the front of the printer to release it. Remove the slider pin.


⚠ CAUTION: When the slider pin is removed, the ISA is not captive and can suddenly detach from the printer.

Figure 4-144 Remove the slider pin




4. Support the ISA, release the FFCs from the retainers, and then carefully pass the FFCs and the ground wire up through the slots in the top cover.

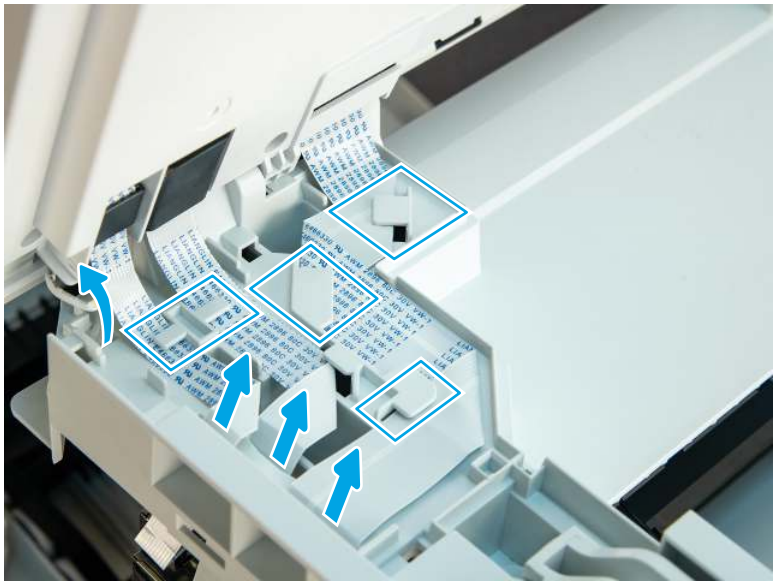Figure 4-145 Release the FFCs and ground wire



5. Slide ISA as shown below to release it.

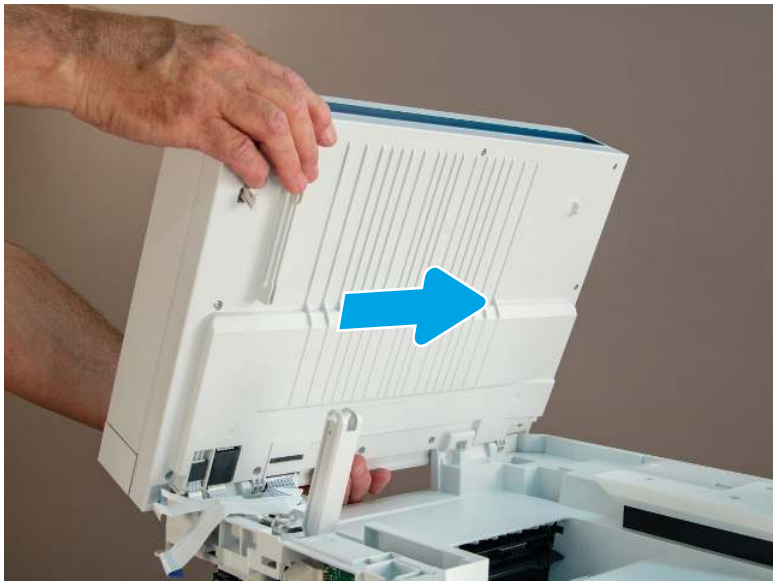Figure 4-146 Release the ISA



6. Remove the ISA.

Figure 4-147 Remove the ISA




3. Remove the right cover (MFP)

Follow the procedure below to remove and replace the right cover (MFP).

NOTE: The following procedure is for an MFP printer only. If this assembly is being removed to gain access to dependency parts for a SFP printer, skip this step.


1. Remove one screw (callout 1).

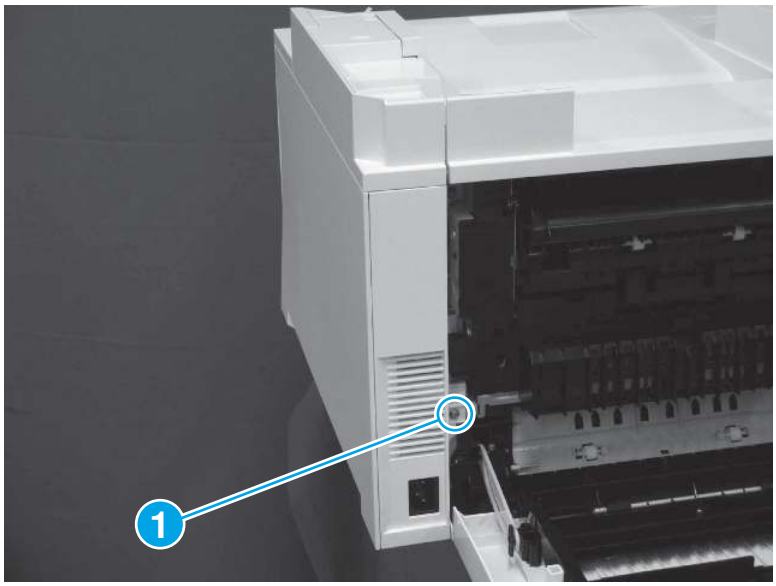Figure 4-148 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to three tabs (callout 1). Release three tabs.

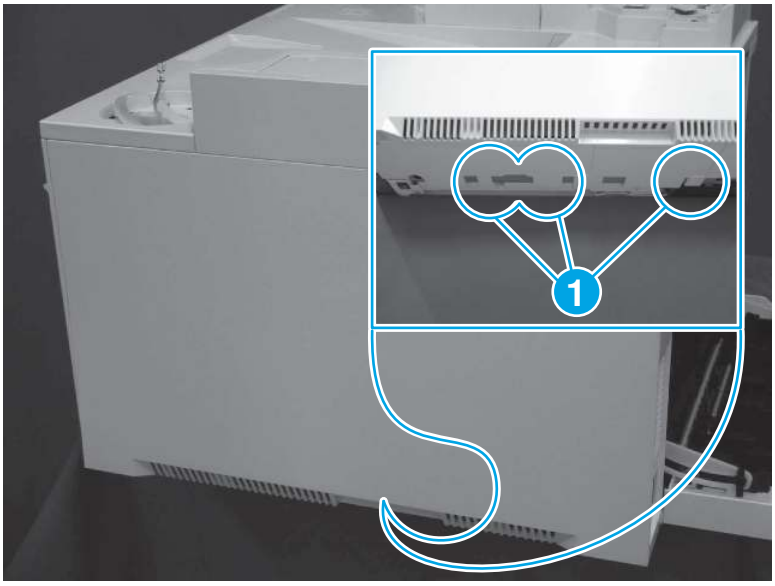Figure 4-149 Release three tabs




3. Press in on the side (callout 1) of the right cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

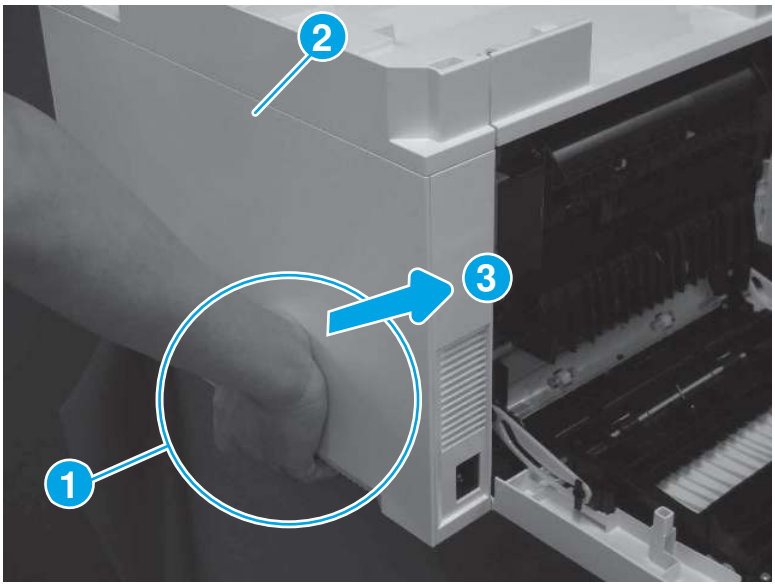Figure 4-150 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

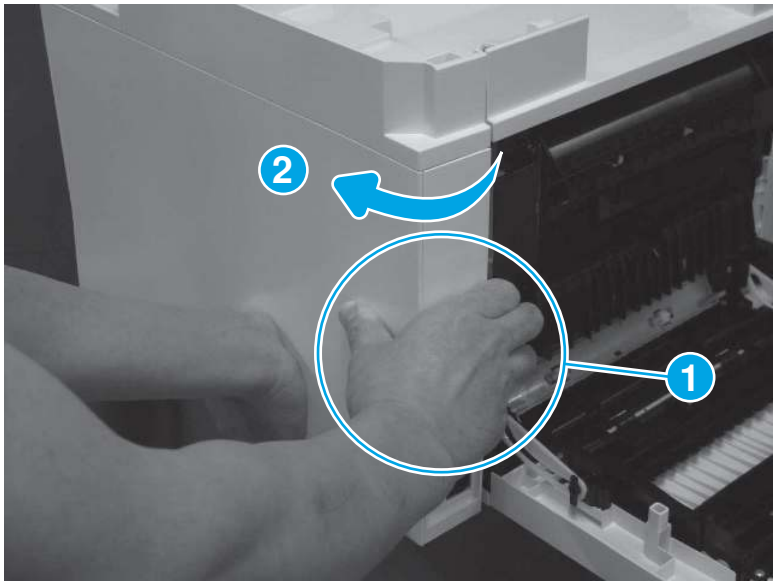Figure 4-151 Disengage the cover corner



5. Remove the right cover (callout 1).

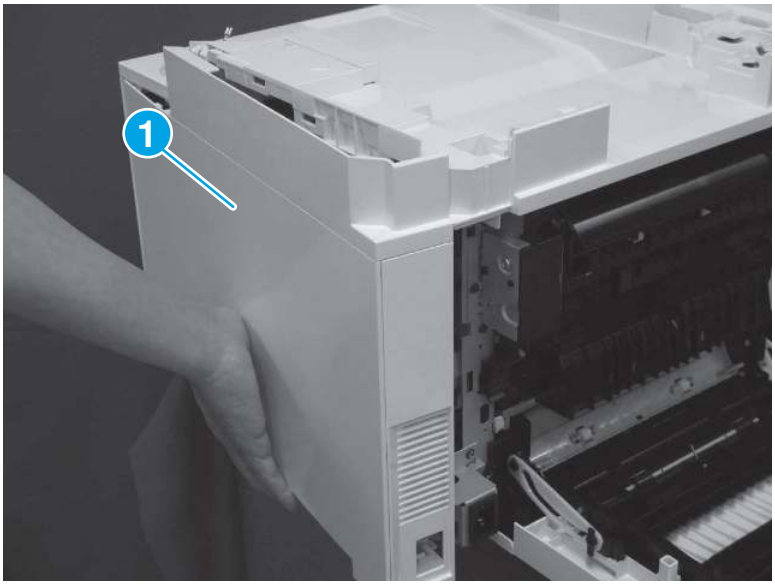Figure 4-152 Remove the cover




4. Remove the front cover (MFP)

Follow the procedure below to remove and replace the front cover.

Reinstallation tip: Make sure to follow the special installation instructions for this part or step (located after the unpack and recycle or cleaning section).

1. Remove three screws (callout 1).

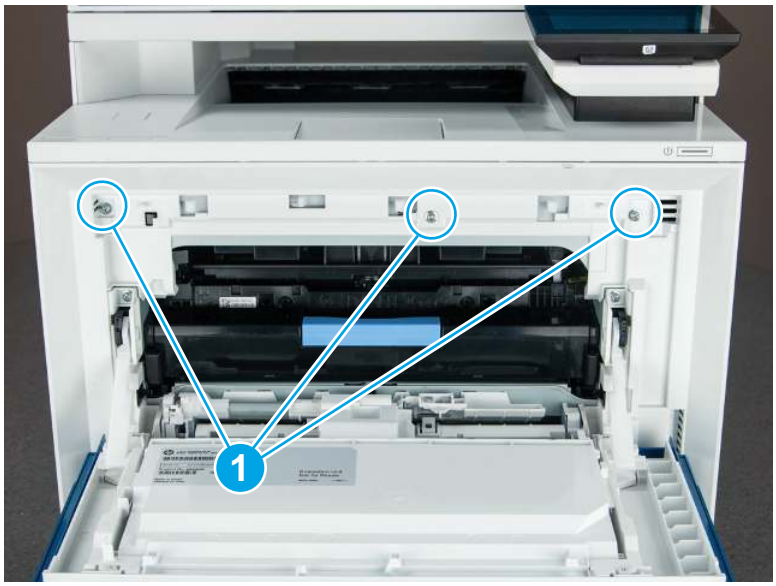
Figure 4-153 Remove three screws



2. Before proceeding, take note of the door release arm (callout 1). This arm can be easily dislodged when the cover is removed.


⚠ CAUTION: Do not lose the spring (callout 2) when removing the front cover.

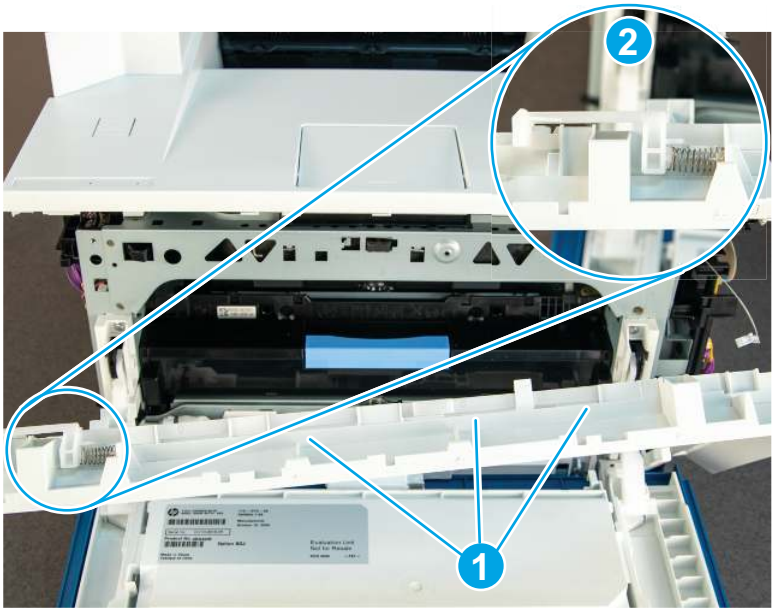Figure 4-154 Door release arm



3. Release four tabs (callout 1), and then remove the front cover (callout 2).

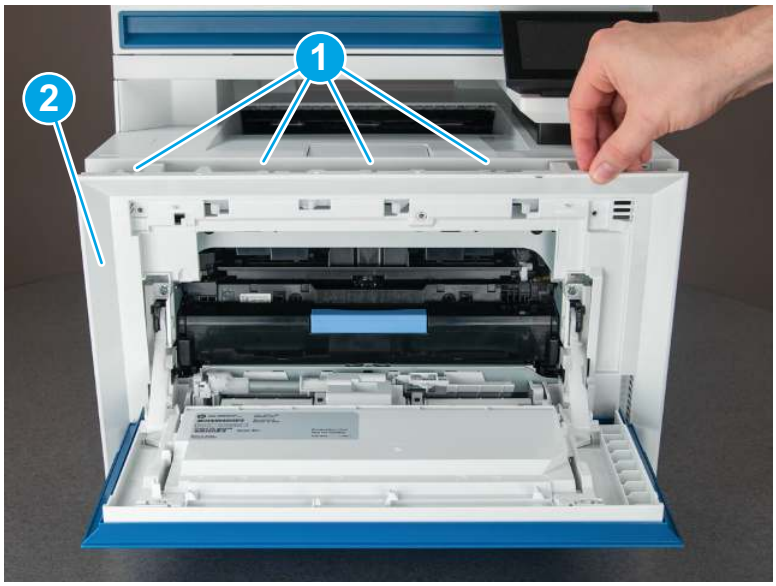Figure 4-155 Remove the cover




5. Remove the top cover (MFP)

Follow the procedure below to remove and replace the top cover (MFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.

1. Close the ISA lift arm.

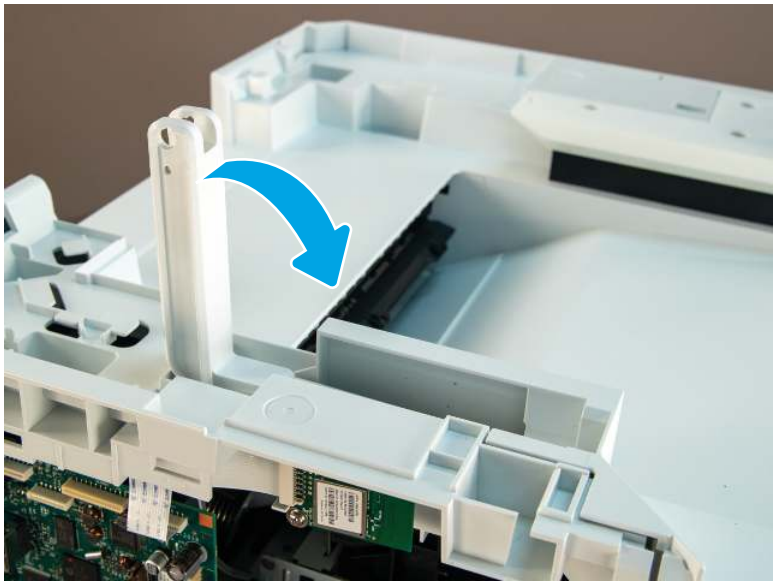
Figure 4-156 Close the ISA lift arm



2. Remove one screw.


⚠ **CAUTION:** The support arm is spring loaded and can unexpectedly spring into the open position. To avoid injury, do not place a finger in the screw well when the support arm is in the closed position.

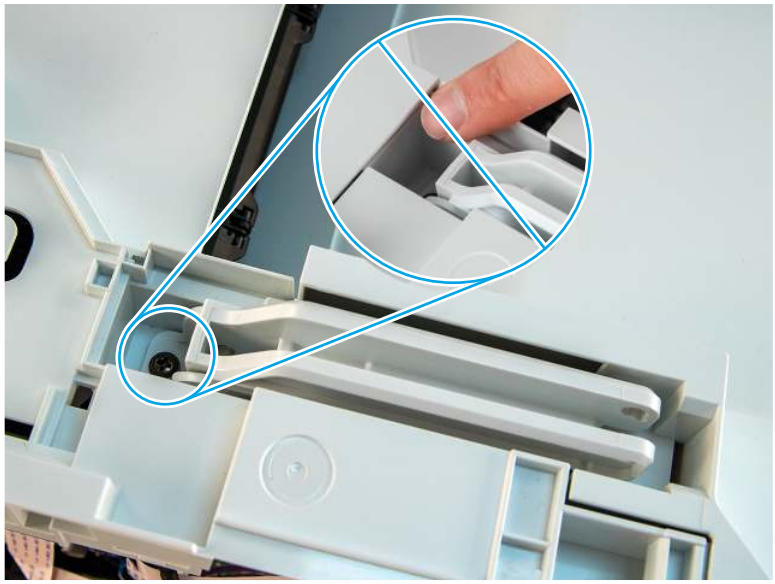Figure 4-157 Remove one screw



3. Rotate one end of the lift arm up (callout 1), and then slide the lift arm as shown below (callout 2) to release it. Remove the lift arm.

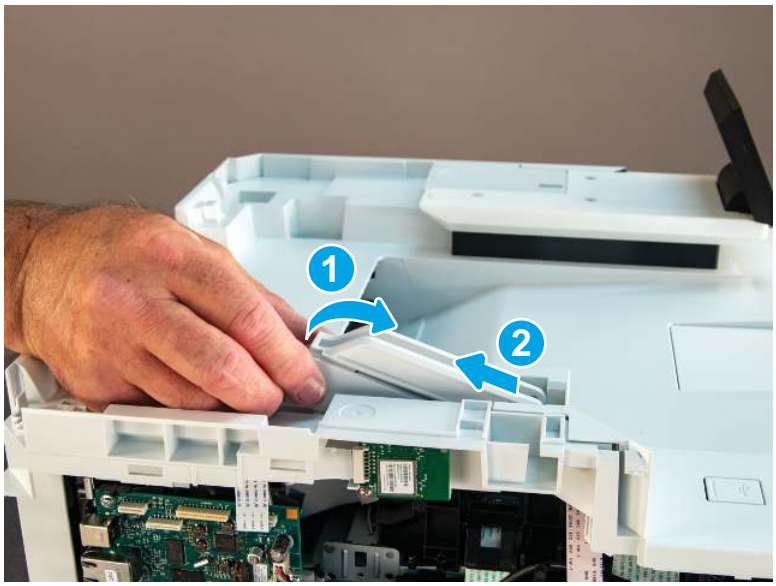Figure 4-158 Remove the lift arm




4. Do the following:

   a. Disconnect one FFC (control panel; callout 1).

b. Remove one screw (callout 2), and then separate the wireless PCA from the top cover.


NOTE: The wireless PCA does not need to be completely removed. Instead, release the FFC from the retainer (callout 3), and then gently move it out of the way.

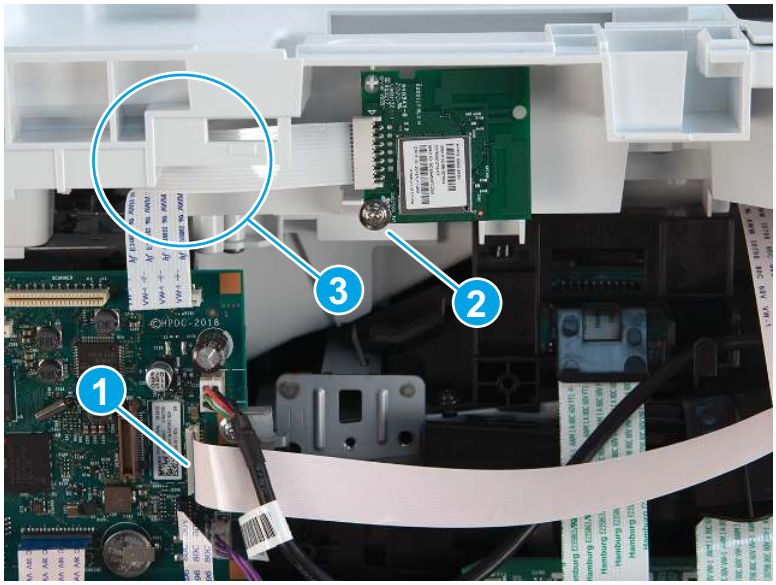Figure 4-159 Disconnect FFC and move the wireless PCA



5. Disconnect one FFC (power button), and then remove one screw (grounding sheet-metal plate).

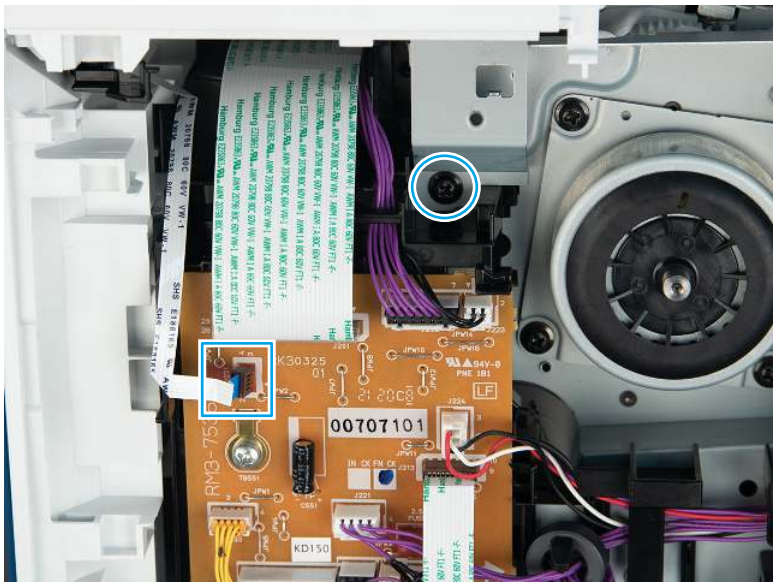Figure 4-160 Disconnect one FFC and remove one screw




6. Remove three screws.

Figure 4-161 Remove three screws



7. Release one tab and rotate one end of the base cover up (callout 1), and then slide the cover as shown (callout 2) to remove it.

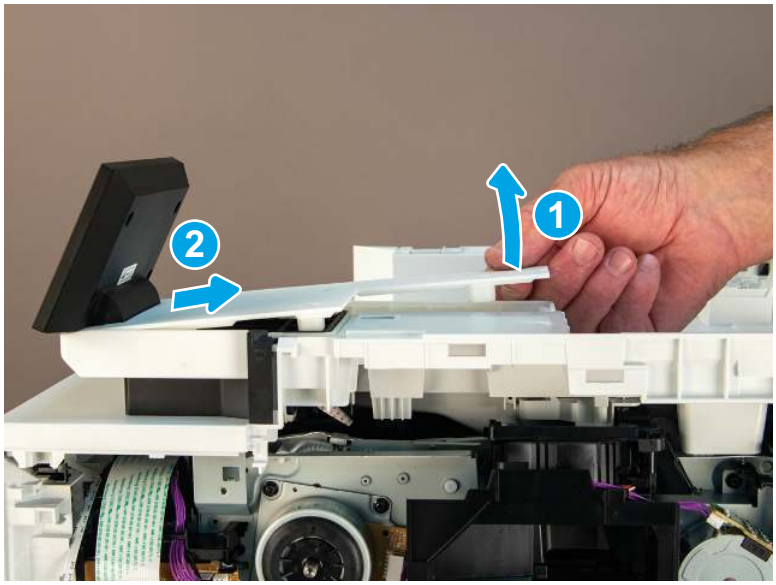Figure 4-162 Remove the cover



8. Disconnect two FFCs.

NOTE: Theses are zero-insertion force (ZIF) connectors. To remove the FFCs, first release the locking clip on the connector, and then pull the cable straight out of the connector.

TIP: For reinstallation, make sure that the line of the FFC is parallel with the body.

Figure 4-163 Disconnect two FFCs



9. Remove four screws.

NOTE: Two of the screws are self-tapping threads (black), and two of the screws are machine thread (silver).


Figure 4-164 Remove four screws



10. Lift the control panel and base straight up and off of the printer to remove them together.


NOTE: When handling the assembly, do not lose the ferrite (callout 1).

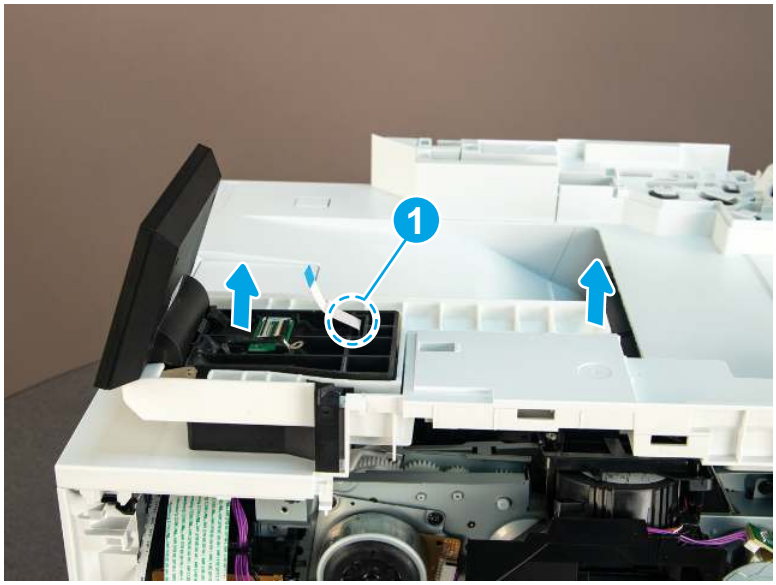Figure 4-165 Remove control panel and base



11. Remove three screws.

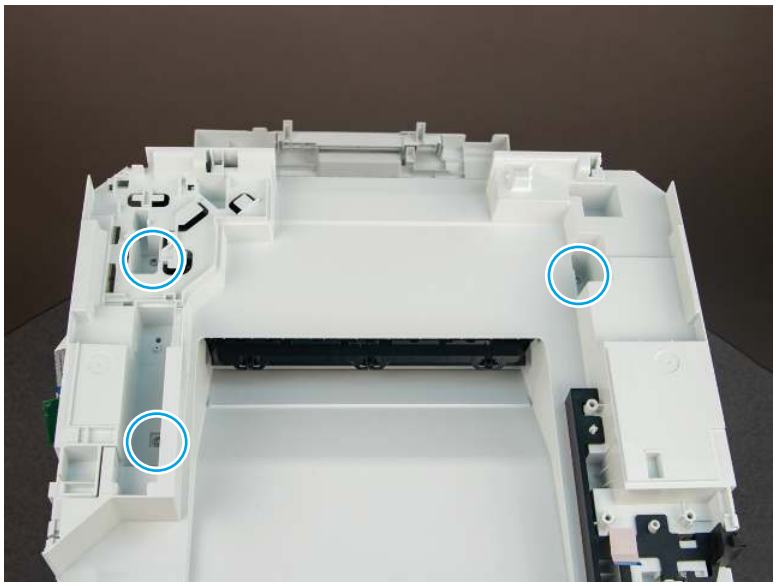
Figure 4-166 Remove three screws



12. Sliding the cover from the back of the printer to the front to remove it.

TIP: Slightly move the control-panel ground bracket (circled) back and forth to help release the top cover.

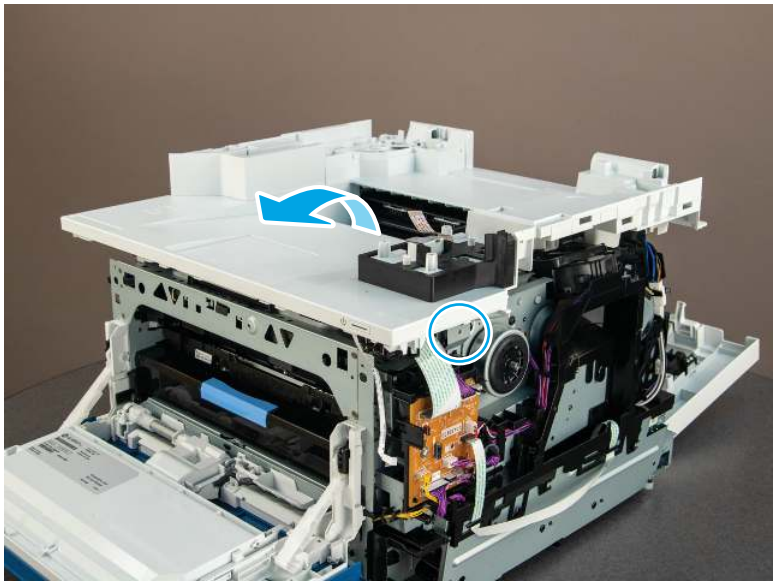Figure 4-167 **Remove the cover**



13. **When the cover is reinstalled**: Make sure that the front USB assembly is correctly positioned under the cover.

Figure 4-168 **Front USB assembly**



6. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

> **NOTE:** HP recommends responsible disposal of the defective part.
>
> http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: 

Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.


7. Special installation instructions - top cover (MFP)

Use the following special installation instructions to install a replacement top cover (MFP).

1. The following items must be removed from the discarded top cover, and then installed on a replacement top cover.
   - **Callout 1**: Control panel ground bracket
   - **Callout 2**: Control panel pillar cover (located on the top side of the cover)

NOTE: The control panel FFC and power switch are included with a replacement top cover (RM2-2762-000CN).

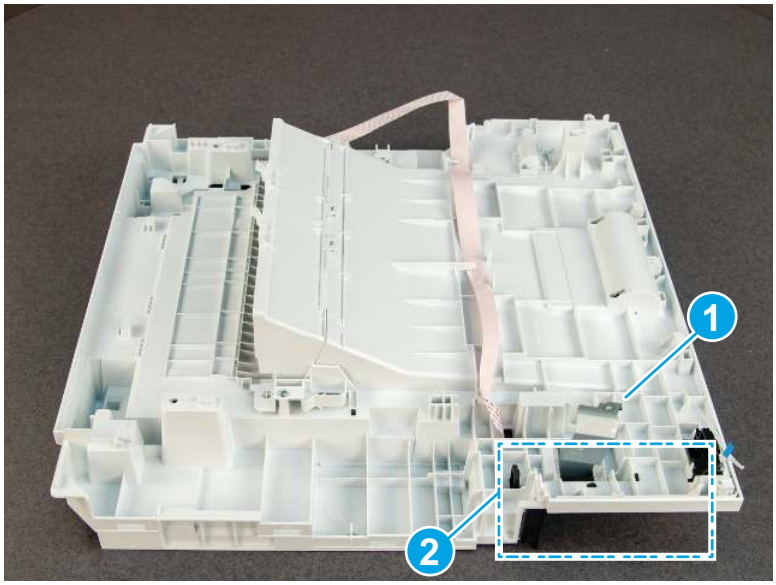Figure 4-169 Power switch and ground bracket



2. Remove the control-panel pillar cover and ground bracket. Do the following:


NOTE: The figure below shows a black-plastic pillar cover. On production model printers, the pillar cover is white.

a. Release one tab (callout 1).

b. Lift up on the end of the cover (callout 2).

c. Remove the cover and ground bracket (callout 3) together.

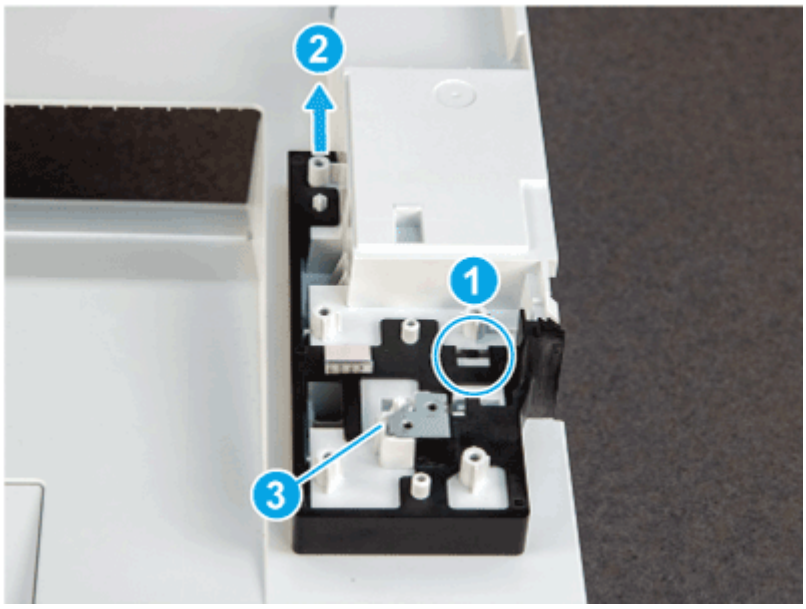Figure 4-170 Remove the cover and bracket




8. Special installation instructions - Front cover

Follow the special instructions below to install the front cover.

NOTE: Front cover installation is **identical** for both the SFP and MFP models.

1. If the door release arm becomes dislodged when handling the cover, install it as shown below (callout 1, 2).

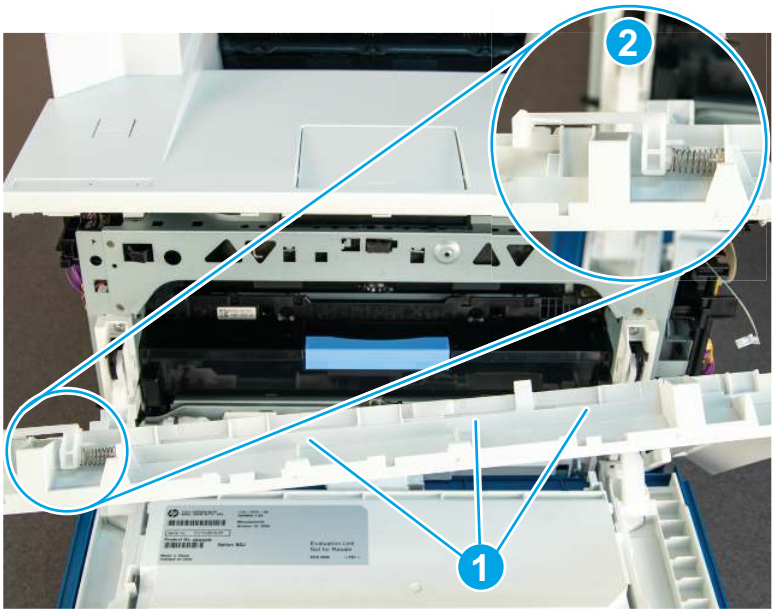Figure 4-171 **Door release arm installed**



2. At the right and left side of the front cover, align the holes (callout 1) in the cover with the alignment pins (callout 2) on the chassis.


Figure 4-172 **Cover alignment pins**



3. Rotate the top of the cover towards the printer to install it.

IMPORTANT: Verify that the spring loaded door release button (on the left side of the cover) correctly functions.

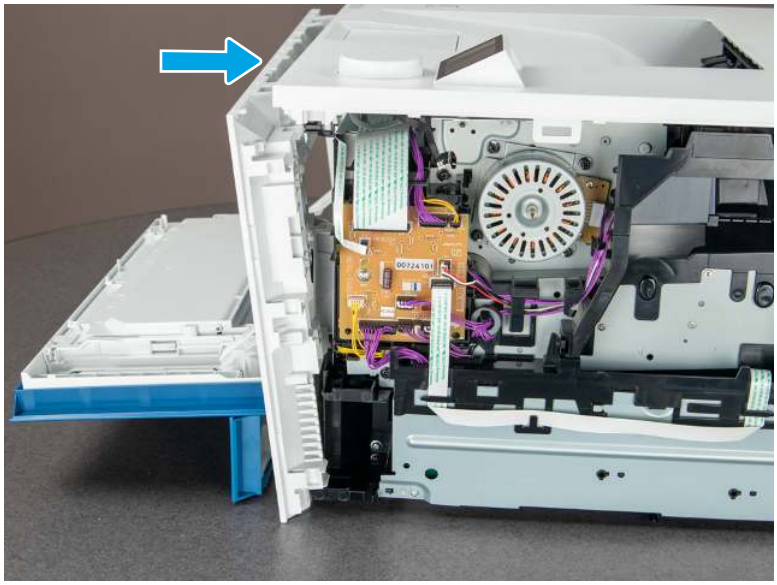Figure 4-173 Install the cover



Removal and replacement: Rear door

Learn about rear door removal.

Mean time to repair: 5 minutes

Service level: Easy

Before performing service

Turn the printer power off

- Disconnect the power cable.

> ⚠ **WARNING!** To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-15 Part information

Part number	Part description
RM2-2754-000CN	Rear door assembly

Required tools

- #2 Phillips screwdriver with a magnetic tip and a 152 mm (6 in) shaft length

After performing service

Turn the printer power on

- Connect the power cable.

- Use the power switch to turn the power on.

Post service test


No post service test is available for this assembly.

1. Remove the rear door

Follow the procedure below to remove and replace the rear door.


1. Open the rear door, and then raise the secondary transfer feed assembly (callout 1) up and into the locked position.

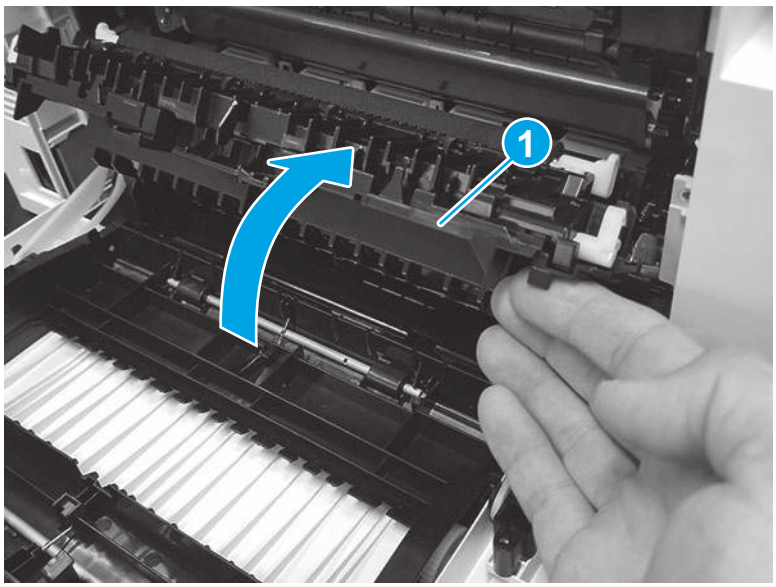Figure 4-174 Place the T2 feed assembly in the locked position




2. Remove two screws (callout 1), and then release the left- and right-side retainer arms (callout 2)

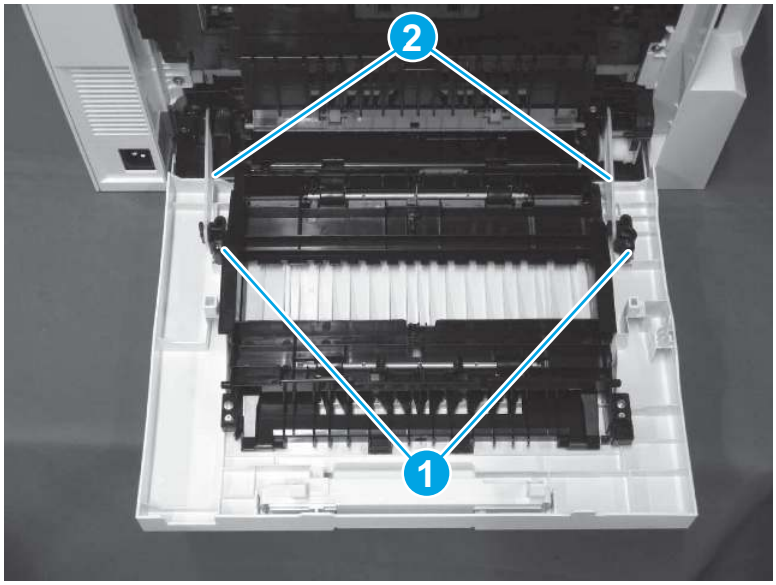Figure 4-175 Release the retainer arms



3. Carefully position the printer at the edge of the work surface and allow the rear door to open to an angle greater than 90 degrees (callout 1). Slide the door away (callout 2) from the formatter side of the printer (callout 3) to release it, and then remove the rear door.

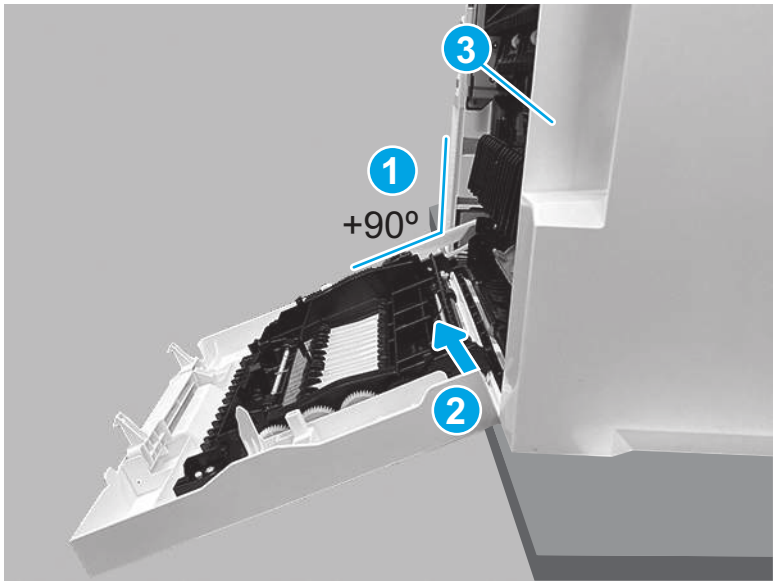Figure 4-176 Remove the door



2. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.

Removal and replacement: Cartridge door

Learn about cartridge door removal.

View a video of removing and replacing the cartridge door.

Mean time to repair: 10 minutes

Service level: Medium

Before performing service

Turn the printer power off

- Disconnect the power cable.

WARNING! To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-16 Part information

Part number	Part description
RM2-2843-000CN	Cartridge door assembly (blue) (SFP)
RM2-2847-000CN	Cartridge door assembly (gray) (SFP)
RM2-2844-000CN	Cartridge door assembly (blue) (MFP)
RM2-2848-000CN	Cartridge door assembly (gray) (MFP)

Required tools

- #2 Phillips screwdriver with a magnetic tip and a 152 mm (6 in) shaft length
- Small flat-blade screwdriver

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test

No post service test is available for this assembly.


1. Remove the Tray 1 pickup roller assembly

Follow the procedure below to remove and replace the Tray 1 pickup roller assembly.

Reinstallation tip: Make sure to follow the special installation instructions for this part or step (located after the unpack and recycle or cleaning section).


1. Open the cartridge door, and then depress the lever (callout 1) and slide it as shown below.

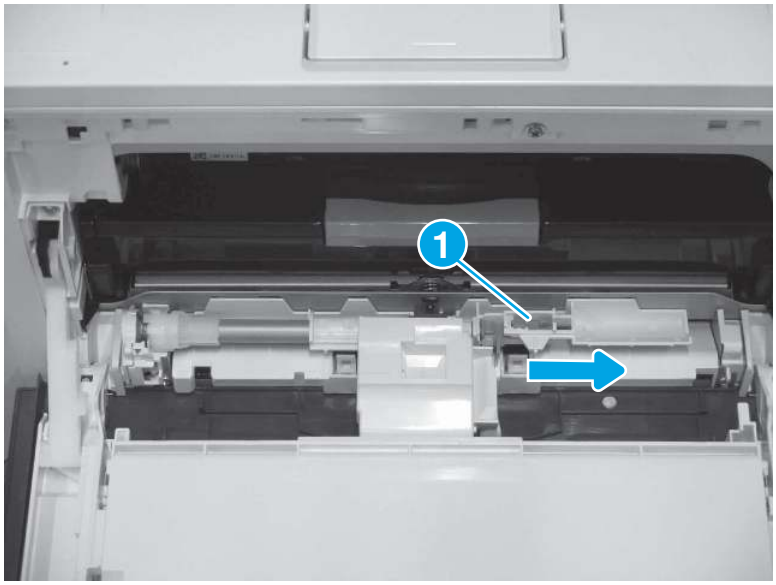Figure 4-177 **Release the Tray 1 pickup roller assembly**



2. Slide the pickup roller assembly (callout 1) as shown below to remove it.

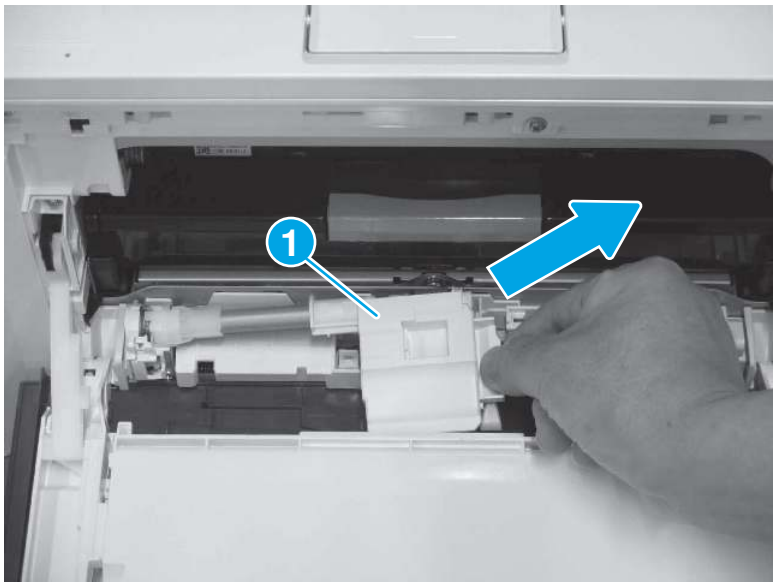Figure 4-178 **Remove the Tray 1 pickup roller assembly**




2. Remove the cartridge door assembly

Follow the procedure below to remove and replace the cartridge door assembly.


1. **Right-side door hinge**: Slightly pull Tray 1 away from the printer while releasing two tabs (callout 1) on the hinge.

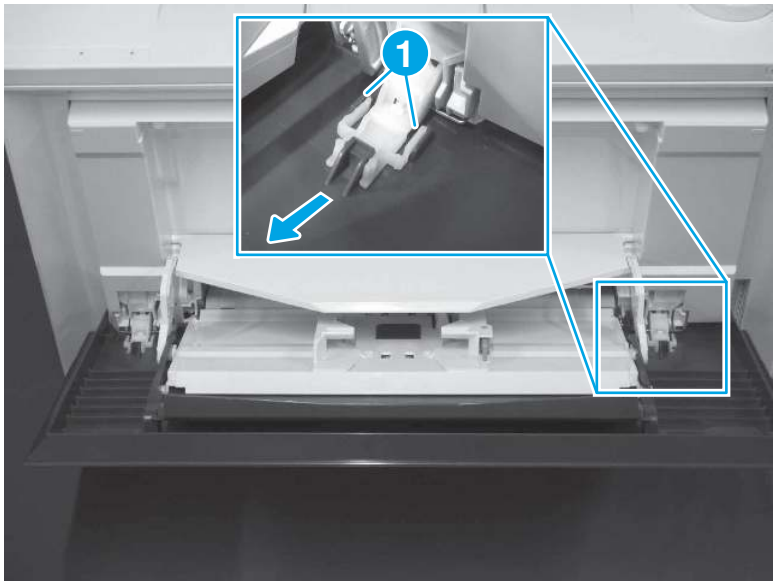Figure 4-179 **Release two tabs (right hinge)**




2. **Right-side door hinge**: Rotate the hinge up and away from the cover.

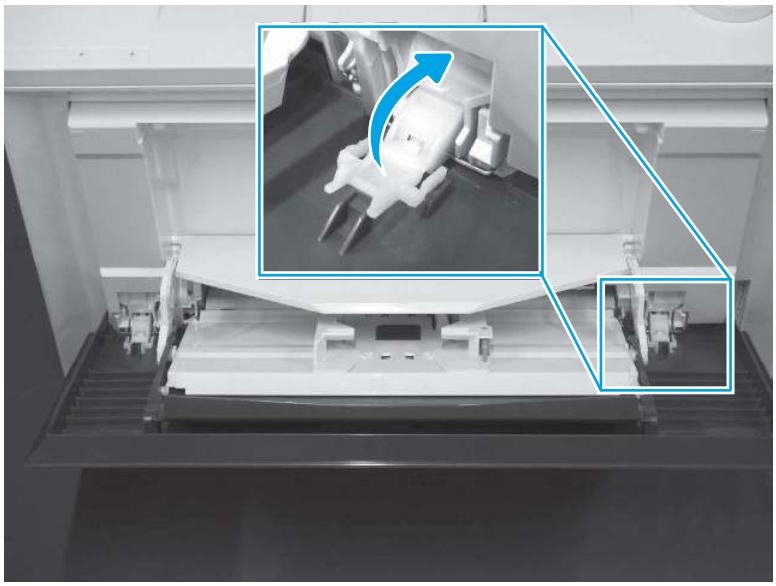Figure 4-180 **Remove the hinge (right side)**




3. **Left-side door hinge**: Slightly pull Tray 1 away from the printer while releasing two tabs (callout 1) on the hinge.

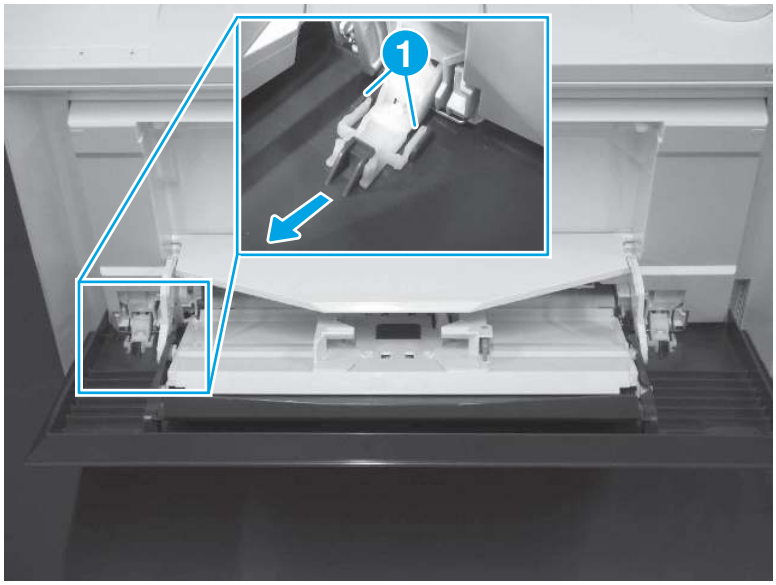Figure 4-181 **Release two tabs (left hinge)**




4. **Left-side door hinge**: Rotate the hinge up and away from the cover.

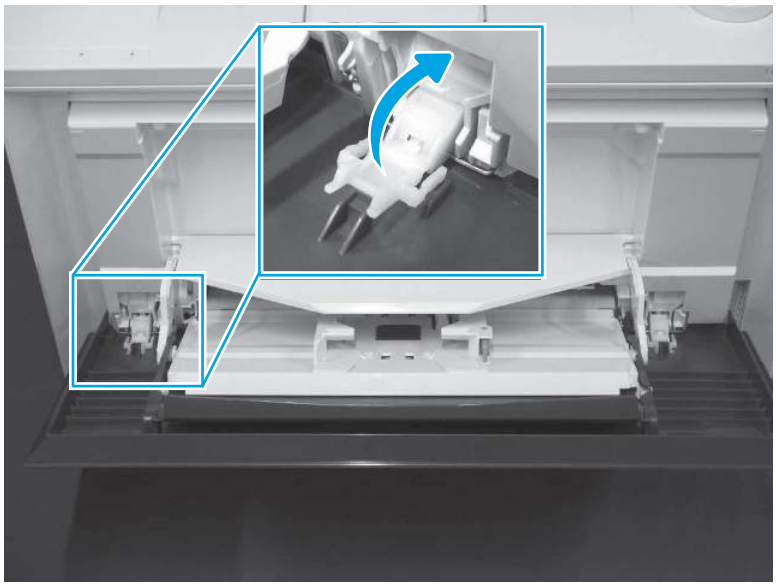Figure 4-182 **Remove the hinge (left side)**




5. Release Tray 1 from the right- and left-side retainer hooks.

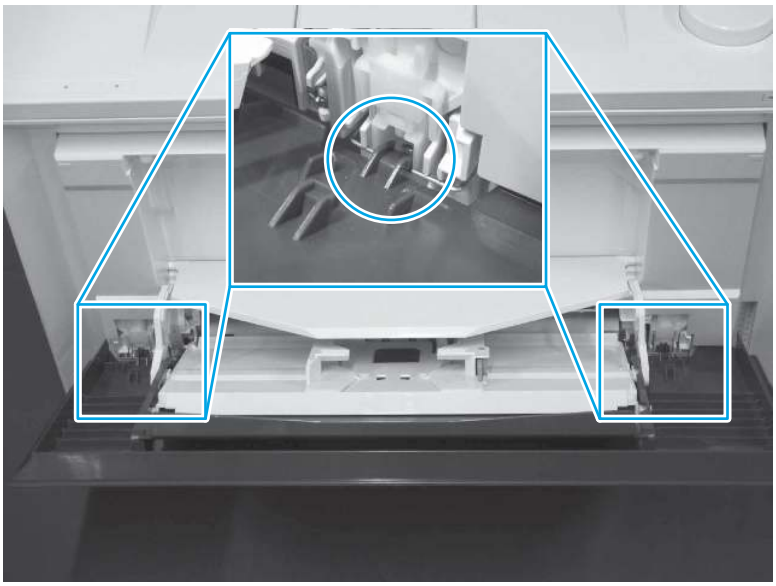Figure 4-183 **Release the retainer hooks**




6. Position Tray 1 (callout 1) in the upright position resting on the work surface.

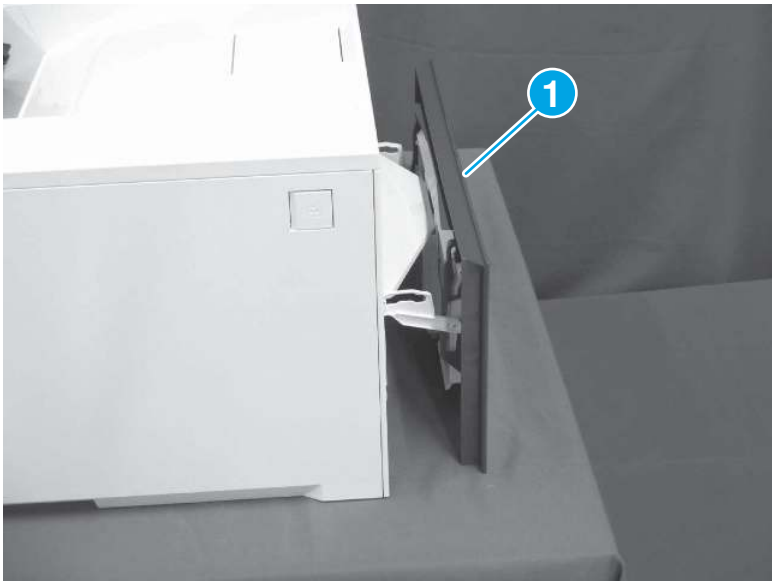Figure 4-184 **Position Tray 1**



7. Release the right- and left-side arms, and then remove Tray 1.

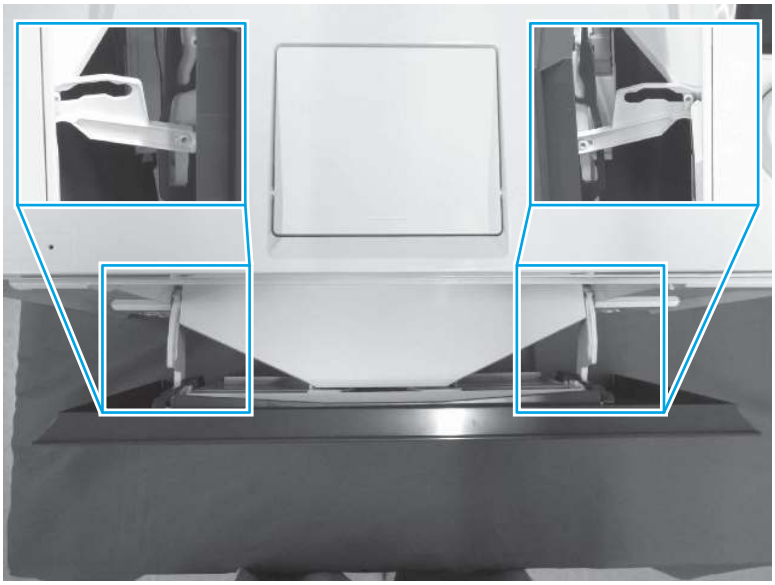
Figure 4-185 **Release the arms and remove the tray**



8. Use a small flat-blade screwdriver to remove the right- and left-side hinges.


Reinstallation tip: **For a replacement cover only**: Install these hinges on the replacement assembly.

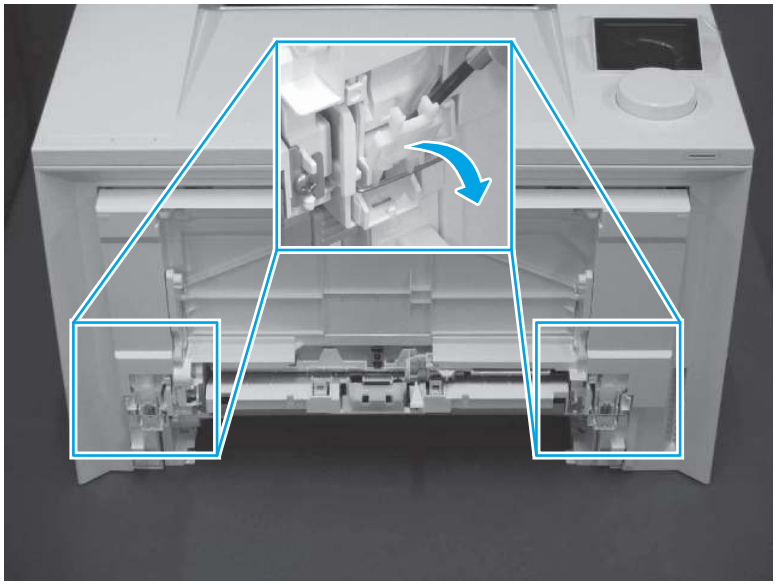Figure 4-186 **Remove the hinges**




9. Open the cartridge door.

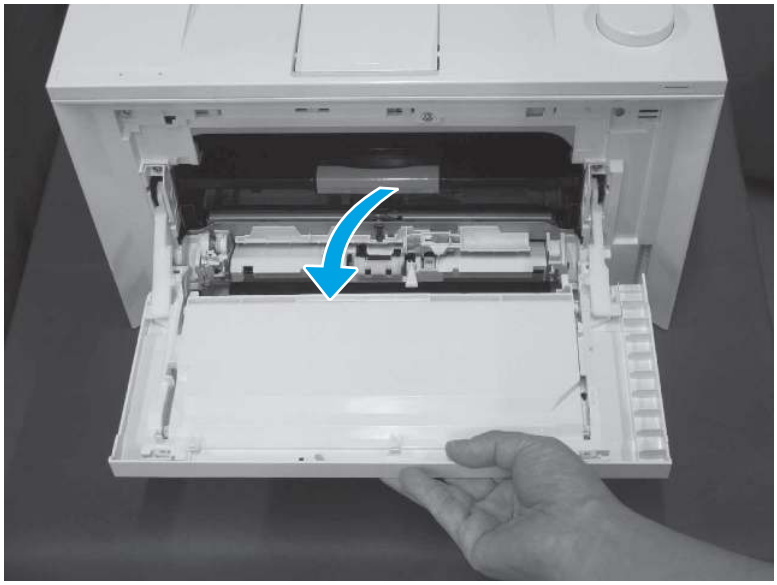Figure 4-187 Open the door



10. Remove the right- and left-side link arms (callout 1), and then remove the cartridge door (callout 2).

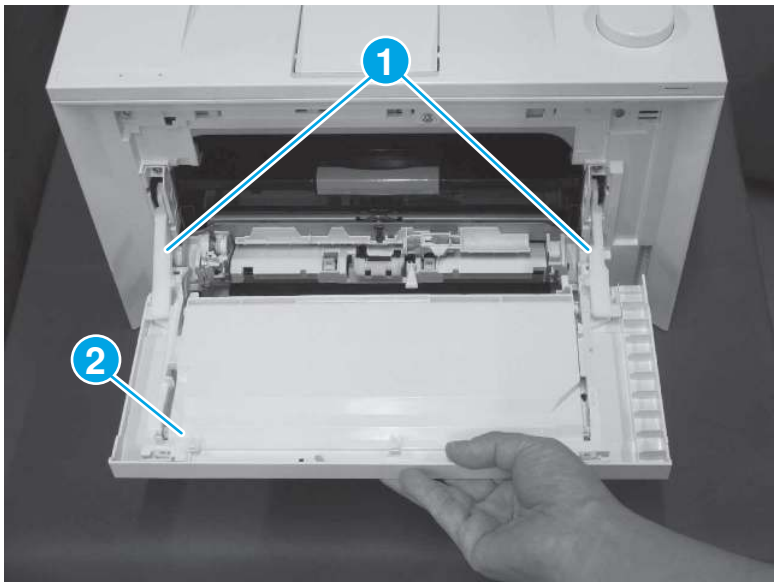Figure 4-188 Remove the link arms and cartridge door



3. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.


4. Special installation instructions - Tray 1 pickup roller assembly

Follow the special instructions below to install the Tray 1 pickup roller assembly.

- When the Tray 1 pickup roller assembly (callout 1) is installed, make sure that the alignment tab (callout 2) is in the slot (callout 3) on the assembly shaft.

TIP: When correctly installed, the tab fits completely into the slot (callout 4).

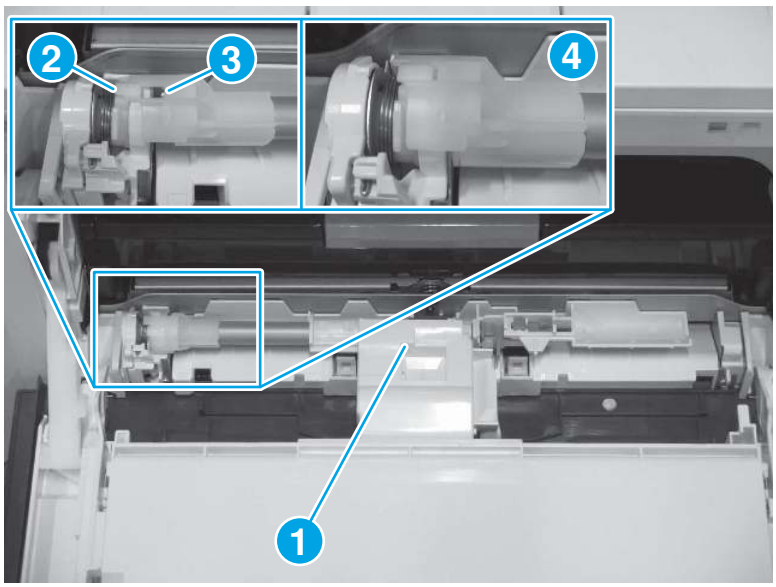Figure 4-189 **Install the Tray 1 pickup roller assembly**



Removal and replacement: Duplexing bottom cover

Learn about duplexing bottom cover removal.

Mean time to repair: 6 minutes

Service level: Easy

Before performing service

Turn the printer power off

- Disconnect the power cable.

> ⚠ **WARNING!** To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-17 Part information

Part number	Part description
RC5-6129-000CN	Cover, duplexing bottom

Required tools

- No special tools are required to remove or install this assembly.

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test


No post service test is available for this assembly.

1. Remove the rear door

Follow the procedure below to remove and replace the rear door.


1. Open the rear door, and then raise the secondary transfer feed assembly (callout 1) up and into the locked position.

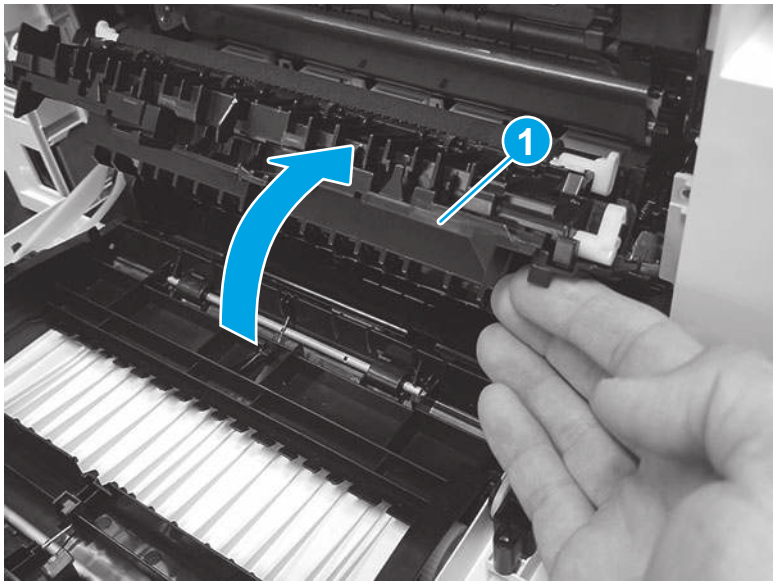Figure 4-190 Place the T2 feed assembly in the locked position




2. Remove two screws (callout 1), and then release the left- and right-side retainer arms (callout 2)

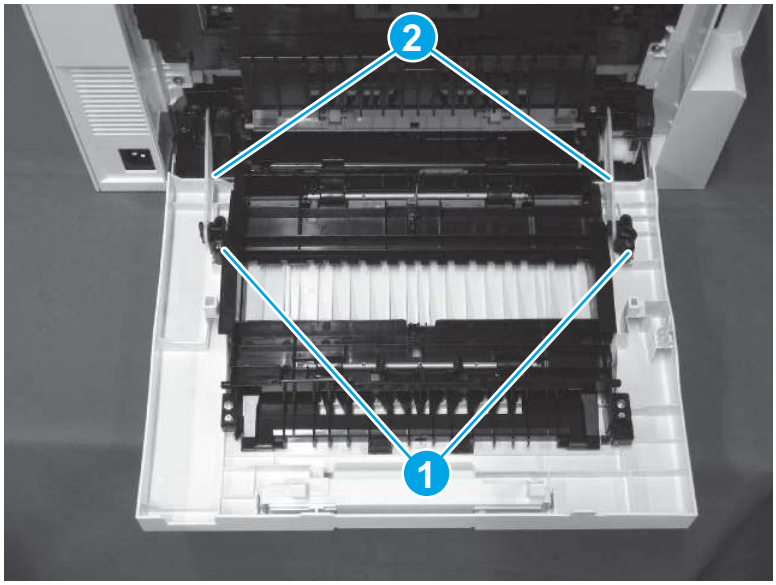Figure 4-191 Release the retainer arms



3. Carefully position the printer at the edge of the work surface and allow the rear door to open to an angle greater than 90 degrees (callout 1). Slide the door away (callout 2) from the formatter side of the printer (callout 3) to release it, and then remove the rear door.

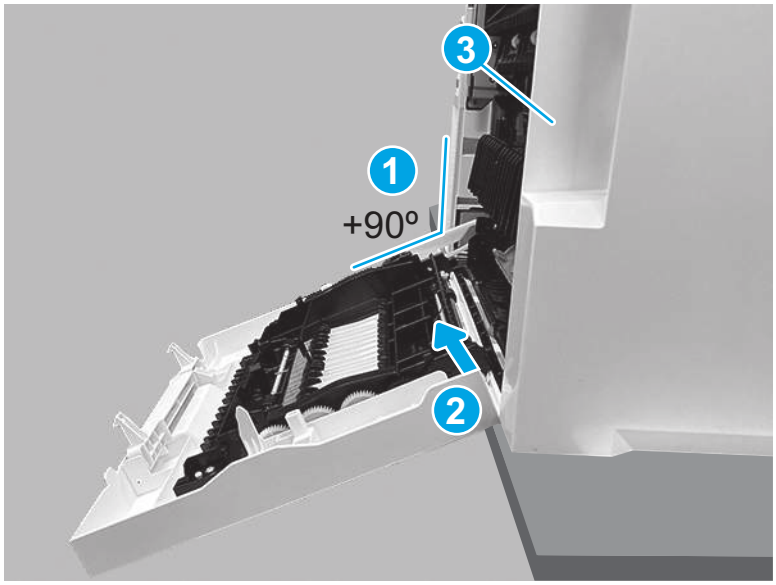Figure 4-192 **Remove the door**




2. Remove the duplexing bottom cover

Follow the procedure below to remove and replace the duplexing bottom cover.

- Release two tabs (callout 1), and then remove the duplexing bottom cover (callout 2).

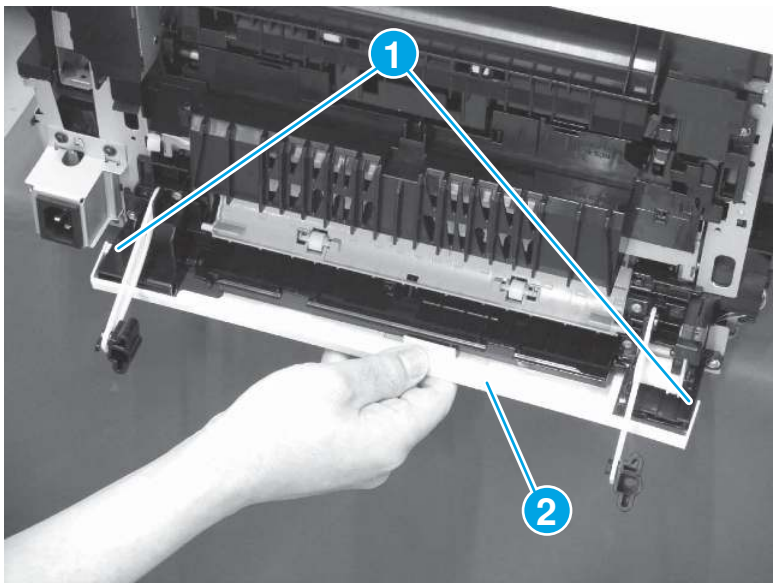Figure 4-193 **Remove the duplexing bottom cover**



3. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: 

Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.

Internal parts and assemblies

Learn how to remove and replace the printer internal parts and assemblies.

Removal and replacement: Front USB

Learn about front USB removal.

View a video of removing and replacing the front USB.

Mean time to repair: 23 minutes (SFP)

Mean time to repair: 33 minutes (MFP)

Service level: Medium (SFP/MFP)

Before performing service

Turn the printer power off

- Disconnect the power cable.

WARNING! To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-18 Part information

Part number	Part description
5851-7005	Assy-USB A F Panel Mount To WTB 335mm (front USB port)

Required tools

- Small flat-blade screwdriver

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test

Print any pages necessary to make sure the printer is functioning correctly.

1. Remove the left cover (SFP)


Follow the procedure below to remove and replace the left cover (SFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.

TIP: There might be a small cover installed on the USB port located at the back of the printer. If installed, remove this cover now.


1. Remove one screw (callout 1).

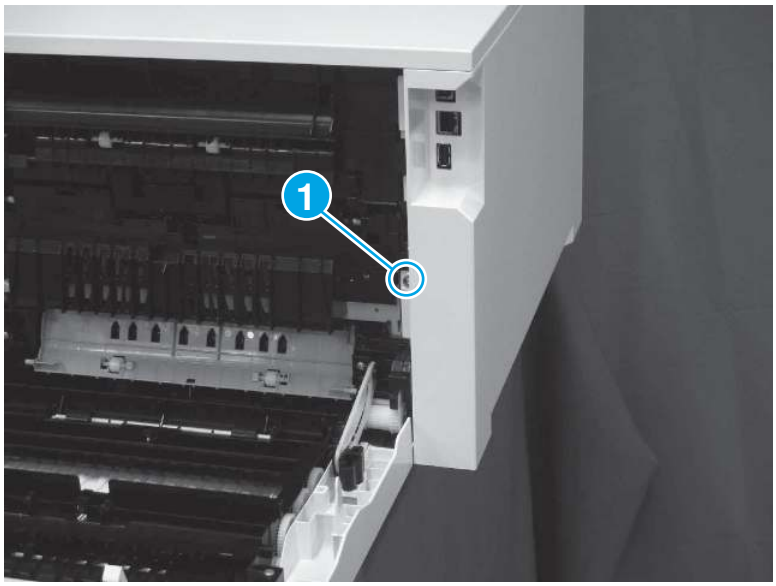Figure 4-194 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

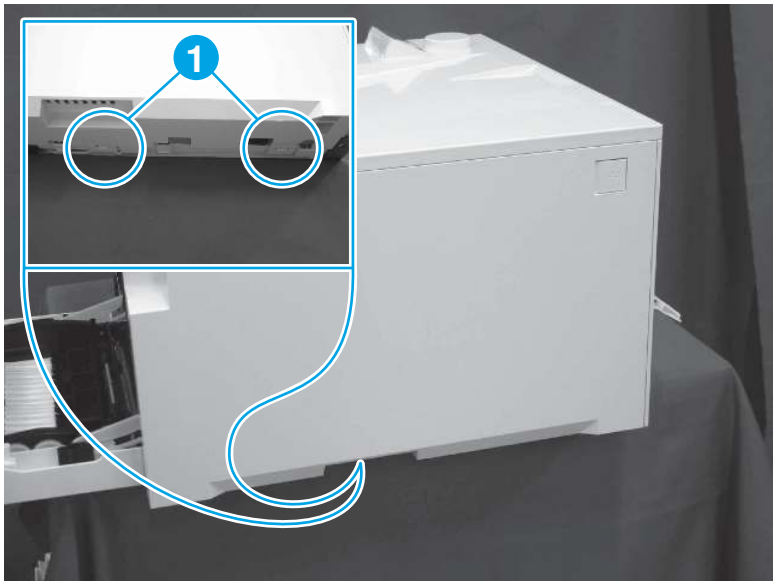Figure 4-195 **Release two tabs**




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

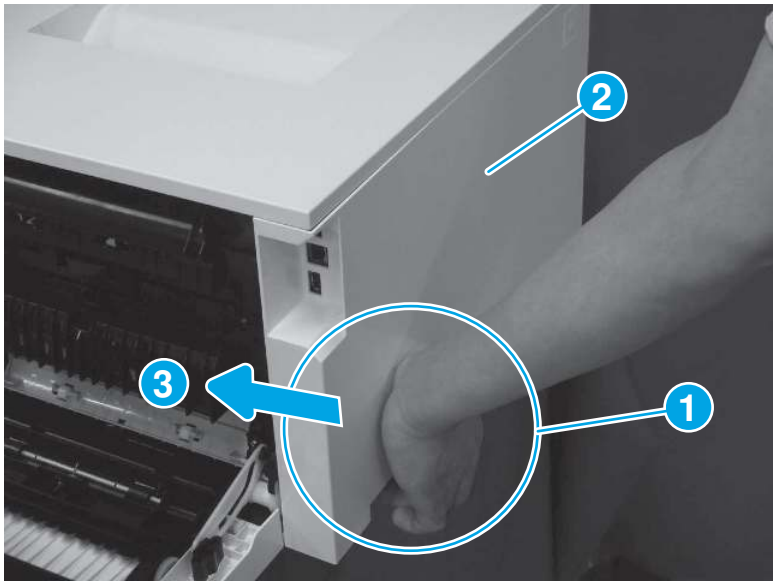Figure 4-196 **Release the rear cover corner**




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

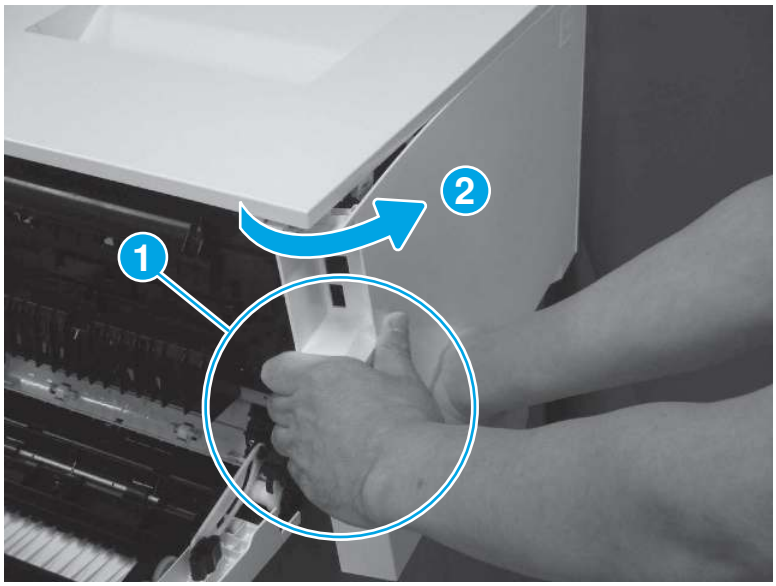Figure 4-197 Disengage the cover corner



5. Remove the left cover (callout 1).

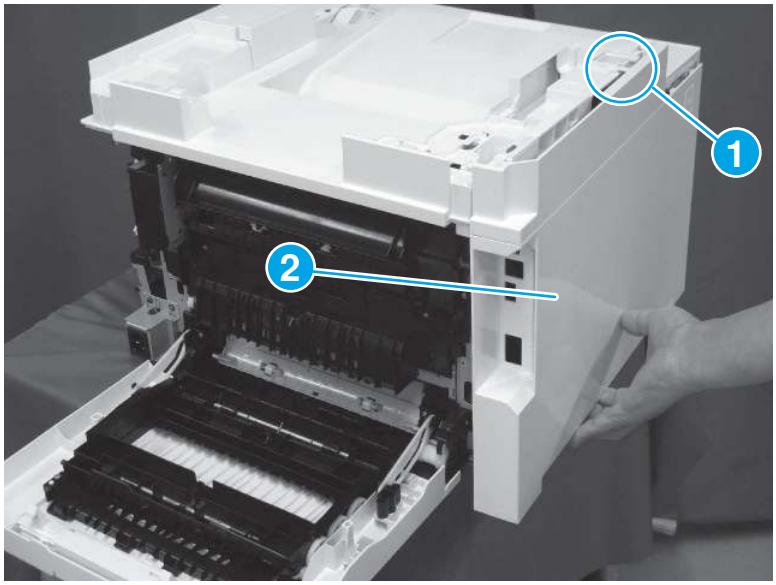Figure 4-198 Remove the cover



2. Remove the left cover (MFP)


Follow the procedure below to remove and replace the left cover (MFP).

NOTE: The following procedure is for an MFP printer only. If this assembly is being removed to gain access to dependency parts for a SFP printer, skip this step.

TIP: There might be a small cover installed on the USB port and/or the fax port located at the back of the printer. If installed, remove these covers now.


1. Remove one screw (callout 1).

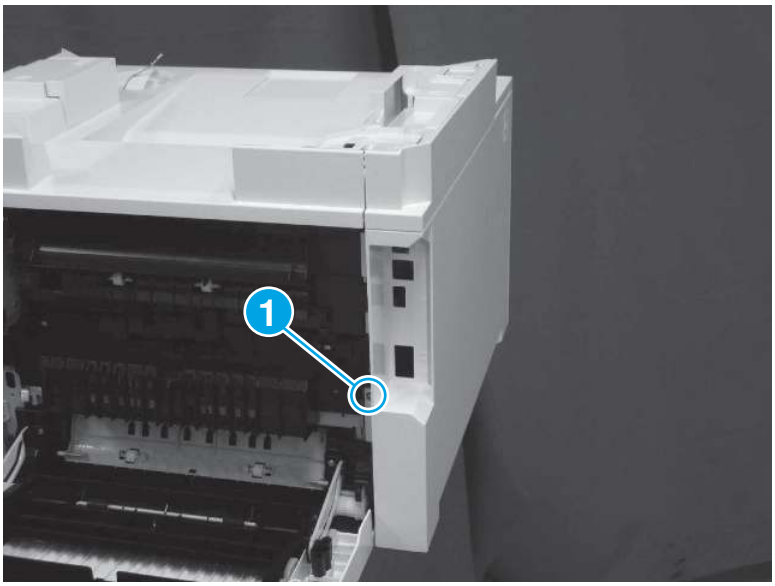Figure 4-199 **Remove one screw**




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

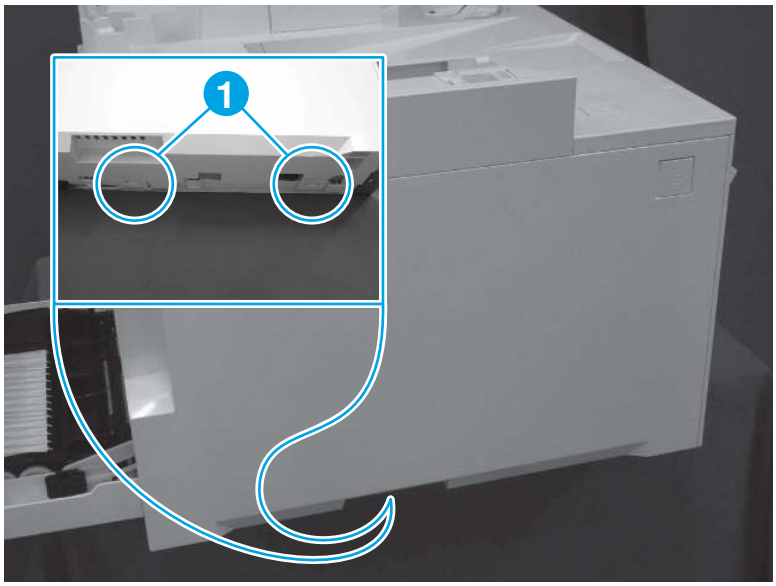Figure 4-200 **Release two tabs**




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

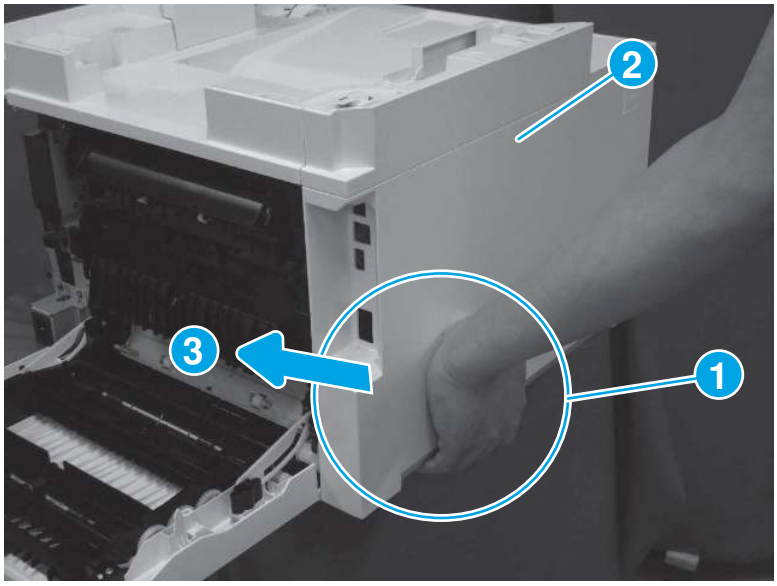Figure 4-201 **Release the rear cover corner**




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

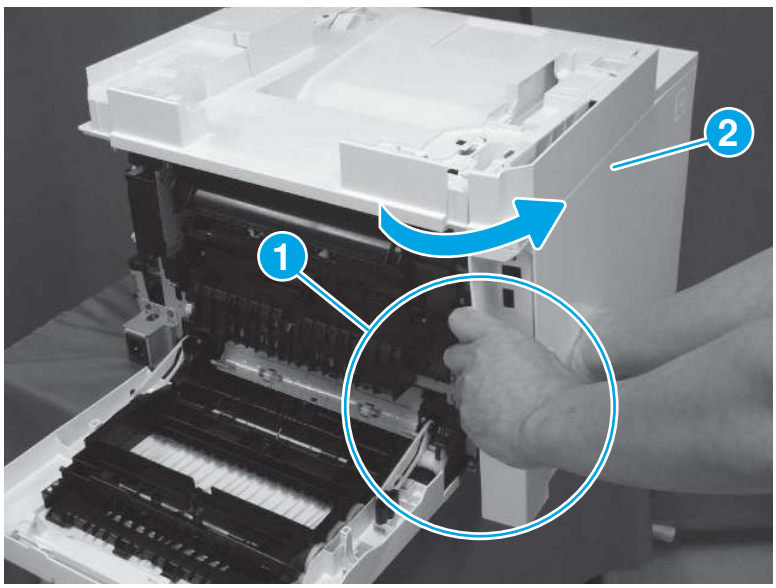Figure 4-202 **Disengage the cover corner**



5. Remove the left cover (callout 1).

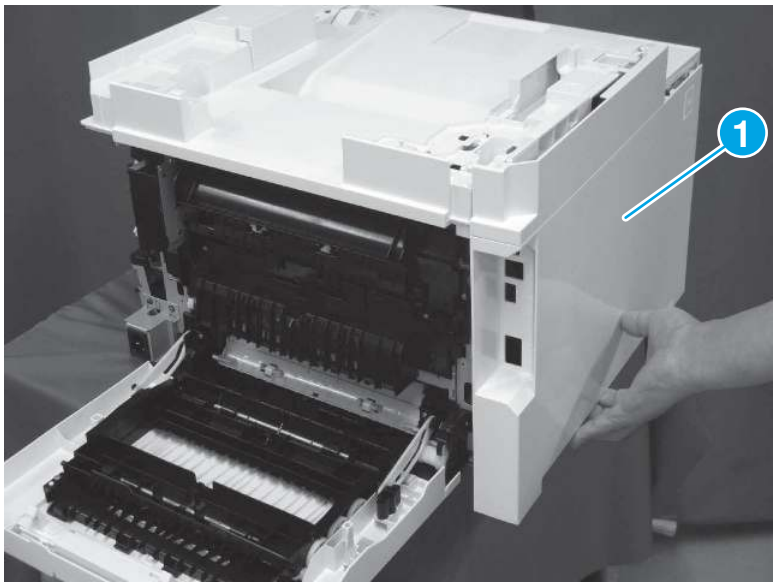Figure 4-203 **Remove the cover**



3. Remove the ISA (MFP)

Follow the procedure below to remove and replace the ISA.


1. Open the ISA, and then remove the ISA FFC cover (callout 1).

Figure 4-204 **Remove the FFC cover**



2. Disconnect three FFCs, and then remove one screw to release the ground cable.

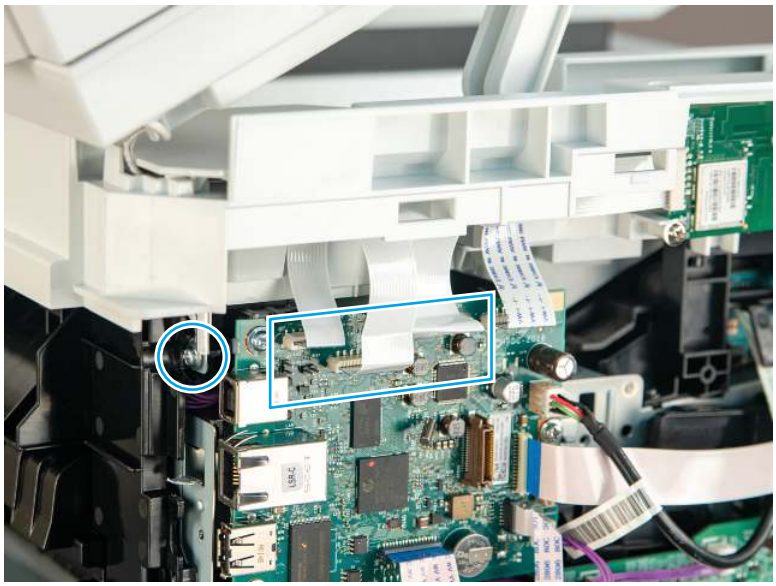Figure 4-205 Disconnect FFCs and remove screw



3. Release one tab (callout 1), and then rotate the ISA slider pin (callout 2) towards the front of the printer to release it. Remove the slider pin.


⚠ CAUTION: When the slider pin is removed, the ISA is not captive and can suddenly detach from the printer.

Figure 4-206 Remove the slider pin




4. Support the ISA, release the FFCs from the retainers, and then carefully pass the FFCs and the ground wire up through the slots in the top cover.

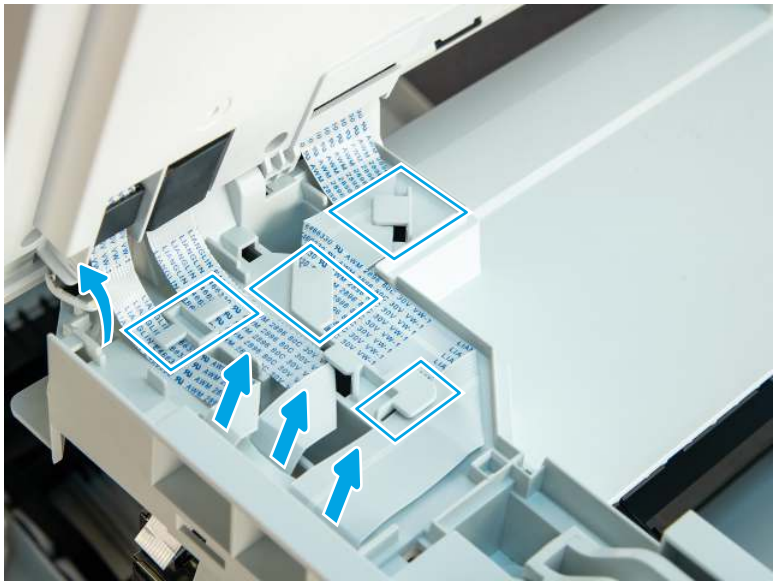Figure 4-207 **Release the FFCs and ground wire**



5. Slide ISA as shown below to release it.

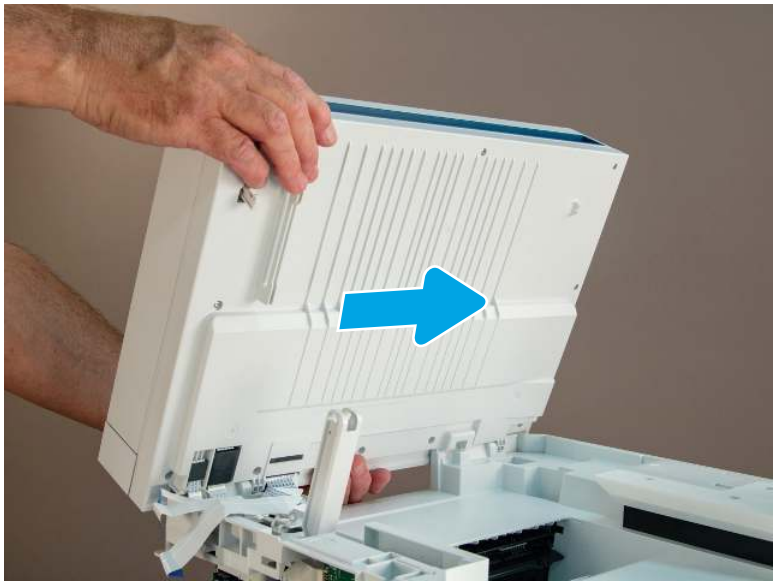Figure 4-208 **Release the ISA**



6. Remove the ISA.

Figure 4-209 **Remove the ISA**




4. Remove the right cover (SFP)

Follow the procedure below to remove and replace the right cover (SFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.


1. Remove one screw (callout 1).

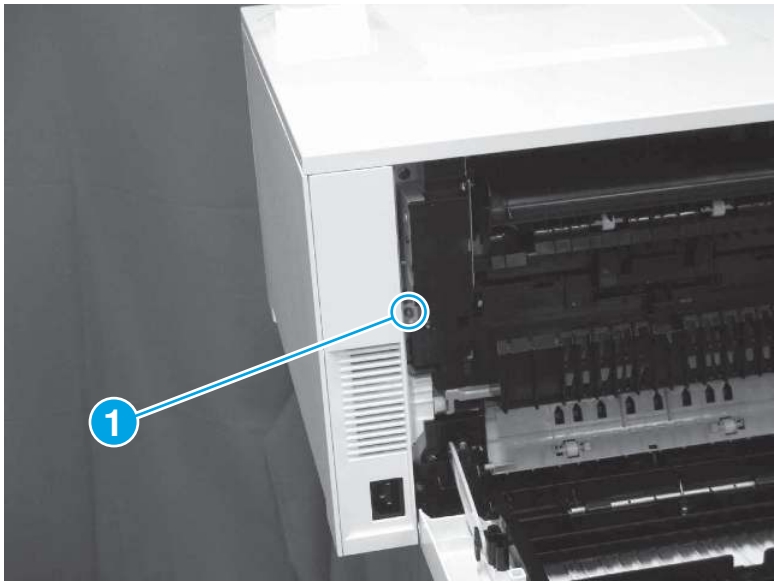Figure 4-210 **Remove one screw**




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to three tabs (callout 1). Release three tabs.

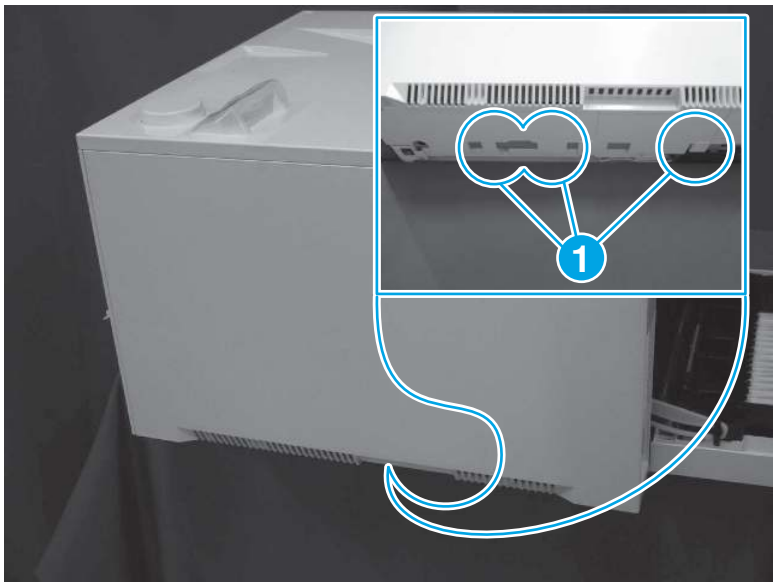Figure 4-211 Release three tabs




3. Press in on the side (callout 1) of the right cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

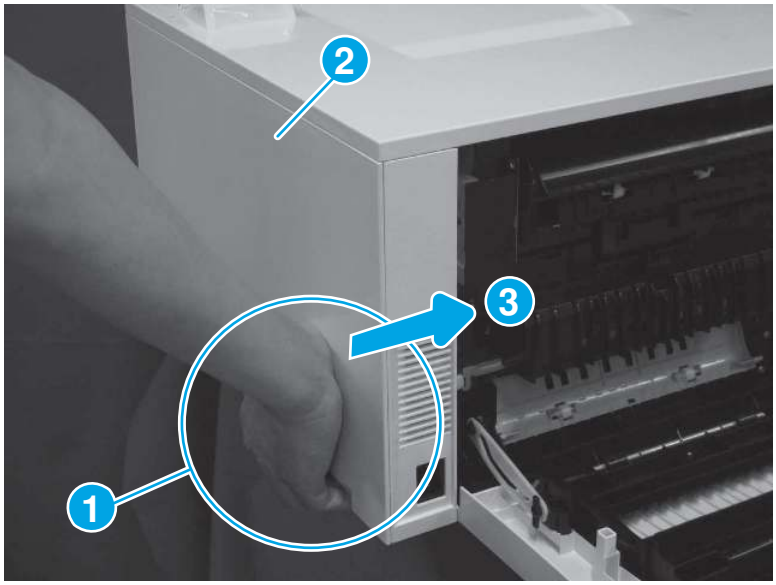Figure 4-212 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

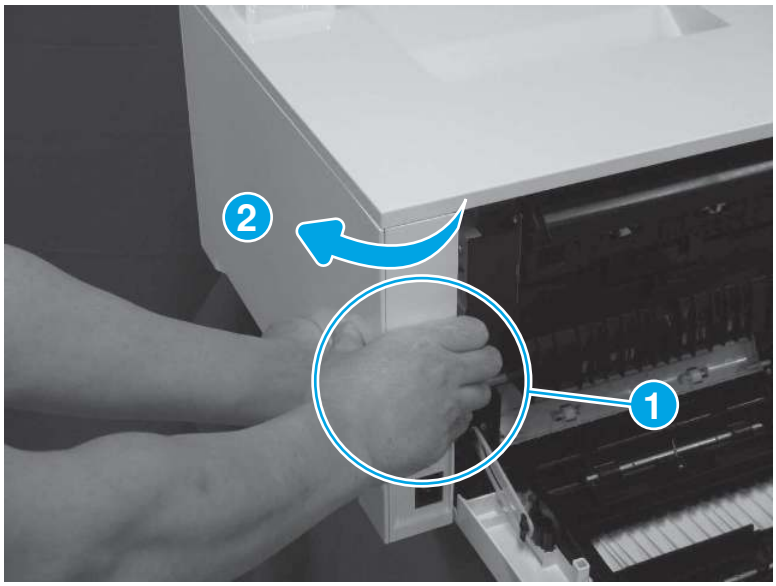Figure 4-213 Disengage the cover corner



5. Remove the right cover (callout 1).

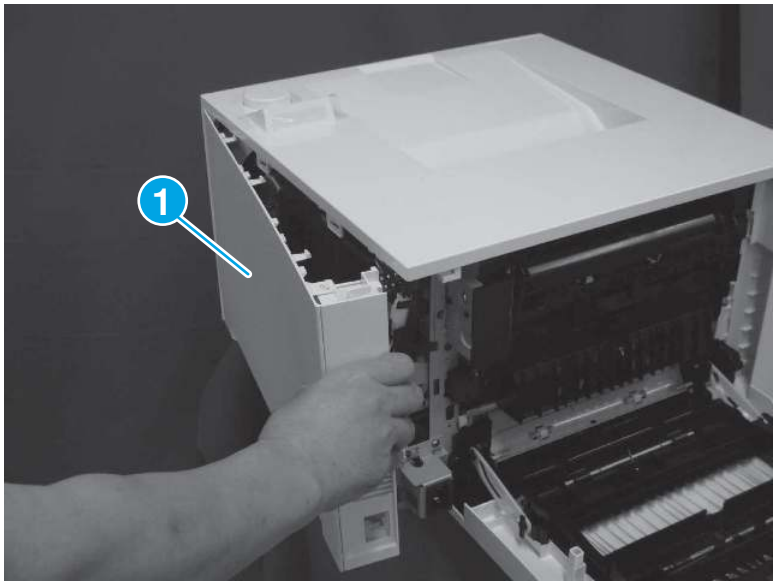Figure 4-214 Remove the cover




5. Remove the right cover (MFP)

Follow the procedure below to remove and replace the right cover (MFP).

NOTE: The following procedure is for an MFP printer only. If this assembly is being removed to gain access to dependency parts for a SFP printer, skip this step.


1. Remove one screw (callout 1).

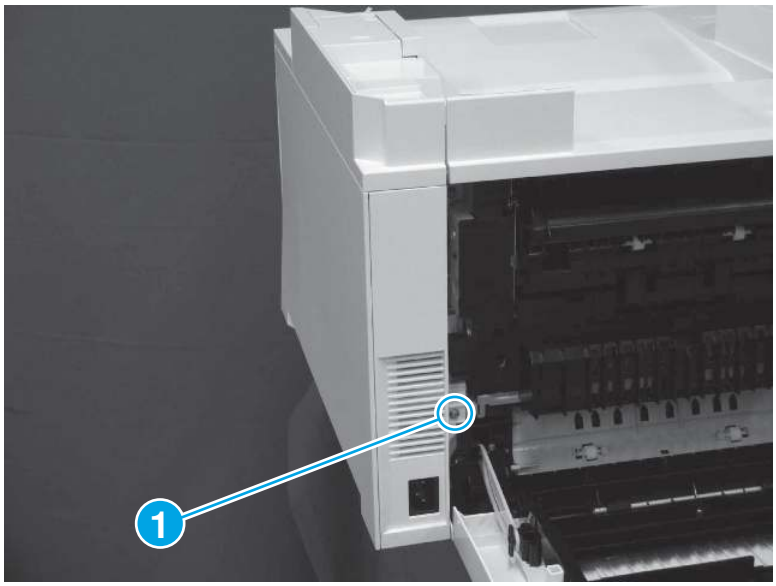Figure 4-215 **Remove one screw**




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to three tabs (callout 1). Release three tabs.

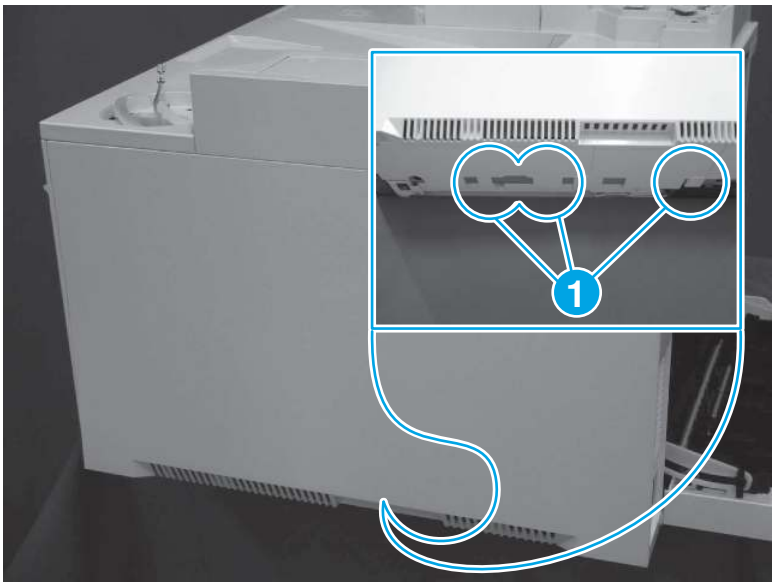Figure 4-216 **Release three tabs**




3. Press in on the side (callout 1) of the right cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

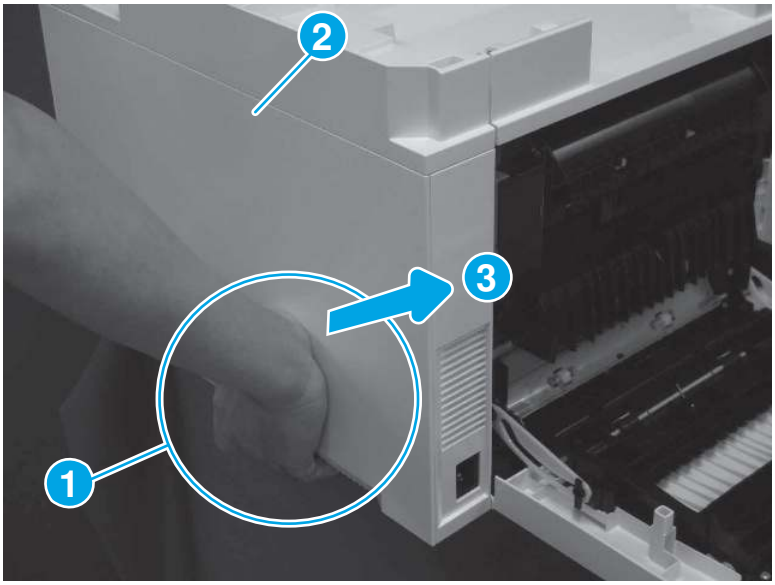Figure 4-217 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

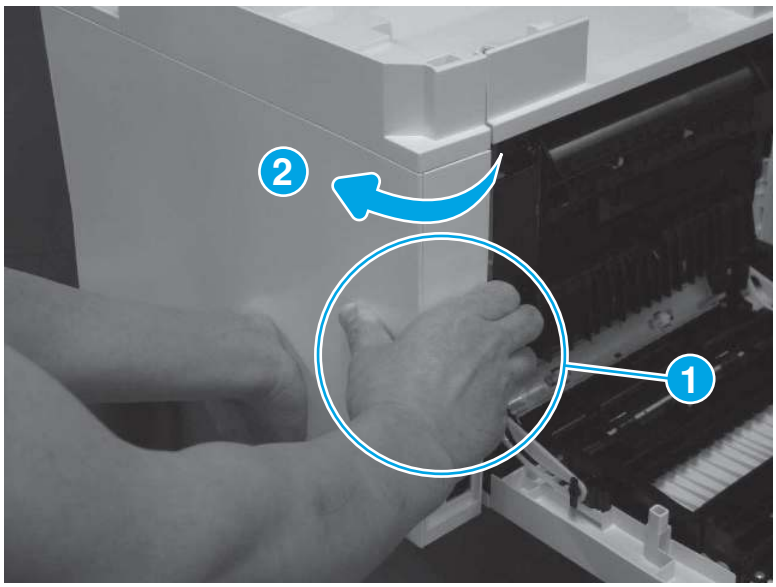Figure 4-218 Disengage the cover corner



5. Remove the right cover (callout 1).

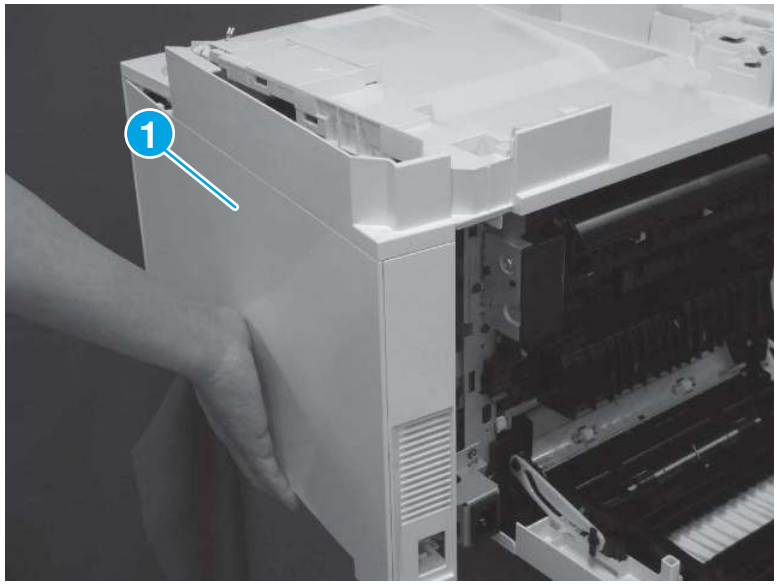Figure 4-219 **Remove the cover**



6. Remove the front cover


Follow the procedure below to remove and replace the front cover.

NOTE: Front cover removal is **identical** for both SFP and MFP models.

Reinstallation tip: Make sure to follow the special installation instructions for this part or step (located after the unpack and recycle or cleaning section).

1. Remove three screws (callout 1).

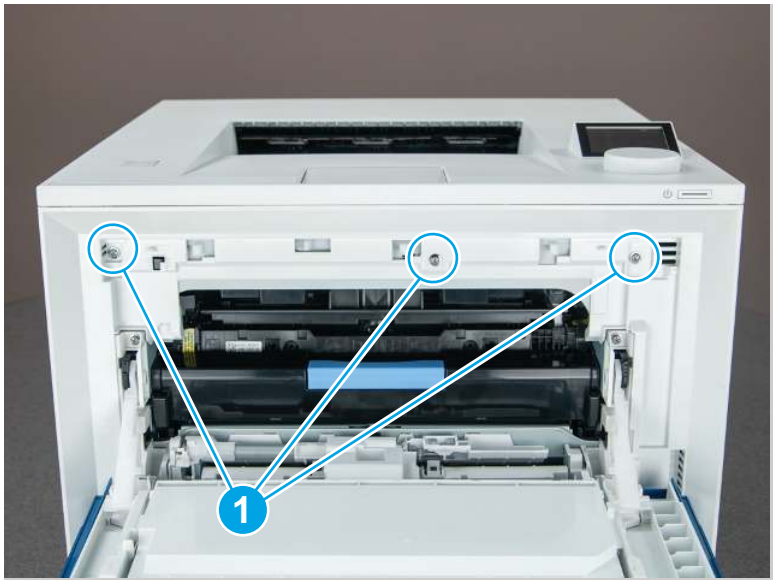
Figure 4-220 **Remove three screws**



2. Before proceeding, take note of the door release arm (callout 1). This arm can be easily dislodged when the cover is removed.


⚠ **CAUTION:** Do not lose the spring (callout 2) when removing the front cover.

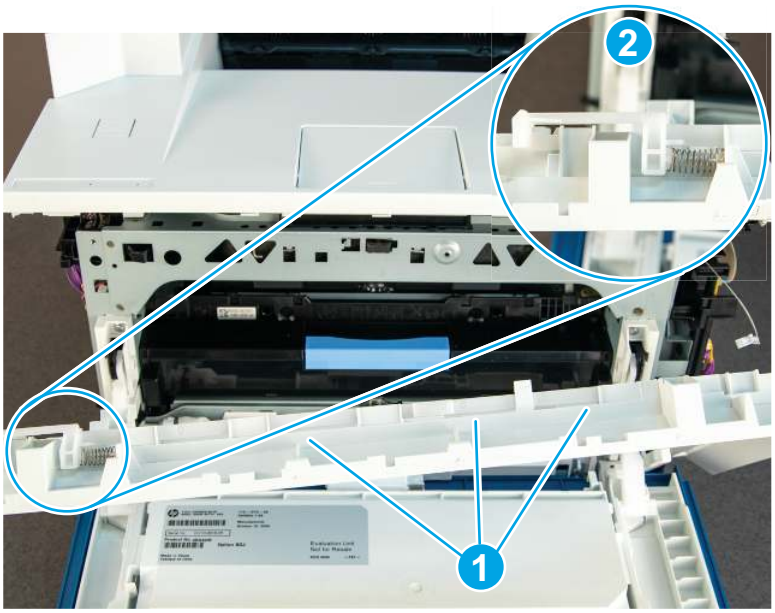Figure 4-221 **Door release arm**



3. Release four tabs (callout 1), and then remove the front cover (callout 2).

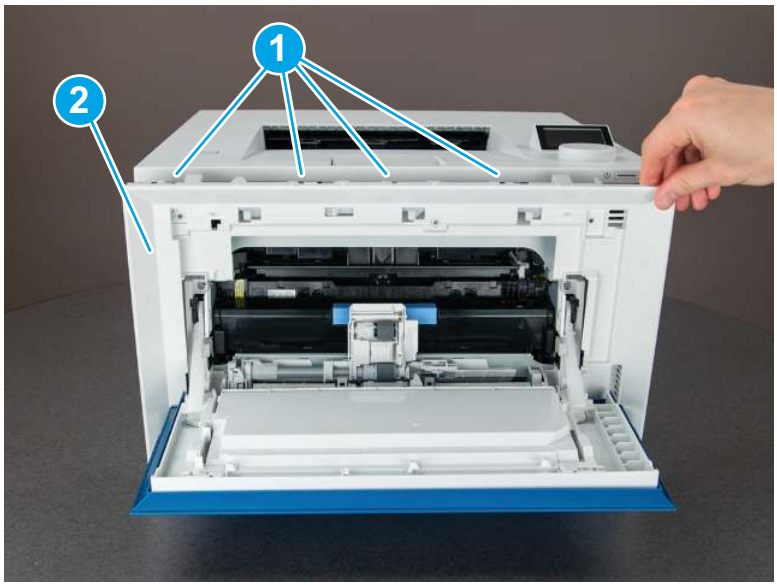Figure 4-222 **Remove the cover**



7. Remove the top cover (SFP)

Follow the procedure below to remove and replace the top cover (SFP).


NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.

1. **Wireless model only:** Raise and support the left side of the printer, remove one screw, and then separate the wireless PCA from the cover.

CAUTION: Do not attempt to completely remove the wireless PCA. Instead, gently move it out of the way.


TIP: To remove the screw without raising the printer, use a short-barrel screwdriver.

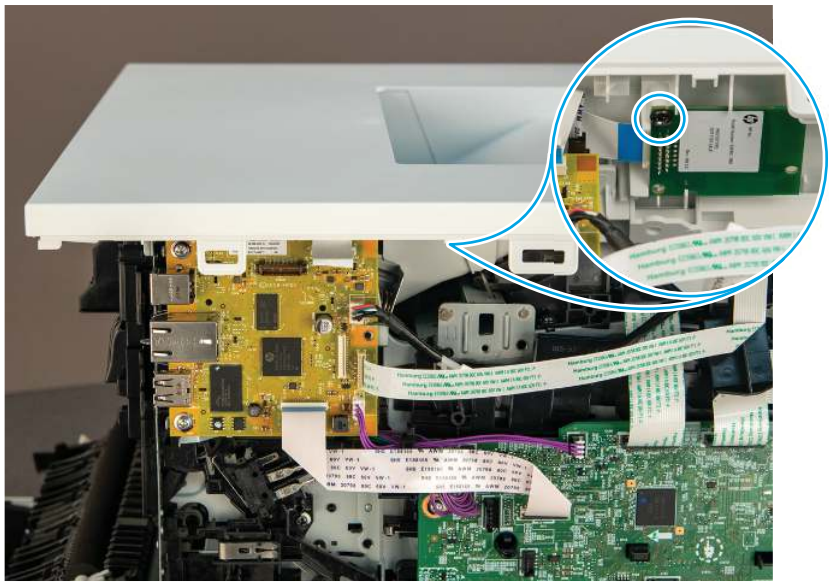Figure 4-223 **Remove one screw**



2. Disconnect one flat-flexible cable (FFC).

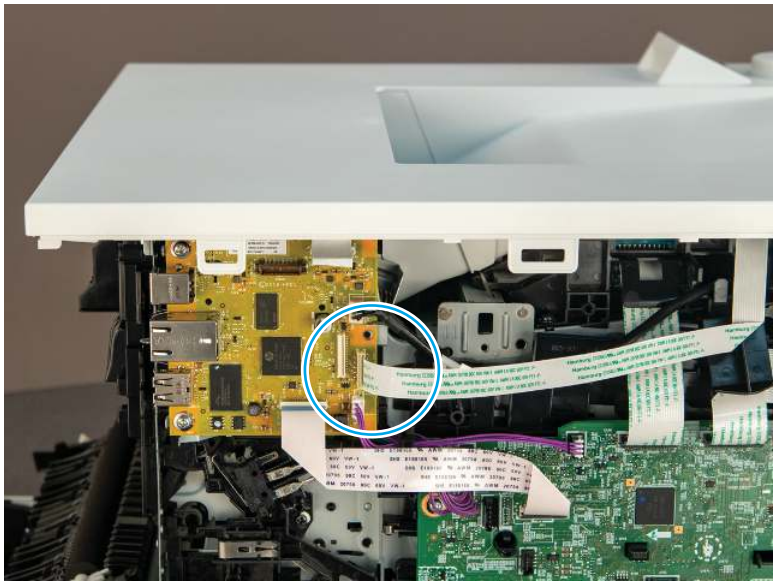Figure 4-224 **Disconnect one FFC**



3. Disconnect one FFC, and then remove one screw to release the ground wire.


NOTE: The front cover is shown installed in the figure below. However, this step is correct for removing the top cover.

Figure 4-225 Disconnect one FFC and remove one screw



4. Sliding the cover from the back of the printer towards the front to remove it.

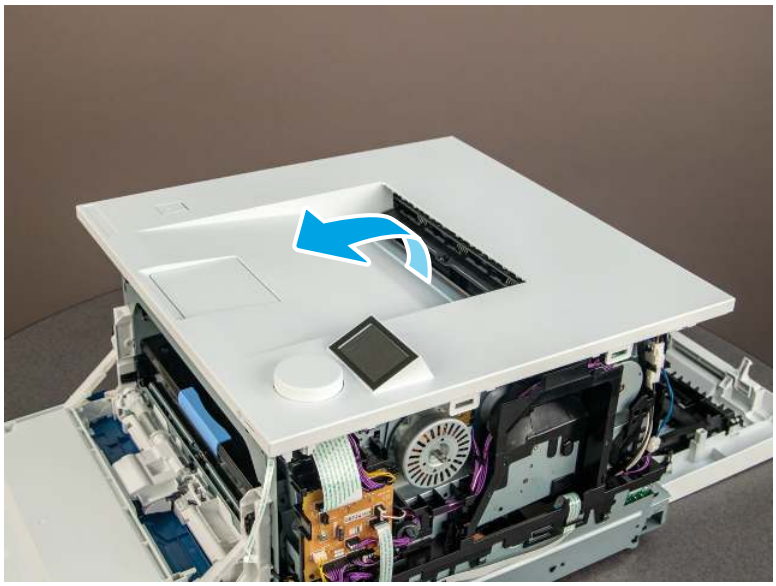Figure 4-226 Remove the cover




8. Remove the top cover (MFP)

Follow the procedure below to remove and replace the top cover (MFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.

1. Close the ISA lift arm.

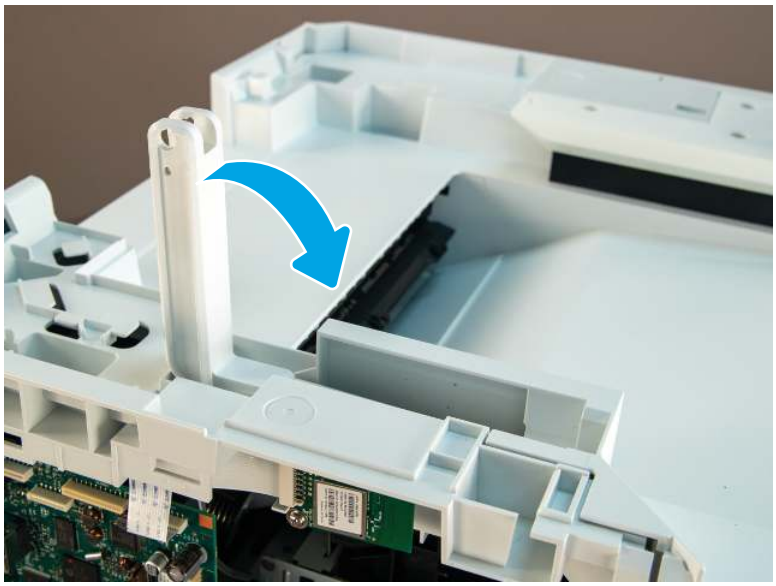
Figure 4-227 **Close the ISA lift arm**



2. Remove one screw.


⚠ **CAUTION:** The support arm is spring loaded and can unexpectedly spring into the open position. To avoid injury, do not place a finger in the screw well when the support arm is in the closed position.

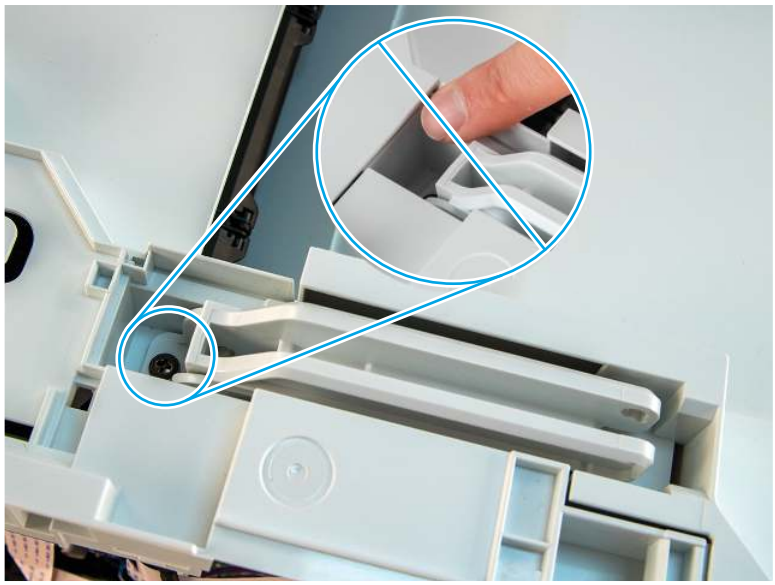Figure 4-228 **Remove one screw**



3. Rotate one end of the lift arm up (callout 1), and then slide the lift arm as shown below (callout 2) to release it. Remove the lift arm.

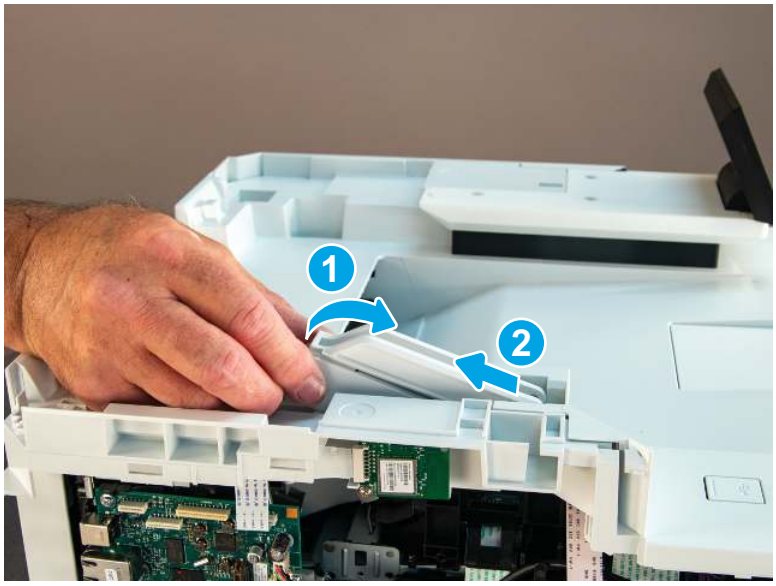Figure 4-229 Remove the lift arm




4. Do the following:

   a. Disconnect one FFC (control panel; callout 1).

   b. Remove one screw (callout 2), and then separate the wireless PCA from the top cover.


   NOTE: The wireless PCA does not need to be completely removed. Instead, release the FFC from the retainer (callout 3), and then gently move it out of the way.

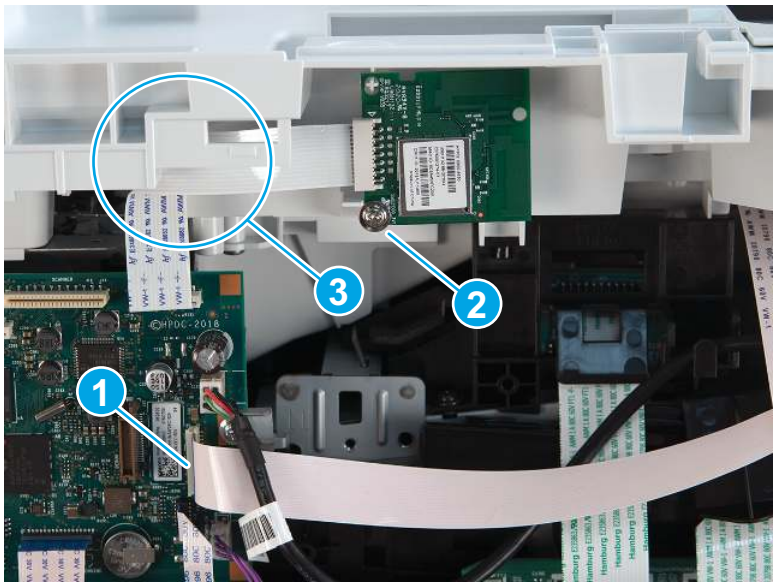Figure 4-230 Disconnect FFC and move the wireless PCA



5. Disconnect one FFC (power button), and then remove one screw (grounding sheet-metal plate).

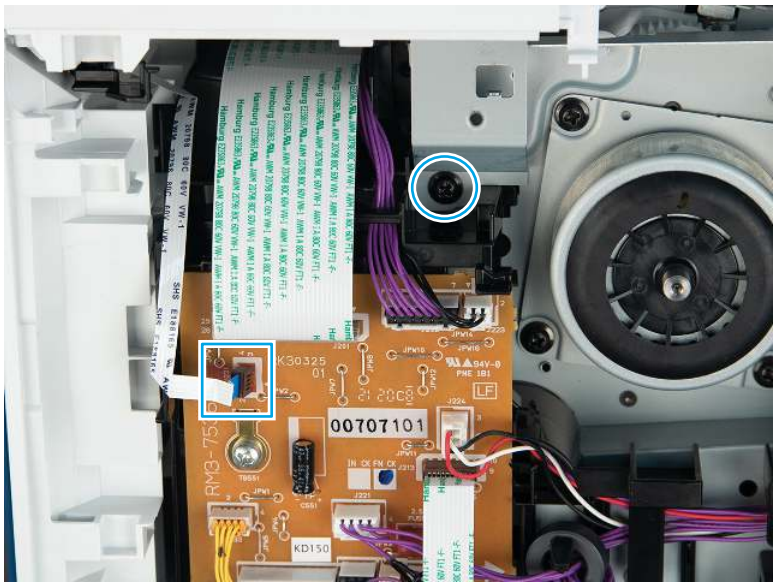Figure 4-231 **Disconnect one FFC and remove one screw**




6. Remove three screws.

Figure 4-232 **Remove three screws**



7. Release one tab and rotate one end of the base cover up (callout 1), and then slide the cover as shown (callout 2) to remove it.

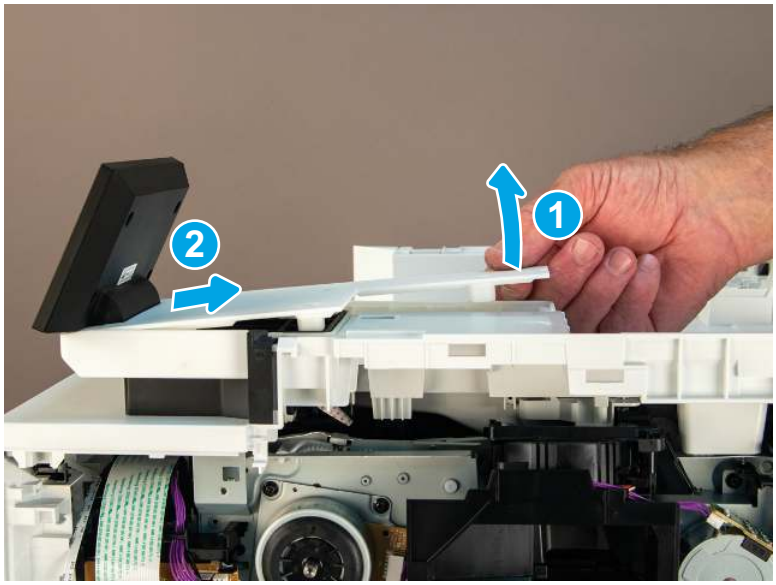Figure 4-233 Remove the cover



8. Disconnect two FFCs.

NOTE: Theses are zero-insertion force (ZIF) connectors. To remove the FFCs, first release the locking clip on the connector, and then pull the cable straight out of the connector.

TIP: For reinstallation, make sure that the line of the FFC is parallel with the body.

Figure 4-234 Disconnect two FFCs



9. Remove four screws.

NOTE: Two of the screws are self-tapping threads (black), and two of the screws are machine thread (silver).


Figure 4-235 Remove four screws



10. Lift the control panel and base straight up and off of the printer to remove them together.


NOTE: When handling the assembly, do not lose the ferrite (callout 1).

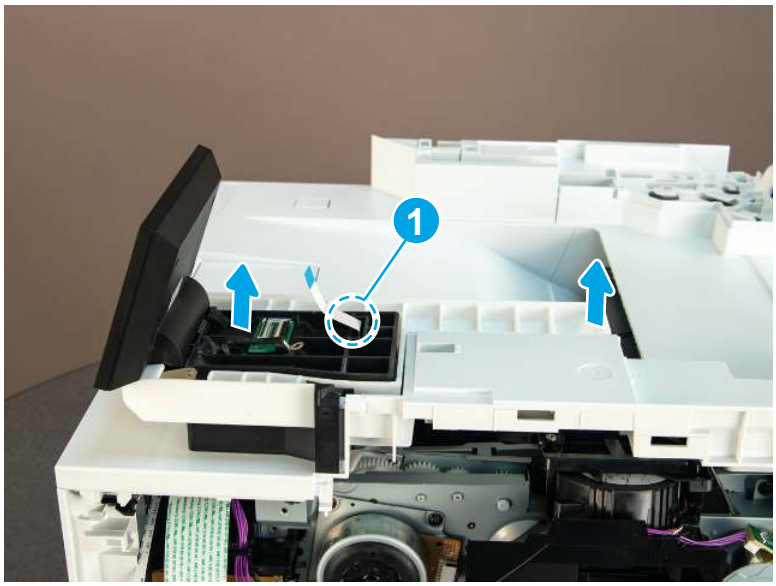Figure 4-236 Remove control panel and base



11. Remove three screws.

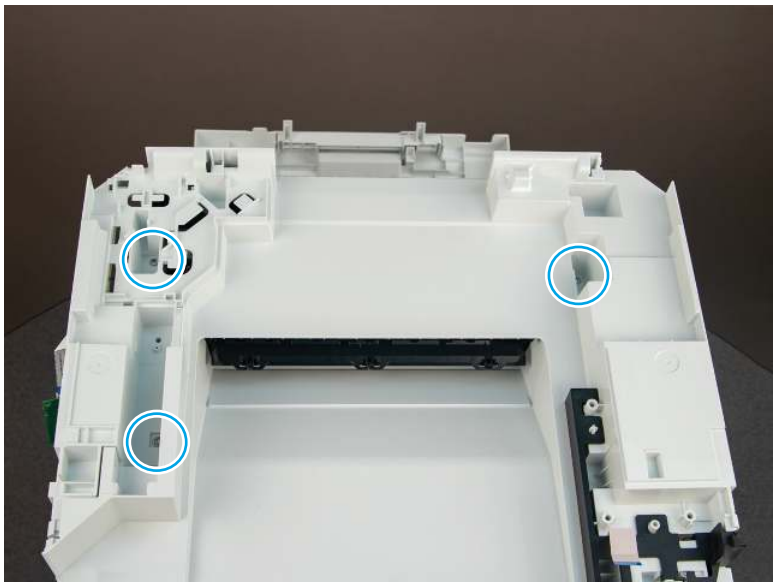
Figure 4-237 Remove three screws



12. Sliding the cover from the back of the printer to the front to remove it.

TIP: Slightly move the control-panel ground bracket (circled) back and forth to help release the top cover.

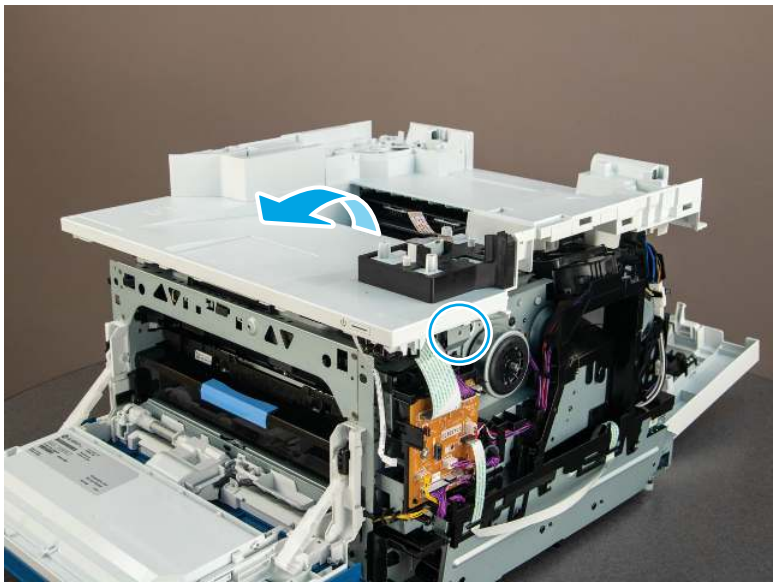Figure 4-238 Remove the cover



13. **When the cover is reinstalled**: Make sure that the front USB assembly is correctly positioned under the cover.

Figure 4-239 **Front USB assembly**




9. Remove the front USB

Follow the procedure below to remove the front USB.

NOTE: An MFP printer is shown in this section. However, the procedure is correct for all printer models.

1. Do the following:
   a. Disconnect one connector (callout 1).
   b. Release the wire harness from the retainer (callout 2).
   c. Remove one screw (callout 3), and then remove the front USB and bracket together.

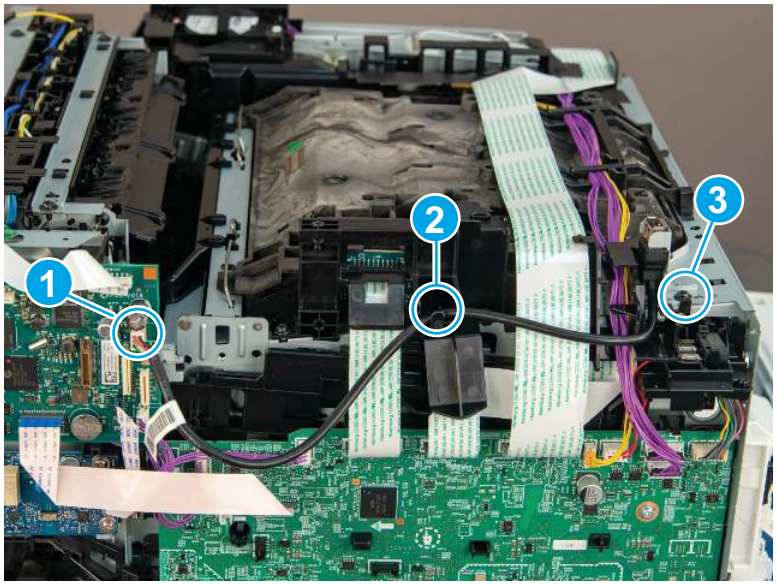Figure 4-240 Remove the assembly



2. Remove one screw, and then separate the front USB and cable from the bracket.

Figure 4-241 Separate the assembly from the bracket



10. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: 

Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.


11. Special installation instructions - Front cover

Follow the special instructions below to install the front cover.

NOTE: Front cover installation is **identical** for both the SFP and MFP models.


1. If the door release arm becomes dislodged when handling the cover, install it as shown below (callout 1, 2).

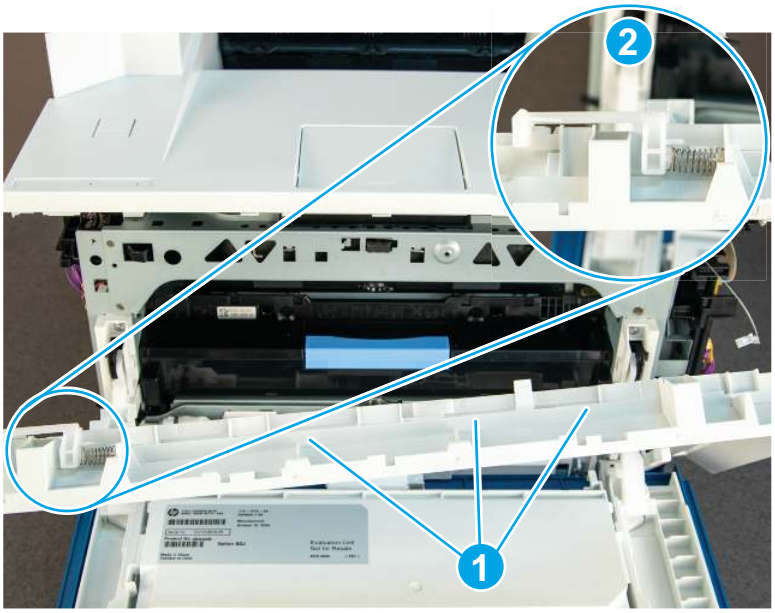Figure 4-242 Door release arm installed



2. At the right and left side of the front cover, align the holes (callout 1) in the cover with the alignment pins (callout 2) on the chassis.

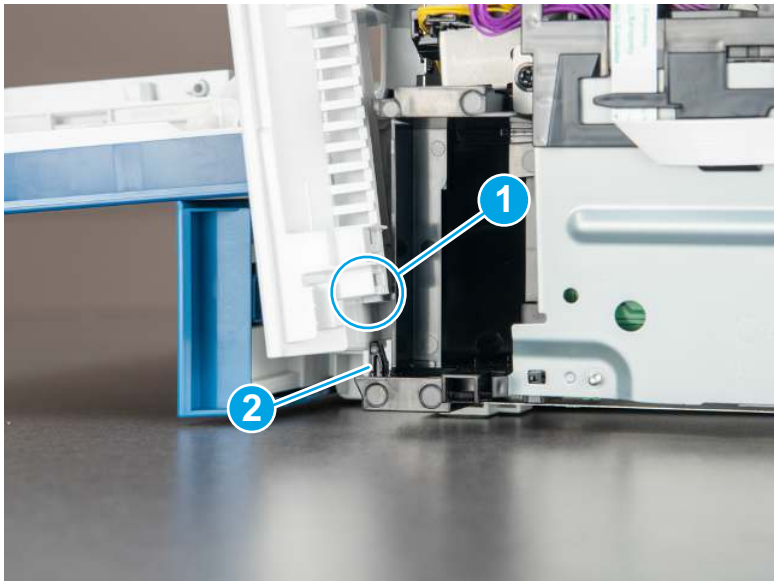
Figure 4-243 Cover alignment pins



3. Rotate the top of the cover towards the printer to install it.

IMPORTANT: Verify that the spring loaded door release button (on the left side of the cover) correctly functions.

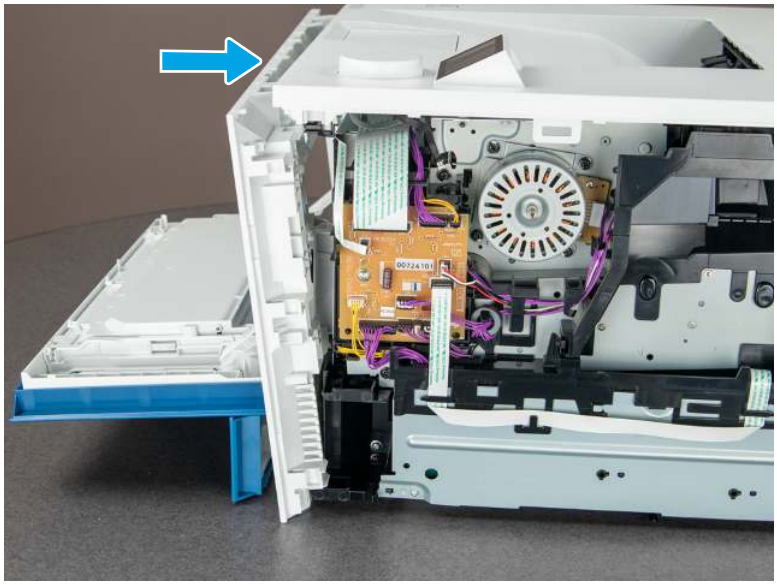Figure 4-244 Install the cover



Removal and replacement: Wireless PCA (SFP)

Learn about wireless (WiFi) PCA

Mean time to repair: 6 minutes

Service level: Easy

Before performing service

Turn the printer power off

- Disconnect the power cable.

> ⚠ **WARNING!** To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-19 Part information

Part number	Part description
0960-4630	WIFI PCA 802.11N Dual Band Radio

Required tools

- #2 Phillips screwdriver with a magnetic tip and a 152 mm (6 in) shaft length

After performing service

Turn the printer power on

- Connect the power cable.

- Use the power switch to turn the power on.

Post service test

Print any pages necessary to make sure the printer is functioning correctly.

1. Remove the left cover (SFP)


Follow the procedure below to remove and replace the left cover (SFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.

TIP: There might be a small cover installed on the USB port located at the back of the printer. If installed, remove this cover now.


1. Remove one screw (callout 1).

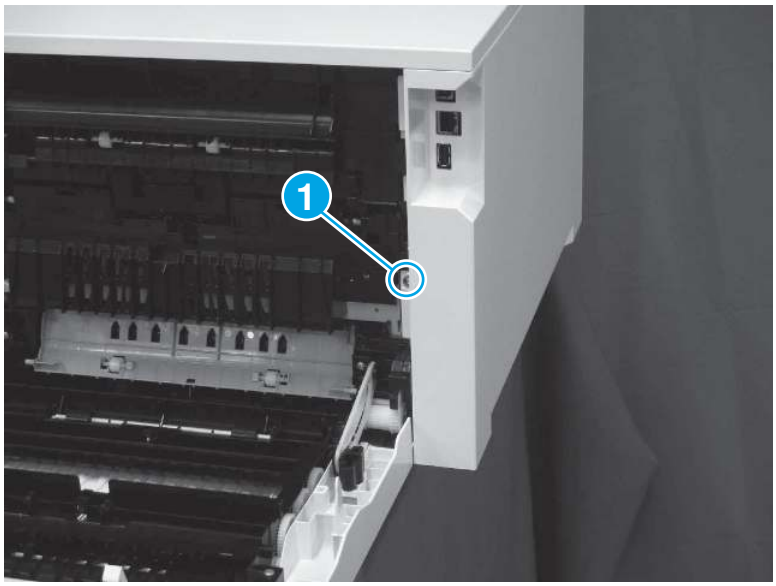Figure 4-245 **Remove one screw**




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

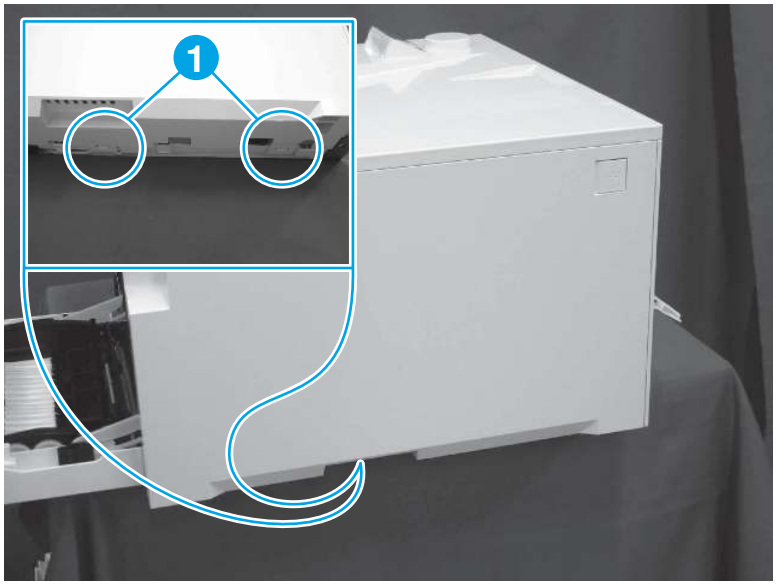Figure 4-246 **Release two tabs**




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

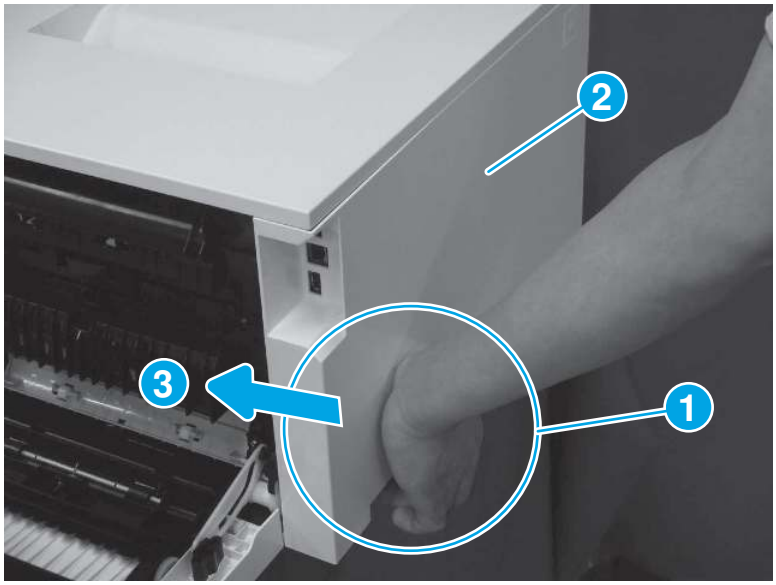Figure 4-247 **Release the rear cover corner**




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

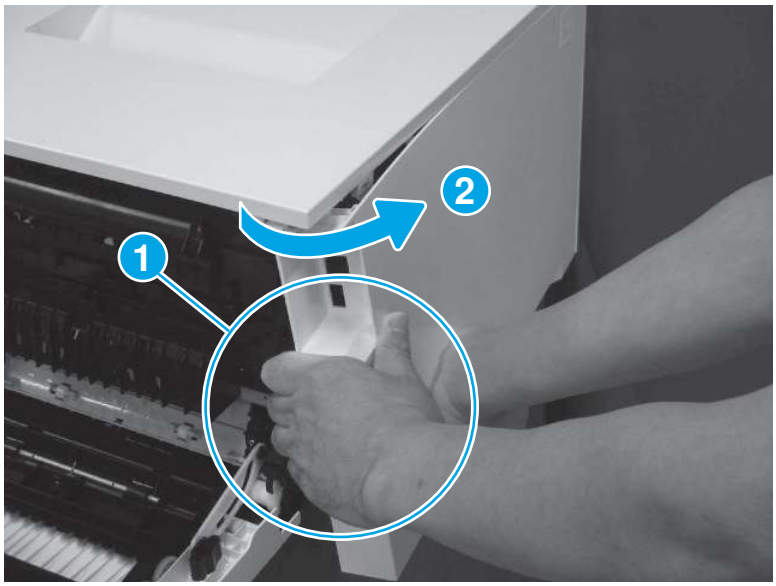Figure 4-248 Disengage the cover corner



5. Remove the left cover (callout 1).

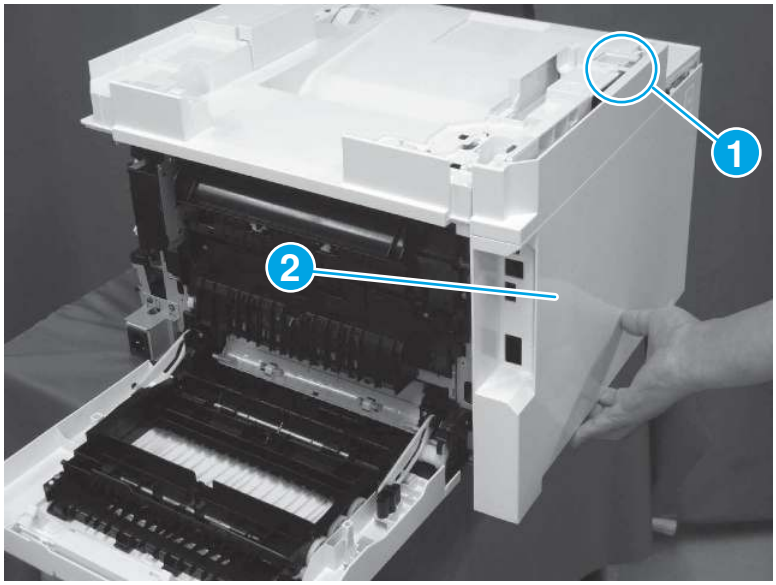Figure 4-249 Remove the cover




2. Remove the Wireless PCA PCA (SFP)

Follow the procedure below to remove the wireless PCA (SFP)

1. Raise and support the left side of the printer, and then remove one screw.

TIP: To remove the screw without raising the printer, use a short-barrel screwdriver.

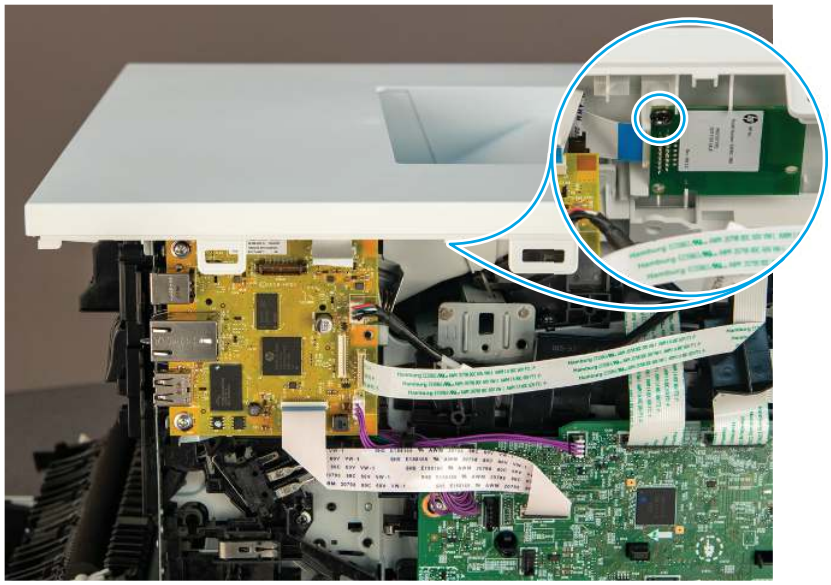Figure 4-250 Remove one screw



2. Disconnect one FFC and then remove the wireless PCA.

Figure 4-251 Remove the PCA



3. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: 

Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.

Removal and replacement: Wireless PCA (MFP)

Learn about wireless (WiFi) PCA

Mean time to repair: 6 minutes

Service level: Easy

Before performing service

Turn the printer power off

- Disconnect the power cable.

WARNING! To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-20 Part information

Part number	Part description
0960-4630	WIFI PCA 802.11N Dual Band Radio

Required tools

- #2 Phillips screwdriver with a magnetic tip and a 152 mm (6 in) shaft length

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test

Print any pages necessary to make sure the printer is functioning correctly.

1. Remove the left cover (MFP)


Follow the procedure below to remove and replace the left cover (MFP).

NOTE: The following procedure is for an MFP printer only. If this assembly is being removed to gain access to dependency parts for a SFP printer, skip this step.

TIP: There might be a small cover installed on the USB port and/or the fax port located at the back of the printer. If installed, remove these covers now.


1. Remove one screw (callout 1).

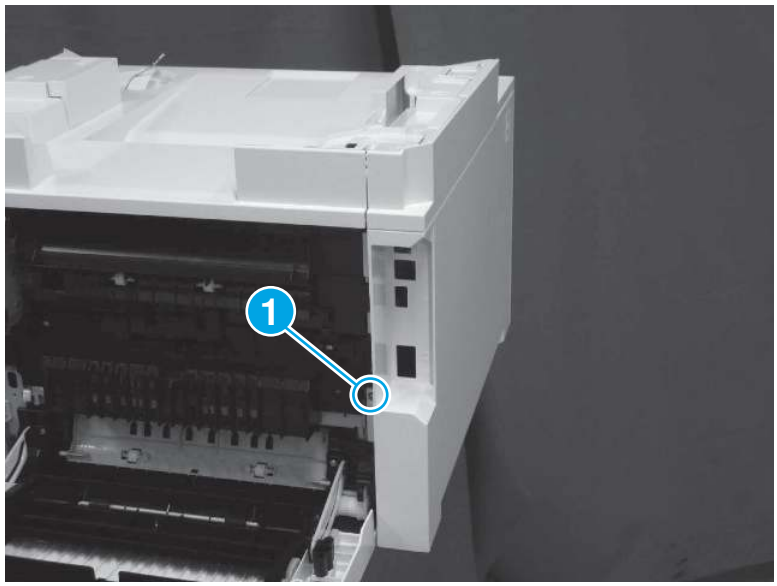Figure 4-252 **Remove one screw**




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

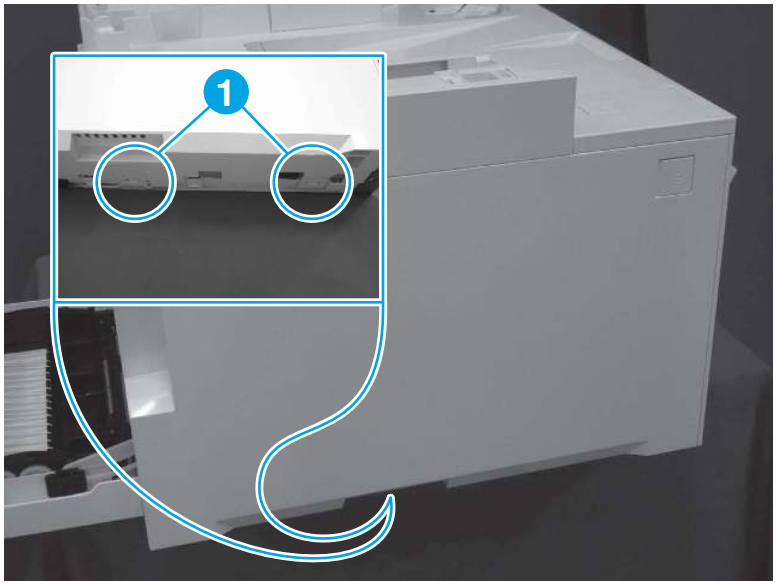Figure 4-253 Release two tabs




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

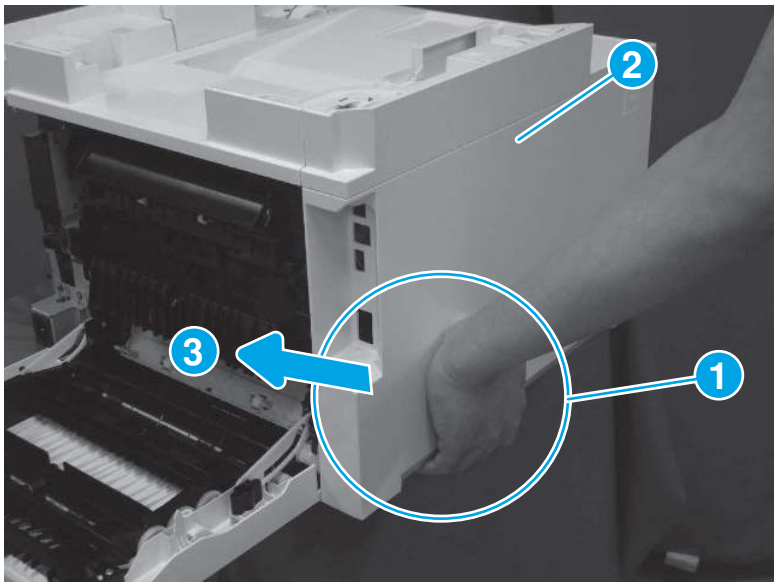Figure 4-254 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

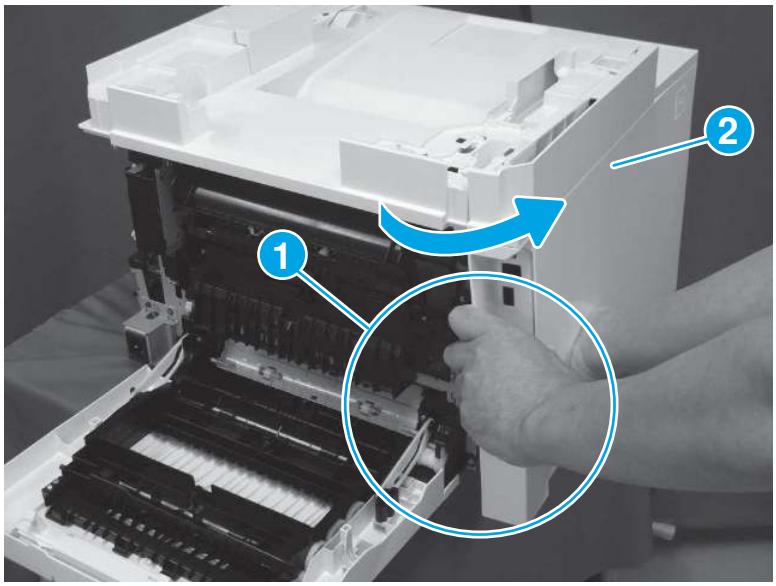Figure 4-255 Disengage the cover corner



5. Remove the left cover (callout 1).

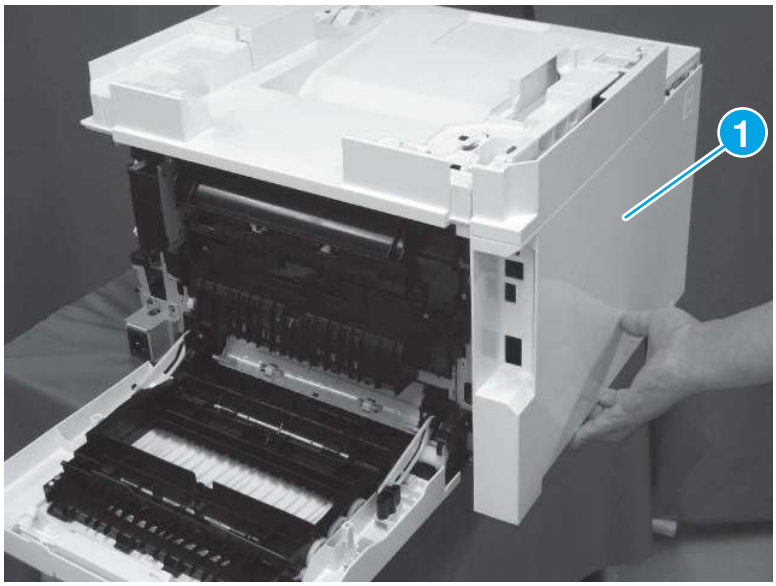Figure 4-256 Remove the cover




2. Remove the wireless PCA (MFP)

Follow the procedure below to remove the wireless PCA (MFP)

1. Remove one screw, and then carefully separate the wireless PCA from the printer.

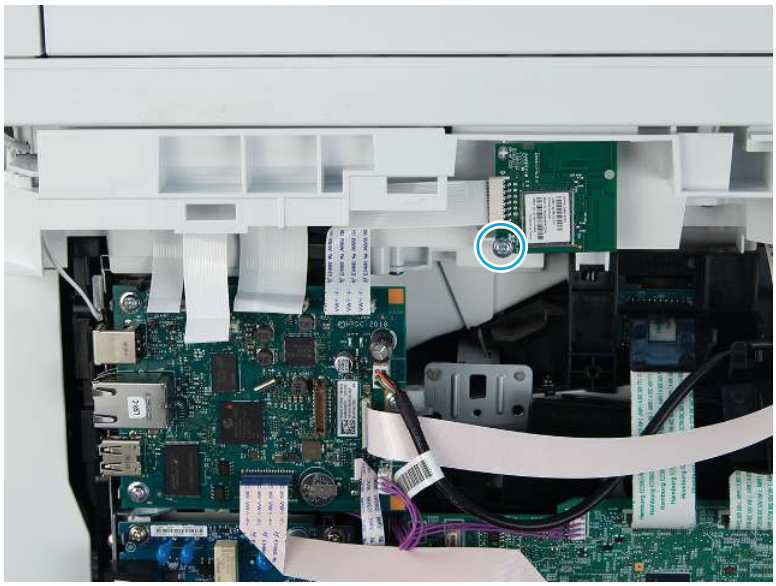Figure 4-257 Remove one screw



2. Disconnect one FFC and then remove the wireless PCA.

Figure 4-258 Remove the PCA



3. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: 

Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.

Removal and replacement: Fax PCA (MFP)

Learn about fax PCA

Mean time to repair: 8 minutes

Service level: Easy

Before performing service

Turn the printer power off

- Disconnect the power cable.

WARNING! To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-21 Part information

Part number	Part description
W1A78-67906	Fax PCA kit (USA)
W1A78-67907	Fax PCA kit (EURO)
W1A78-67908	Fax PCA kit (Brazil)
W1A78-67909	Fax PCA kit (Philippines)

Required tools

- #2 Phillips screwdriver with a magnetic tip and a 152 mm (6 in) shaft length

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test

Print any pages necessary to make sure the printer is functioning correctly.

1. Remove the left cover (MFP)


Follow the procedure below to remove and replace the left cover (MFP).

NOTE: The following procedure is for an MFP printer only. If this assembly is being removed to gain access to dependency parts for a SFP printer, skip this step.

TIP: There might be a small cover installed on the USB port and/or the fax port located at the back of the printer. If installed, remove these covers now.


1. Remove one screw (callout 1).

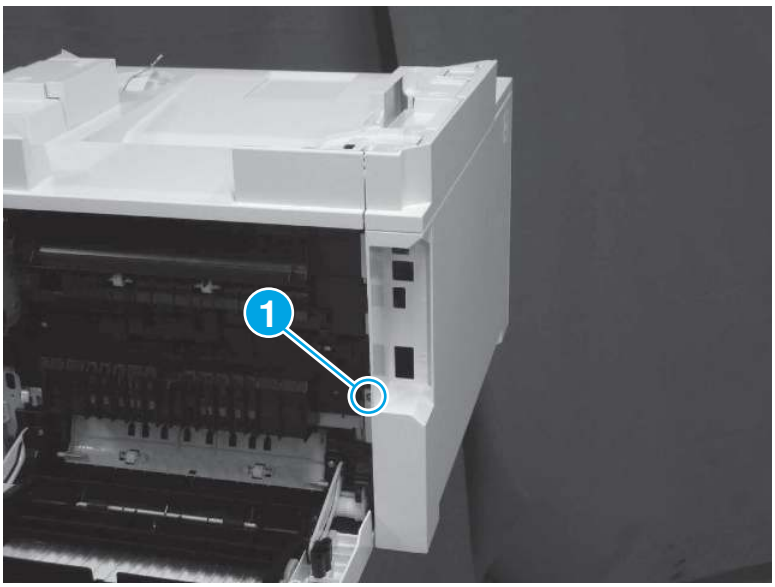Figure 4-259 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

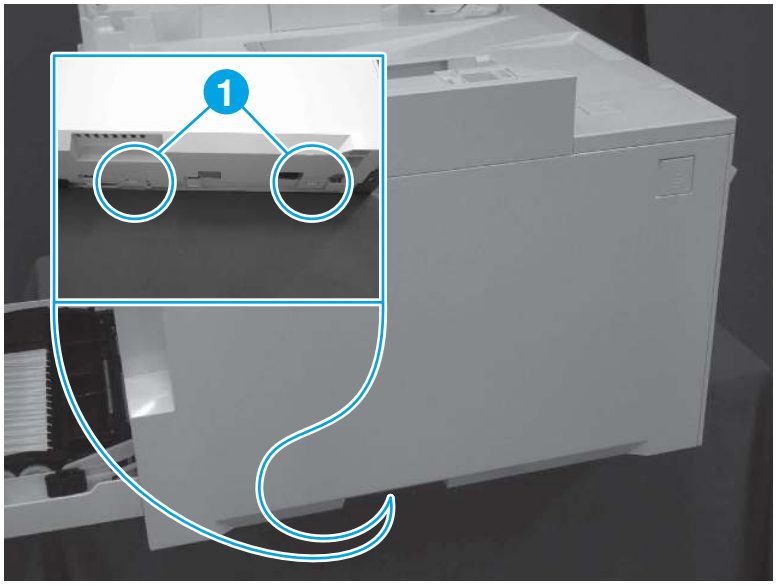Figure 4-260 Release two tabs




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

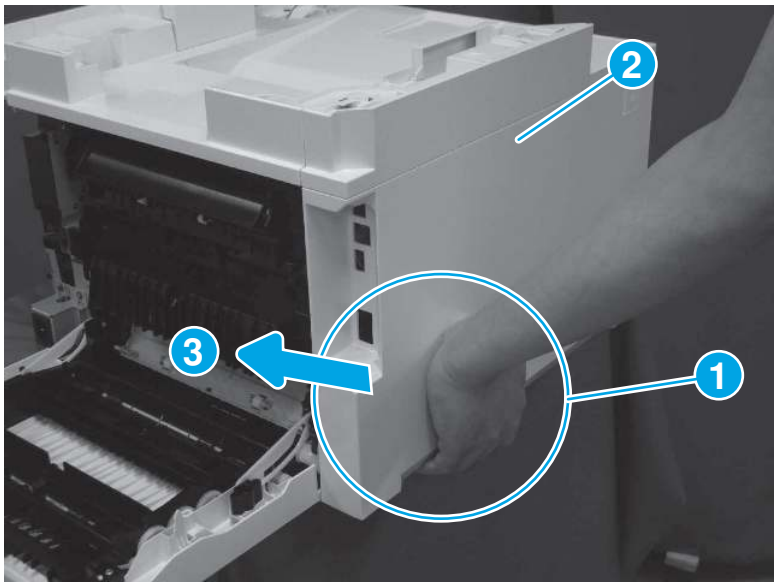Figure 4-261 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

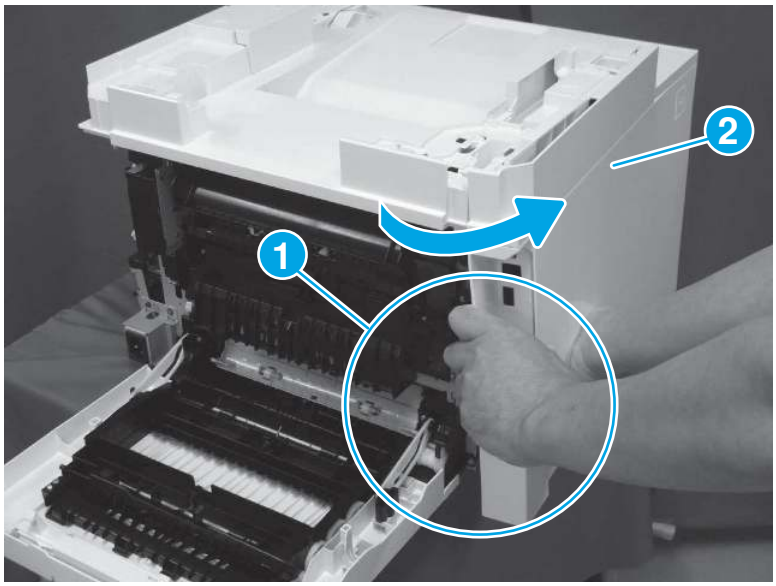Figure 4-262 Disengage the cover corner



5. Remove the left cover (callout 1).

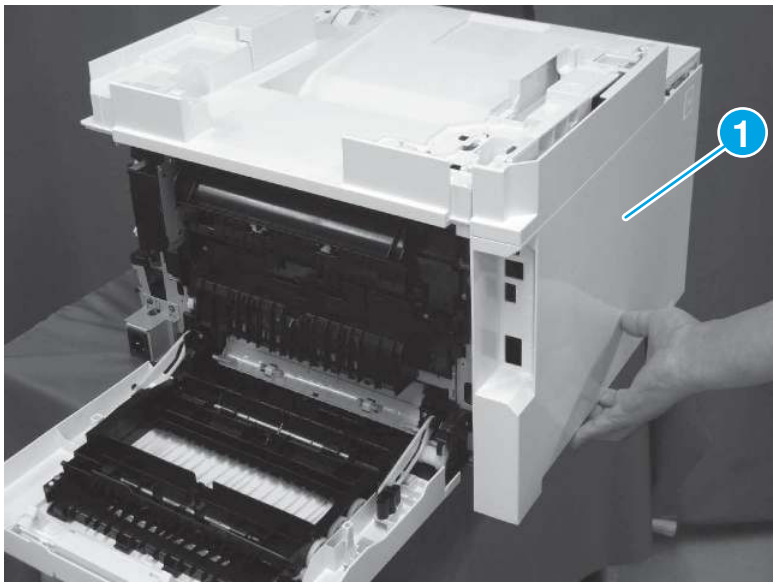Figure 4-263 Remove the cover




2. Remove the Fax PCA (MFP)

Follow the procedure below to remove the fax PCA (MFP)

- Disconnect one FCC connector (callout 1), remove three screws (callout 2), and then remove the fax PCA.

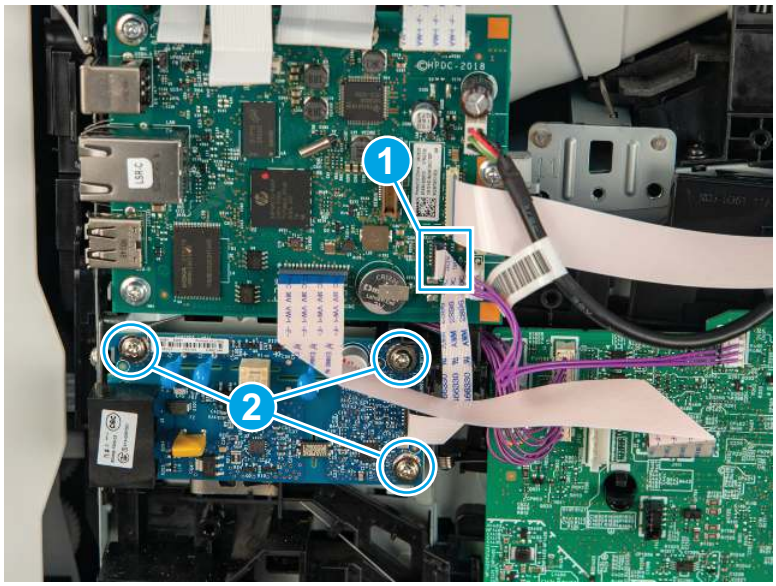Figure 4-264 Remove the fax PCA



3. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.

Removal and replacement: MP paper feed assembly

Learn about MP paper feed guide removal.

Mean time to repair: 5 minutes

Service level: Easy

Before performing service

Turn the printer power off

- Disconnect the power cable.

WARNING! To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-22 Part information

Part number	Part description
RM2-2741-000	MP paper feed assembly

Required tools

- No special tools are required to remove or install this assembly.

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test

Print any pages necessary to make sure the printer is functioning correctly.

1. Remove the left cover (SFP)


Follow the procedure below to remove and replace the left cover (SFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.

TIP: There might be a small cover installed on the USB port located at the back of the printer. If installed, remove this cover now.


1. Remove one screw (callout 1).

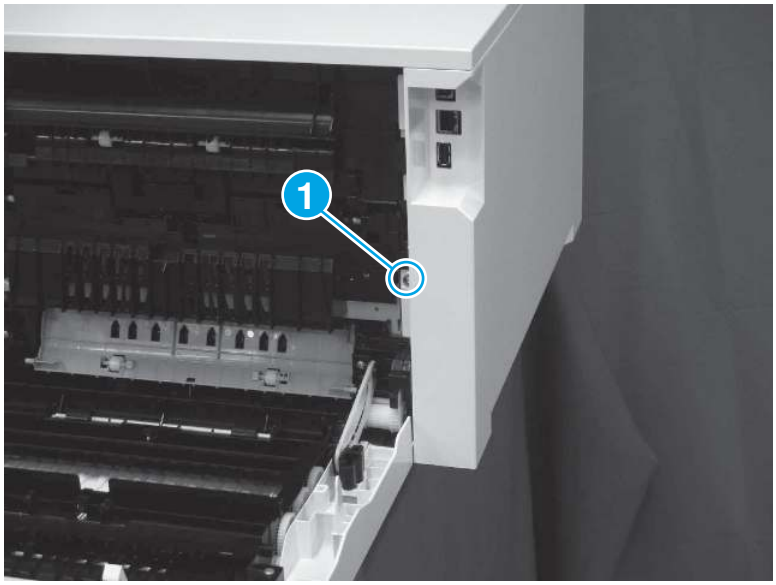Figure 4-265 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

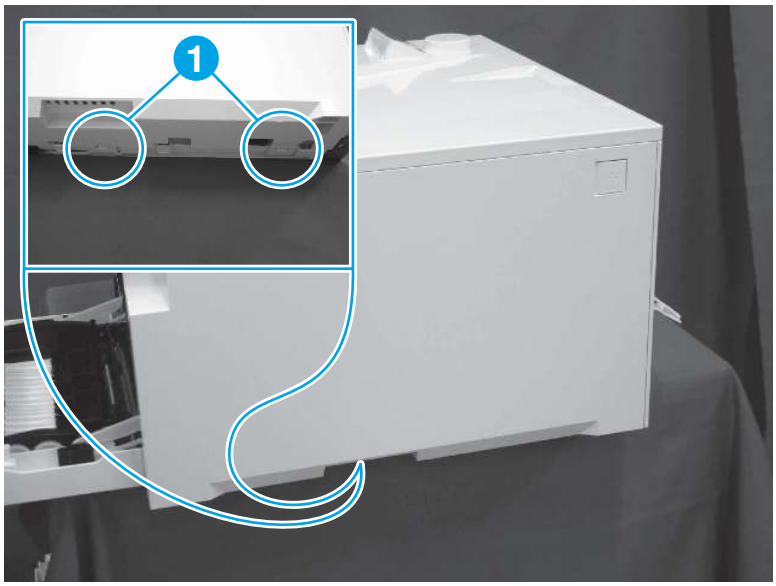Figure 4-266 Release two tabs




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

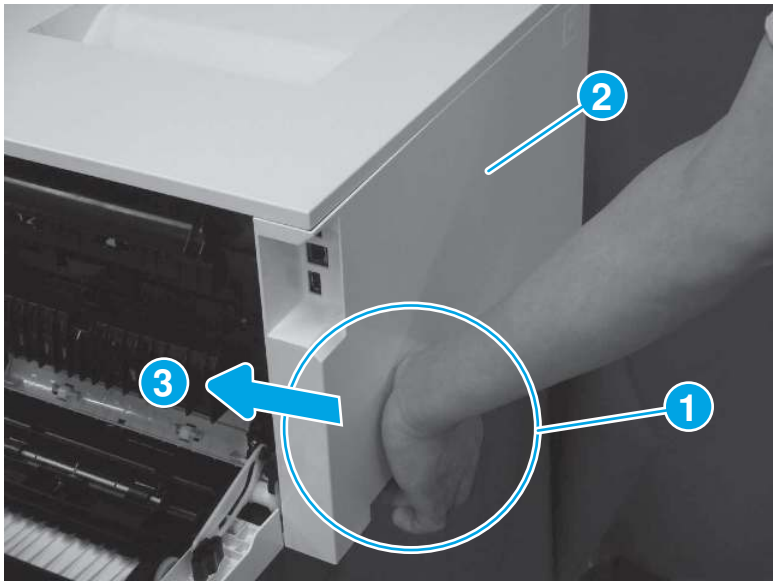Figure 4-267 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

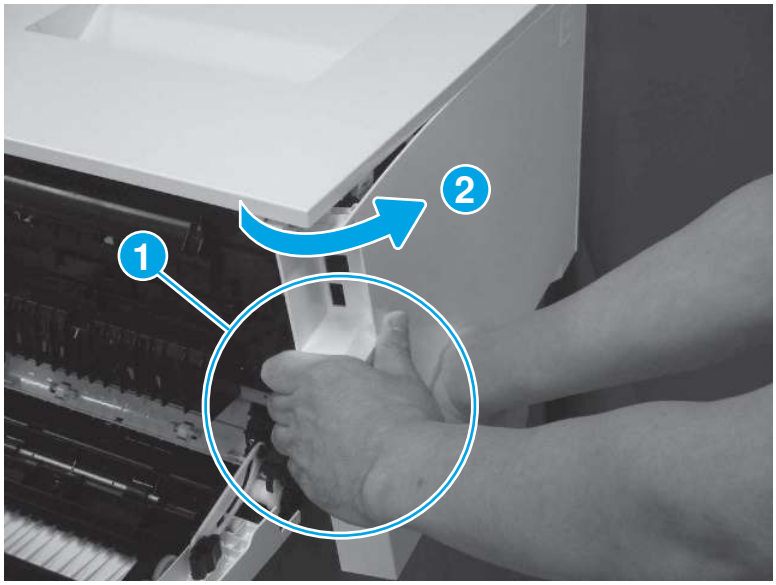Figure 4-268 Disengage the cover corner



5. Remove the left cover (callout 1).

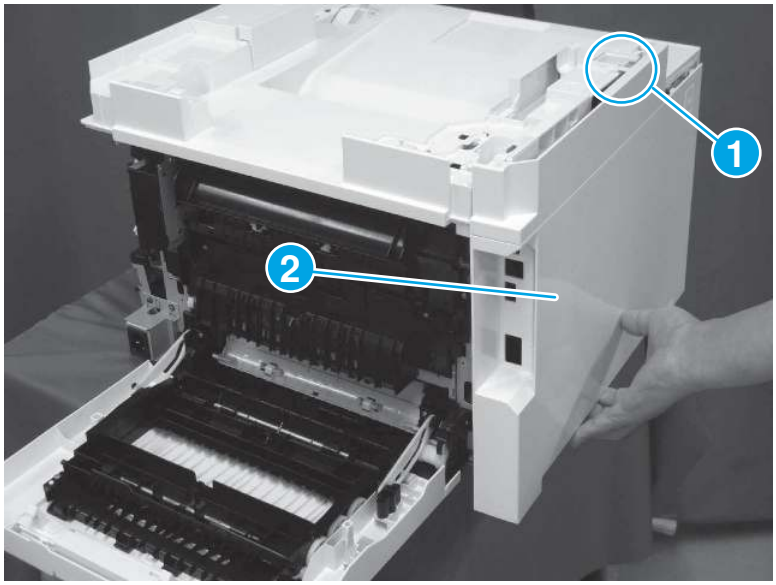Figure 4-269 **Remove the cover**



2. Remove the left cover (MFP)


Follow the procedure below to remove and replace the left cover (MFP).

NOTE: The following procedure is for an MFP printer only. If this assembly is being removed to gain access to dependency parts for a SFP printer, skip this step.

TIP: There might be a small cover installed on the USB port and/or the fax port located at the back of the printer. If installed, remove these covers now.


1. Remove one screw (callout 1).

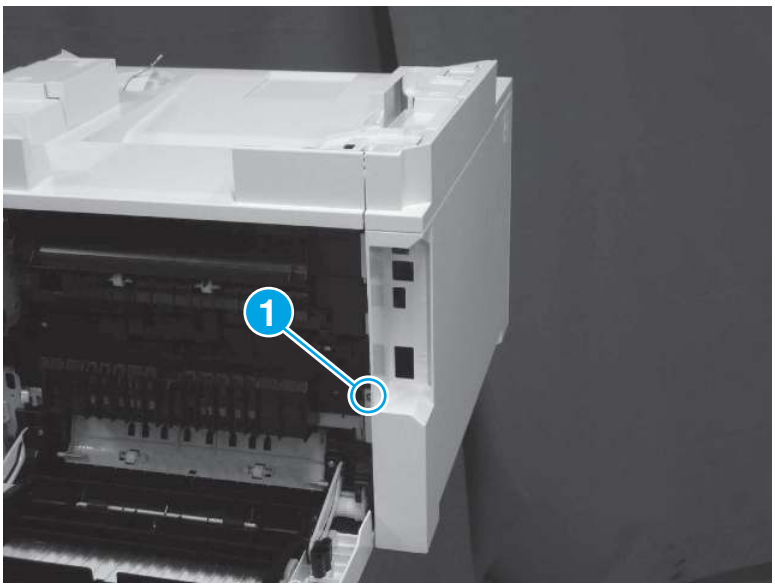Figure 4-270 **Remove one screw**




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

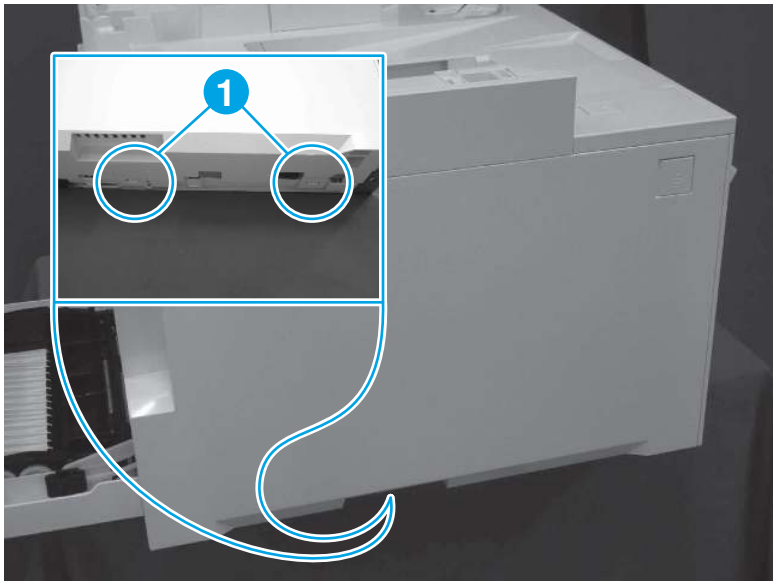Figure 4-271 Release two tabs




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

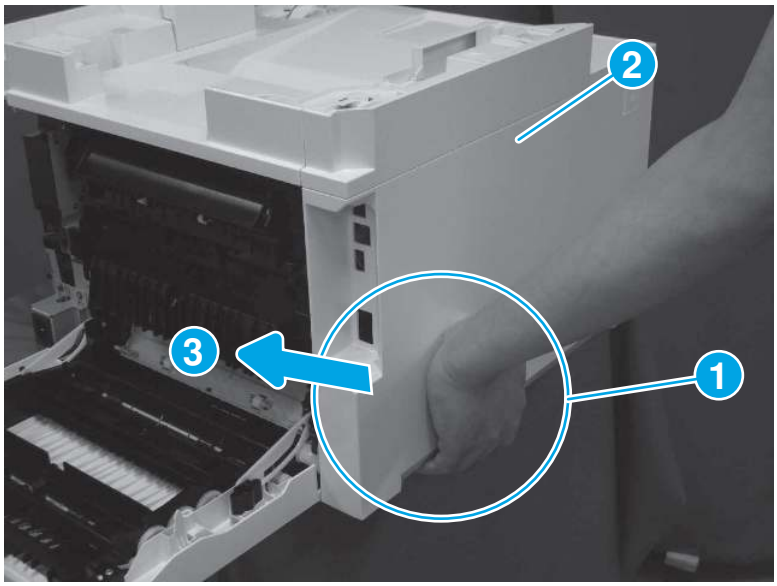Figure 4-272 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

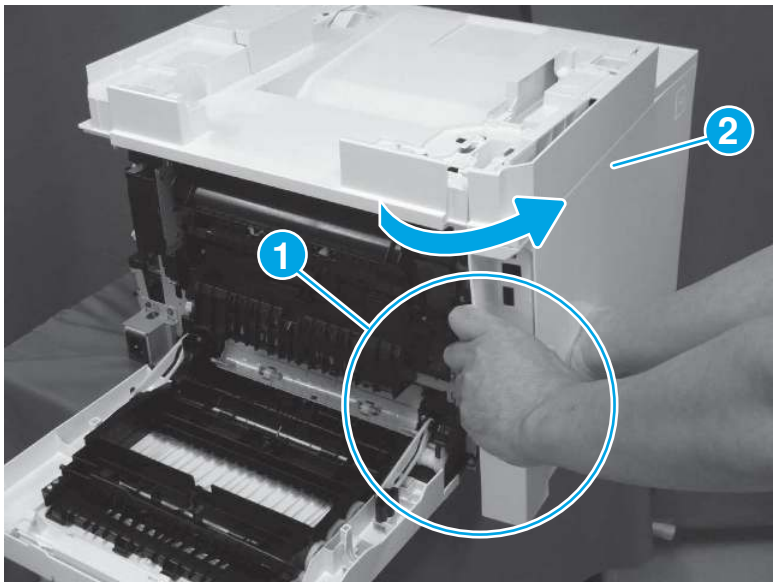Figure 4-273 Disengage the cover corner



5. Remove the left cover (callout 1).

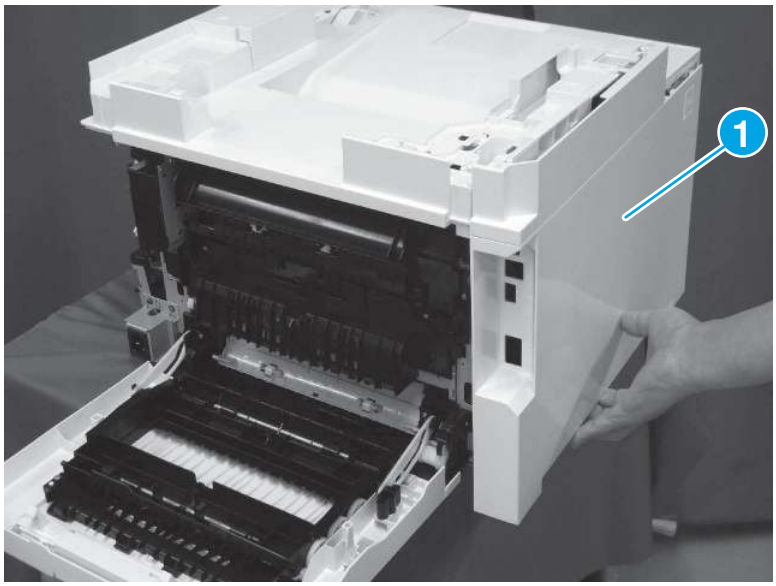Figure 4-274 Remove the cover




3. Remove the right cover (SFP)

Follow the procedure below to remove and replace the right cover (SFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.


1. Remove one screw (callout 1).

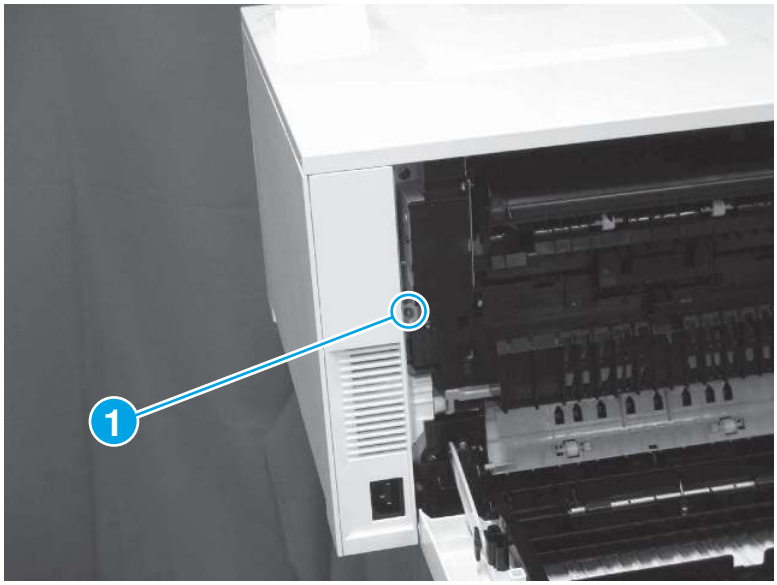Figure 4-275 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to three tabs (callout 1). Release three tabs.

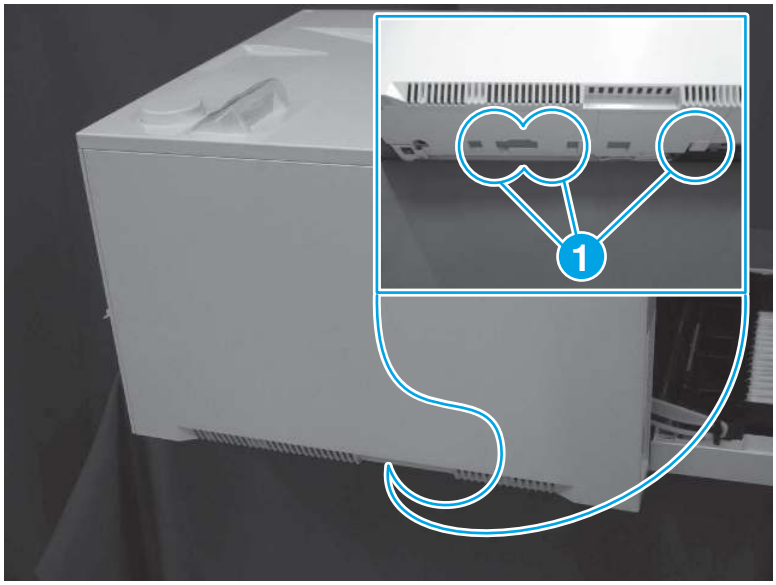Figure 4-276 Release three tabs




3. Press in on the side (callout 1) of the right cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

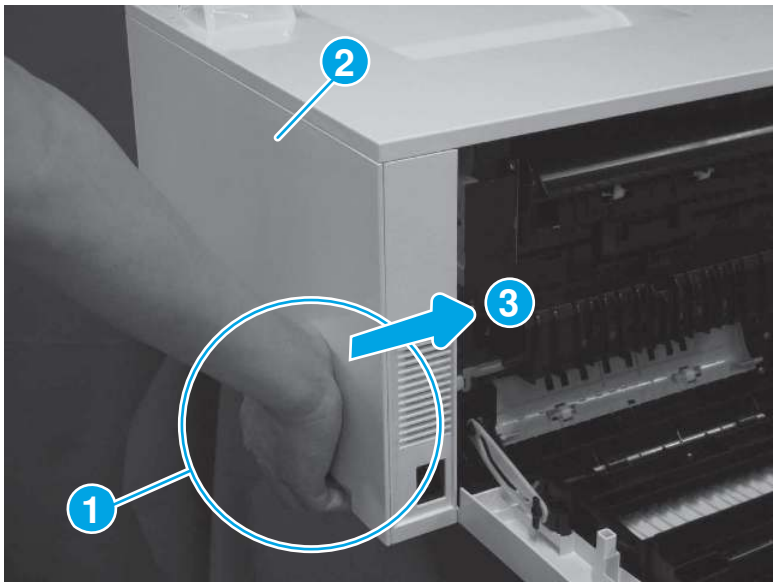Figure 4-277 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

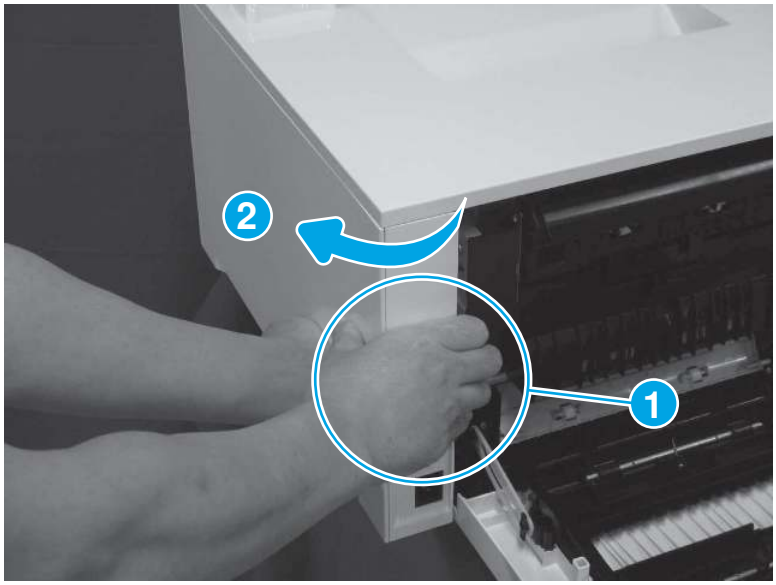Figure 4-278 Disengage the cover corner



5. Remove the right cover (callout 1).

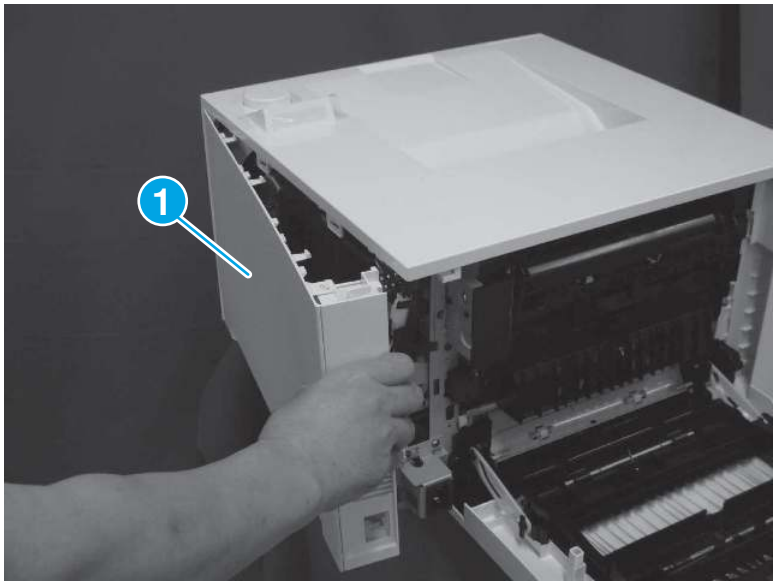Figure 4-279 **Remove the cover**




4. Remove the right cover (MFP)

Follow the procedure below to remove and replace the right cover (MFP).

NOTE: The following procedure is for an MFP printer only. If this assembly is being removed to gain access to dependency parts for a SFP printer, skip this step.


1. Remove one screw (callout 1).

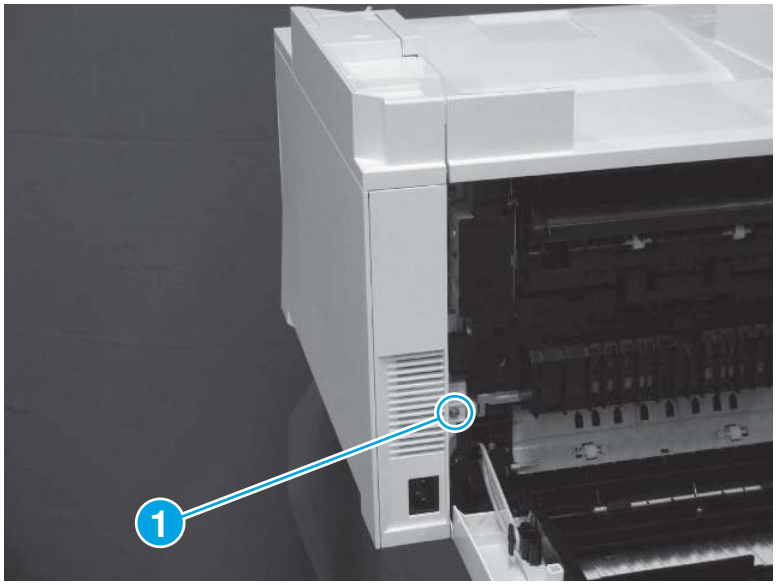Figure 4-280 **Remove one screw**




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to three tabs (callout 1). Release three tabs.

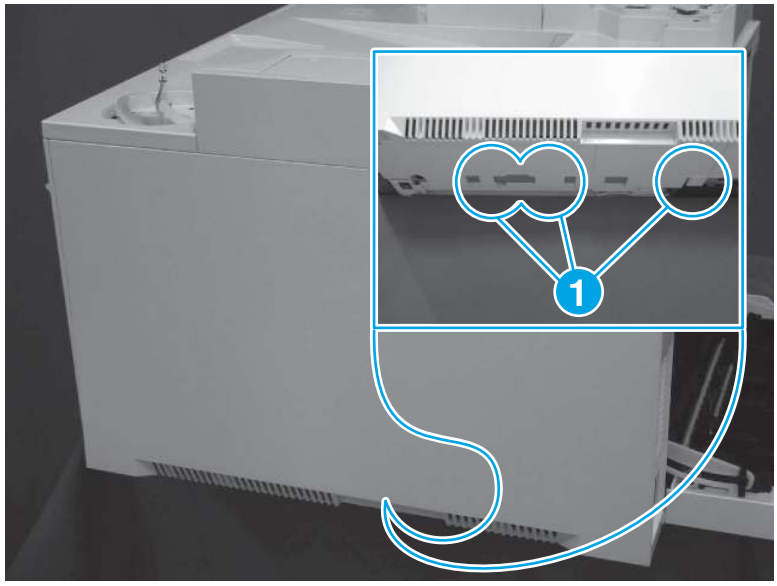Figure 4-281 Release three tabs




3. Press in on the side (callout 1) of the right cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

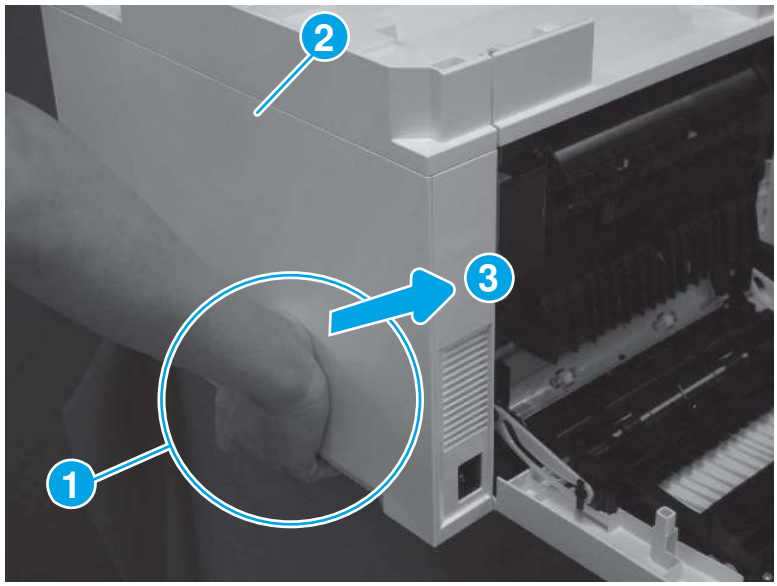Figure 4-282 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

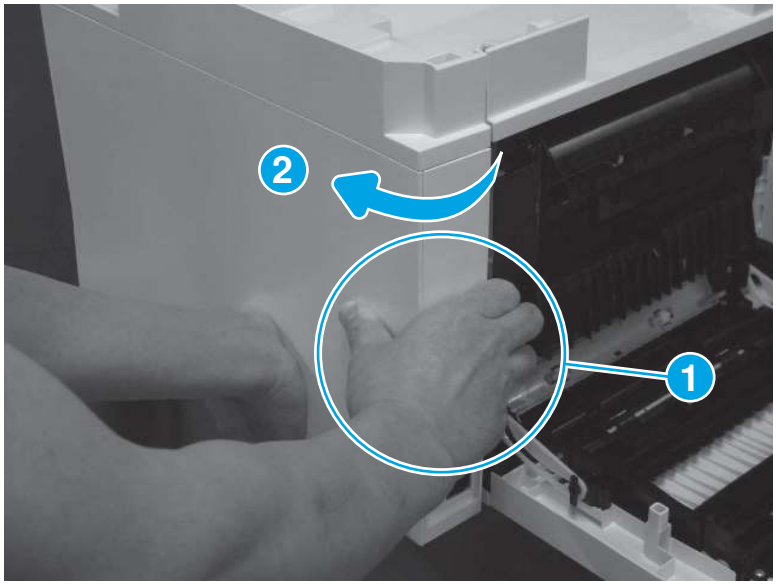Figure 4-283 Disengage the cover corner



5. Remove the right cover (callout 1).

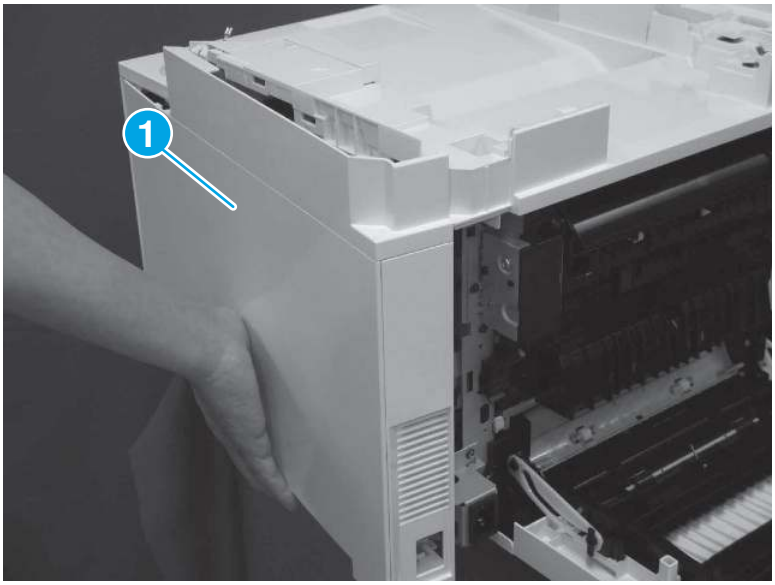Figure 4-284 Remove the cover




5. Remove the MP paper feed assembly

Follow the procedure below to remove the MP paper feed assembly.


1. Position the printer with the rear-door side down.

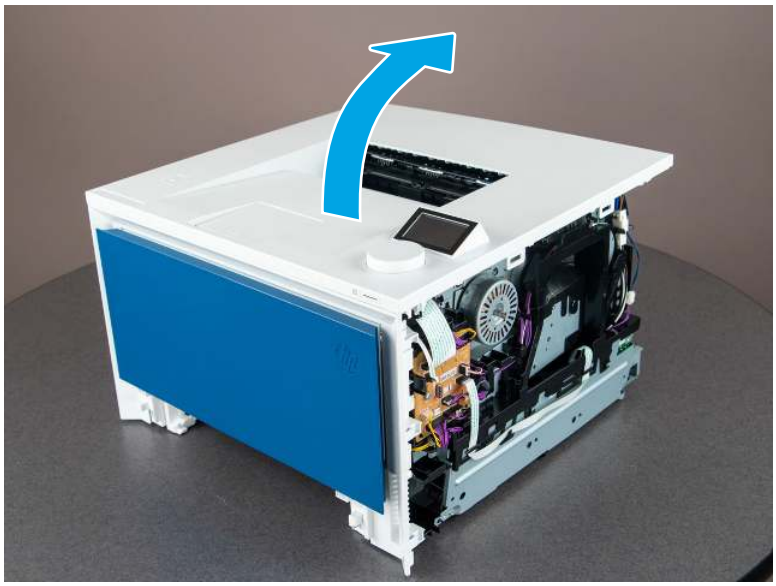Figure 4-285 **Position the printer**



2. Press the green button to release the assembly.

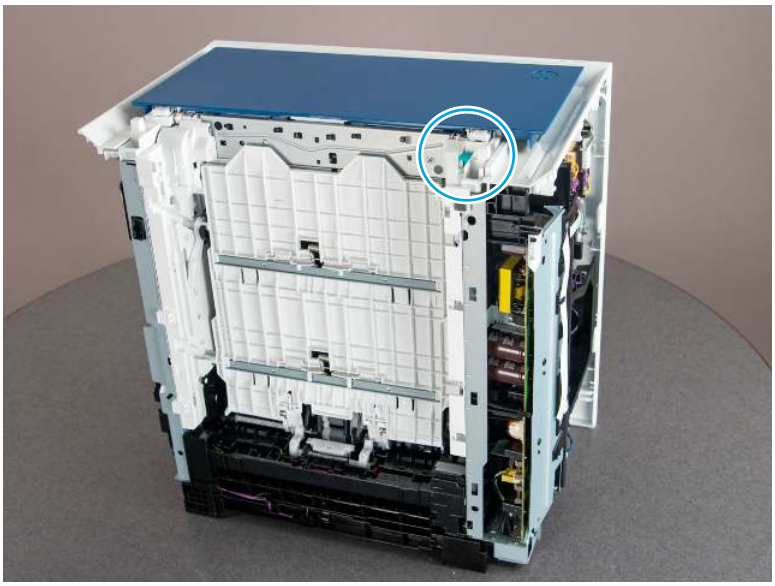
Figure 4-286 **Release the assembly**



3. Slide the assembly up (callout 1), and then toward the right-side of the printer (callout 2) to remove it.


NOTE: There is a retainer arm (callout 3) on one of the assembly legs. Carefully disengage the retainer arm and leg when removing the assembly.

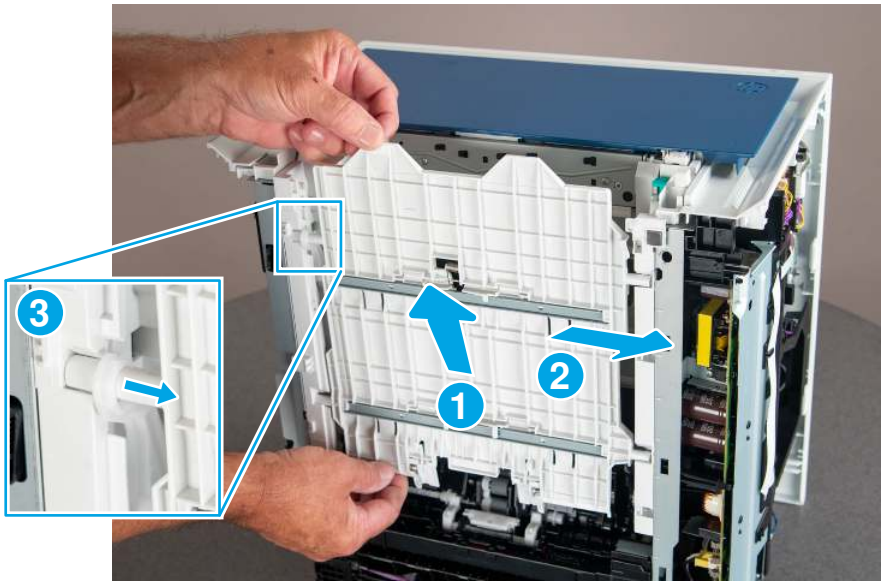Figure 4-287 Remove the assembly



4. If the retainer arm becomes dislodged, reinstall it as shown below.

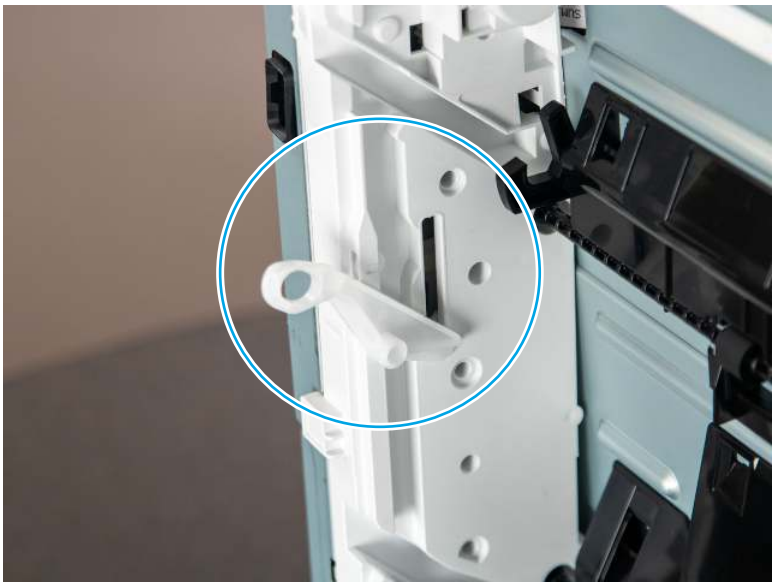Figure 4-288 Install the retainer arm



6. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: 

Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.

Removal and replacement: Tray 1 pickup roller assembly

Learn about Tray 1 pickup roller assembly removal.

View a video of removing and replacing the Tray 1 pickup roller assembly.

Mean time to repair: 2 minutes

Service level: Easy

Before performing service

Turn the printer power off

- Disconnect the power cable.

WARNING! To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-23 Part information

Part number	Part description
RM2-2758-000CN	Multipurpose feed assembly

Required tools

- No special tools are required to remove or install this assembly.

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test

Print any pages necessary to make sure the printer is functioning correctly.


1. Remove the Tray 1 pickup roller assembly

Follow the procedure below to remove and replace the Tray 1 pickup roller assembly.

Reinstallation tip: Make sure to follow the special installation instructions for this part or step (located after the unpack and recycle or cleaning section).


1. Open the cartridge door, and then depress the lever (callout 1) and slide it as shown below.

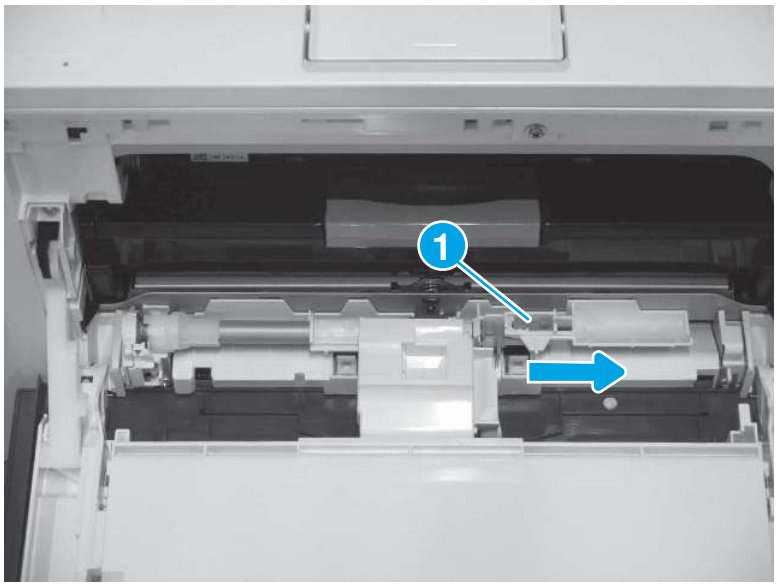Figure 4-289 Release the Tray 1 pickup roller assembly



2. Slide the pickup roller assembly (callout 1) as shown below to remove it.

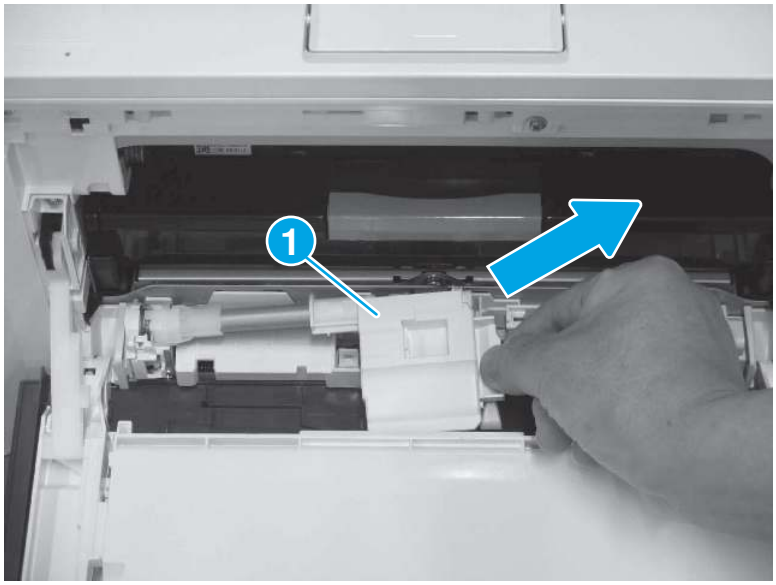Figure 4-290 **Remove the Tray 1 pickup roller assembly**



2. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.


3. Special installation instructions - Tray 1 pickup roller assembly

Follow the special instructions below to install the Tray 1 pickup roller assembly.

- When the Tray 1 pickup roller assembly (callout 1) is installed, make sure that the alignment tab (callout 2) is in the slot (callout 3) on the assembly shaft.

TIP: When correctly installed, the tab fits completely into the slot (callout 4).

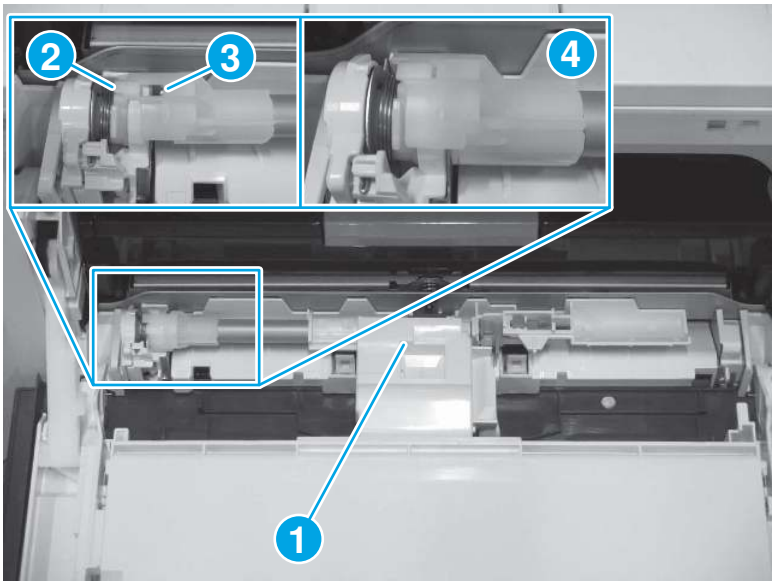Figure 4-291 Install the Tray 1 pickup roller assembly



Removal and replacement: Tray 1 separation roller

Learn about Tray 1 separation roller assembly removal.

View a video of removing and replacing the Tray 1 separation roller assembly.

Mean time to repair: 3 minutes

Service level: Easy

Before performing service

Turn the printer power off

- Disconnect the power cable.

WARNING! To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-24 Part information

Part number	Part description
RM2-2692-000CN	Separation roller assembly (Tray1/2/3)

Required tools

- No special tools are required to remove or install this assembly.

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test

Print any pages necessary to make sure the printer is functioning correctly.


1. Remove the Tray 1 pickup roller assembly

Follow the procedure below to remove and replace the Tray 1 pickup roller assembly.

Reinstallation tip: Make sure to follow the special installation instructions for this part or step (located after the unpack and recycle or cleaning section).


1. Open the cartridge door, and then depress the lever (callout 1) and slide it as shown below.

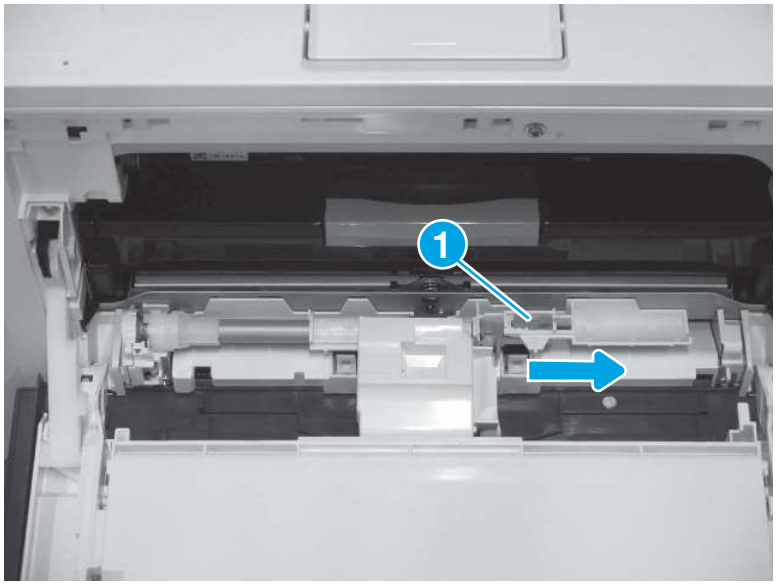Figure 4-292 Release the Tray 1 pickup roller assembly



2. Slide the pickup roller assembly (callout 1) as shown below to remove it.

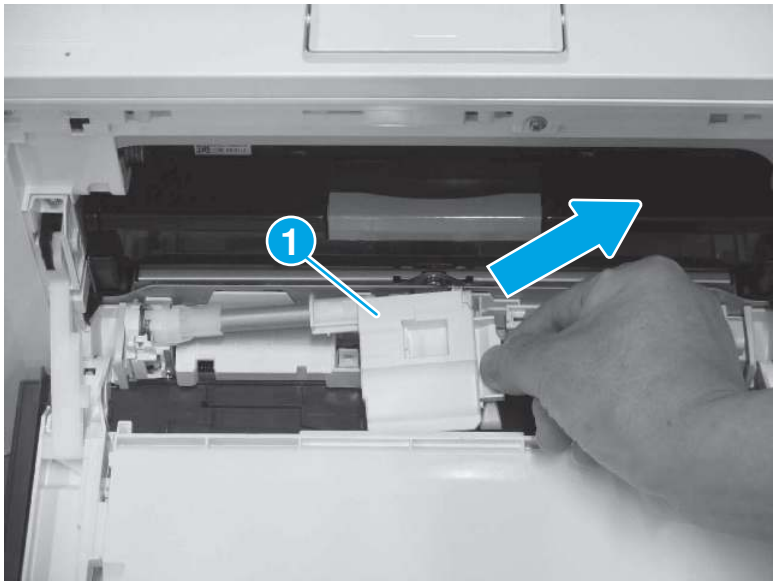Figure 4-293 Remove the Tray 1 pickup roller assembly




2. Remove the Tray 1 separation roller assembly

Follow the procedure below to remove and replace the Tray 1 separation roller assembly.


1. Pull up on the guide (callout 1) to remove it.

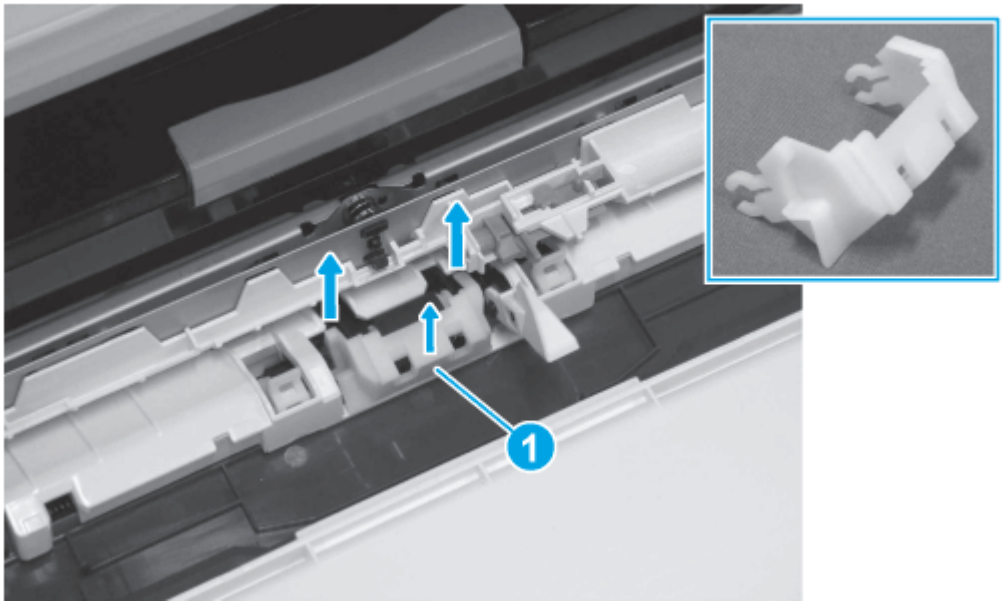Figure 4-294 Remove the guide



2. Remove the Tray 1 separation roller (callout 1).

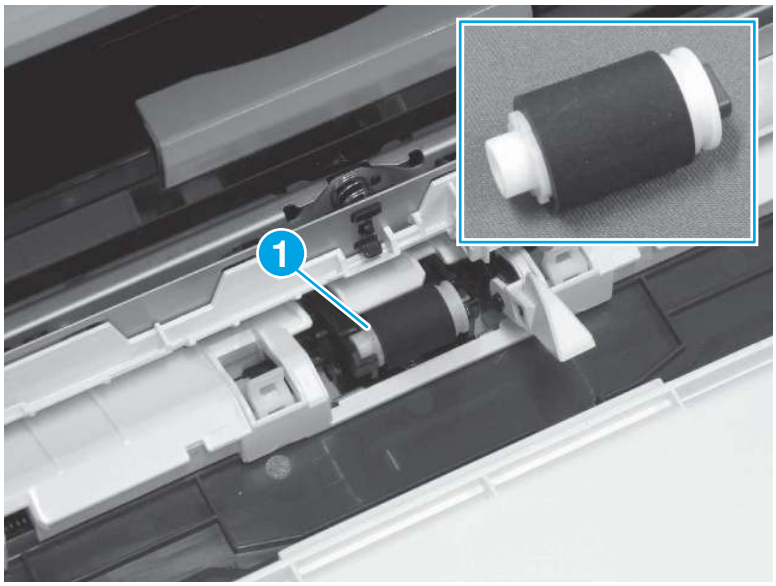Figure 4-295 **Remove the Tray 1 separation roller**



3. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.


4. Special installation instructions - Tray 1 pickup roller assembly

Follow the special instructions below to install the Tray 1 pickup roller assembly.

- When the Tray 1 pickup roller assembly (callout 1) is installed, make sure that the alignment tab (callout 2) is in the slot (callout 3) on the assembly shaft.

TIP: When correctly installed, the tab fits completely into the slot (callout 4).

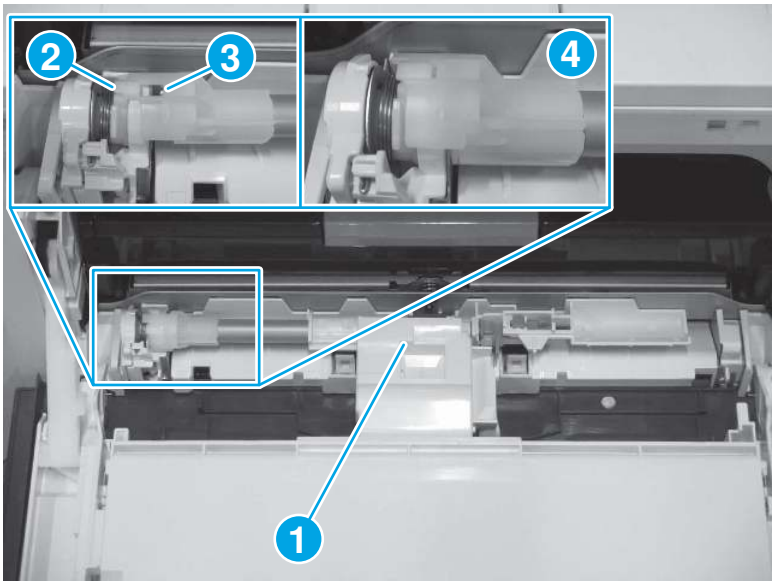Figure 4-296 **Install the Tray 1 pickup roller assembly**



Removal and replacement: Tray 2 pickup and feed rollers

Learn about Tray 2 pickup and feed rollers assembly removal.

View a video of removing and replacing the Tray 2 pickup and feed rollers.

Mean time to repair: 4 minutes

Service level: Easy

Before performing service

Turn the printer power off

- Disconnect the power cable.

WARNING! To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-25 Part information

Part number	Part description
RM2-2695-000CN	Paper pickup roller assembly NOTE: RM2-2695-000CN includes both the pickup and feed rollers (identical parts).

Required tools

- No special tools are required to remove or install this assembly.

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test


Print any pages necessary to make sure the printer is functioning correctly.

1. Remove the Tray 2 pickup and feed rollers

Follow the procedure below to remove and replace the Tray 2 pickup and feed rollers.


1. Position the printer on its left side, press the lever (callout 1) to release the MP feed guide (callout 2).

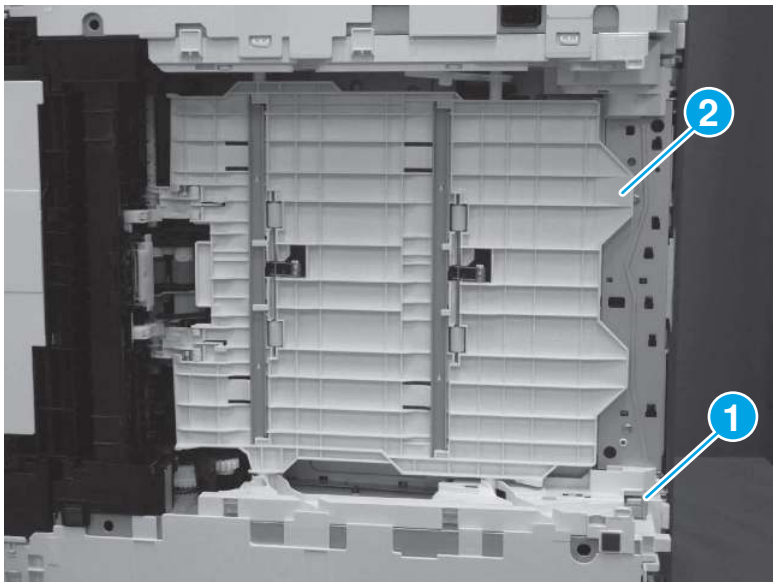Figure 4-297 Release the MP tray guide




2. Push the lever (callout 1) and move the holder (callout 2) as shown below.

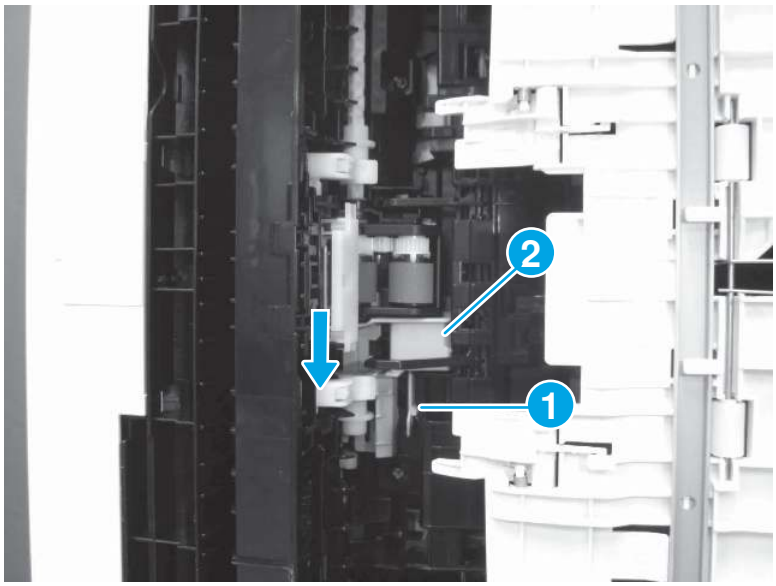Figure 4-298 Move the holder



3. Remove the pickup roller (callout 1) and feed roller (callout 2) as an assembly.

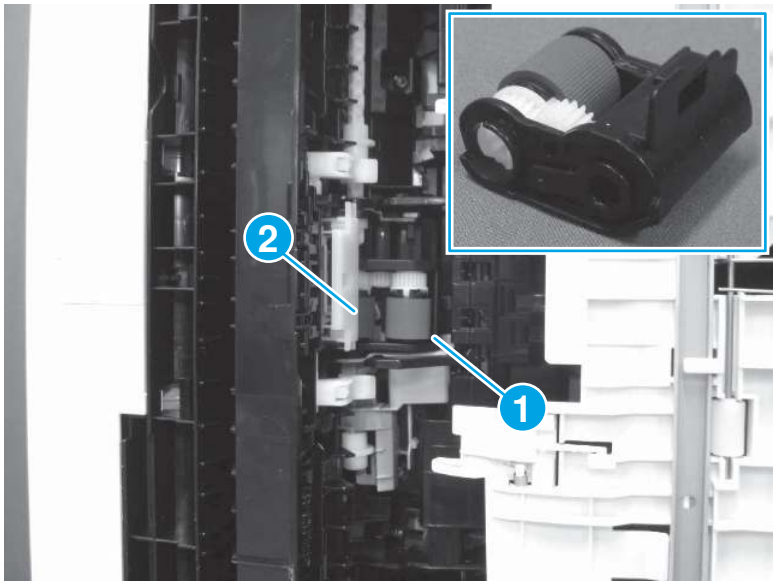Figure 4-299 Remove the roller assembly




4. Do the following:

   a. Rotate the retainer (callout 1) as shown below to remove it.

   b. Remove the pickup roller (callout 2) and the feed roller (callout 3) from the holder (callout 4).

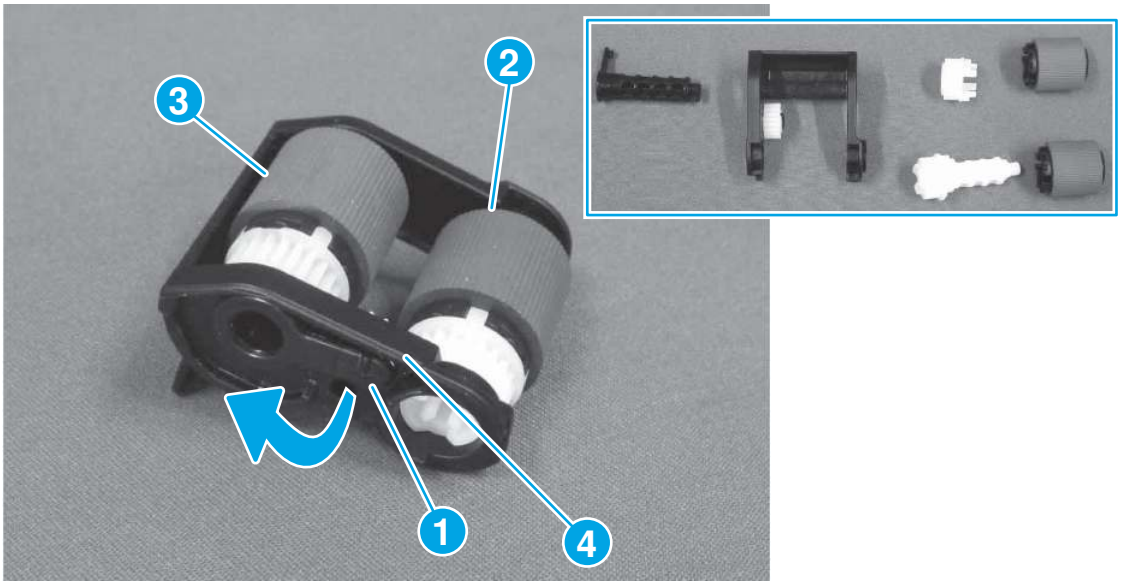Figure 4-300 Remove the rollers



2. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.

Removal and replacement: Tray 2 separation roller

Learn about Tray 2 separation roller assembly removal.

View a video of removing and replacing the Tray 2 separation roller.

Mean time to repair: 5 minutes

Service level: Easy

Before performing service

Turn the printer power off

- Disconnect the power cable.

WARNING! To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-26 Part information

Part number	Part description
RM2-2692-000CN	Separation roller assembly (Tray1/2/3)

Required tools

- Small flat-blade screwdriver

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test


Print any pages necessary to make sure the printer is functioning correctly.

1. Remove the Tray 2 separation roller

Follow the procedure below to remove and replace the Tray 2 separation roller.


1. Position the printer on its left side, use a small flat-blade screwdriver to release two tabs (callout 1), and then remove the guide (callout 2).

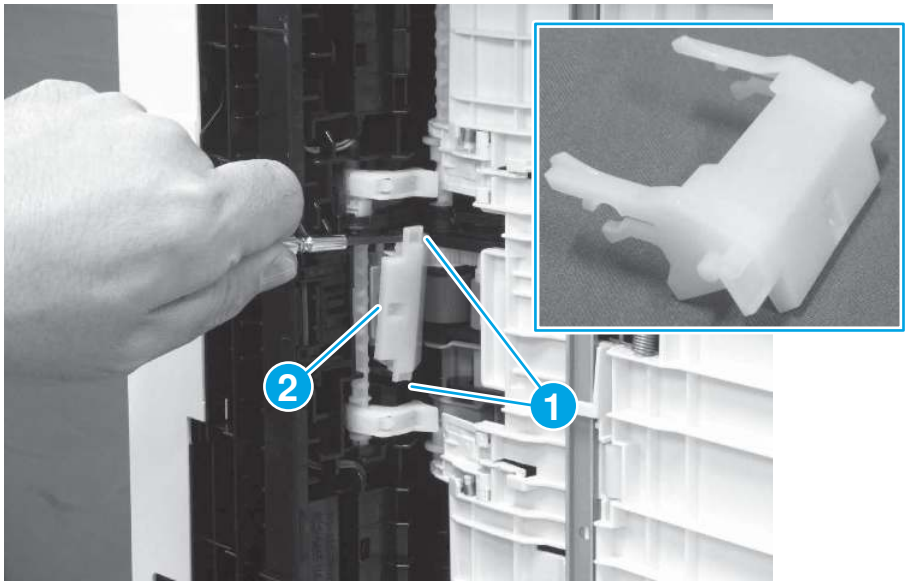Figure 4-301 **Remove the guide**




2. Remove the Tray 2 separation roller assembly (callout 1).

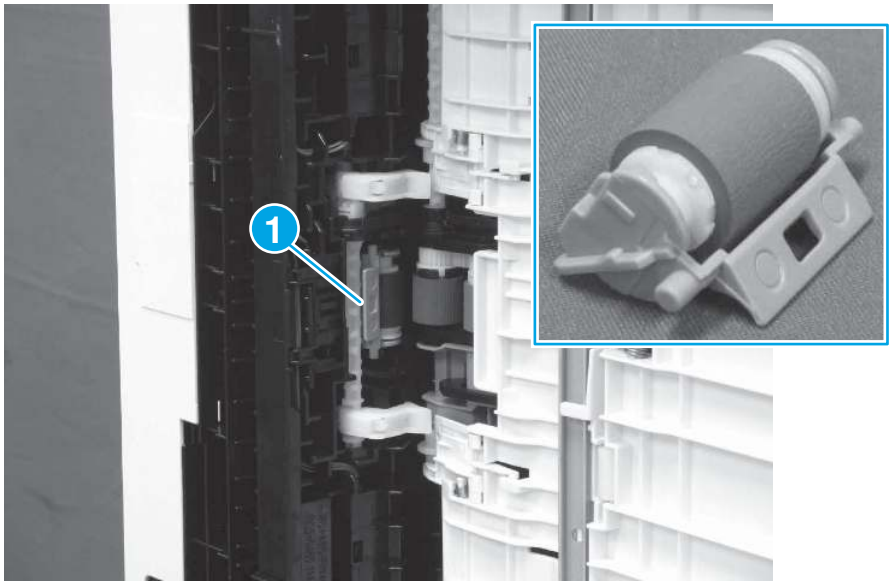Figure 4-302 **Move the roller assembly**



3. Release one tab (callout 1), and then remove the roller (callout 2) from the holder (callout 3).

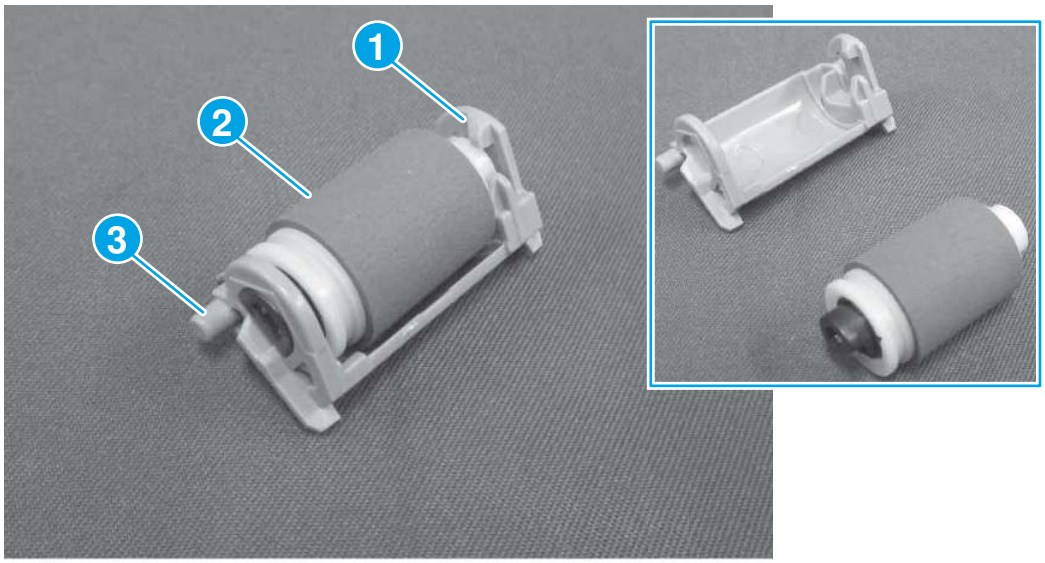Figure 4-303 **Disassemble the roller assembly**



2. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.

Removal and replacement: Secondary transfer roller (T2)

Learn about T2 roller removal.

Mean time to repair: 3 minutes

Service level: Easy

Before performing service

Turn the printer power off

- Disconnect the power cable.

WARNING! To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-27 Part information

Part number	Part description
RM2-6455-000CN	Secondary transfer roller assembly

Required tools

- Small flat-blade screwdriver

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test

Print any pages necessary to make sure the printer is functioning correctly.

1. Remove the secondary transfer roller (T2)

Follow the procedure below to remove and replace the T2 roller.

- Do the following:
  a. Open the rear door, and then release two tabs 9callout 1)

b. Pull on the bushing (callout 2) to release it.


⚠ **CAUTION:** There is a non-captive spring located under the bushing. When the bushing is removed from the holder the spring might still be attached to the bushing. Do not lose the spring while handling the assembly.

c. Remove the T2 roller.

IMPORTANT: **For a replacement t2 roller**: Do not touch the spongy portion of the roller. Skin oils on the roller can cause paper-handling and print-quality problems. HP recommends using disposable gloves or thoroughly washing your hands before handling the assembly..

NOTE: Do not discard the two white plastic bushings (located on the left-and right-ends of the roller shaft). These bushings are not included with the replacement assembly.

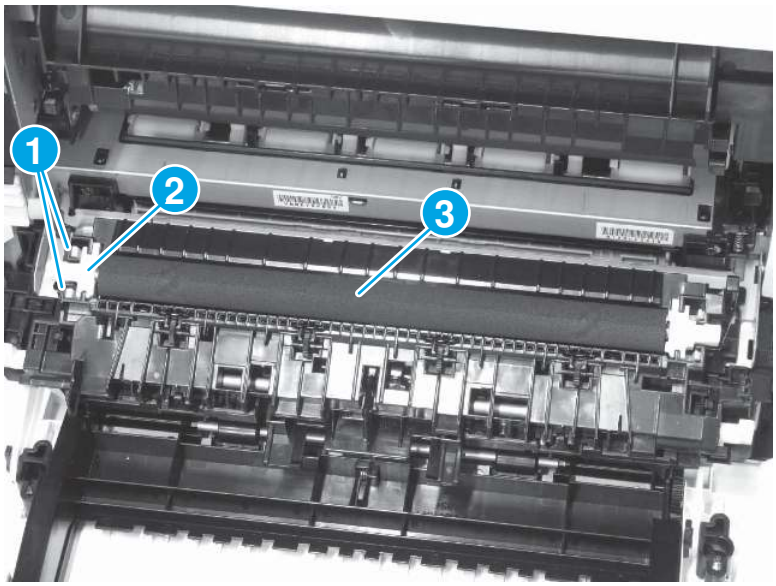Figure 4-304 **Remove the roller**



2. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

⚠ **CAUTION:** Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not

available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.

Removal and replacement: Secondary transfer roller (T2) assembly

Learn about T2 assembly removal.

Mean time to repair: 5 minutes

Service level: Easy

Before performing service

Turn the printer power off

- Disconnect the power cable.

WARNING! To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-28 Part information

Part number	Part description
RM2-2755-000CN	Secondary transfer feed assembly

Required tools

- No special tools are required to remove or install this assembly.

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test


Print any pages necessary to make sure the printer is functioning correctly.

1. Remove the secondary transfer roller (T2) assembly

Follow the procedure below to remove and replace the T2 roller assembly.


1. Open the rear door, and then rotate the bushing (callout 1) in the direction shown below.

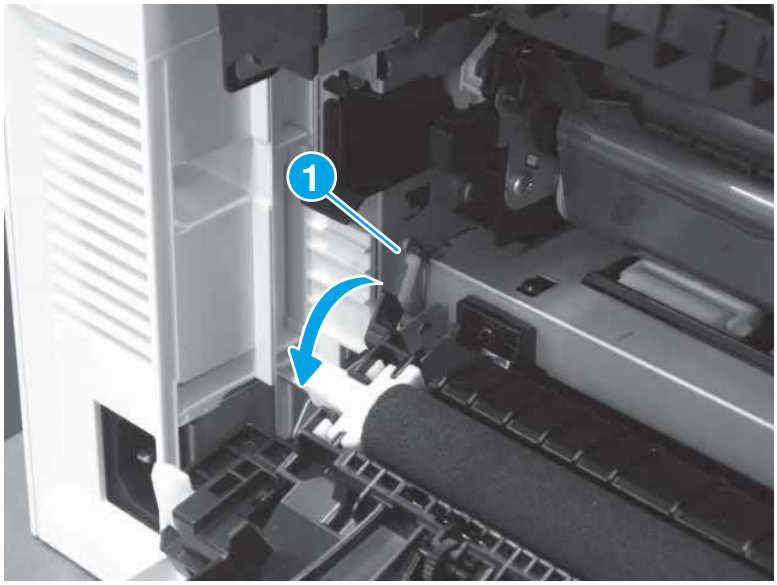Figure 4-305 **Rotate the bushing**




2. Slide the bushing in the direction shown below.

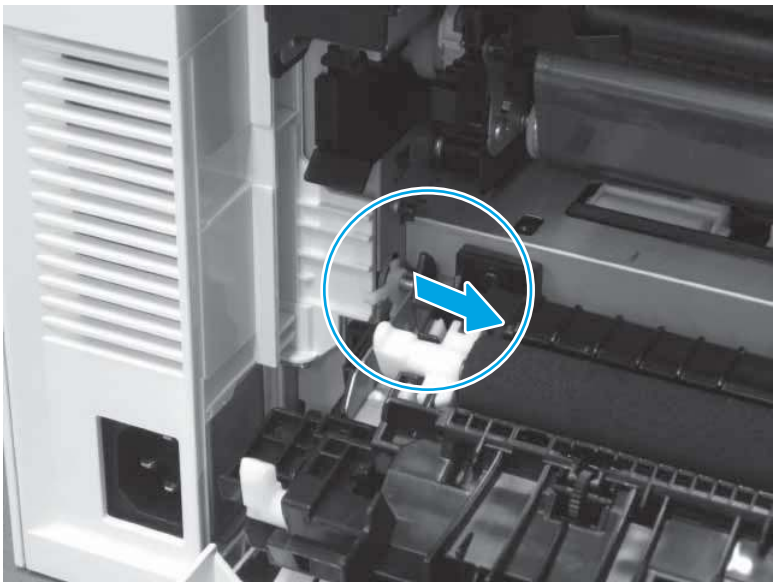Figure 4-306 **Slide the bushing**




3. Slide the T2 assembly (callout 1) in the direction shown below to remove it.

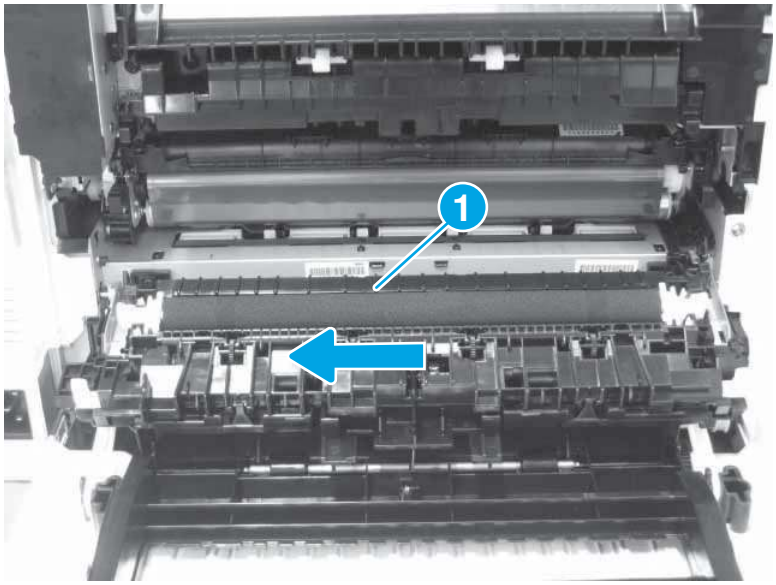Figure 4-307 Remove the T2 assembly



4. The bushing shown in the figure below is supplied with the replacement assembly.

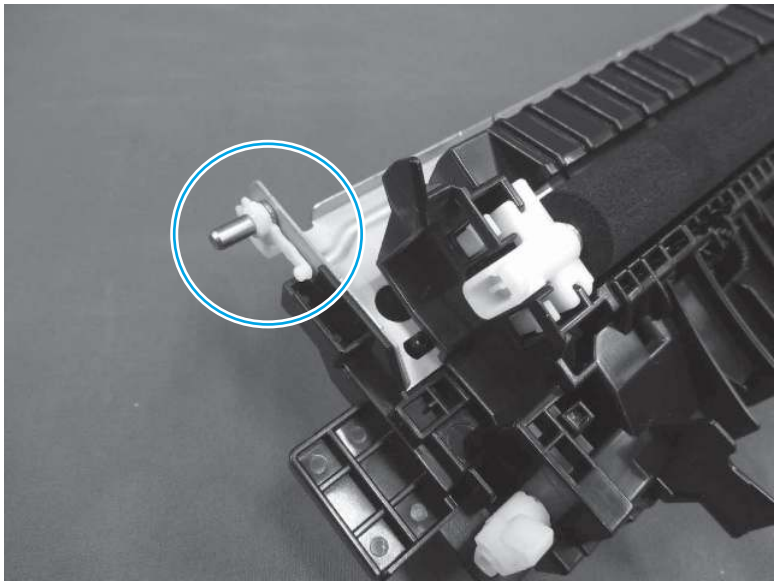Figure 4-308 T2 assembly bushing



2. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: 

Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.

Removal and replacement: Intermediate transfer belt (ITB)

Learn about ITB removal.

View a video of removing and replacing the ITB.

Mean time to repair: 5 minutes

Service level: Easy

IMPORTANT: *Before* ITB removal, do the following:

1. Make sure that the cartridge door and rear door are closed.
2. Turn the printer power on (initial rotation), and then turn the power off.
3. Open the cartridge door and rear door.
4. Pull the cartridge tray out of the printer until it stops.

Before performing service

Turn the printer power off

- Disconnect the power cable.

WARNING! To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-29 Part information

Part number	Part description
RM2-2811-000CN	Intermediate transfer belt

Required tools

- No special tools are required to remove or install this assembly.

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test

Print any pages necessary to make sure the printer is functioning correctly.

1. Remove the intermediate transfer belt (ITB)

Follow the procedure below to remove and replace the ITB.


IMPORTANT: *Before* ITB removal, do the following:

1. Make sure that the cartridge door and rear door are closed.
2. Turn the printer power on (initial rotation), and then turn the power off.
3. Open the cartridge door and rear door.
4. Pull the cartridge tray out of the printer until it stops.

Make sure to follow the special installation instructions for this part or step (located after the unpack and recycle or cleaning section).

1. Press the tab (callout 1) while pulling out on the coupling release lever (callout 2).

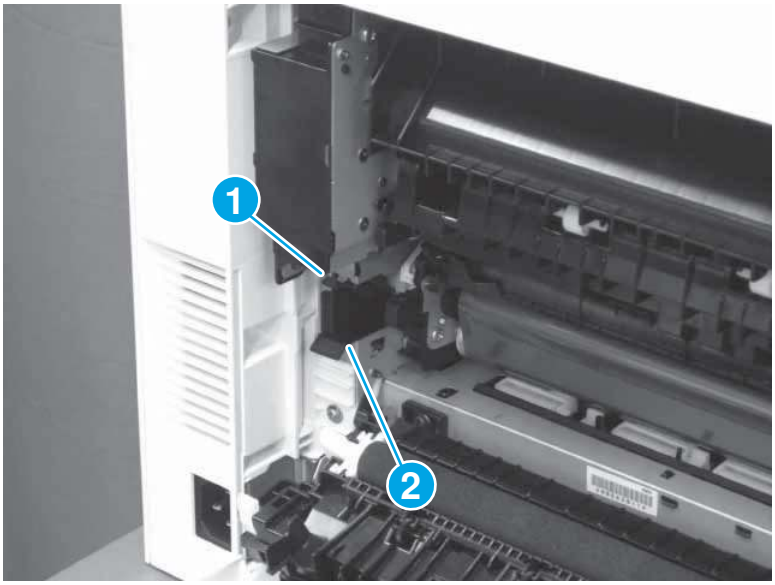Figure 4-309 **Pull the coupling release lever out**




2. Do the following:

   a. Cover the secondary transfer (T2) roller (callout 1) with a sheet of clean paper (callout 2).

   b. Grasp the left- and right-side ITB grips (callout 3), and then pull the ITB (callout 4) straight out of the printer to remove it.

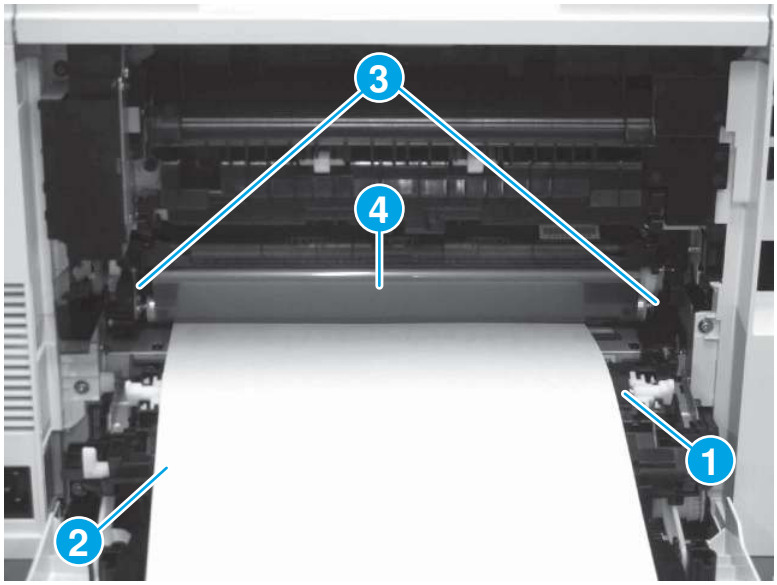Figure 4-310 **Remove the ITB**



2. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.

3. Special installation instructions - ITB

Follow the special instructions below to install the ITB.

Before installing the ITB, use the steps below do the following:

- Make sure that the drive gear on the ITB and the gear inside the printer are correctly aligned (in phase) with each other (see step 1).
- For a replacement ITB, use the control-panel menus to reset the firmware counter (see step 2).


1. **Check the gear alignment.**

   a. Make sure that the gear (callout 1) inside the printer is positioned with the gear rib (callout 2) away from the rear door opening.

   NOTE: If the gear is not positioned correctly, do the following:


   1. Make sure that the cartridge door and rear door are closed.
   2. Turn the printer power on (initial rotation), and then turn the power off.

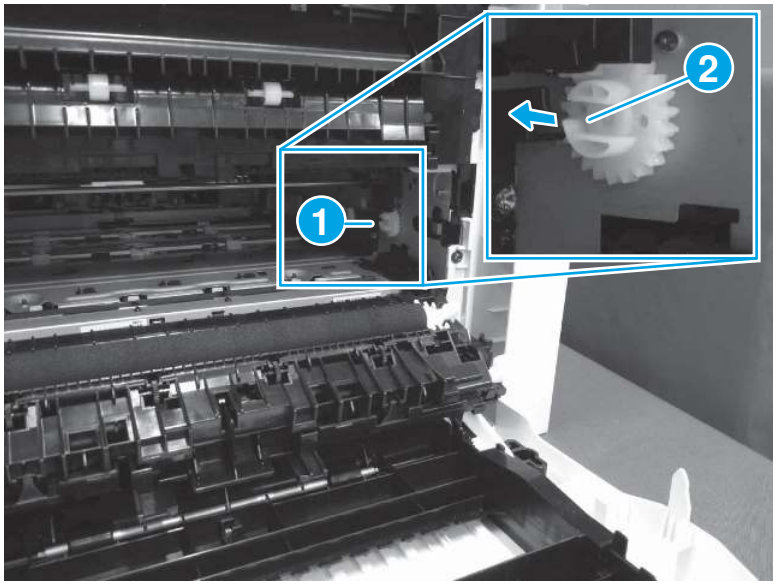   Image to check the ITB printer gear



b. Make sure that the gear (callout 1) on the ITB is positioned with the gear rib (callout 2) towards the handle grip end of the ITB.

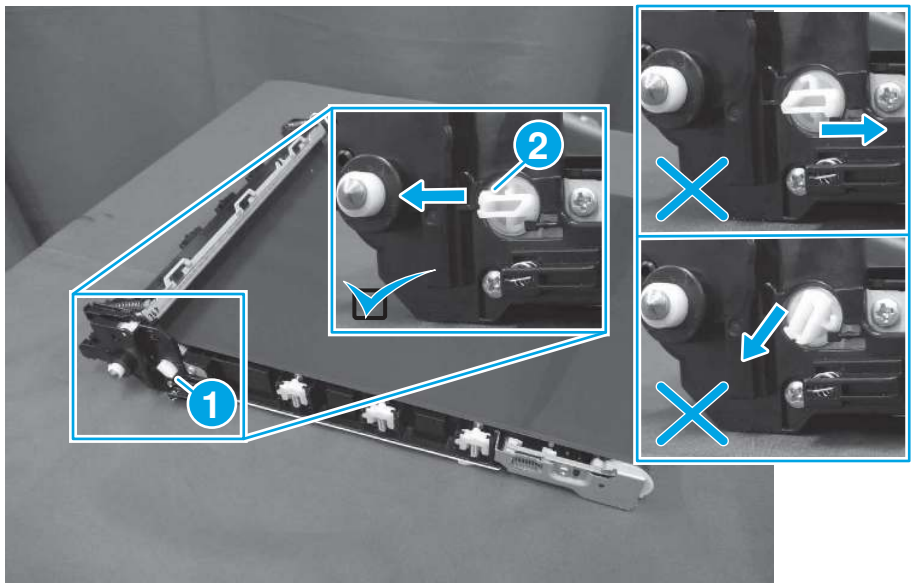NOTE: If the gear is not positioned correctly, rotate the gear to the correct position.:



2. **Reset the firmware counter (replacement ITB only).**

NOTE: If the ITB was removed to gain access to other assemblies, skip this step.

If a **replacement** ITB was installed, perform the steps below to reset the firmware counter.

a. From the control panel Home screen, open the Menu item, and then navigate to and select the Tools menu.

b. Navigate to and select the Service menu.

c. Type in the Service menu personal identification number (PIN).

NOTE: The default PIN (for access to the Service menu and the printer EWS page) for this printer is located on a on a sticker adhered to the front of the toner cartridge tray. Use this PIN to open the Service menu (or EWS) when prompted.

If the default PIN has been changed, contact the printer administrator to obtain it.

Image indicating the printer default PIN location.



d. Navigate to and select the Service Resets menu.

e. Navigate to and select the Transfer Kit Resets item, and then select Resets to initiate the process.

Removal and replacement: Feed motor

Learn about feed motor removal.

Mean time to repair: 6 minutes

Service level: Easy

Before performing service

Turn the printer power off

- Disconnect the power cable.

WARNING! To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-30 Part information

Part number	Part description
RK3-0335-000CN	Motor, stepping DC (feed; M3)

Required tools

- #2 Phillips screwdriver with a magnetic tip and a 152 mm (6 in) shaft length

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test

Print any pages necessary to make sure the printer is functioning correctly.

1. Remove the left cover (SFP)


Follow the procedure below to remove and replace the left cover (SFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.

TIP: There might be a small cover installed on the USB port located at the back of the printer. If installed, remove this cover now.


1. Remove one screw (callout 1).

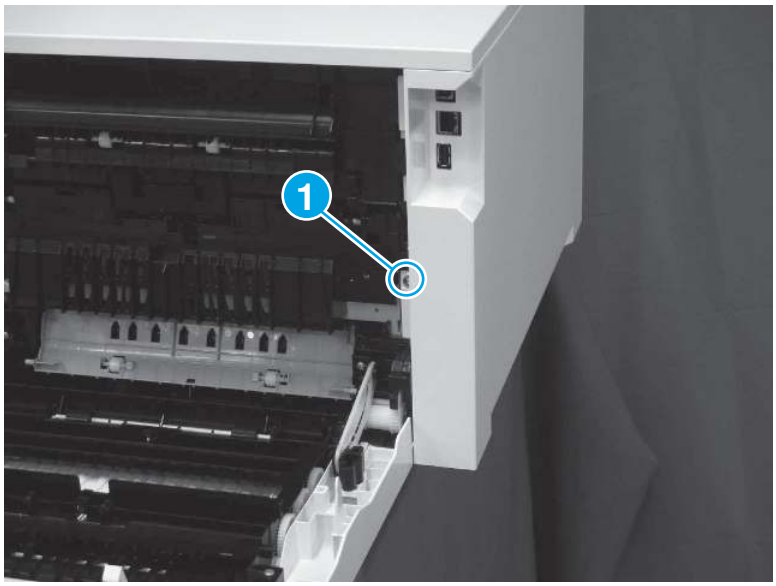Figure 4-311 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

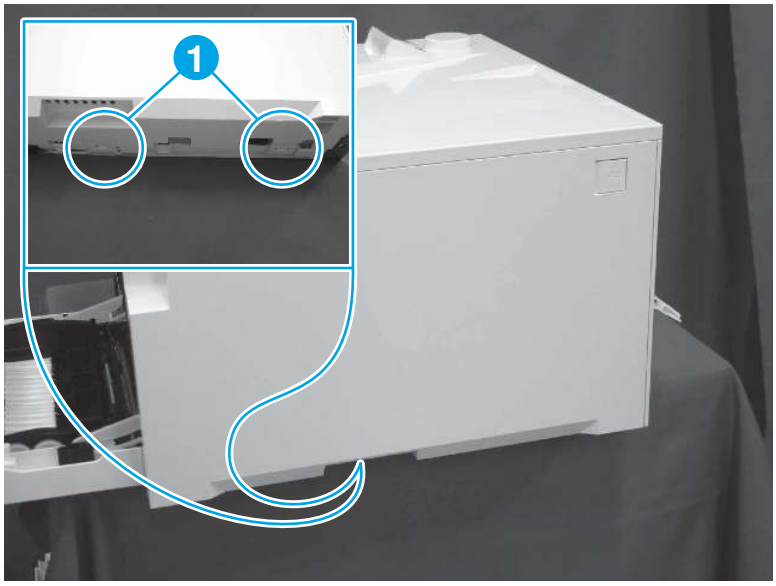Figure 4-312 **Release two tabs**




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

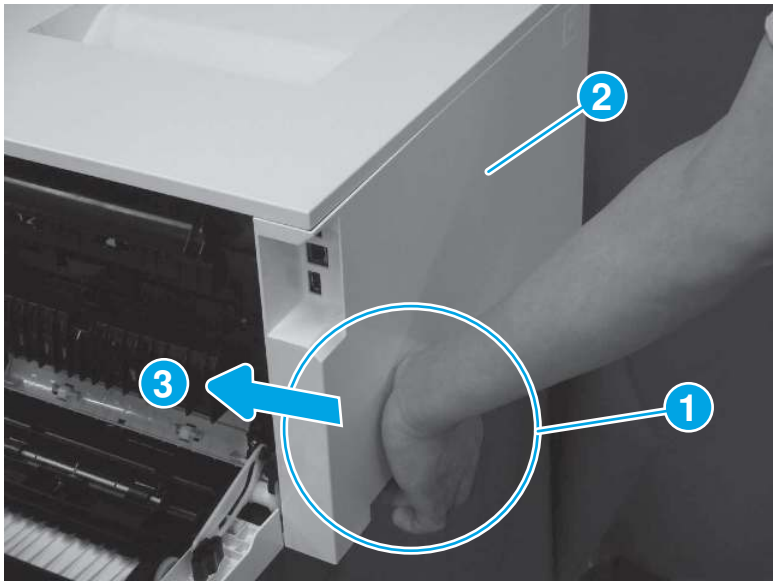Figure 4-313 **Release the rear cover corner**




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

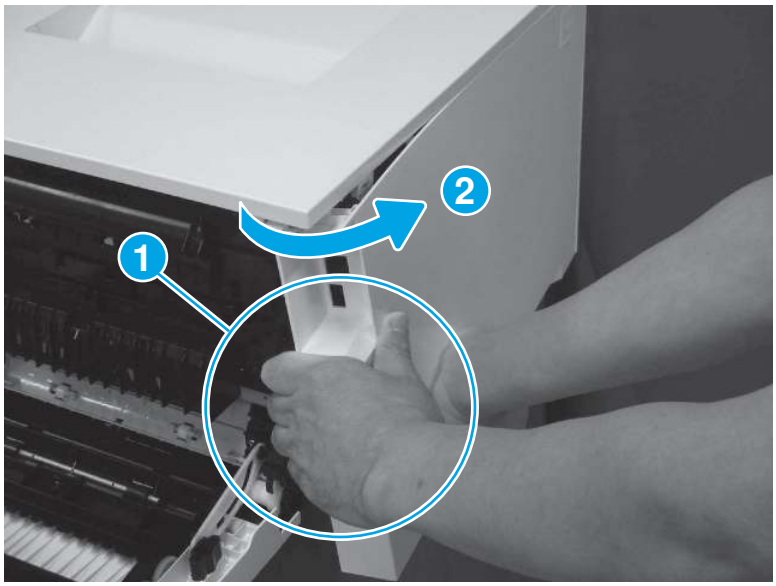Figure 4-314 Disengage the cover corner



5. Remove the left cover (callout 1).

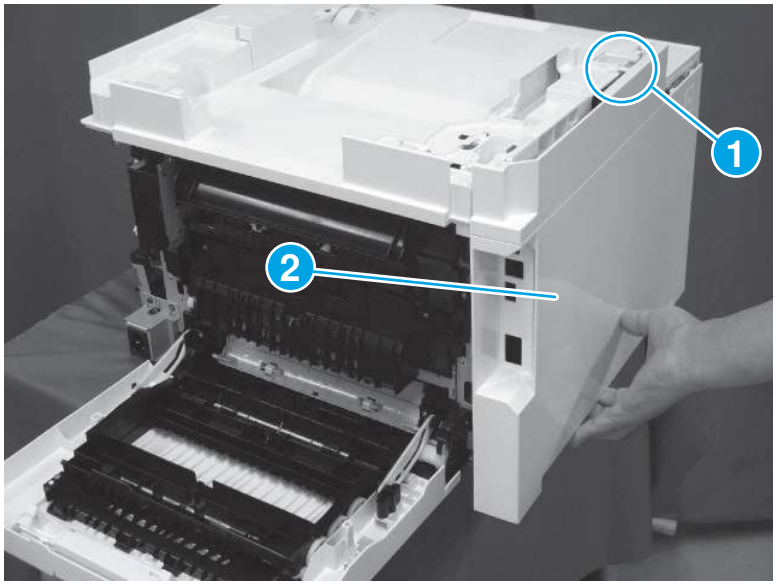Figure 4-315 Remove the cover



2. Remove the left cover (MFP)


Follow the procedure below to remove and replace the left cover (MFP).

NOTE: The following procedure is for an MFP printer only. If this assembly is being removed to gain access to dependency parts for a SFP printer, skip this step.

TIP: There might be a small cover installed on the USB port and/or the fax port located at the back of the printer. If installed, remove these covers now.


1. Remove one screw (callout 1).

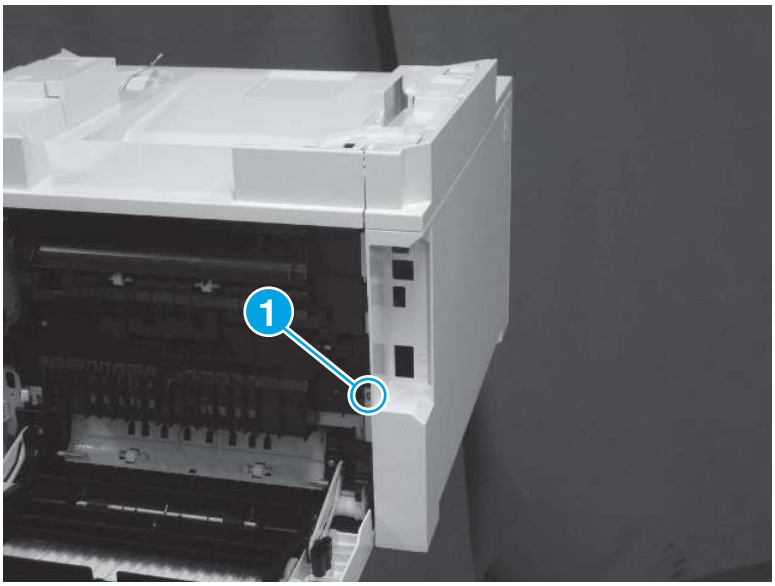Figure 4-316 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

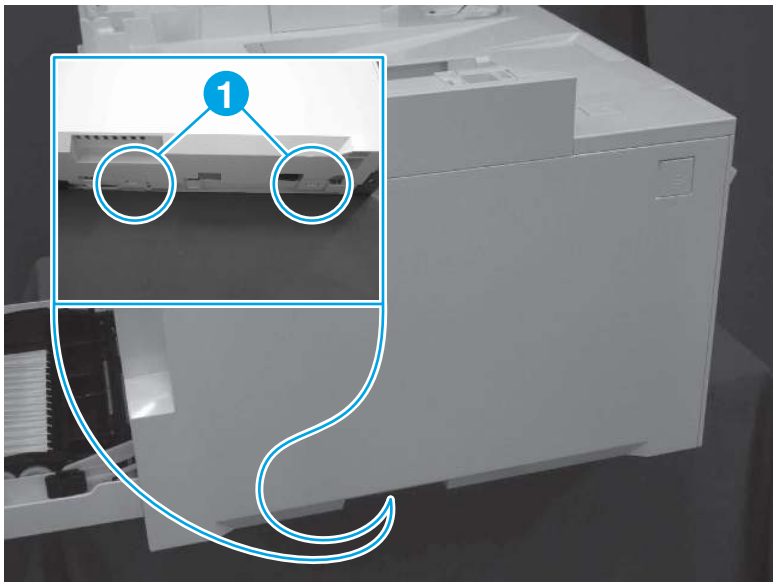Figure 4-317 Release two tabs




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

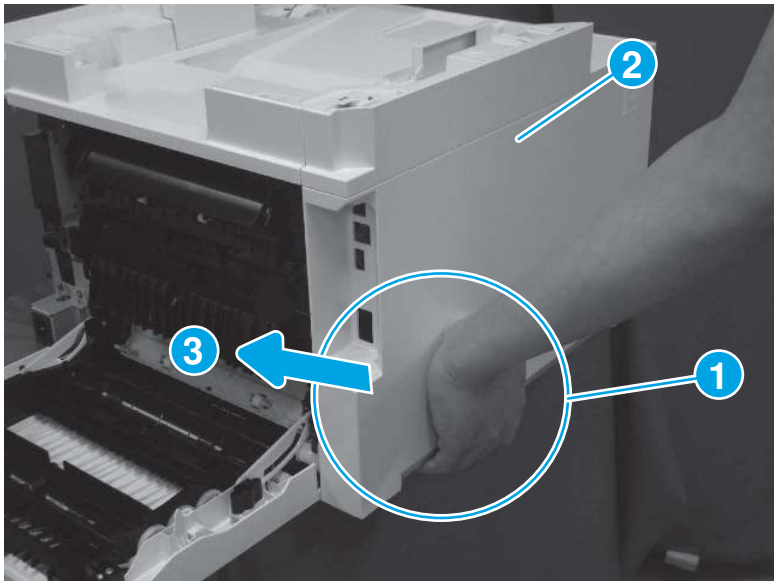Figure 4-318 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

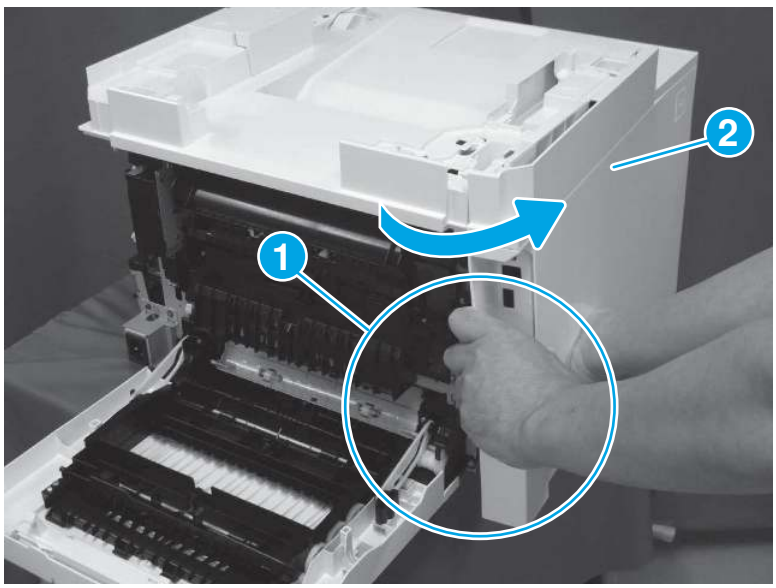Figure 4-319 Disengage the cover corner



5. Remove the left cover (callout 1).

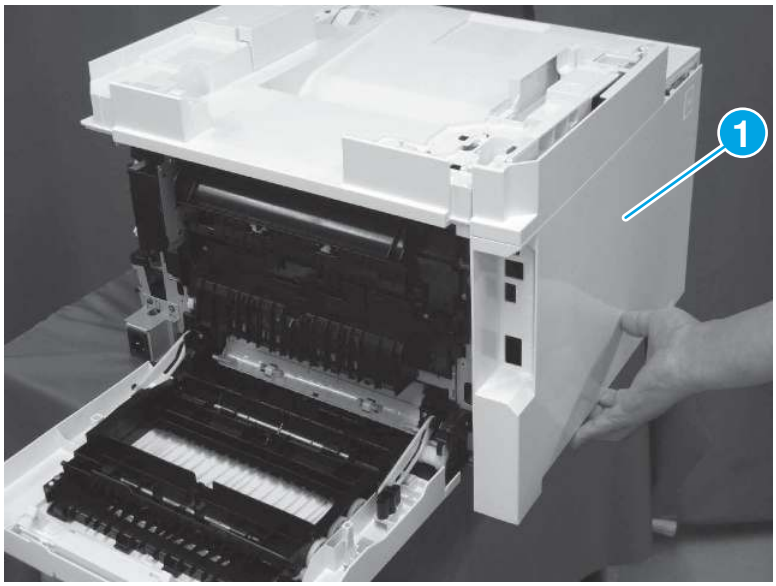Figure 4-320 **Remove the cover**




3. Remove the feed motor

Follow the procedure below to remove and replace the feed motor.

- Disconnect one connector (callout 1), remove two screws (callout 2), and then remove the feed motor (callout 3).

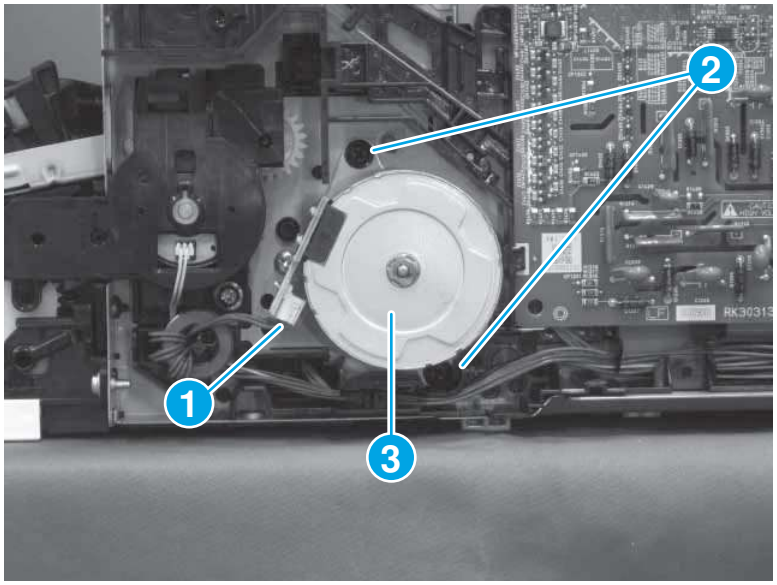Figure 4-321 **Remove the feed motor**



4. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: 

Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.

Removal and replacement: Drum motor

Learn about drum motor removal.

Mean time to repair: 8 minutes

Service level: Easy

Before performing service

Turn the printer power off

- Disconnect the power cable.

WARNING! To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-31 Part information

Part number	Part description
RM2-2779-000CN	Main motor assembly (drum; M1)

Required tools

- #2 Phillips screwdriver with a magnetic tip and a 152 mm (6 in) shaft length

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test

Print any pages necessary to make sure the printer is functioning correctly.


1. Remove the right cover (SFP)

Follow the procedure below to remove and replace the right cover (SFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.


1. Remove one screw (callout 1).

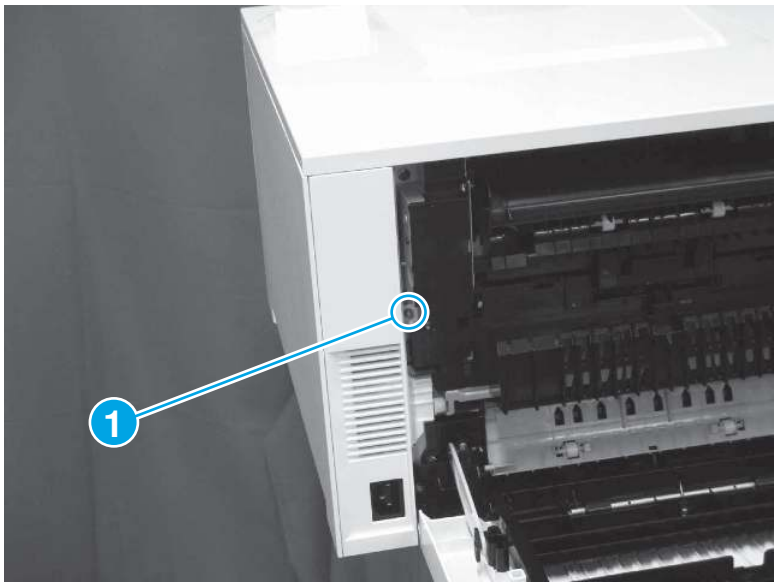Figure 4-322 **Remove one screw**




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to three tabs (callout 1). Release three tabs.

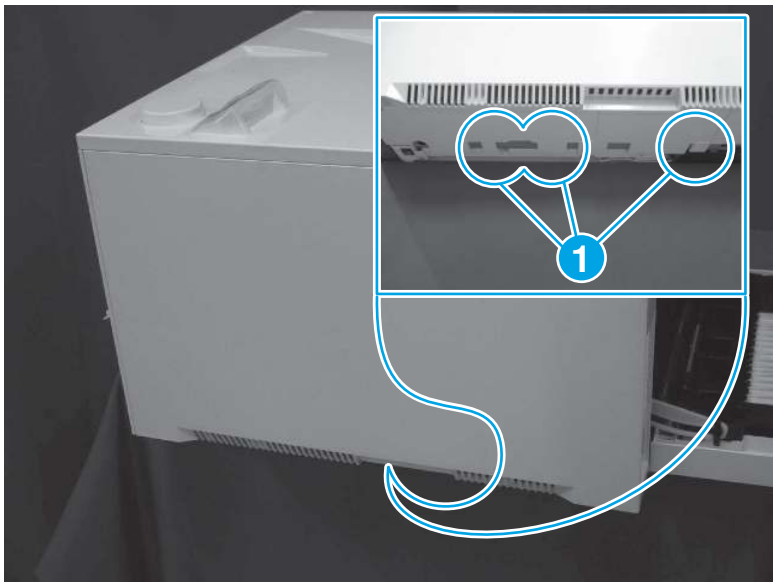Figure 4-323 Release three tabs




3. Press in on the side (callout 1) of the right cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

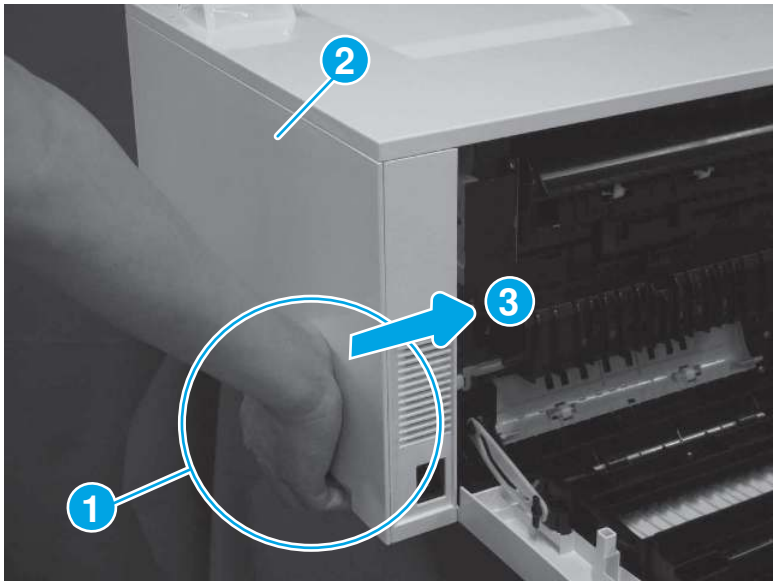Figure 4-324 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

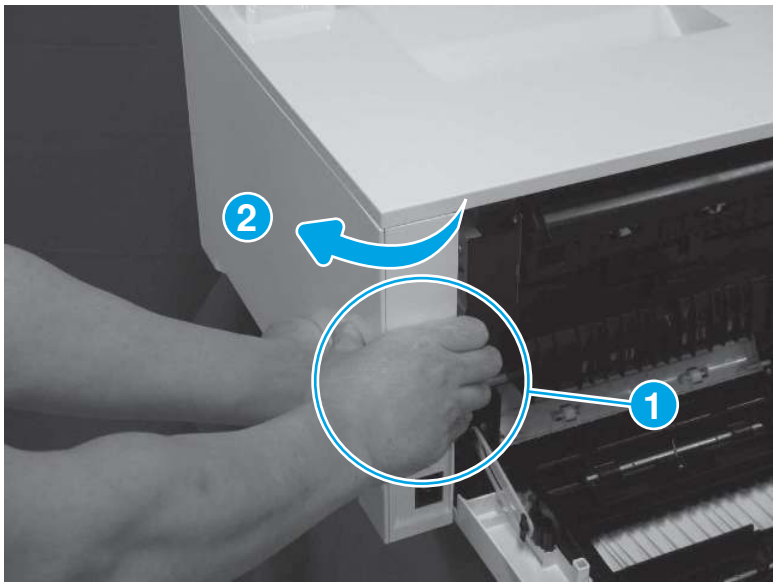Figure 4-325 Disengage the cover corner



5. Remove the right cover (callout 1).

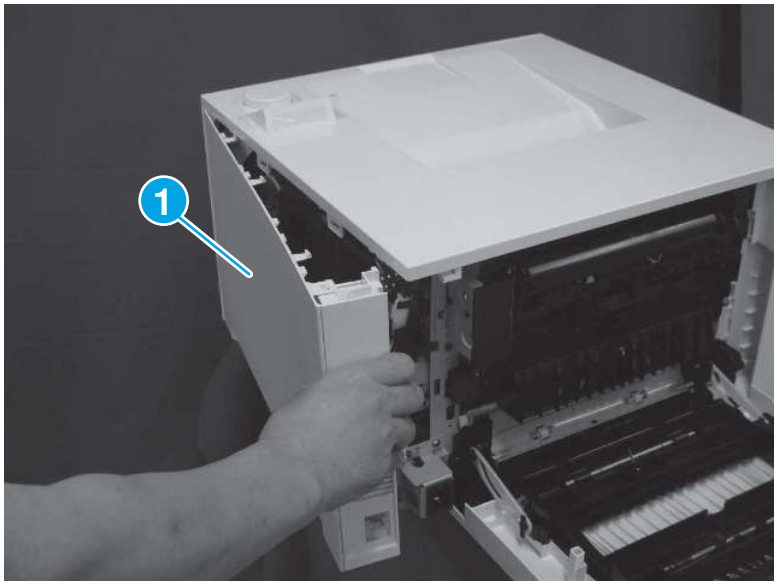Figure 4-326 Remove the cover




2. Remove the right cover (MFP)

Follow the procedure below to remove and replace the right cover (MFP).

NOTE: The following procedure is for an MFP printer only. If this assembly is being removed to gain access to dependency parts for a SFP printer, skip this step.


1. Remove one screw (callout 1).

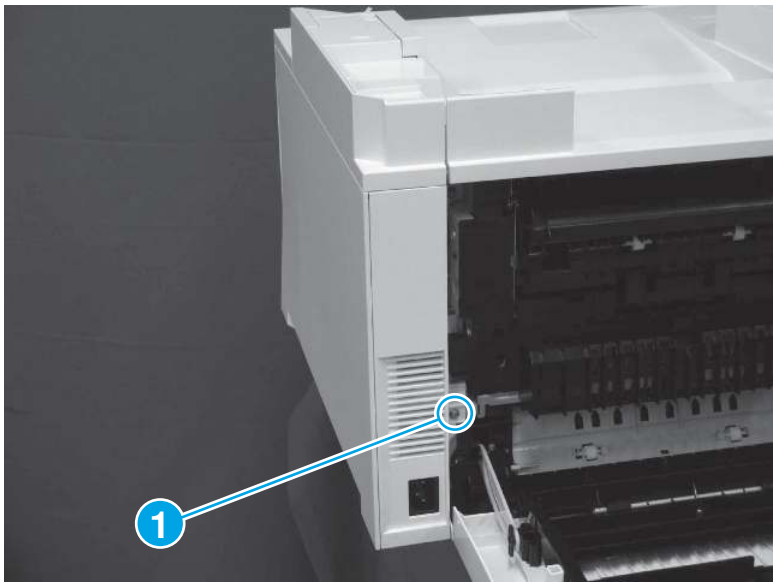Figure 4-327 **Remove one screw**




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to three tabs (callout 1). Release three tabs.

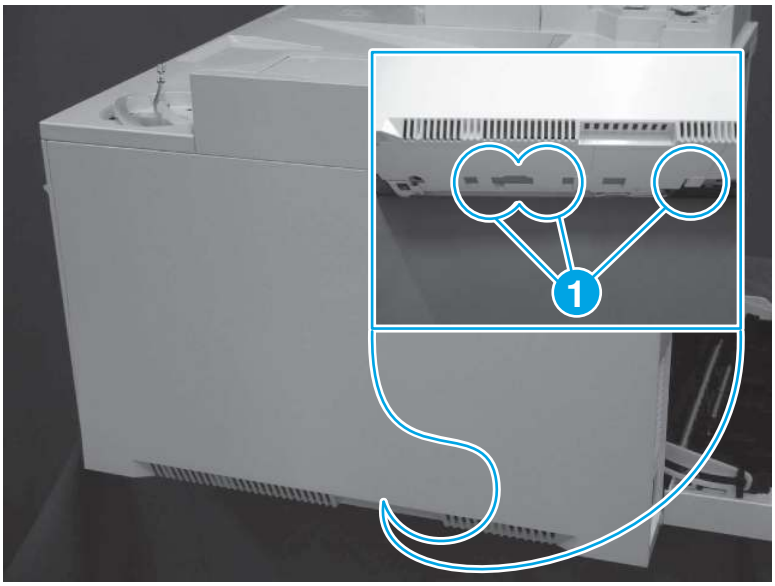Figure 4-328 **Release three tabs**




3. Press in on the side (callout 1) of the right cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

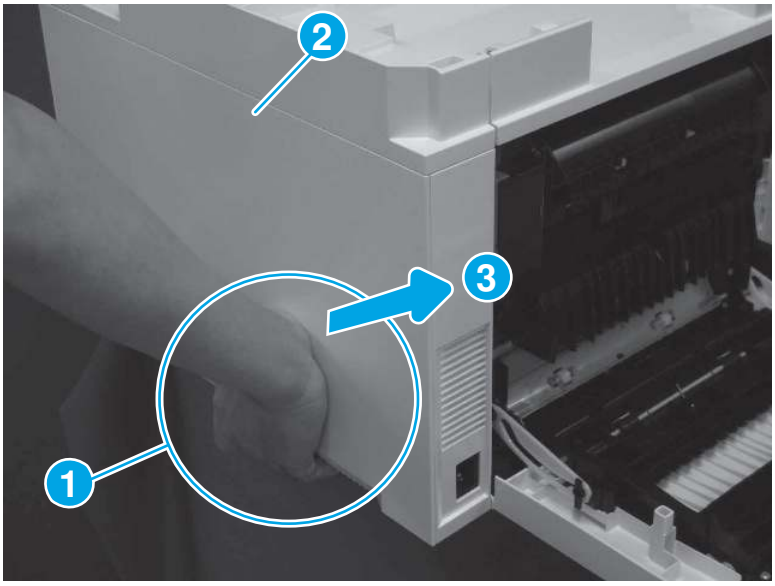Figure 4-329 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

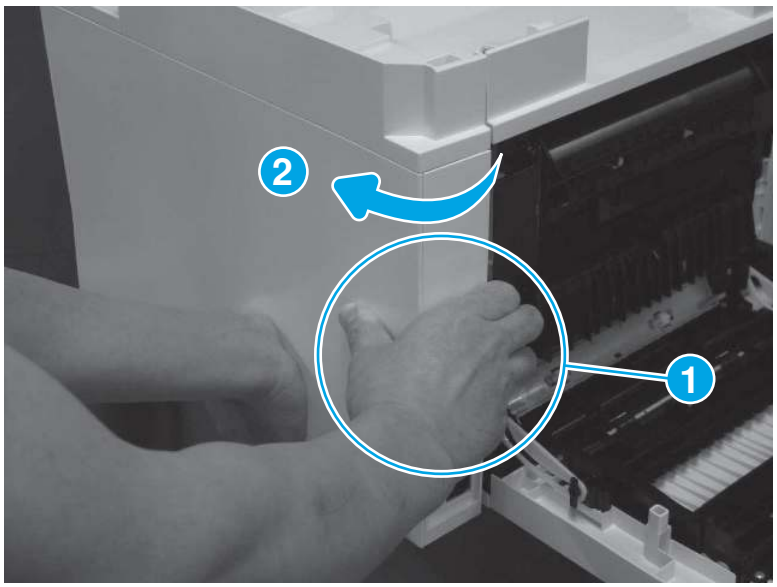Figure 4-330 Disengage the cover corner



5. Remove the right cover (callout 1).

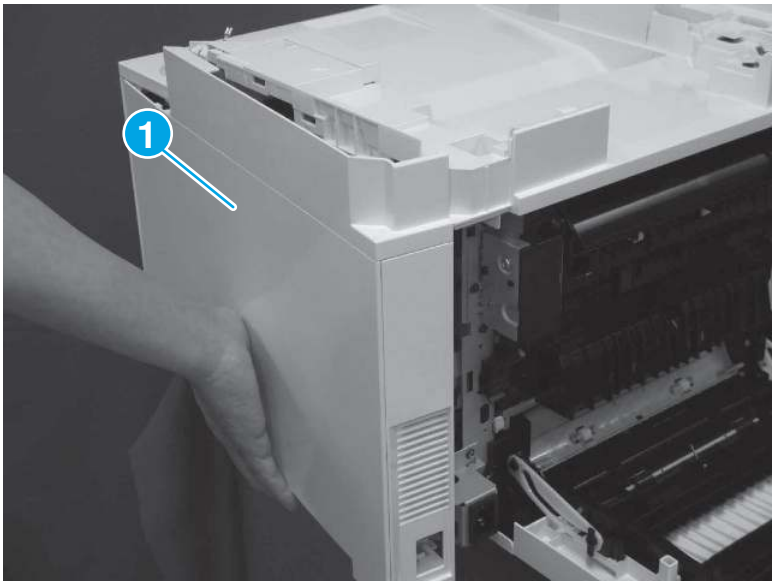Figure 4-331 **Remove the cover**




3. Remove the drum motor

Follow the procedure below to remove and replace the drum motor.

- Disconnect one connector (callout 1), remove four screws (callout 2), and then remove the drum motor (callout 3).

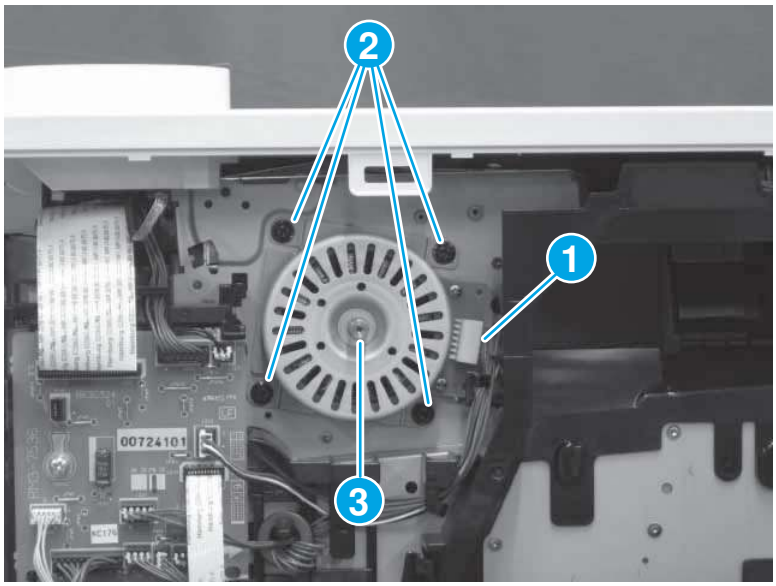Figure 4-332 **Remove the drum motor**



4. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: 

Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.

Removal and replacement: Fuser motor

Learn about fuser motor removal.

Mean time to repair: 9 minutes

Service level: Easy

Before performing service

Turn the printer power off

- Disconnect the power cable.

WARNING! To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-32 Part information

Part number	Part description
RK3-0334-000CN	Motor, stepping DC (fuser; M2)

Required tools

- #2 Phillips screwdriver with a magnetic tip and a 152 mm (6 in) shaft length

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test

Print any pages necessary to make sure the printer is functioning correctly.


1. Remove the right cover (SFP)

Follow the procedure below to remove and replace the right cover (SFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.


1. Remove one screw (callout 1).

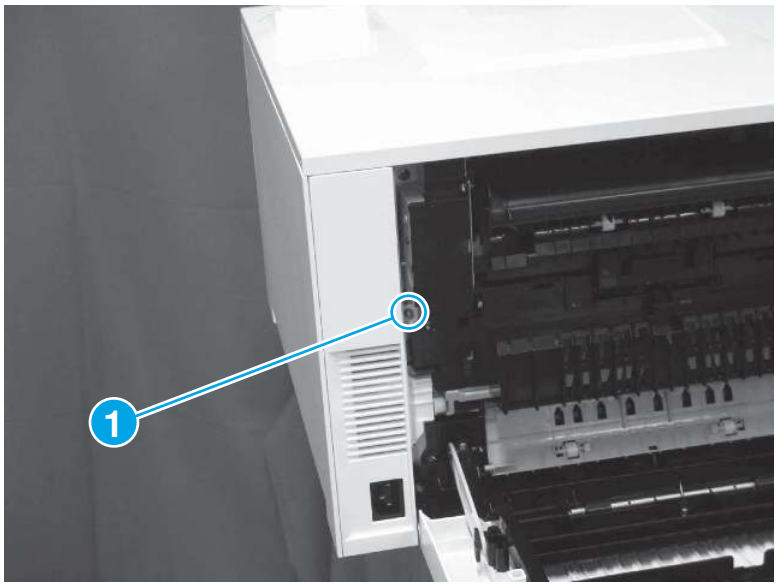Figure 4-333 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to three tabs (callout 1). Release three tabs.

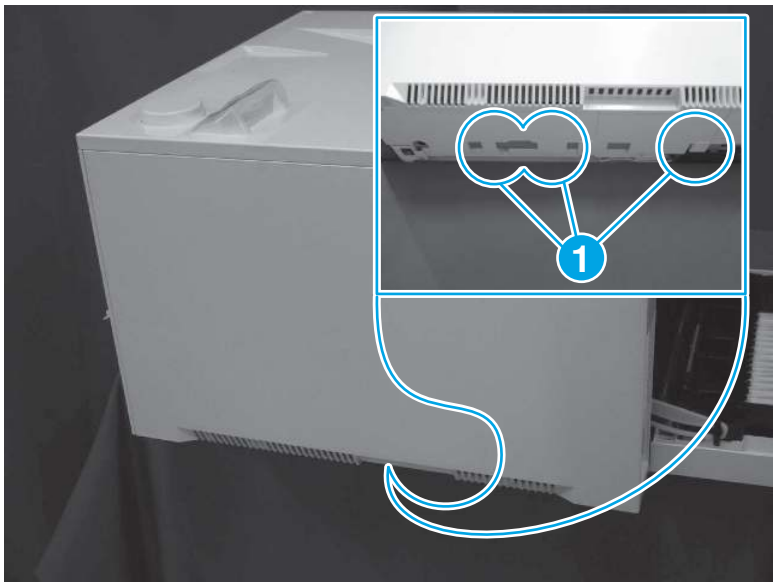Figure 4-334 Release three tabs




3. Press in on the side (callout 1) of the right cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

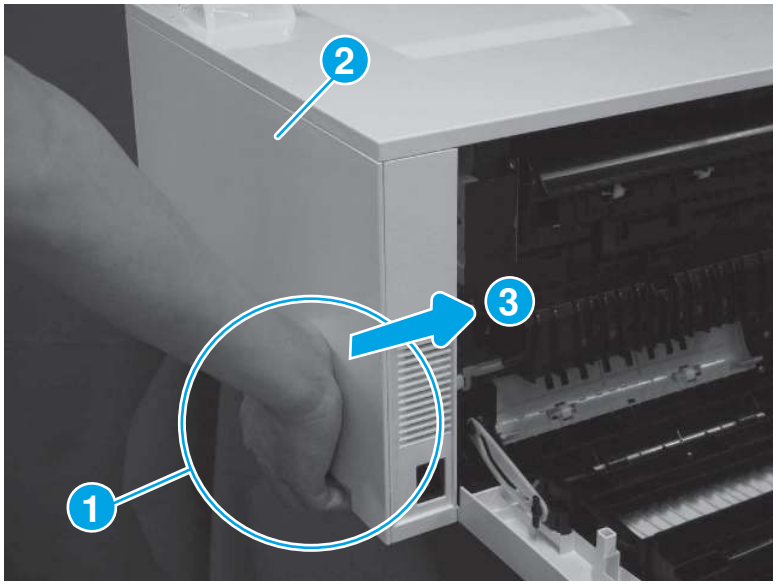Figure 4-335 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

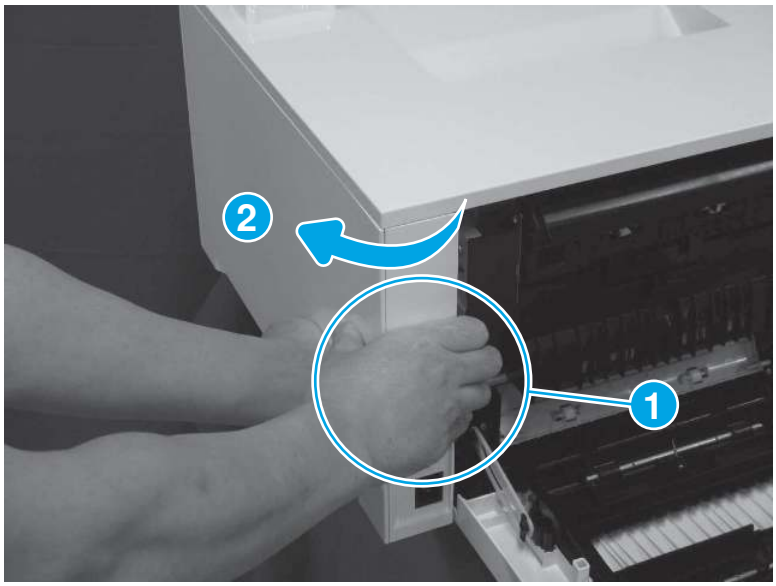Figure 4-336 Disengage the cover corner



5. Remove the right cover (callout 1).

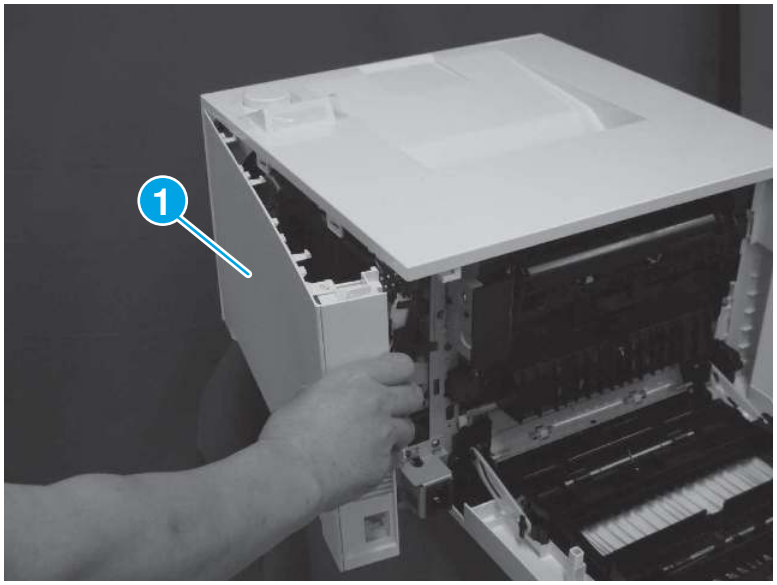Figure 4-337 Remove the cover




2. Remove the right cover (MFP)

Follow the procedure below to remove and replace the right cover (MFP).

NOTE: The following procedure is for an MFP printer only. If this assembly is being removed to gain access to dependency parts for a SFP printer, skip this step.


1. Remove one screw (callout 1).

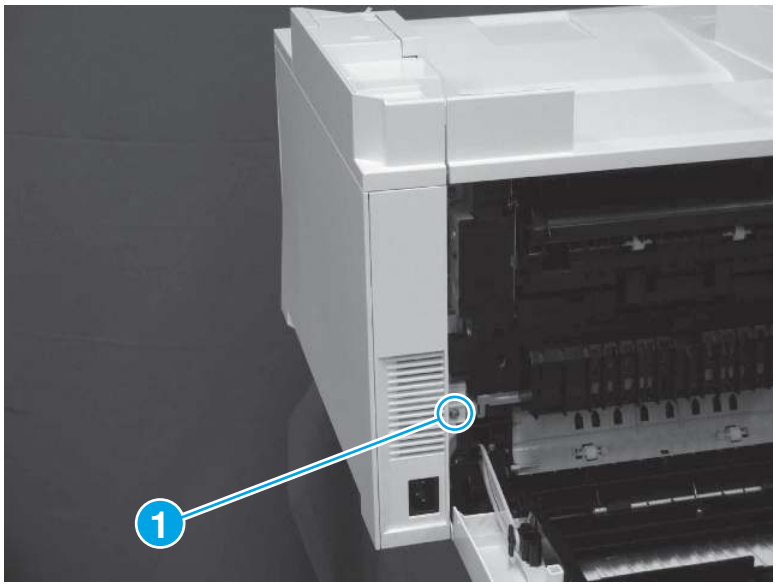Figure 4-338 **Remove one screw**




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to three tabs (callout 1). Release three tabs.

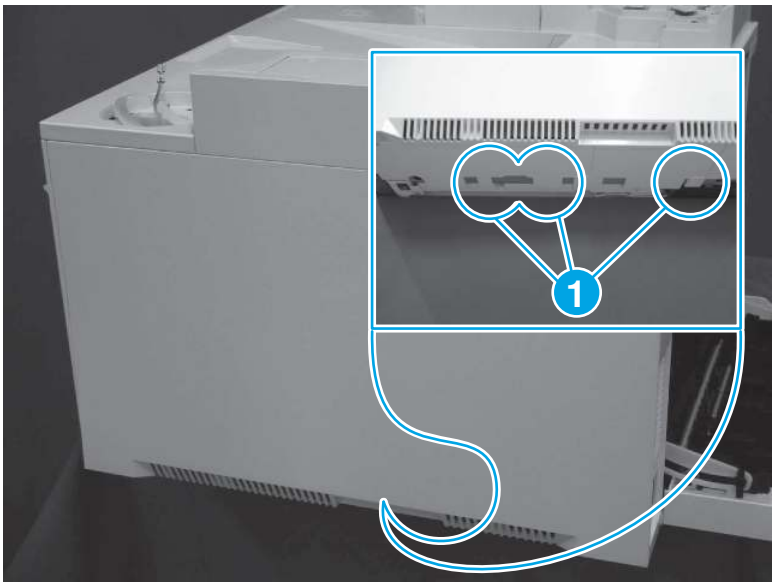Figure 4-339 **Release three tabs**




3. Press in on the side (callout 1) of the right cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

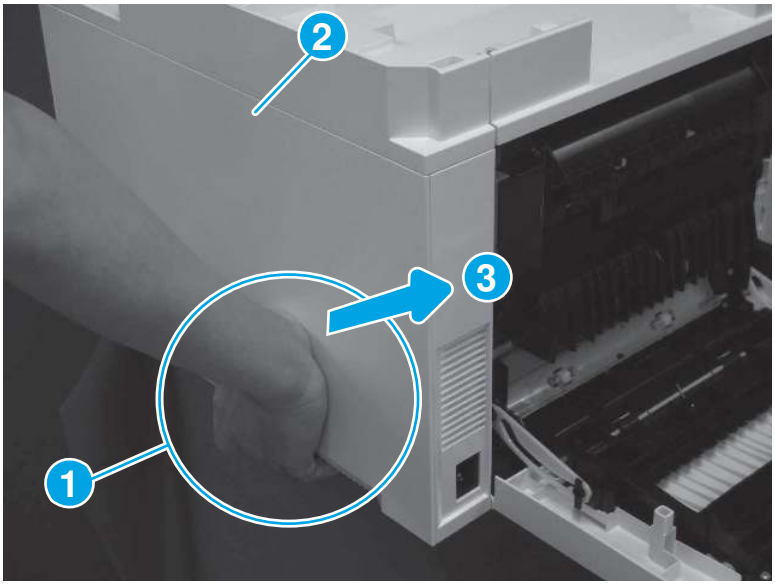Figure 4-340 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

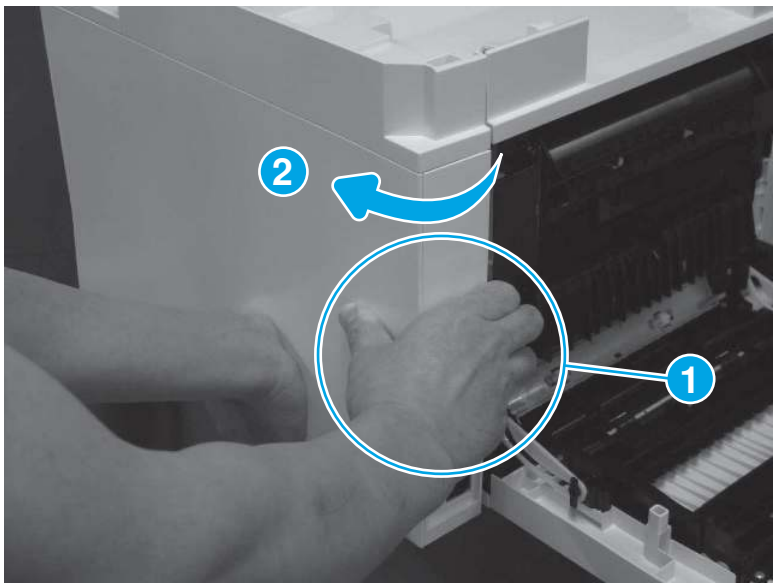Figure 4-341 Disengage the cover corner



5. Remove the right cover (callout 1).

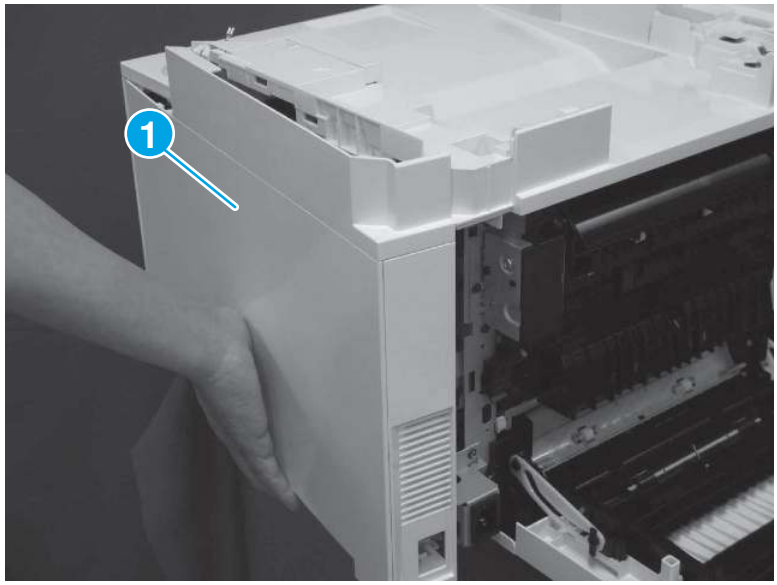Figure 4-342 Remove the cover



3. Remove the fuser motor


Follow the procedure below to remove and replace the fuser motor.

NOTE: Some covers and guides are shown removed in the figures below for clarity. However, only the right cover needs to be removed to service this motor.

1. Disconnect three connectors.


Reinstallation tip: Make sure to follow the special installation instructions for this part or step (located after the unpack and recycle or cleaning section).

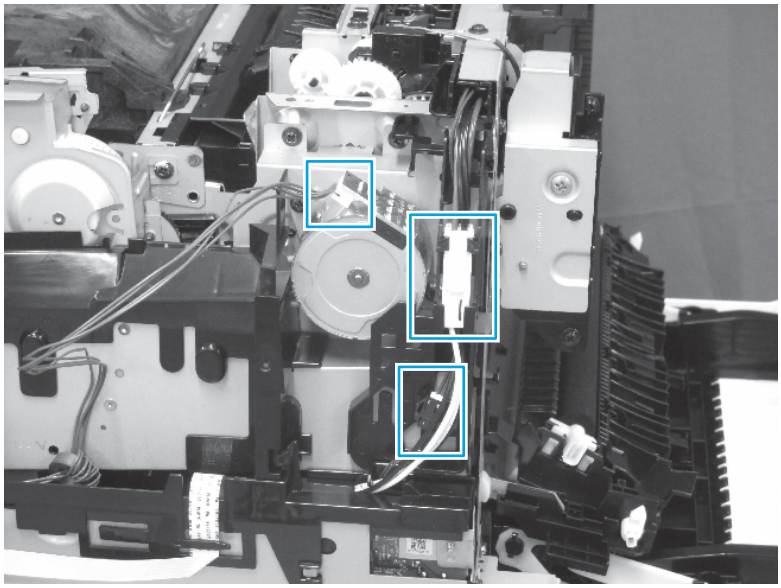Figure 4-343 Disconnect connectors




2. Release one tab (callout 1), slide the guide (callout 2) straight up to release it, and then remove the guide.

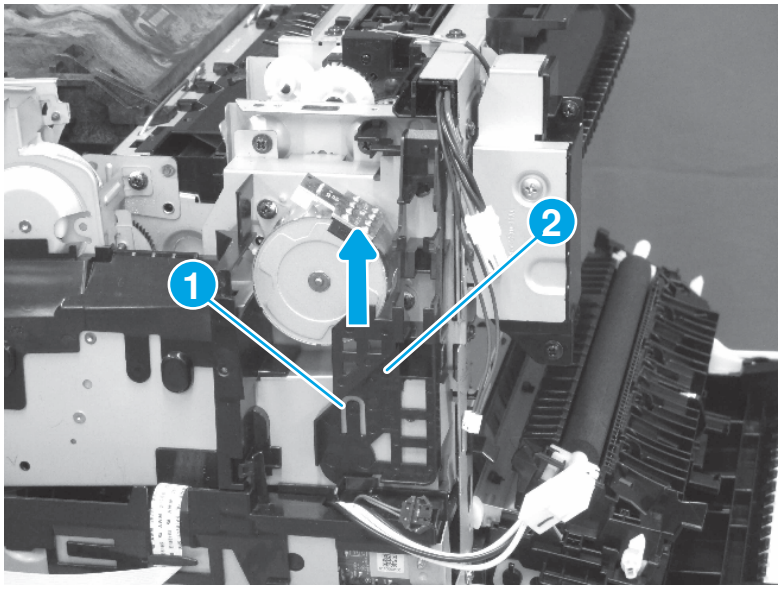Figure 4-344 Remove the guide



3. Remove two screws, and then remove the fuser motor.

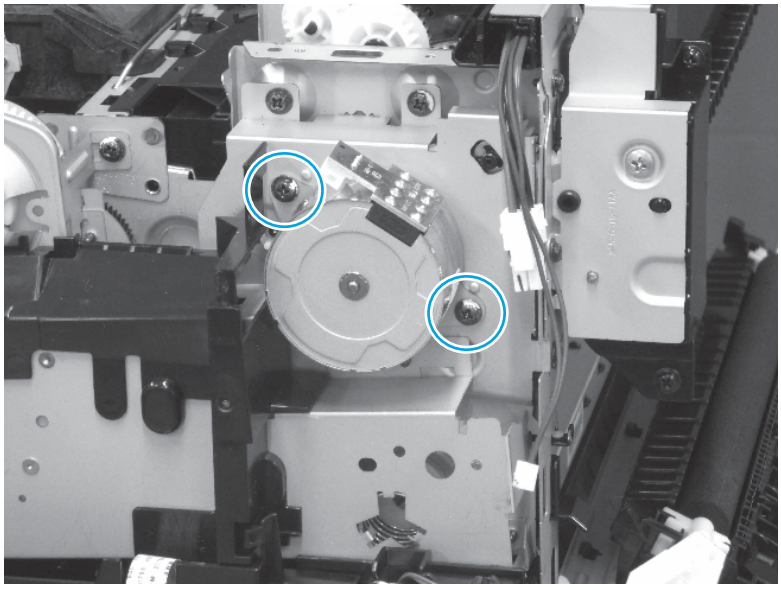Figure 4-345 Remove the motor



4. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.


NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.

5. Special installation instructions - Fuser motor

Follow the special instructions below to install the fuser motor.

- Make sure that the fuser temperature fuse cable (callout 1) is positioned behind the thick cable (callout 2). This prevents the fuser cable from unnecessary movement.

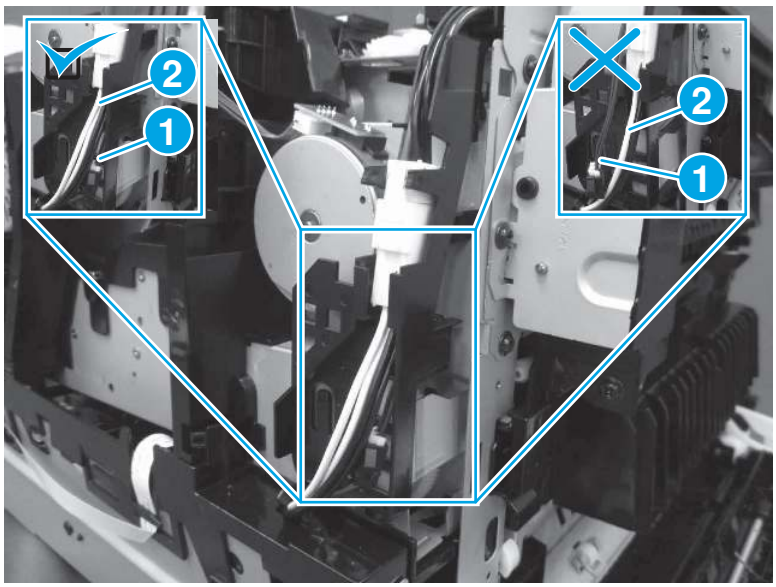Figure 4-346 **Check the fuser temperature fuse cable**



Removal and replacement: Fuser motor PCA

Learn about fuser motor PCA removal.

Mean time to repair: 10 minutes

Service level: Easy

Before performing service

Turn the printer power off

- Disconnect the power cable.

> ⚠ **WARNING!** To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-33 Part information

Part number	Part description
RM3-7536-000CN	Fixing motor control PCA

Required tools

- #2 Phillips screwdriver with a magnetic tip and a 152 mm (6 in) shaft length

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test

Print any pages necessary to make sure the printer is functioning correctly.


1. Remove the right cover (SFP)

Follow the procedure below to remove and replace the right cover (SFP).

> **NOTE:** The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.


1. Remove one screw (callout 1).

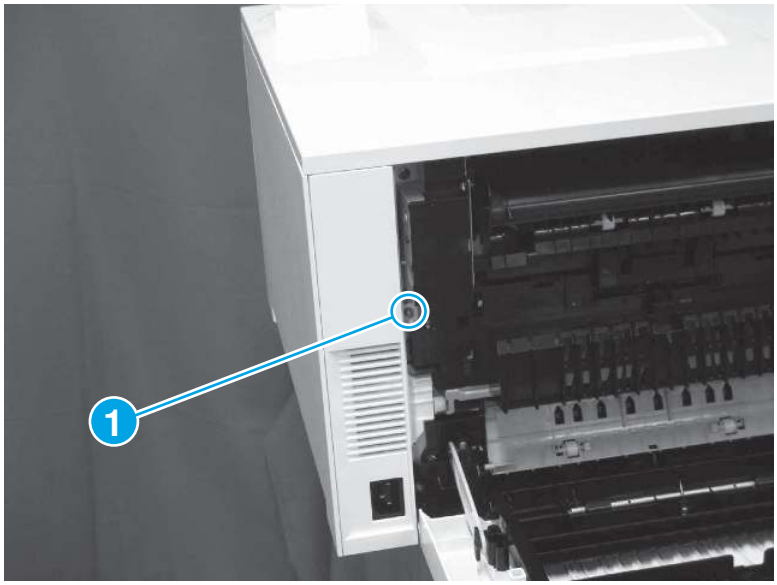Figure 4-347 **Remove one screw**




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to three tabs (callout 1). Release three tabs.

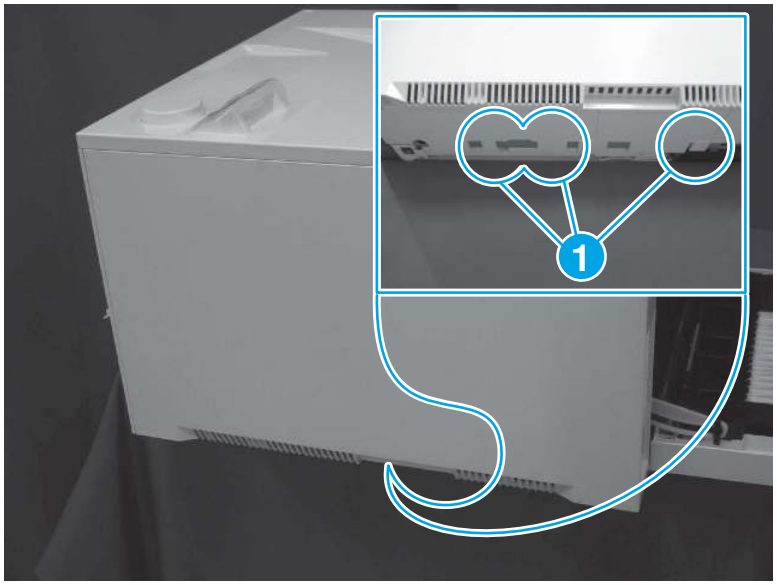Figure 4-348 **Release three tabs**




3. Press in on the side (callout 1) of the right cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

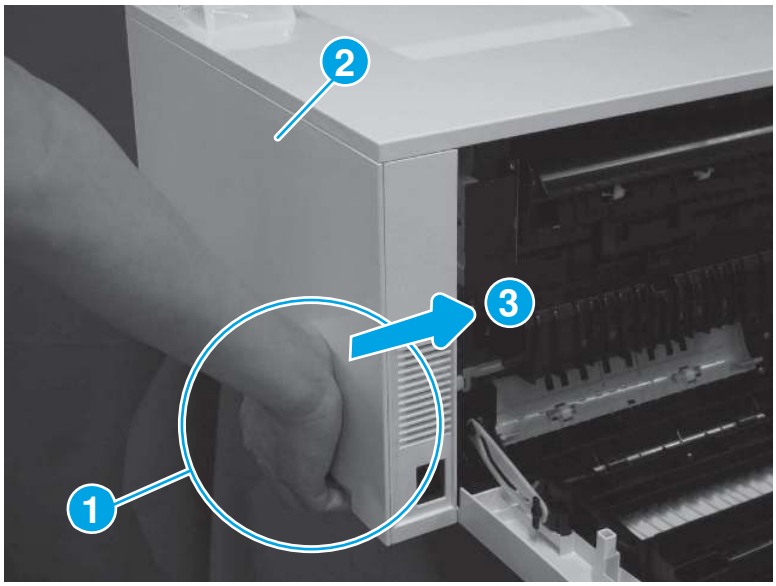Figure 4-349 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

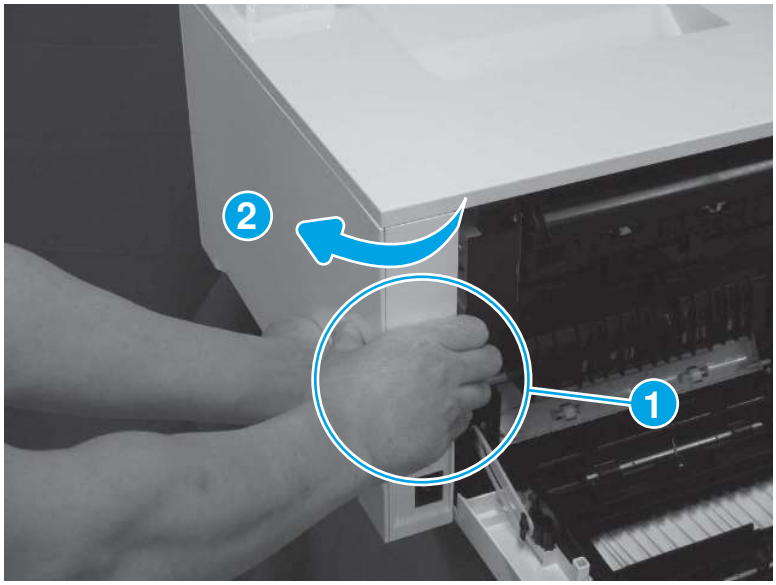Figure 4-350 Disengage the cover corner



5. Remove the right cover (callout 1).

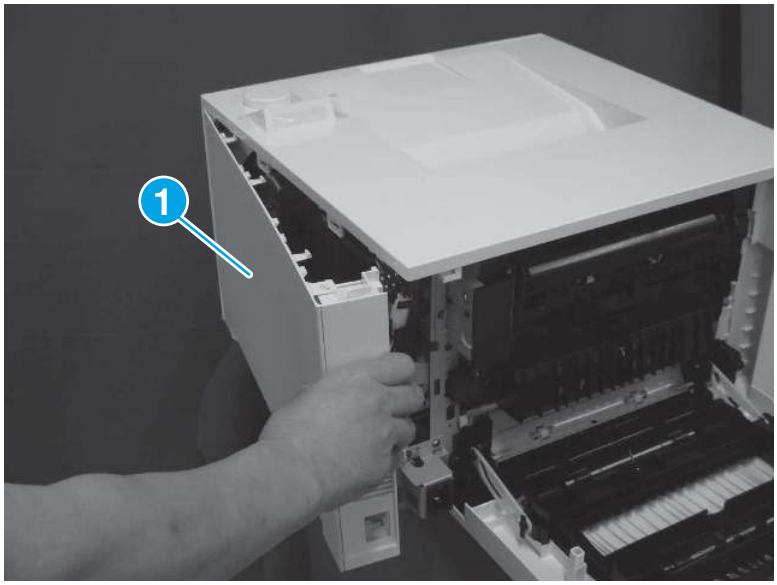Figure 4-351 **Remove the cover**




2. Remove the right cover (MFP)

Follow the procedure below to remove and replace the right cover (MFP).

NOTE: The following procedure is for an MFP printer only. If this assembly is being removed to gain access to dependency parts for a SFP printer, skip this step.


1. Remove one screw (callout 1).

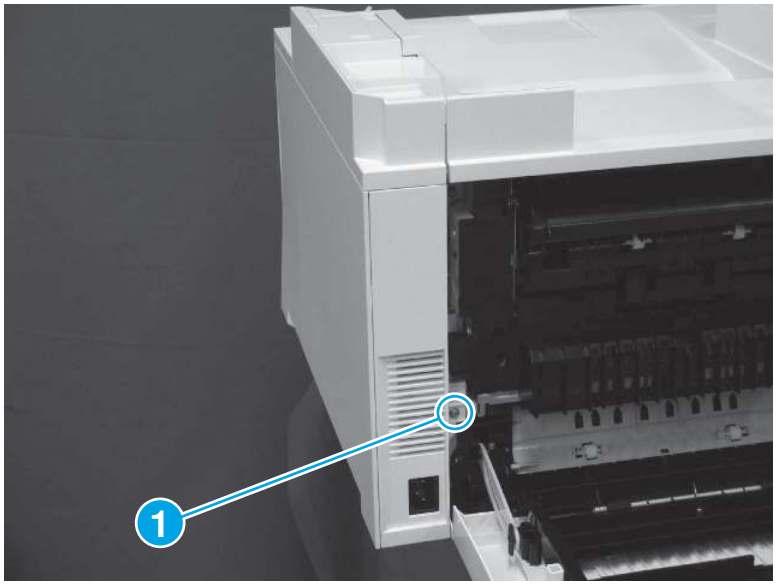Figure 4-352 **Remove one screw**




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to three tabs (callout 1). Release three tabs.

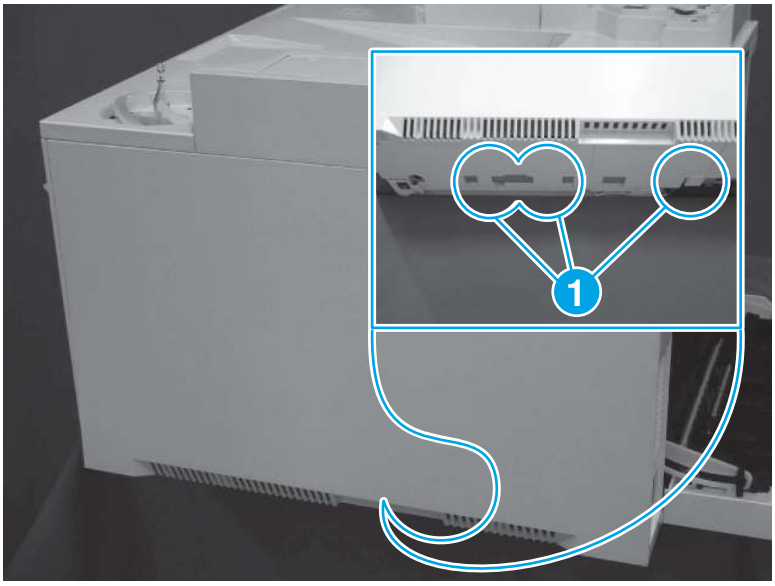Figure 4-353 Release three tabs




3. Press in on the side (callout 1) of the right cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

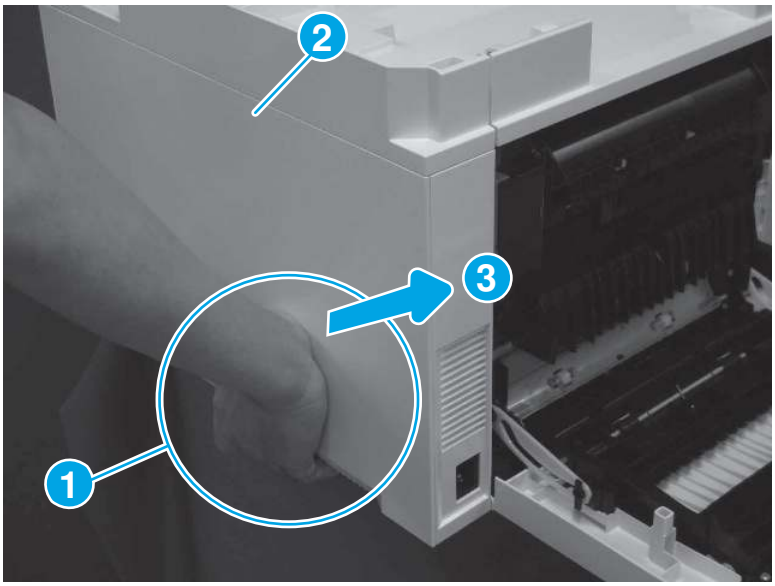Figure 4-354 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

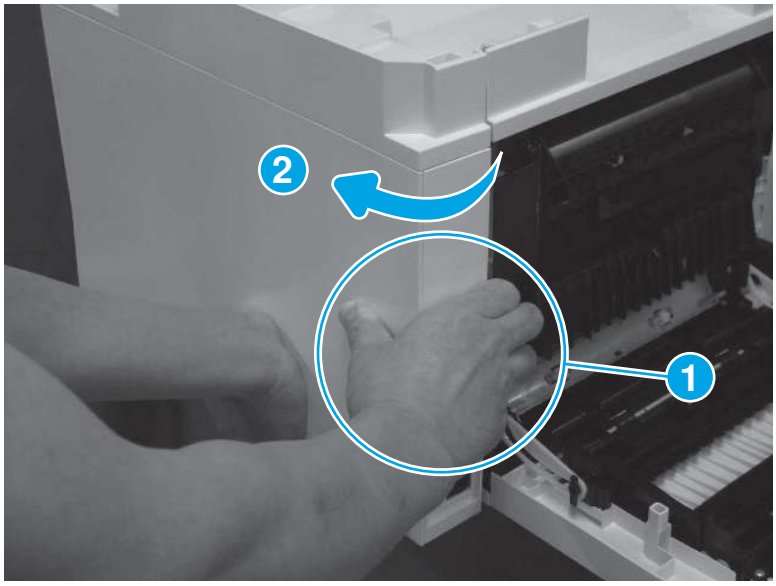Figure 4-355 Disengage the cover corner



5. Remove the right cover (callout 1).

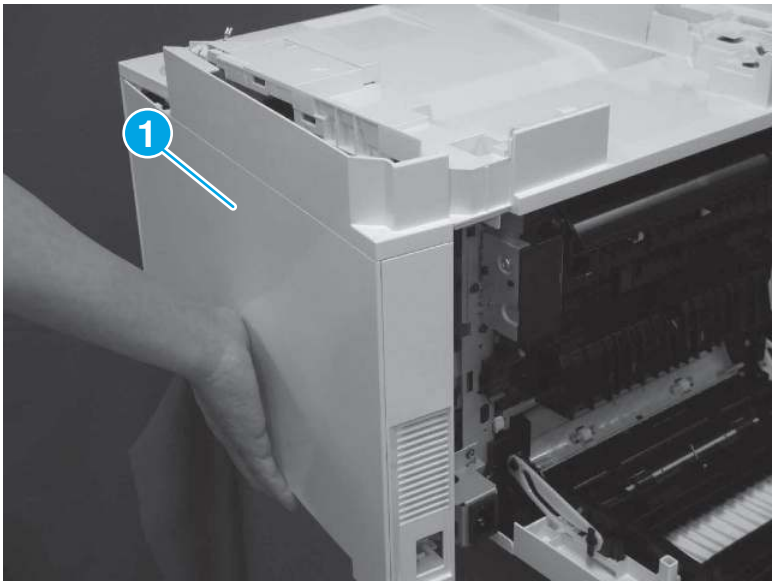Figure 4-356 Remove the cover




3. Remove the fuser motor PCA

Follow the procedure below to remove and replace the fuser motor PCA.


1. Disconnect twelve connectors on the fuser motor PCA, and then remove one screw (callout 1).

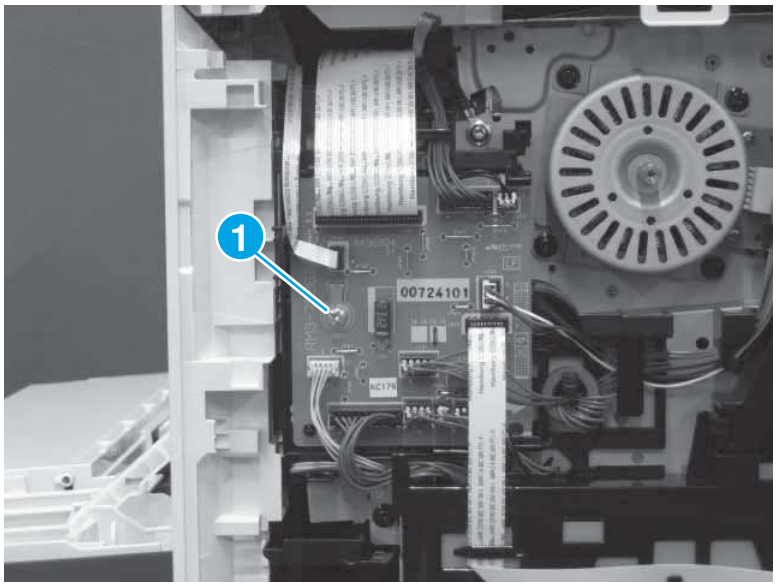Figure 4-357 Disconnect connectors and remove one screw



2. Release two tabs (callout 1), and then remove the fuser motor PCA (callout 2).

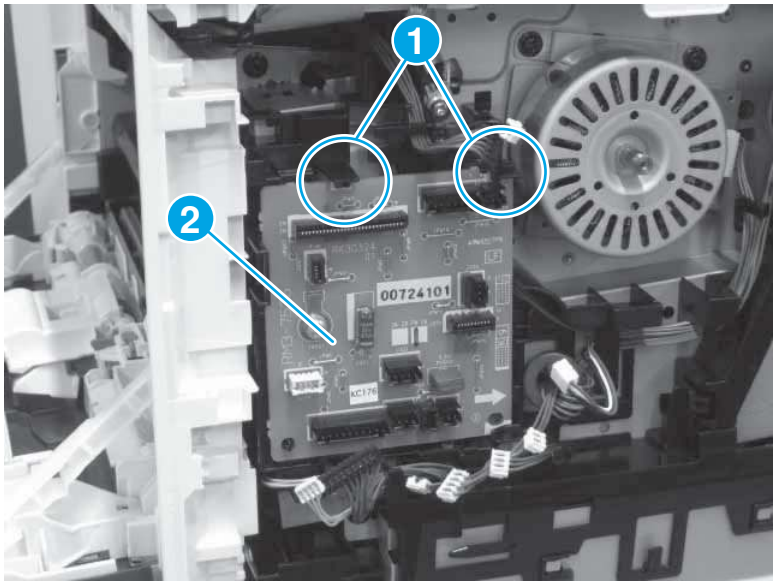Figure 4-358 Remove the fuser motor PCA



3. To reinstall the PCA, do the following:


   a. Slide the PCA from the left-side toward the right-side to install it on the holder (callout 1).

   IMPORTANT: Make sure that none of the FFCs or wire harness are trapped behind the PCA when reinstalling it.

   b. Verify that the holder alignment pin (callout 2), boss (callout 3), and tabs (callout 4) are engaged with the PCA.

   NOTE: With the PCA firmly held in place, reinstall the screw (callout 5).

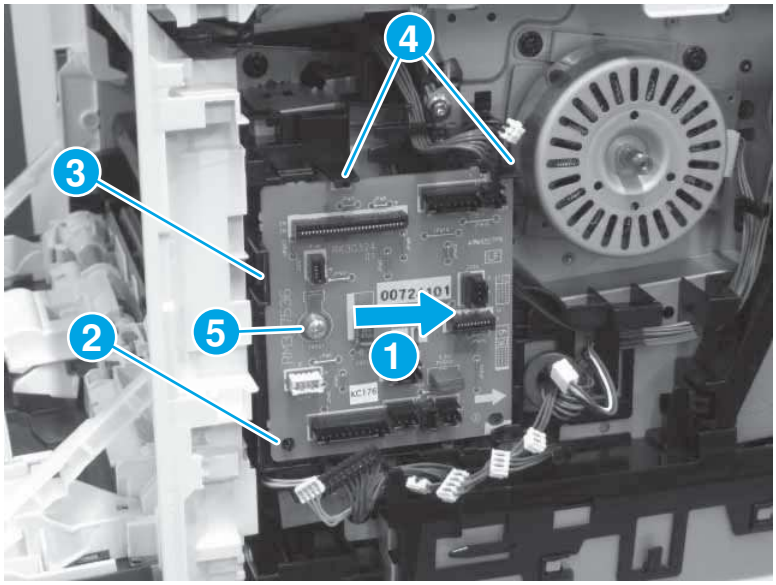Figure 4-359 Reinstall the fuser motor PCA



4. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.

Removal and replacement: Cartridge fan

Learn about cartridge fan removal.

View a video of removing and replacing the cartridge fan.

Mean time to repair: 30 minutes

Service level: Medium

Before performing service

Turn the printer power off

- Disconnect the power cable.

WARNING! To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-34 Part information

Part number	Part description
RK3-0397-000CN	Fan (cartridge; FM1)

Required tools

- #2 Phillips screwdriver with a magnetic tip and a 152 mm (6 in) shaft length
- Small flat-blade screwdriver
- Needle-nose pliers

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test

No post service test is available for this assembly.

1. Remove the left cover (SFP)


Follow the procedure below to remove and replace the left cover (SFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.

TIP: There might be a small cover installed on the USB port located at the back of the printer. If installed, remove this cover now.


1. Remove one screw (callout 1).

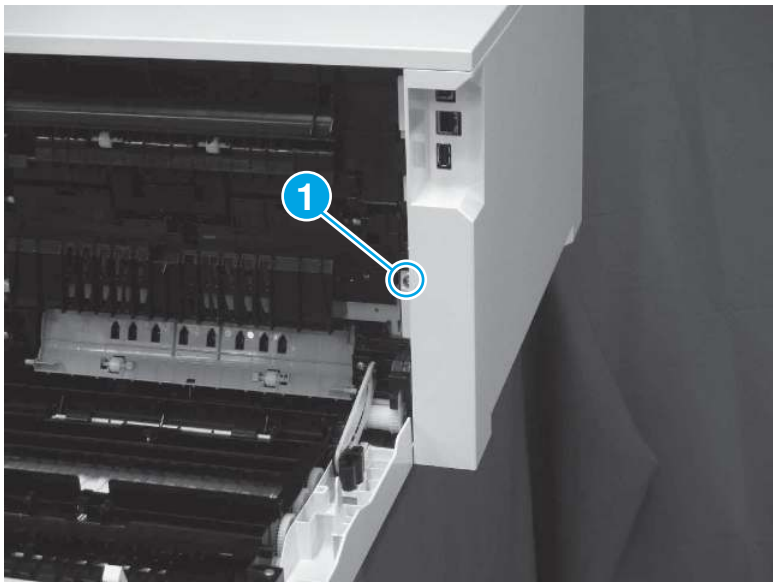Figure 4-360 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

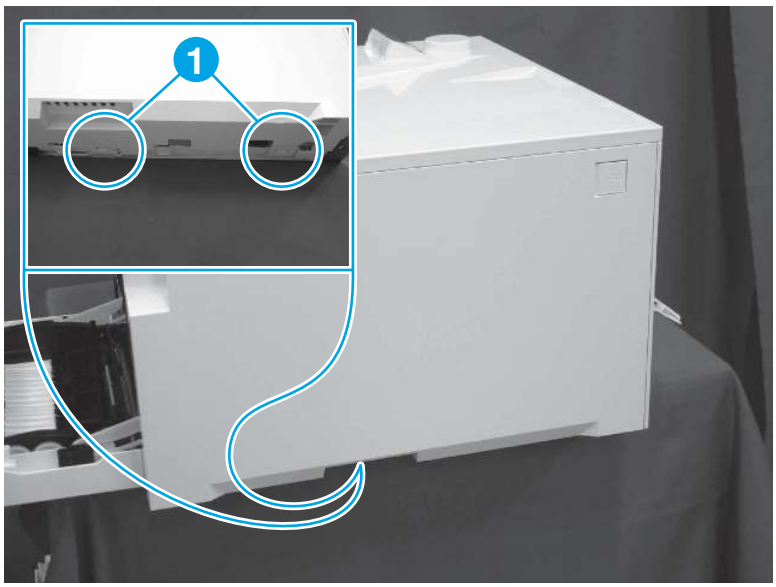Figure 4-361 Release two tabs




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

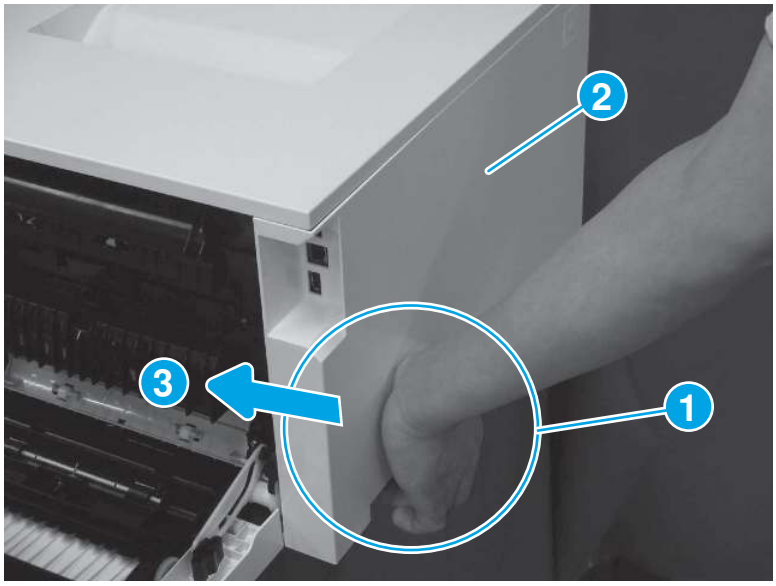Figure 4-362 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

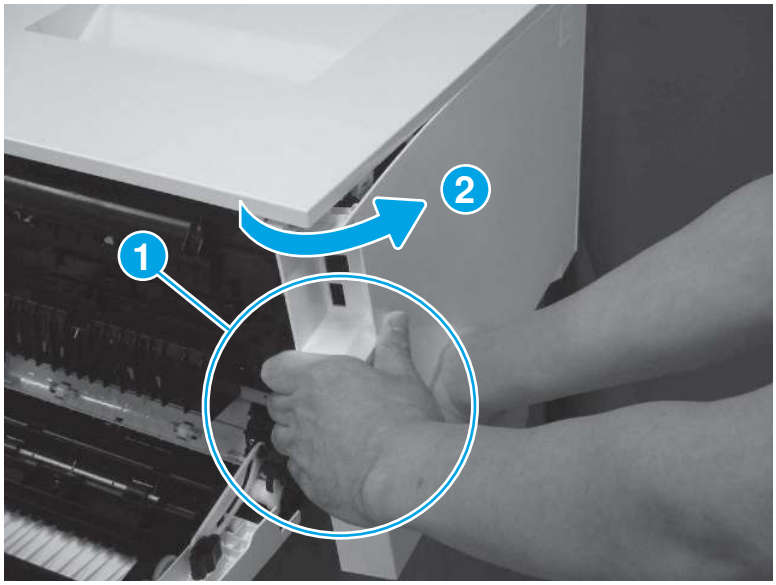Figure 4-363 Disengage the cover corner



5. Remove the left cover (callout 1).

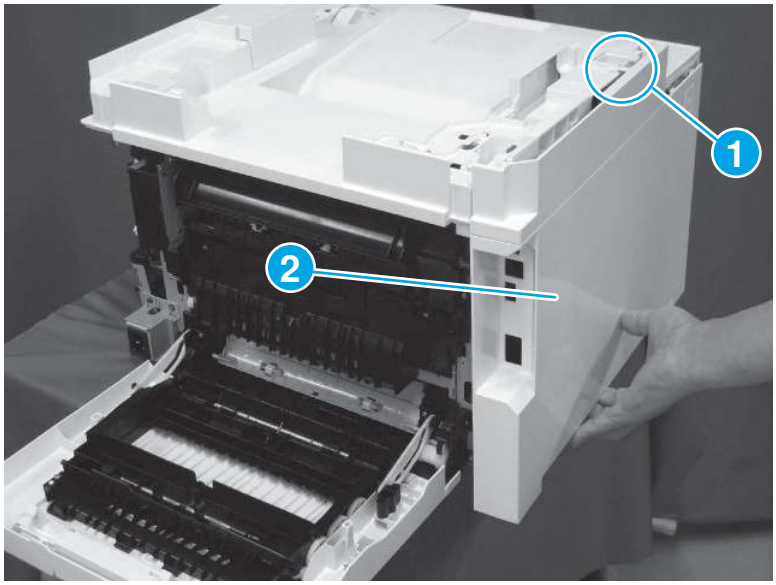Figure 4-364 **Remove the cover**



2. Remove the left cover (MFP)


Follow the procedure below to remove and replace the left cover (MFP).

NOTE: The following procedure is for an MFP printer only. If this assembly is being removed to gain access to dependency parts for a SFP printer, skip this step.

TIP: There might be a small cover installed on the USB port and/or the fax port located at the back of the printer. If installed, remove these covers now.


1. Remove one screw (callout 1).

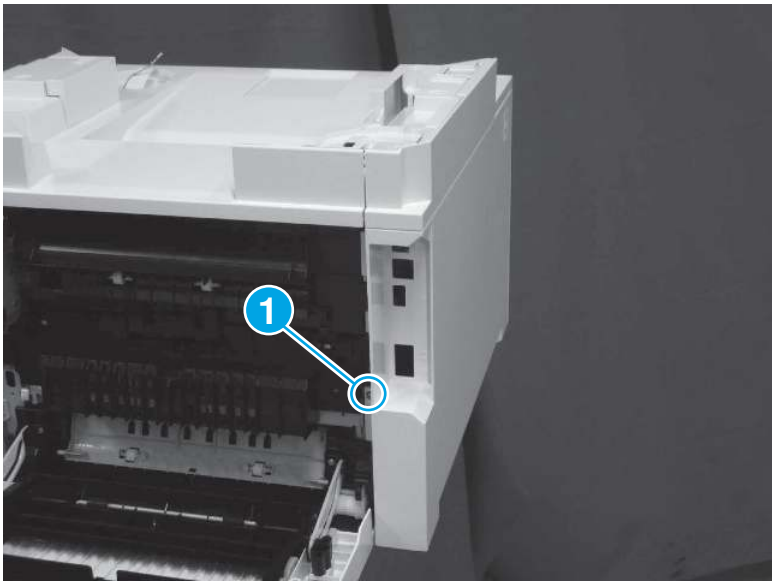Figure 4-365 **Remove one screw**




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

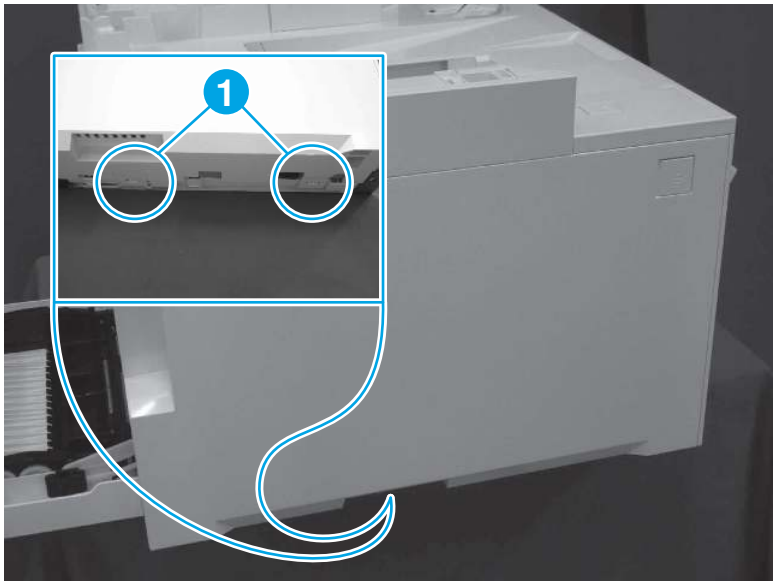Figure 4-366 Release two tabs




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

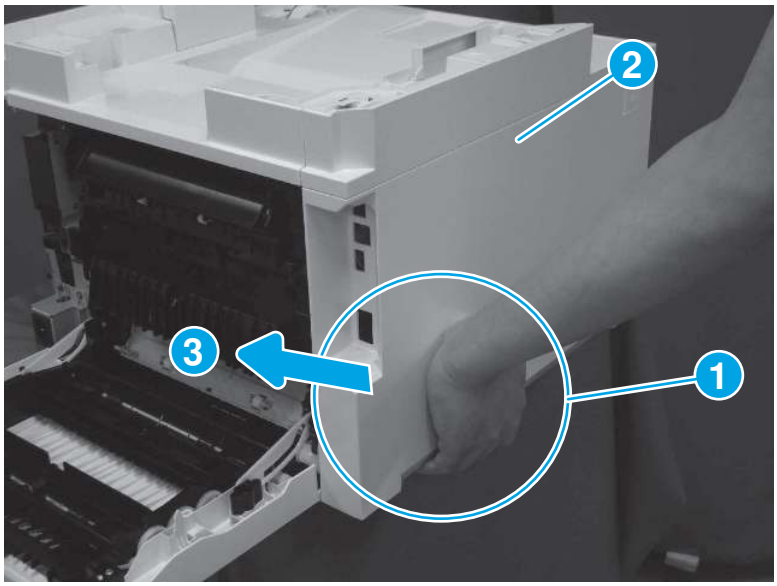Figure 4-367 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

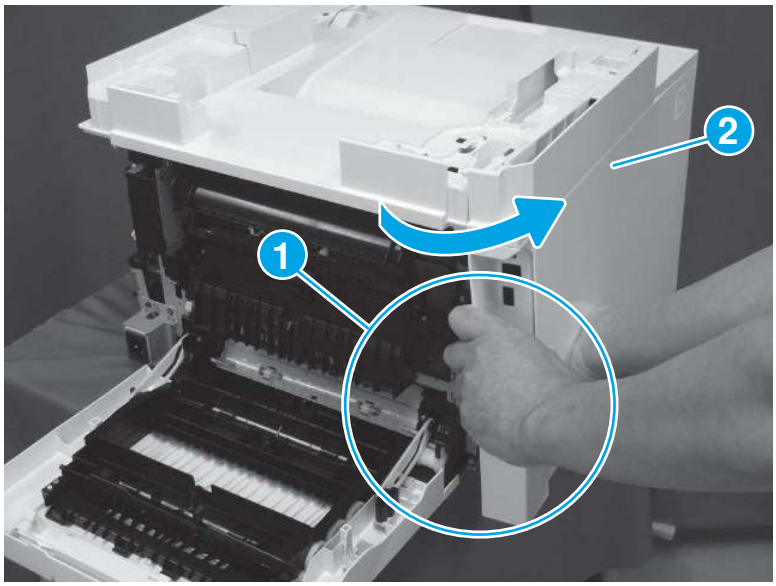Figure 4-368 Disengage the cover corner



5. Remove the left cover (callout 1).

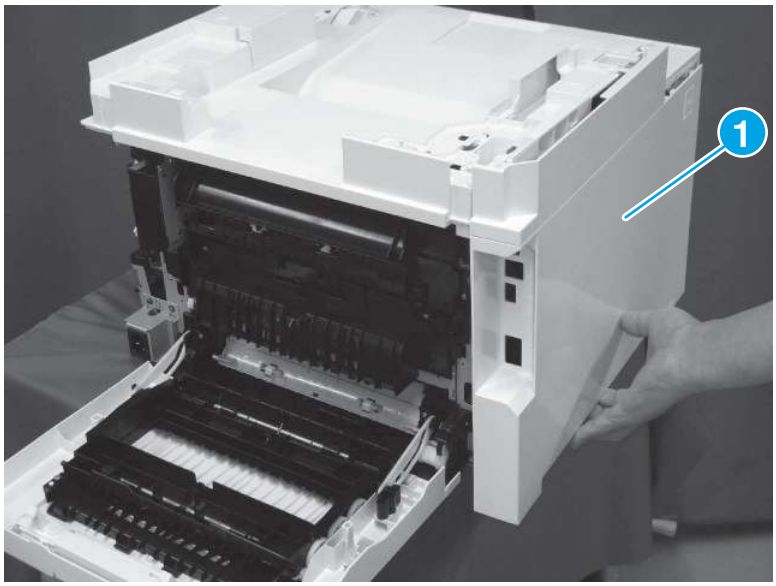Figure 4-369 Remove the cover



3. Remove the ISA (MFP)

Follow the procedure below to remove and replace the ISA.


1. Open the ISA, and then remove the ISA FFC cover (callout 1).

Figure 4-370 Remove the FFC cover



2. Disconnect three FFCs, and then remove one screw to release the ground cable.

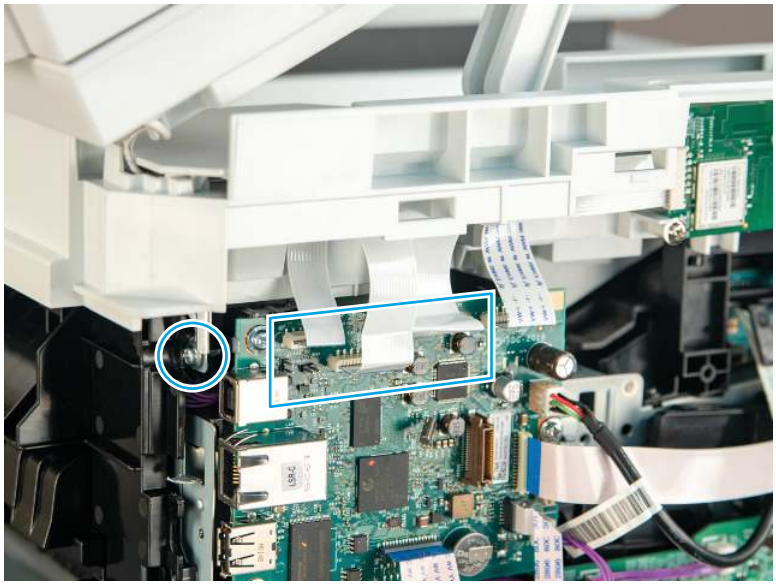Figure 4-371 Disconnect FFCs and remove screw



3. Release one tab (callout 1), and then rotate the ISA slider pin (callout 2) towards the front of the printer to release it. Remove the slider pin.


⚠ CAUTION: When the slider pin is removed, the ISA is not captive and can suddenly detach from the printer.

Figure 4-372 Remove the slider pin




4. Support the ISA, release the FFCs from the retainers, and then carefully pass the FFCs and the ground wire up through the slots in the top cover.

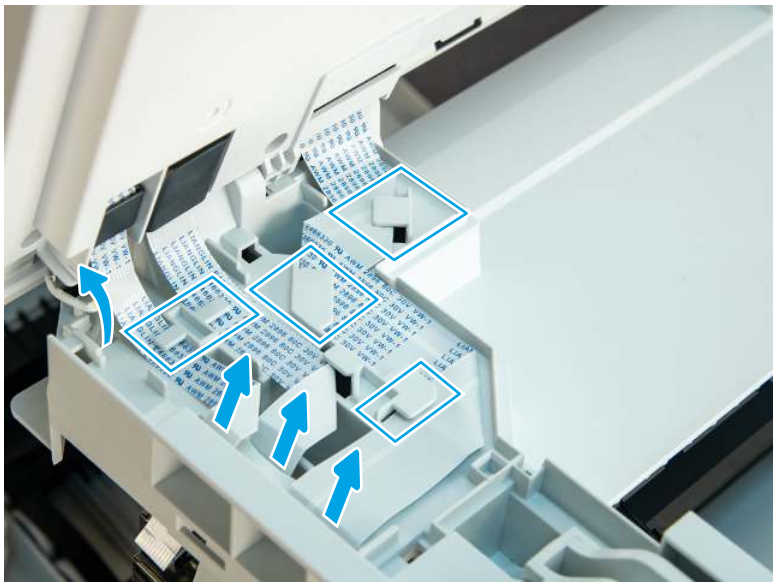Figure 4-373 Release the FFCs and ground wire



5. Slide ISA as shown below to release it.

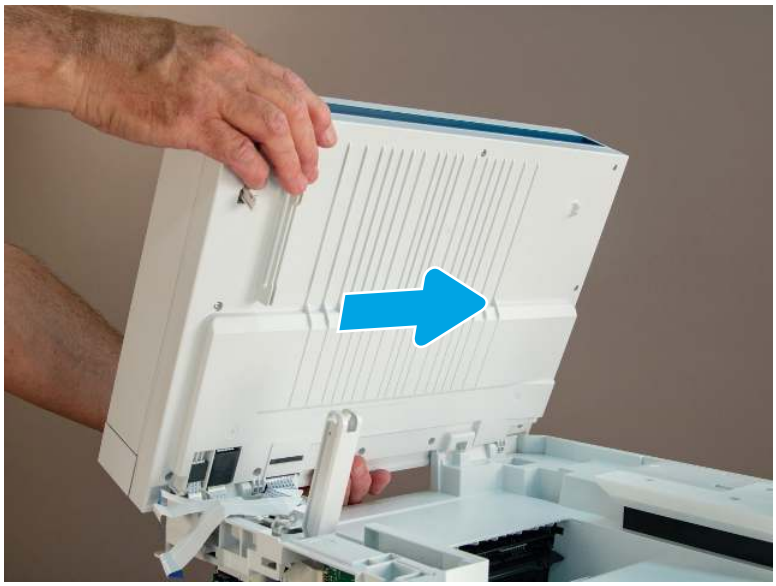Figure 4-374 Release the ISA



6. Remove the ISA.

Figure 4-375 Remove the ISA




4. Remove the right cover (SFP)

Follow the procedure below to remove and replace the right cover (SFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.


1. Remove one screw (callout 1).

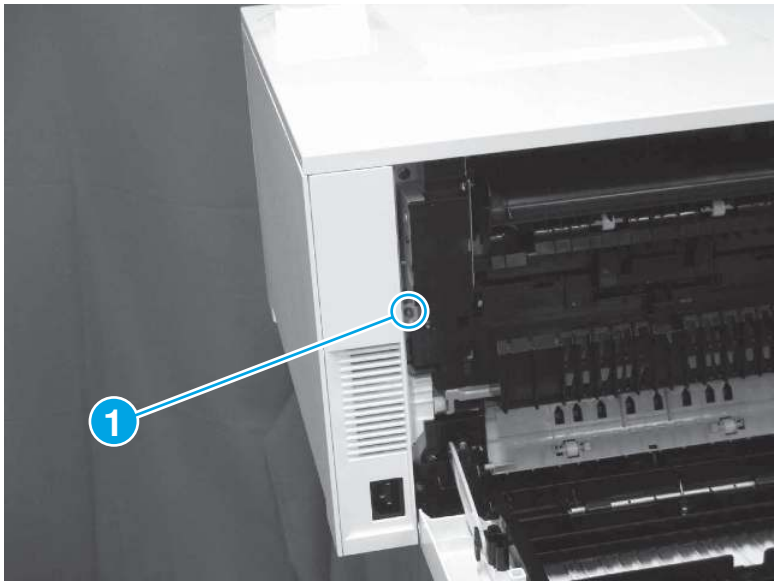Figure 4-376 **Remove one screw**




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to three tabs (callout 1). Release three tabs.

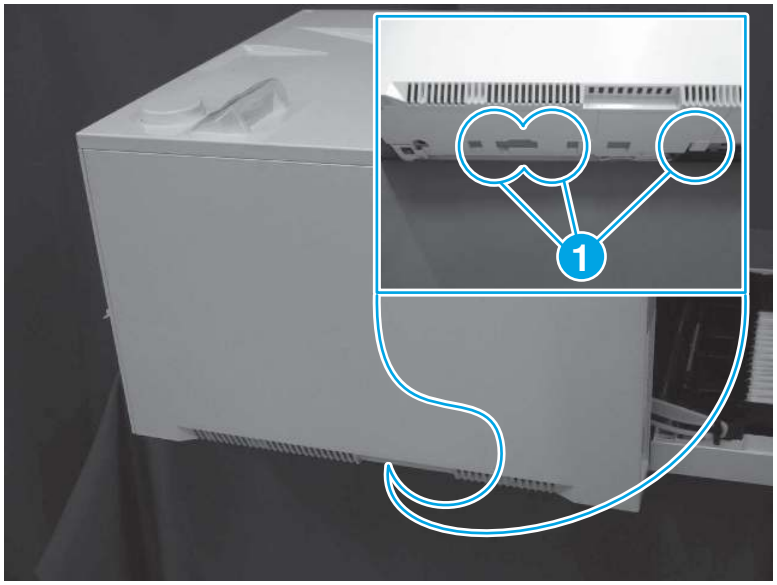Figure 4-377 **Release three tabs**




3. Press in on the side (callout 1) of the right cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

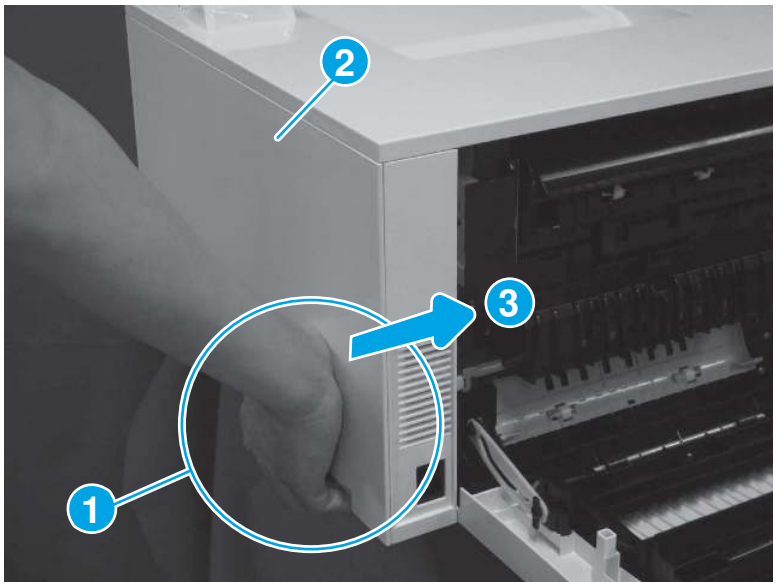Figure 4-378 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

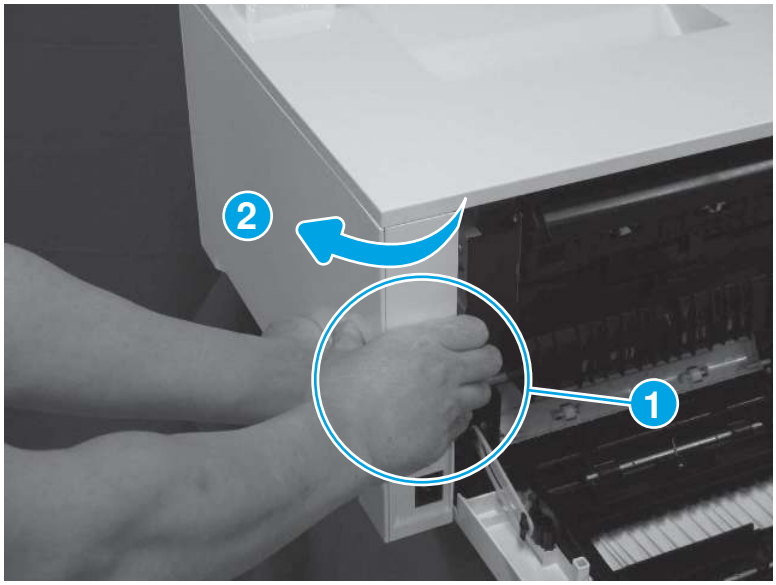Figure 4-379 Disengage the cover corner



5. Remove the right cover (callout 1).

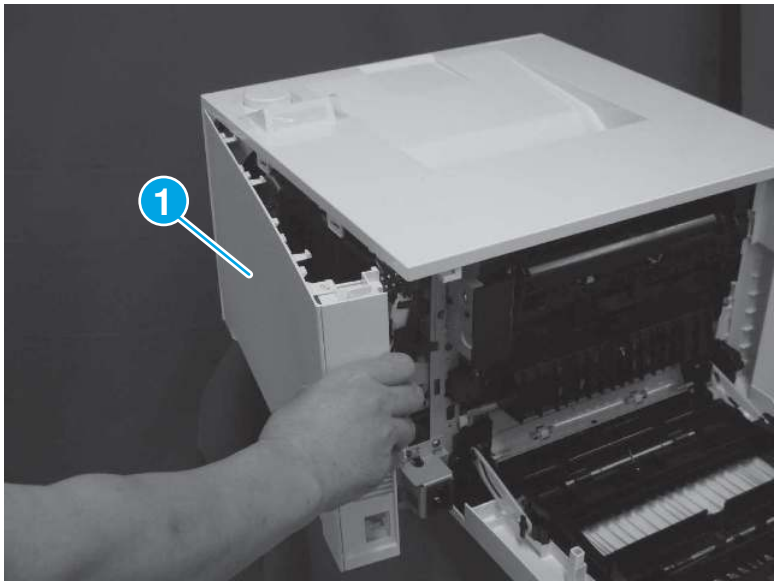Figure 4-380 **Remove the cover**




5. Remove the right cover (MFP)

Follow the procedure below to remove and replace the right cover (MFP).

NOTE: The following procedure is for an MFP printer only. If this assembly is being removed to gain access to dependency parts for a SFP printer, skip this step.


1. Remove one screw (callout 1).

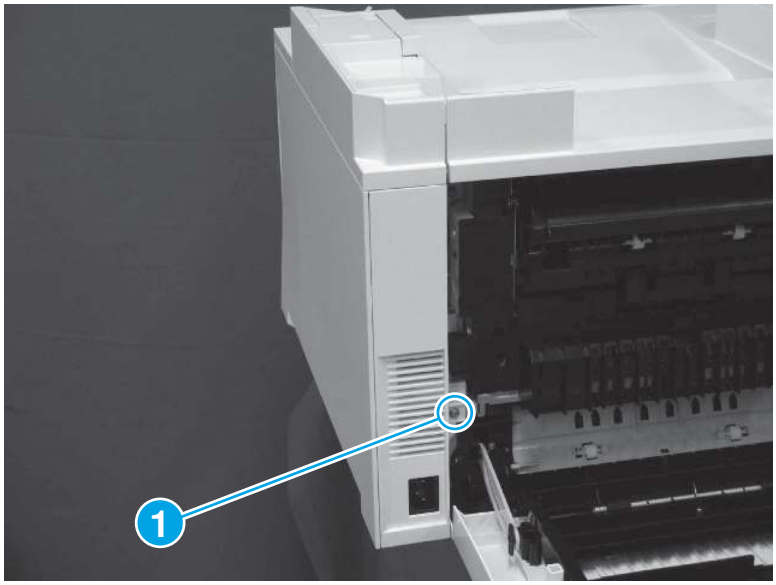Figure 4-381 **Remove one screw**




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to three tabs (callout 1). Release three tabs.

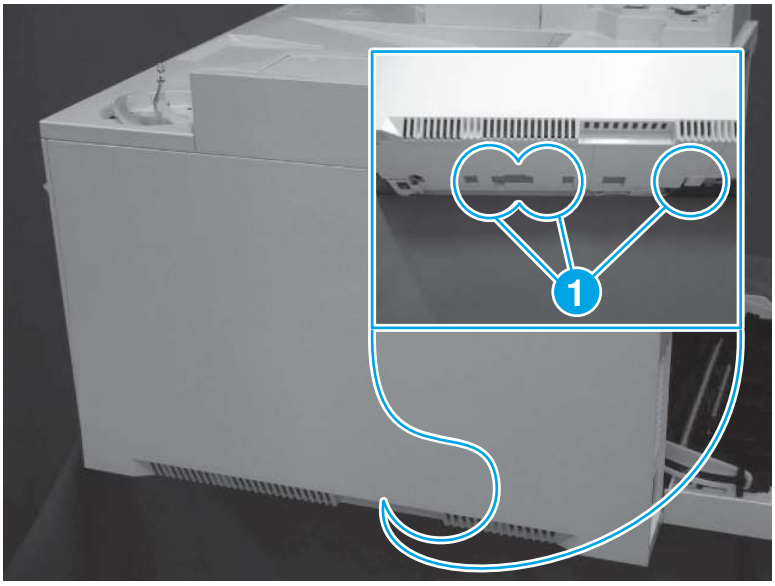Figure 4-382 Release three tabs




3. Press in on the side (callout 1) of the right cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

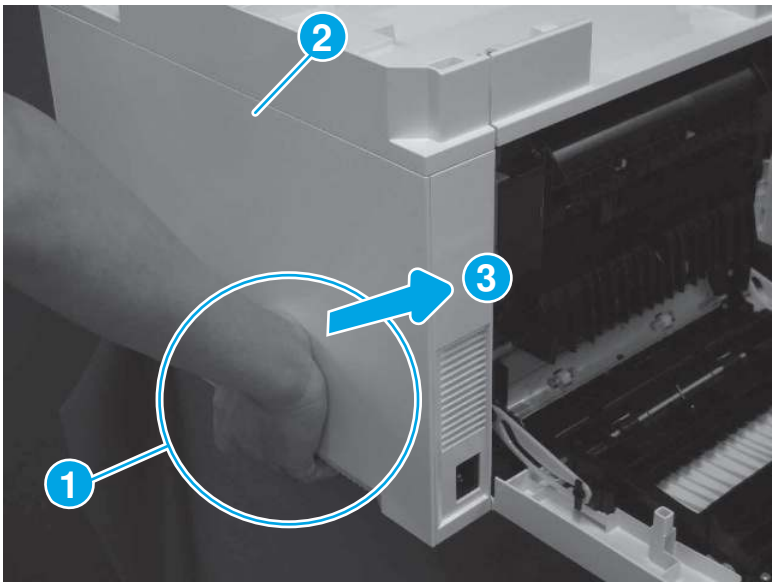Figure 4-383 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

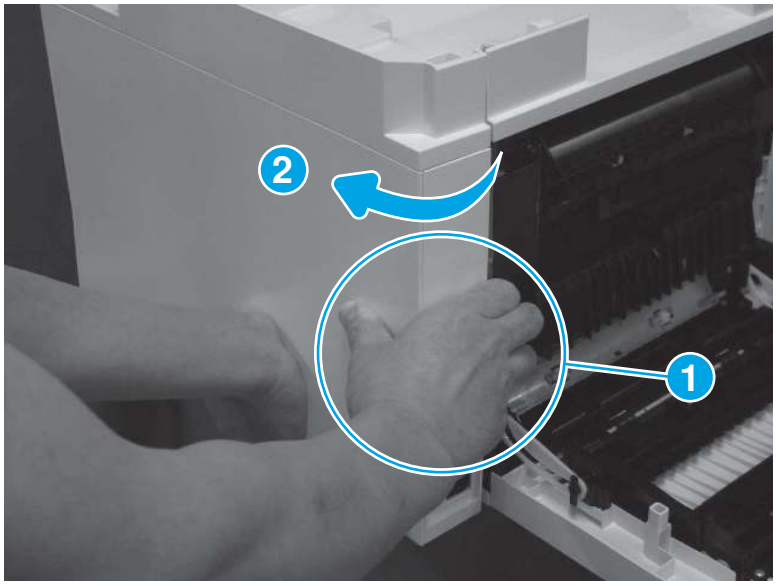Figure 4-384 **Disengage the cover corner**



5. Remove the right cover (callout 1).

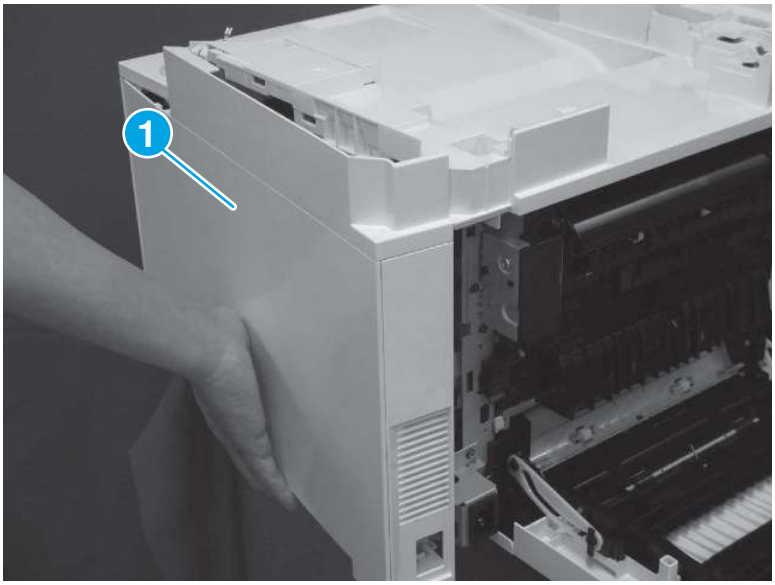Figure 4-385 **Remove the cover**



6. Remove the front cover


Follow the procedure below to remove and replace the front cover.

NOTE: Front cover removal is **identical** for both SFP and MFP models.

Reinstallation tip: Make sure to follow the special installation instructions for this part or step (located after the unpack and recycle or cleaning section).

1. Remove three screws (callout 1).

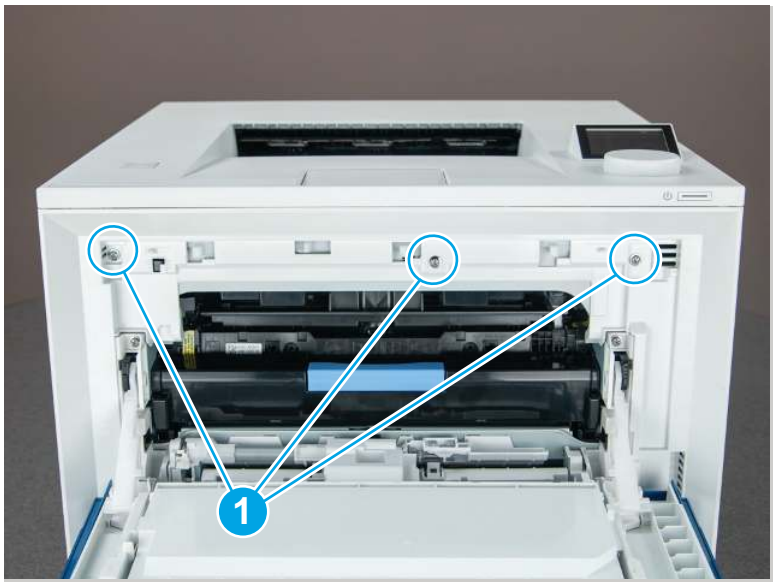
Figure 4-386 Remove three screws



2. Before proceeding, take note of the door release arm (callout 1). This arm can be easily dislodged when the cover is removed.


⚠ CAUTION: Do not lose the spring (callout 2) when removing the front cover.

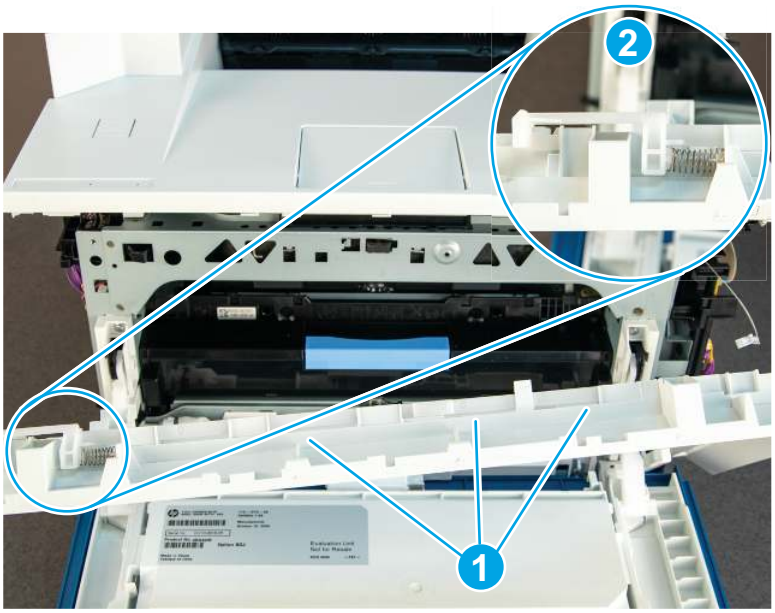Figure 4-387 Door release arm



3. Release four tabs (callout 1), and then remove the front cover (callout 2).

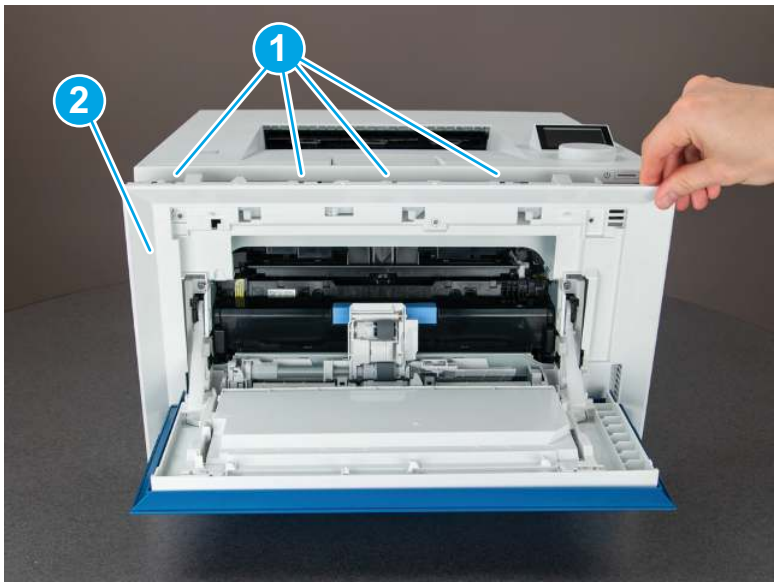Figure 4-388 **Remove the cover**



7. Remove the top cover (SFP)

Follow the procedure below to remove and replace the top cover (SFP).


NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.

1. **Wireless model only**: Raise and support the left side of the printer, remove one screw, and then separate the wireless PCA from the cover.

CAUTION: Do not attempt to completely remove the wireless PCA. Instead, gently move it out of the way.


TIP: To remove the screw without raising the printer, use a short-barrel screwdriver.

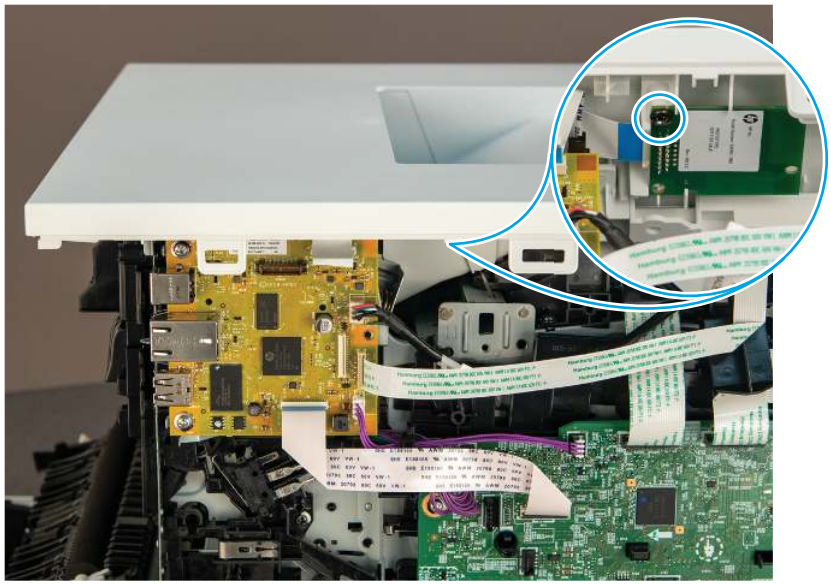Figure 4-389 Remove one screw



2. Disconnect one flat-flexible cable (FFC).

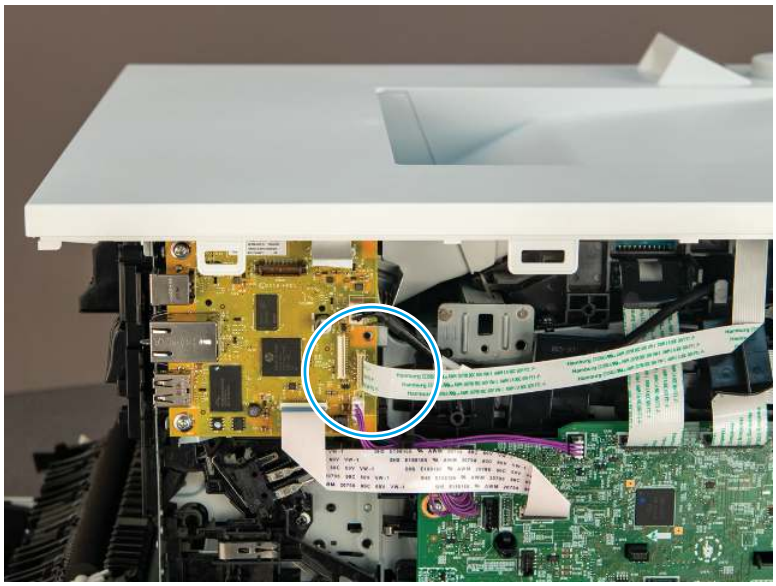Figure 4-390 Disconnect one FFC



3. Disconnect one FFC, and then remove one screw to release the ground wire.


NOTE: The front cover is shown installed in the figure below. However, this step is correct for removing the top cover.

Figure 4-391 Disconnect one FFC and remove one screw



4. Sliding the cover from the back of the printer towards the front to remove it.

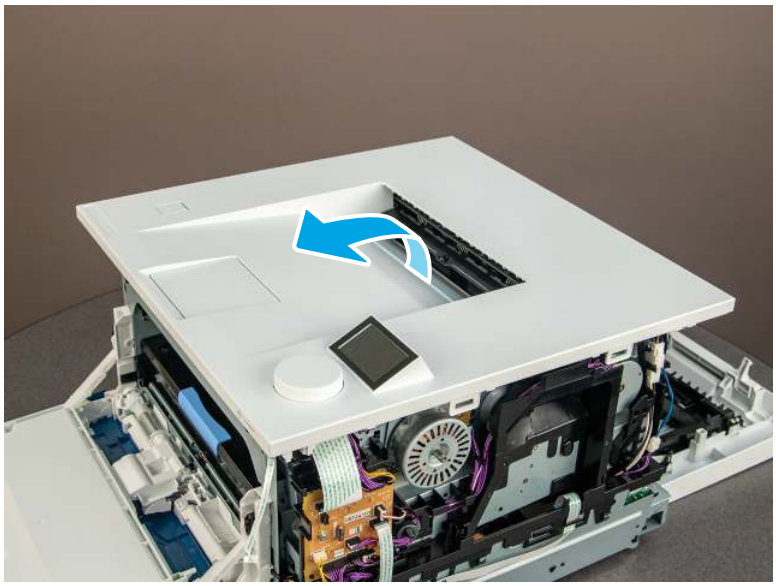Figure 4-392 Remove the cover




8. Remove the top cover (MFP)

Follow the procedure below to remove and replace the top cover (MFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.

1. Close the ISA lift arm.

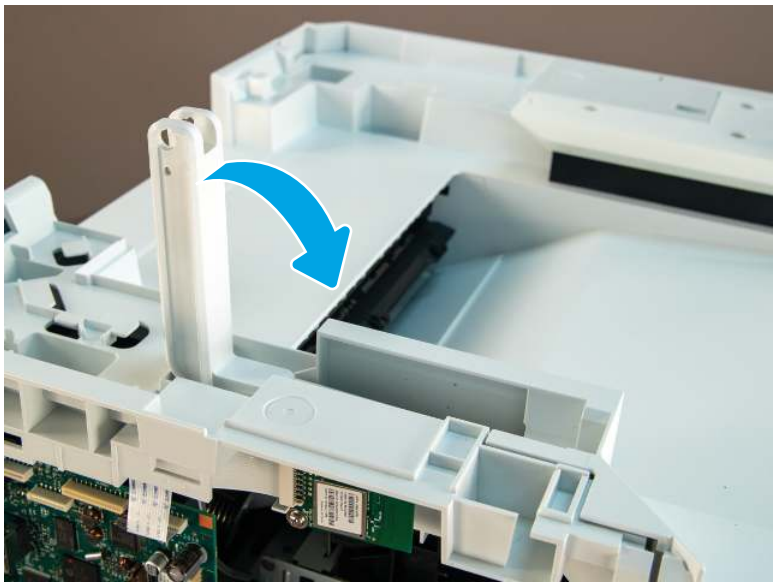
Figure 4-393 Close the ISA lift arm



2. Remove one screw.


⚠ CAUTION: The support arm is spring loaded and can unexpectedly spring into the open position. To avoid injury, do not place a finger in the screw well when the support arm is in the closed position.

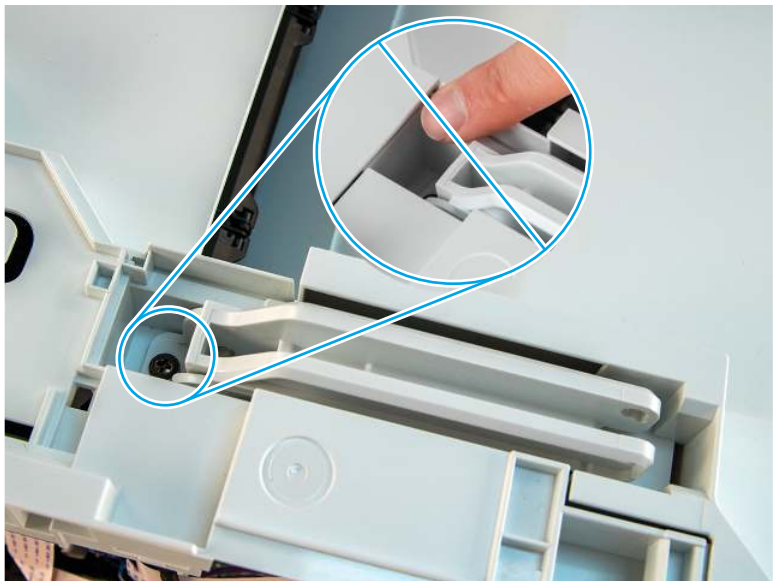Figure 4-394 Remove one screw



3. Rotate one end of the lift arm up (callout 1), and then slide the lift arm as shown below (callout 2) to release it. Remove the lift arm.

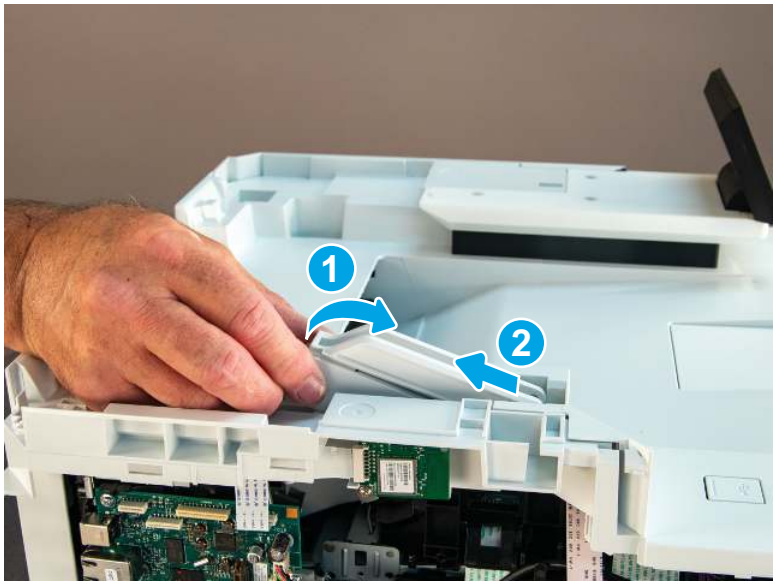Figure 4-395 Remove the lift arm




4. Do the following:

   a. Disconnect one FFC (control panel; callout 1).

   b. Remove one screw (callout 2), and then separate the wireless PCA from the top cover.


NOTE: The wireless PCA does not need to be completely removed. Instead, release the FFC from the retainer (callout 3), and then gently move it out of the way.

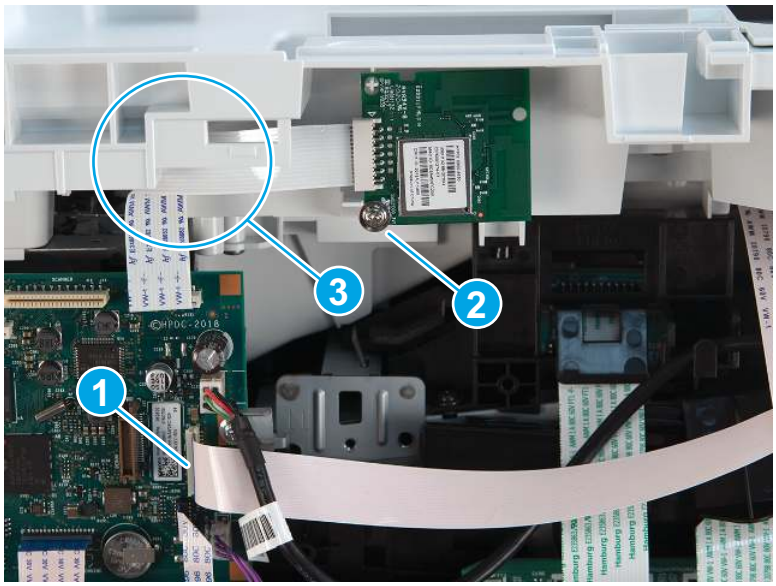Figure 4-396 Disconnect FFC and move the wireless PCA




5. Disconnect one FFC (power button), and then remove one screw (grounding sheet-metal plate).

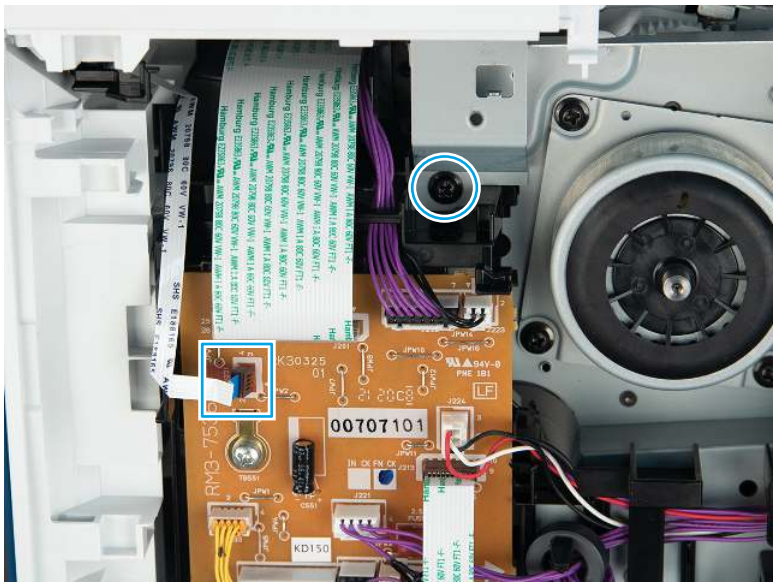Figure 4-397 Disconnect one FFC and remove one screw




6. Remove three screws.

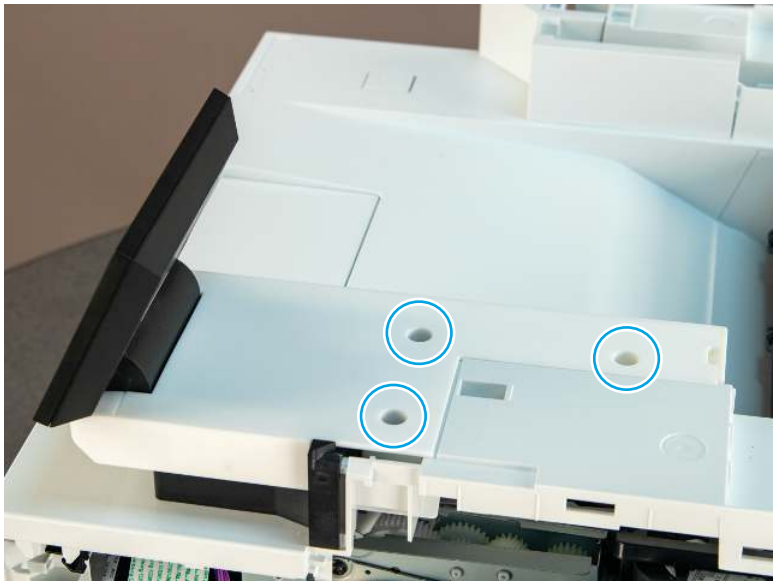Figure 4-398 Remove three screws



7. Release one tab and rotate one end of the base cover up (callout 1), and then slide the cover as shown (callout 2) to remove it.

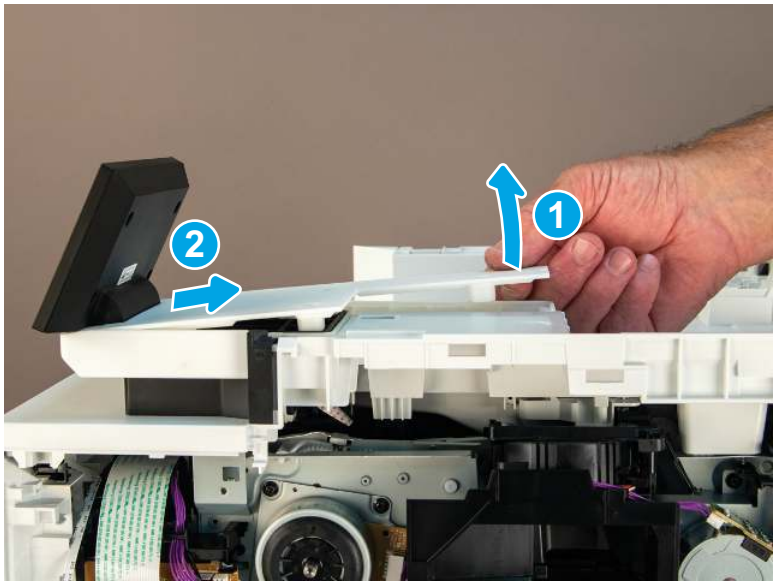Figure 4-399 Remove the cover



8. Disconnect two FFCs.

NOTE: Theses are zero-insertion force (ZIF) connectors. To remove the FFCs, first release the locking clip on the connector, and then pull the cable straight out of the connector.

TIP: For reinstallation, make sure that the line of the FFC is parallel with the body.

Figure 4-400 Disconnect two FFCs



9. Remove four screws.

NOTE: Two of the screws are self-tapping threads (black), and two of the screws are machine thread (silver).


Figure 4-401 Remove four screws



10. Lift the control panel and base straight up and off of the printer to remove them together.


NOTE: When handling the assembly, do not lose the ferrite (callout 1).

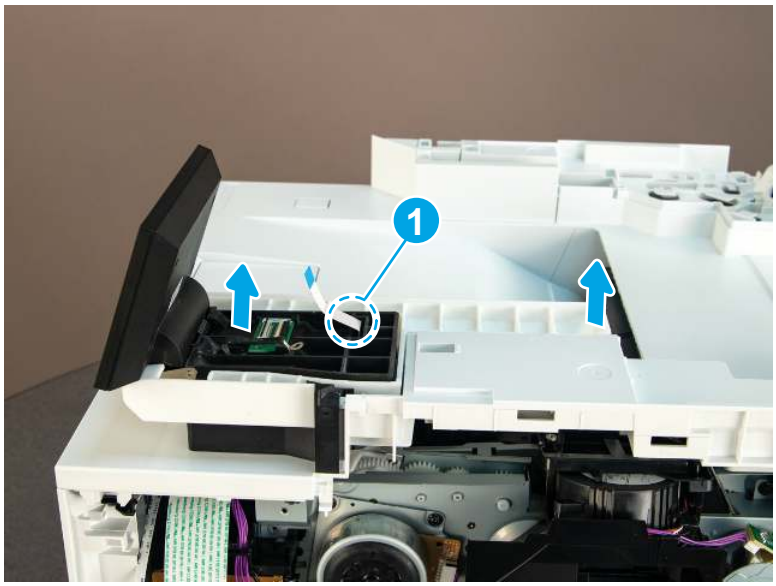Figure 4-402 Remove control panel and base



11. Remove three screws.

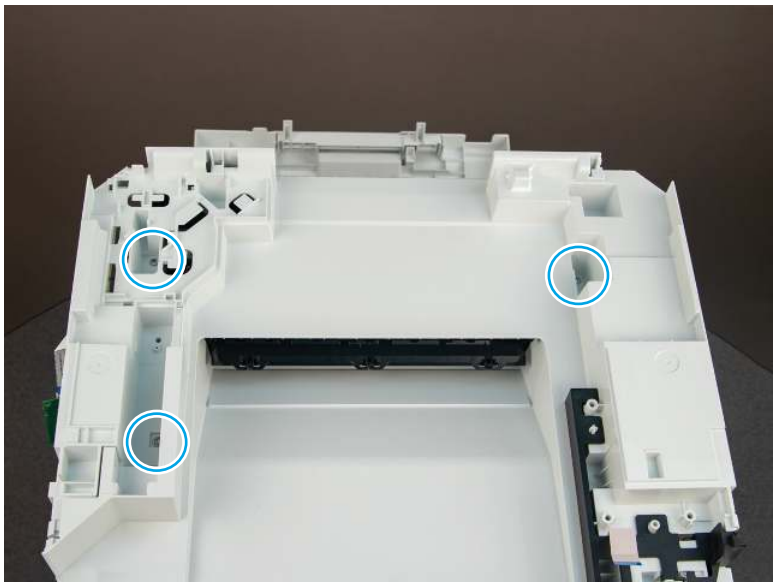
Figure 4-403 **Remove three screws**



12. Sliding the cover from the back of the printer to the front to remove it.

TIP: Slightly move the control-panel ground bracket (circled) back and forth to help release the top cover.

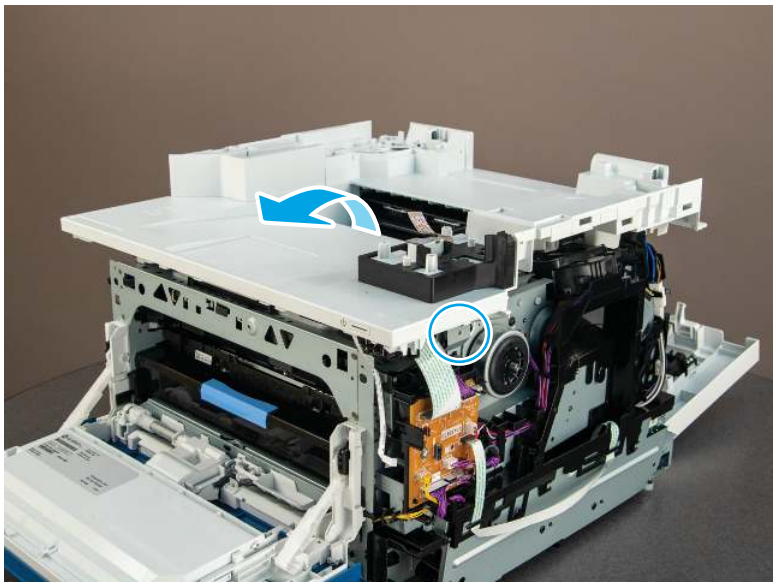Figure 4-404 **Remove the cover**



13. **When the cover is reinstalled**: Make sure that the front USB assembly is correctly positioned under the cover.


Figure 4-405 **Front USB assembly**



9. Remove the cartridge fan


Follow the procedure below to remove and replace the cartridge fan.

NOTE: The fan installed in your printer might look different than the one shown in the figures below. However, these instructions are valid for BOTH cartridge fans.




1. Remove two screws (callout 1), and then remove the holder (callout 2).

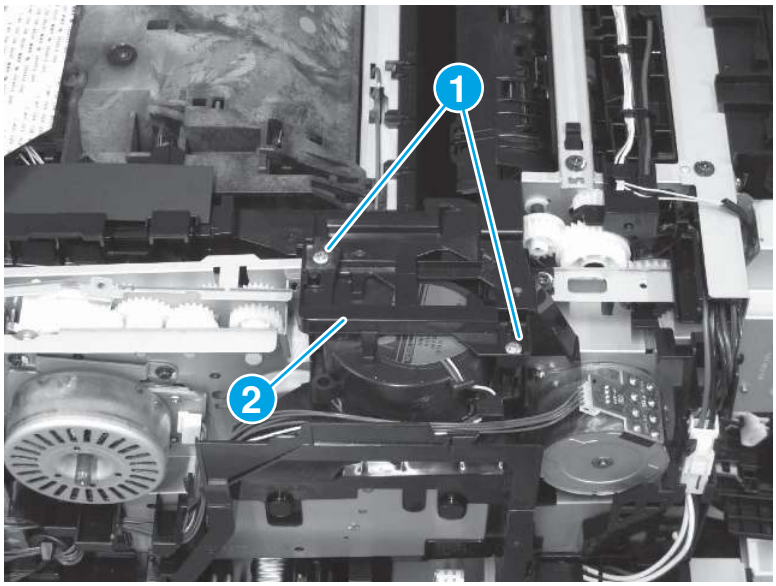Figure 4-406 **Remove the holder**



2. Disconnect one connector (callout 1), release the cable (callout 2) from the guide (callout 3), and then remove the cartridge fan (callout 4).

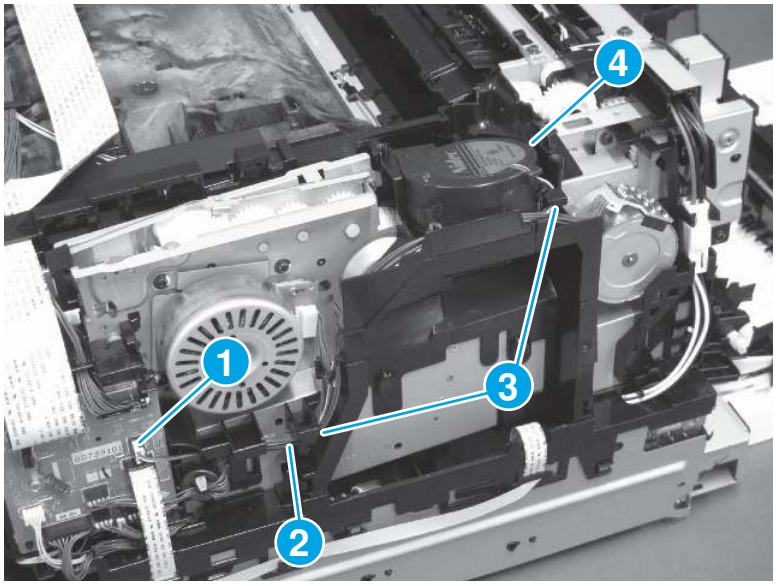Figure 4-407 Remove the cartridge fan



10. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.


NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.

11. Special installation instructions - Cartridge fan

Follow the special instructions below to install the cartridge fan.


- One of two types of cartridge fan are installed in the printer. Adjust the position of the cartridge fan cable as necessary depending on which type of fan is installed.
  - **Short cable cartridge fan** (callout 1)

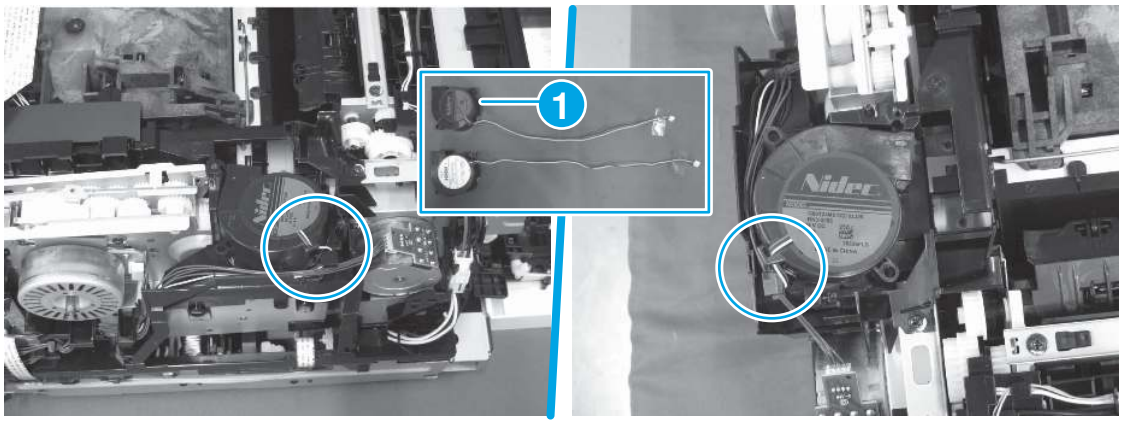Figure 4-408 **Install the cartridge fan (1 of 2)**



  - **Long cable cartridge fan** (callout 2)

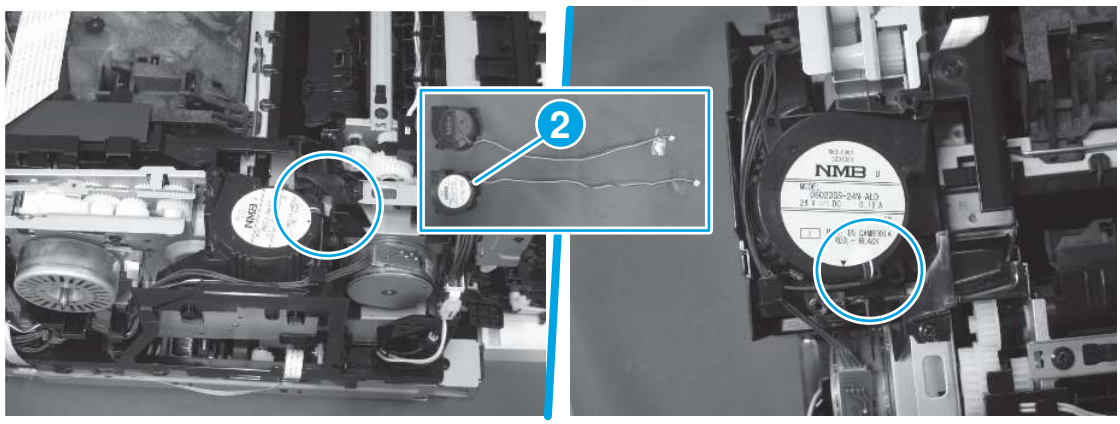Figure 4-409 **Install the cartridge fan (2 of 2)**




12. Special installation instructions - Front cover

Follow the special instructions below to install the front cover.

NOTE: Front cover installation is **identical** for both the SFP and MFP models.


1. If the door release arm becomes dislodged when handling the cover, install it as shown below (callout 1, 2).

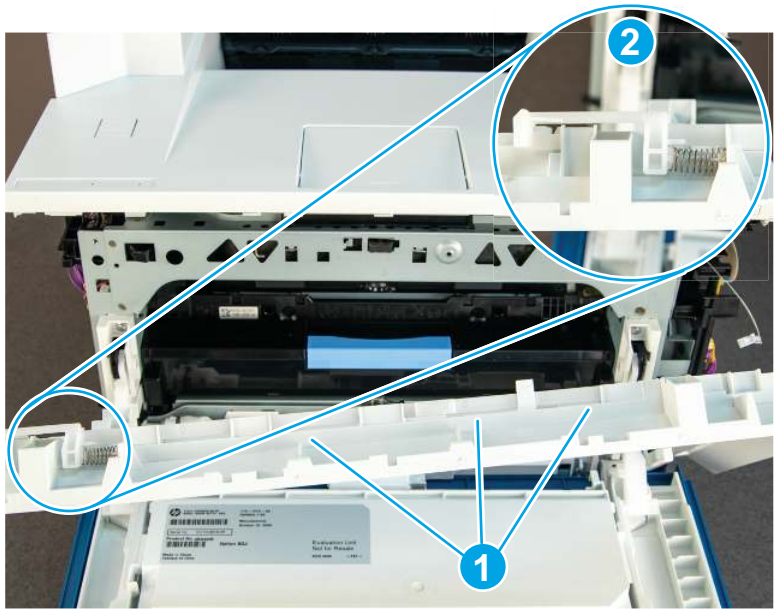Figure 4-410 Door release arm installed



2. At the right and left side of the front cover, align the holes (callout 1) in the cover with the alignment pins (callout 2) on the chassis.

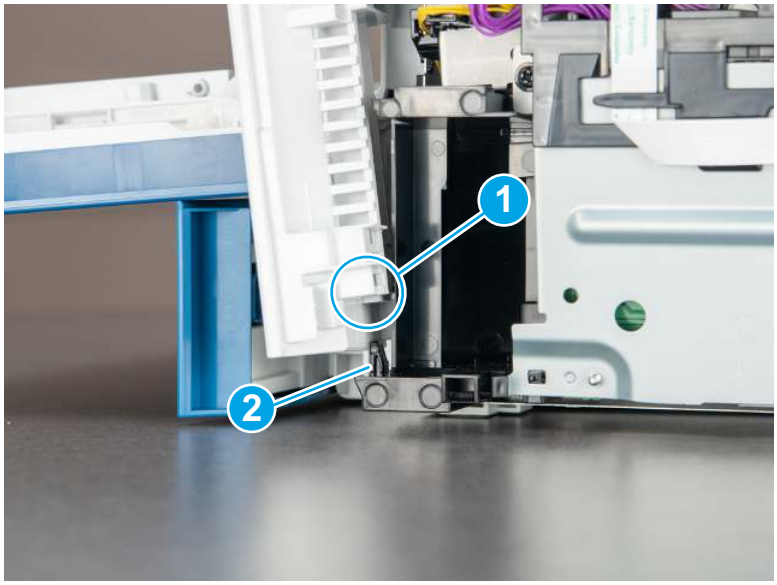
Figure 4-411 Cover alignment pins



3. Rotate the top of the cover towards the printer to install it.

IMPORTANT: Verify that the spring loaded door release button (on the left side of the cover) correctly functions.

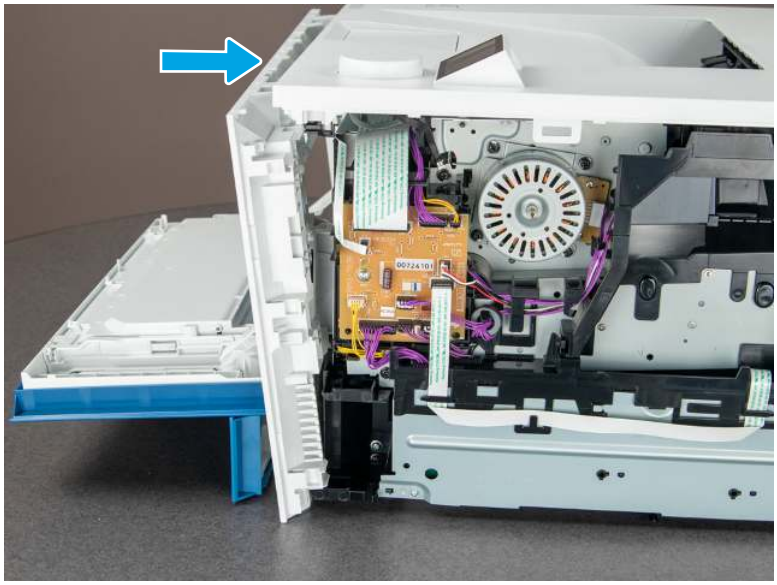Figure 4-412 Install the cover



Removal and replacement: Cartridge tray

Learn about cartridge tray removal.

Mean time to repair: 12 minutes

Service level: Easy

Before performing service

Turn the printer power off

- Disconnect the power cable.

> ⚠ **WARNING!** To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-35 Part information

Part number	Part description
RM2-2750-000CN	Cartridge tray assembly

Required tools

- #2 Phillips screwdriver with a magnetic tip and a 152 mm (6 in) shaft length
- Small flat-blade screwdriver
- Needle-nose pliers

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test

Print any pages necessary to make sure the printer is functioning correctly.

1. Remove the left cover (SFP)


Follow the procedure below to remove and replace the left cover (SFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.

TIP: There might be a small cover installed on the USB port located at the back of the printer. If installed, remove this cover now.


1. Remove one screw (callout 1).

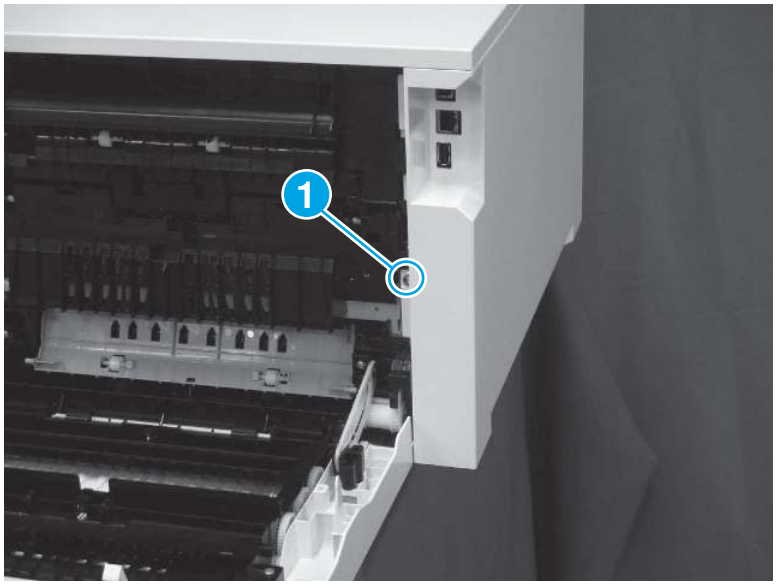Figure 4-413 **Remove one screw**




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

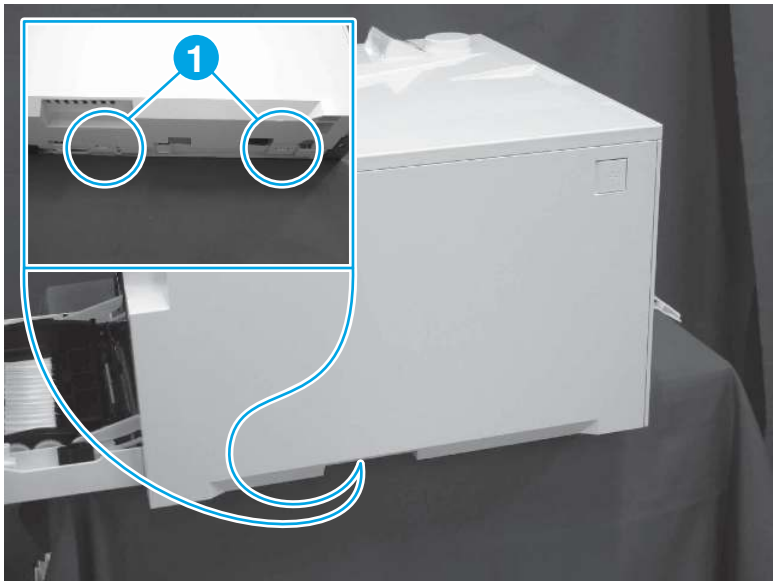Figure 4-414 Release two tabs




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

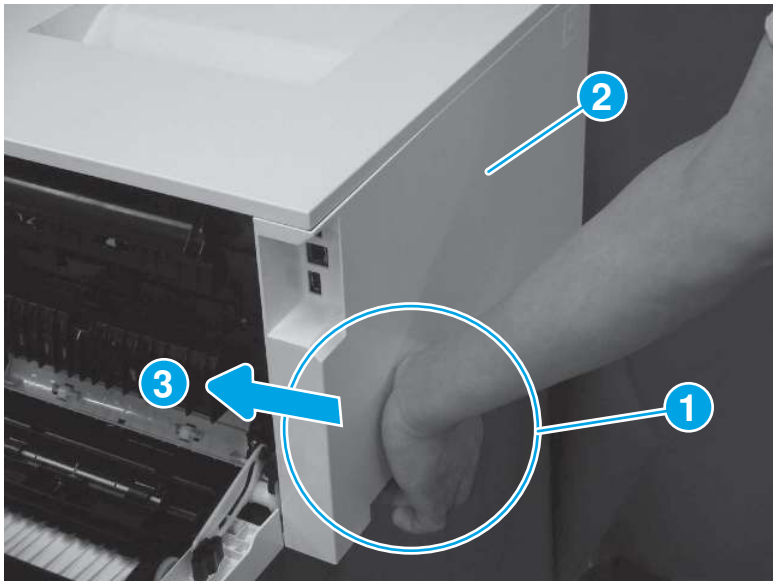Figure 4-415 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

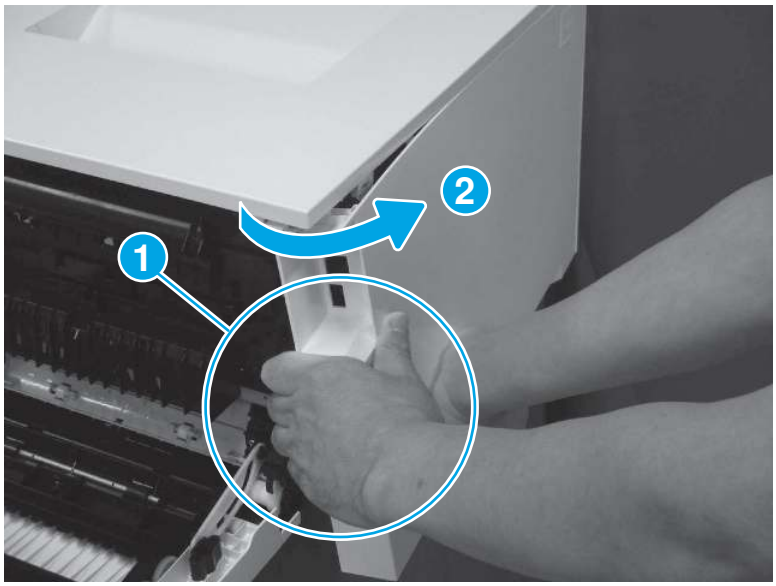Figure 4-416 Disengage the cover corner



5. Remove the left cover (callout 1).

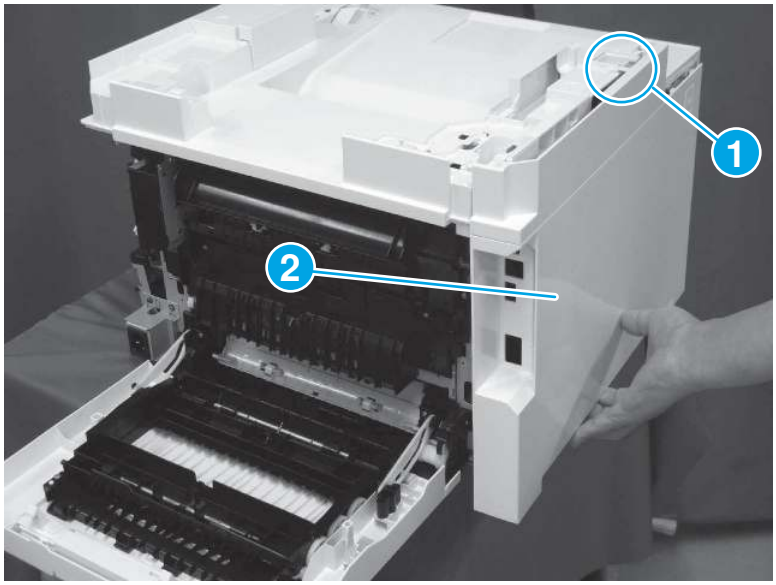Figure 4-417 Remove the cover



2. Remove the left cover (MFP)


Follow the procedure below to remove and replace the left cover (MFP).

NOTE: The following procedure is for an MFP printer only. If this assembly is being removed to gain access to dependency parts for a SFP printer, skip this step.

TIP: There might be a small cover installed on the USB port and/or the fax port located at the back of the printer. If installed, remove these covers now.


1. Remove one screw (callout 1).

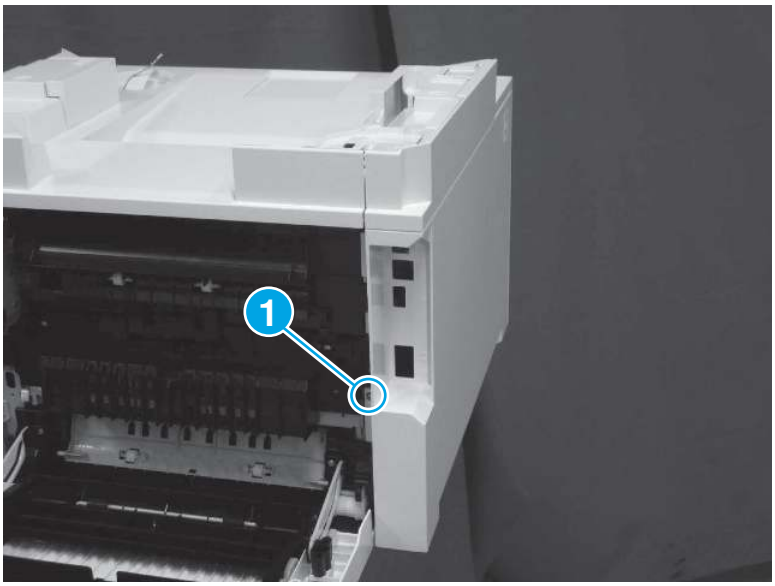Figure 4-418 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

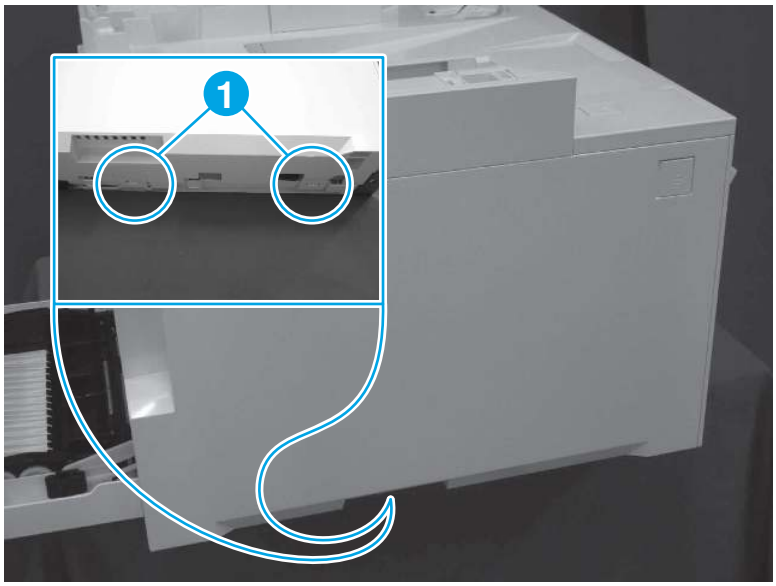Figure 4-419 Release two tabs




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

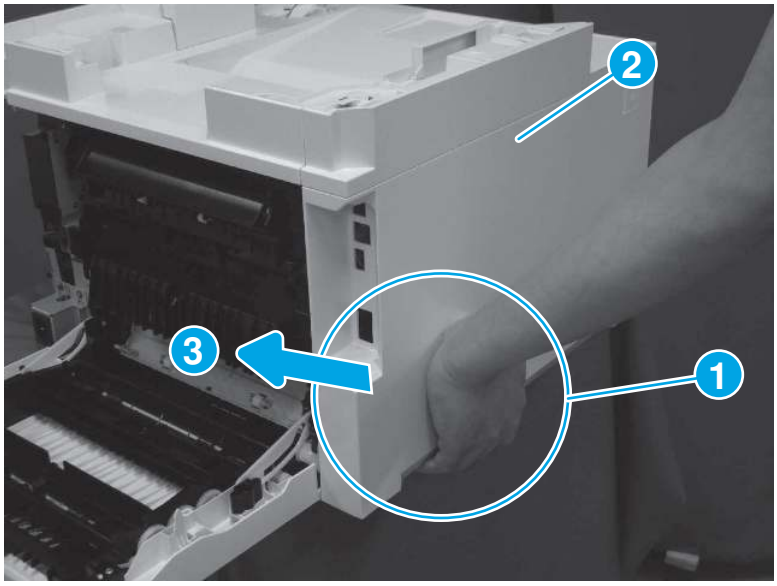Figure 4-420 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

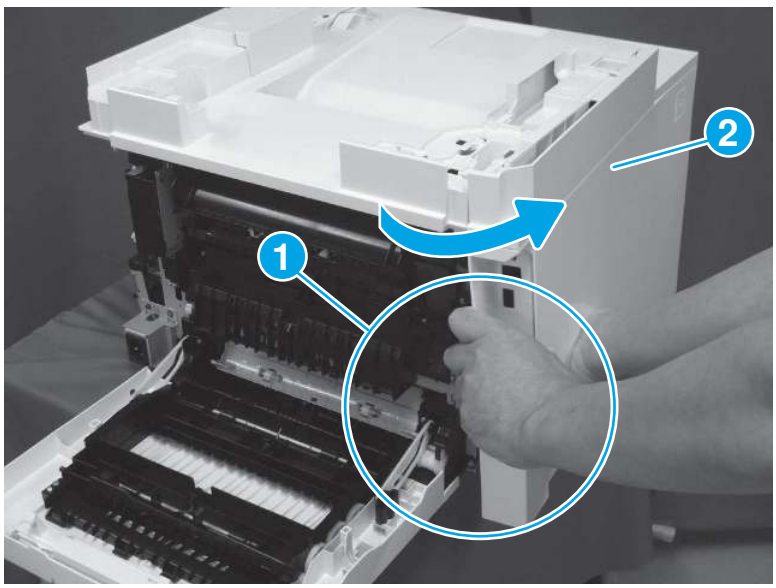Figure 4-421 Disengage the cover corner



5. Remove the left cover (callout 1).

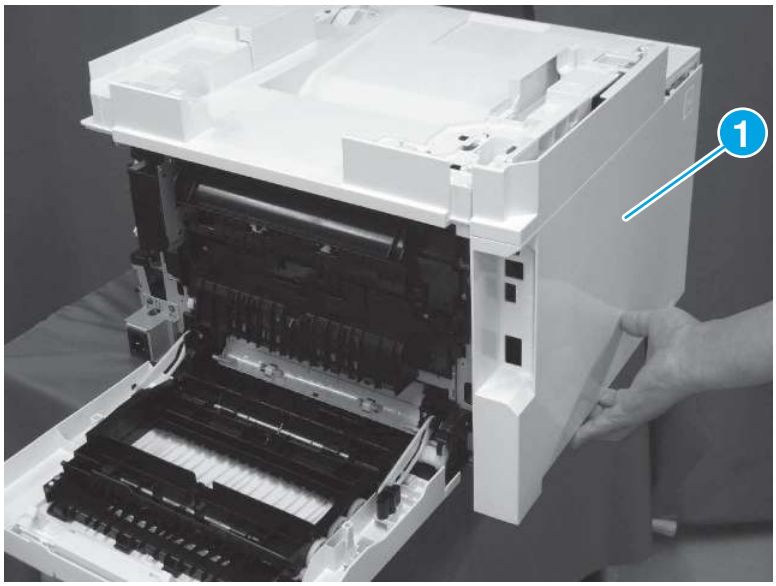Figure 4-422 Remove the cover




3. Remove the right cover (SFP)

Follow the procedure below to remove and replace the right cover (SFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.


1. Remove one screw (callout 1).

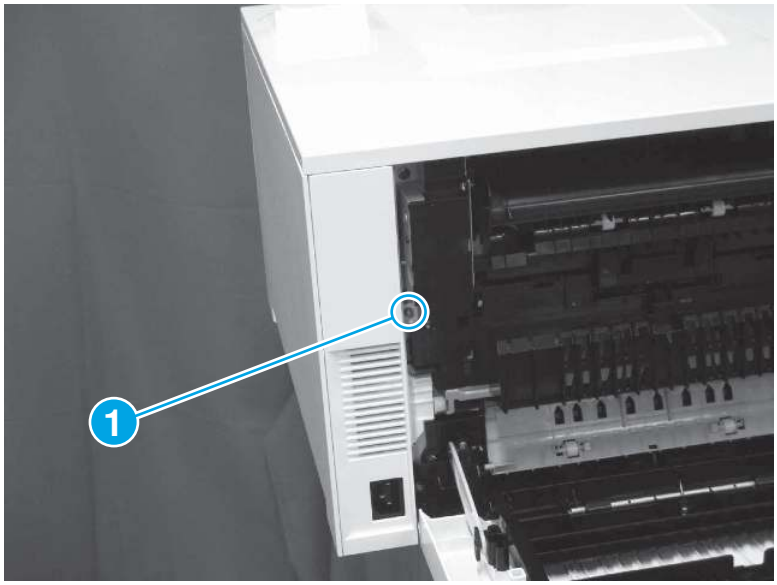Figure 4-423 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to three tabs (callout 1). Release three tabs.

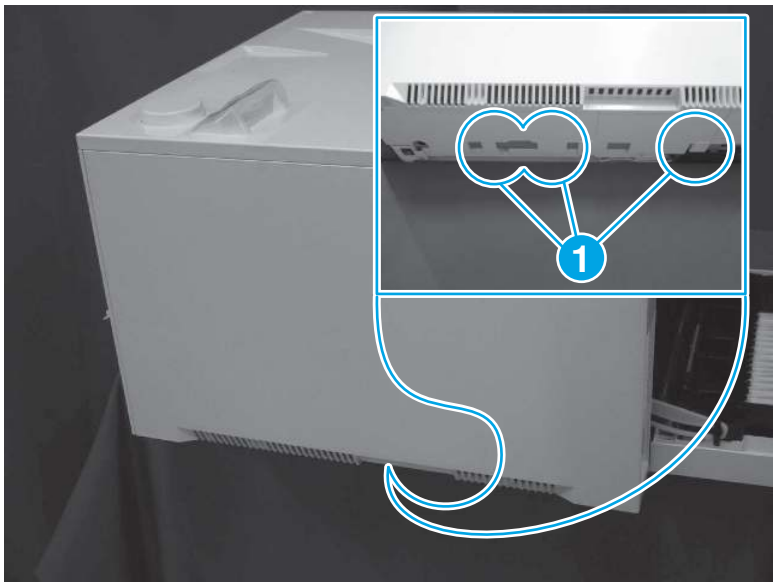Figure 4-424 Release three tabs




3. Press in on the side (callout 1) of the right cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

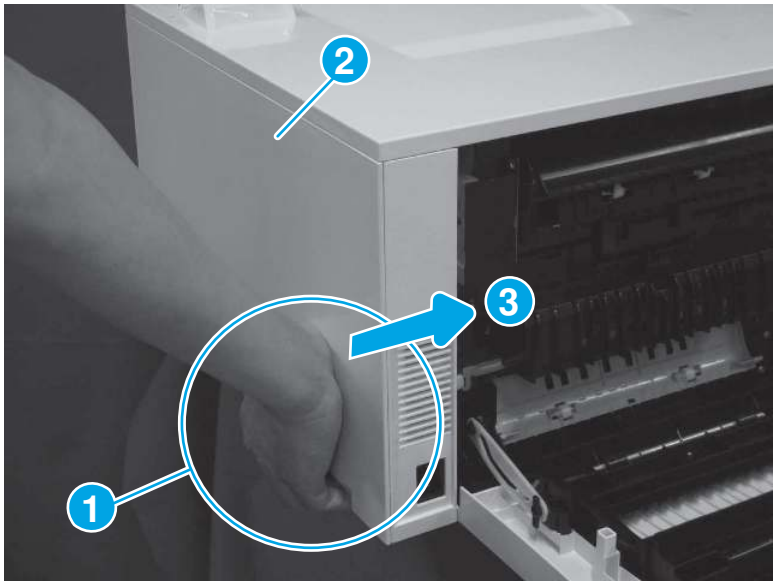Figure 4-425 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

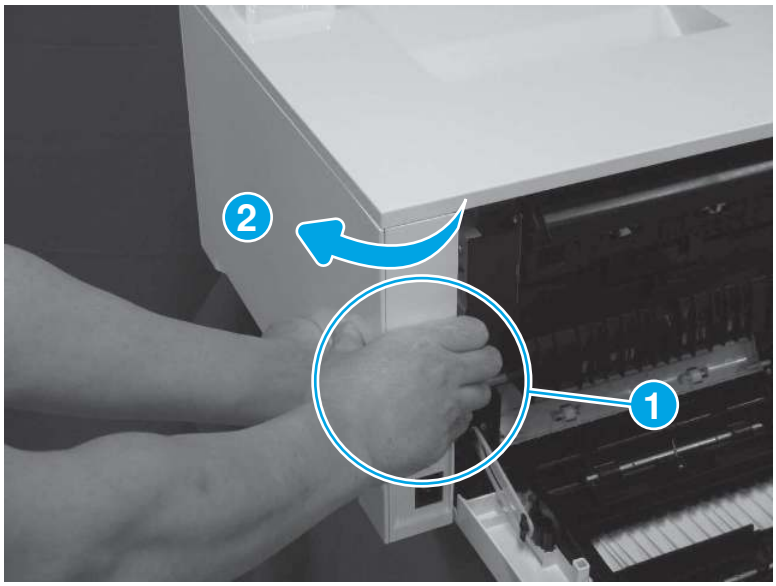Figure 4-426 Disengage the cover corner



5. Remove the right cover (callout 1).

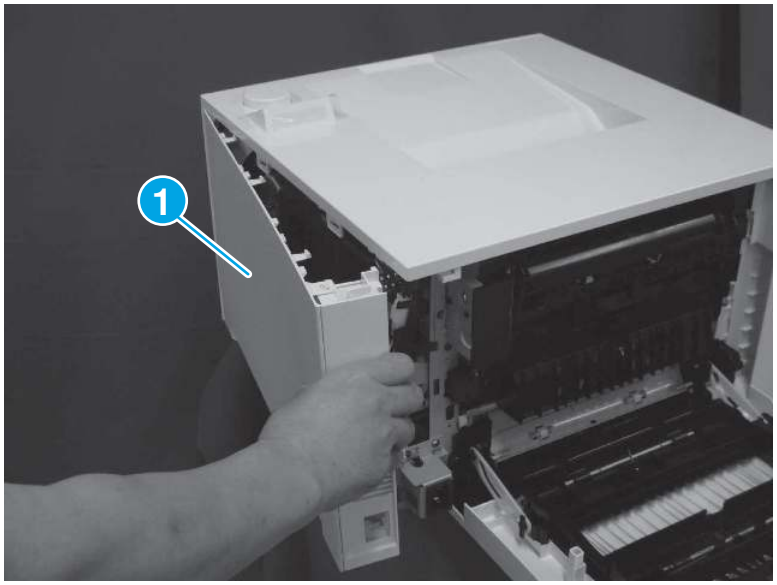Figure 4-427 Remove the cover




4. Remove the right cover (MFP)

Follow the procedure below to remove and replace the right cover (MFP).

NOTE: The following procedure is for an MFP printer only. If this assembly is being removed to gain access to dependency parts for a SFP printer, skip this step.


1. Remove one screw (callout 1).

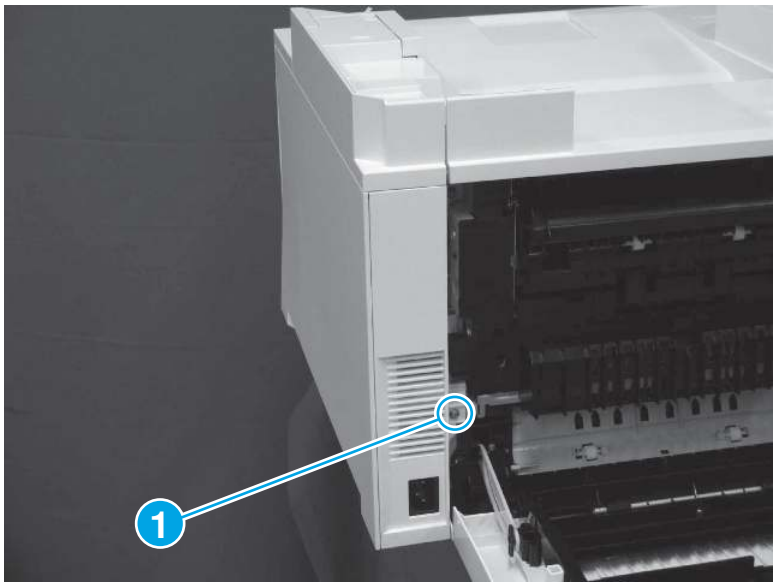Figure 4-428 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to three tabs (callout 1). Release three tabs.

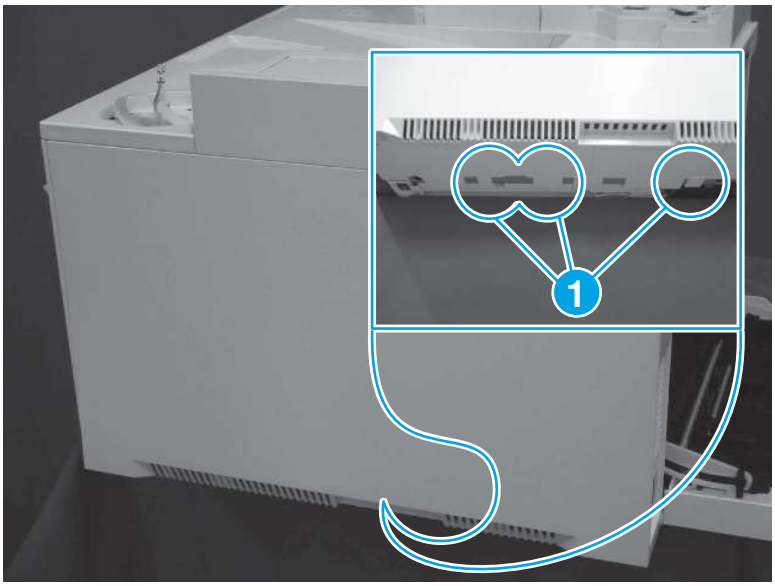Figure 4-429 Release three tabs




3. Press in on the side (callout 1) of the right cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

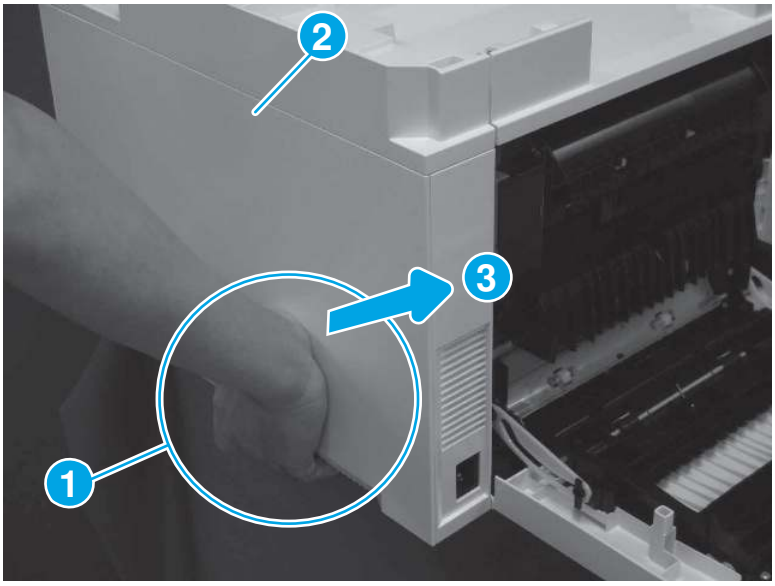Figure 4-430 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

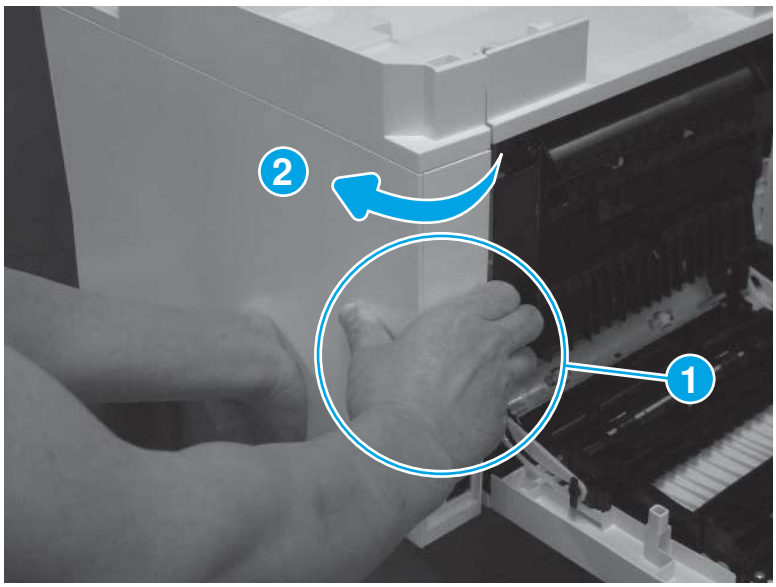Figure 4-431 Disengage the cover corner



5. Remove the right cover (callout 1).

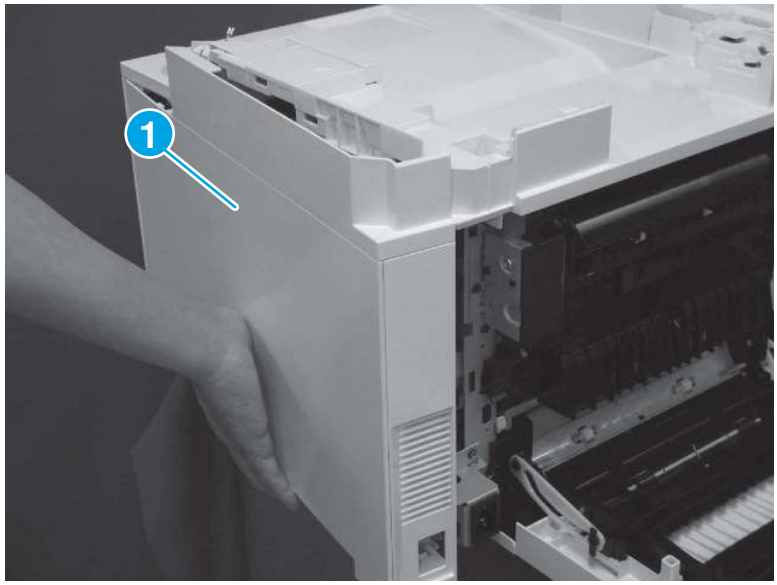Figure 4-432 **Remove the cover**



5. Remove the front cover


Follow the procedure below to remove and replace the front cover.

NOTE: Front cover removal is **identical** for both SFP and MFP models.

Reinstallation tip: Make sure to follow the special installation instructions for this part or step (located after the unpack and recycle or cleaning section).

1. Remove three screws (callout 1).

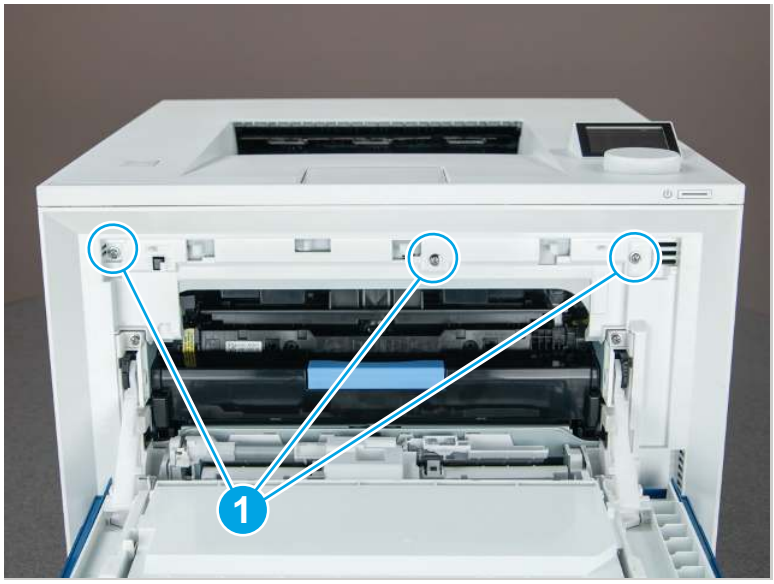
Figure 4-433 **Remove three screws**



2. Before proceeding, take note of the door release arm (callout 1). This arm can be easily dislodged when the cover is removed.


⚠ **CAUTION:** Do not lose the spring (callout 2) when removing the front cover.

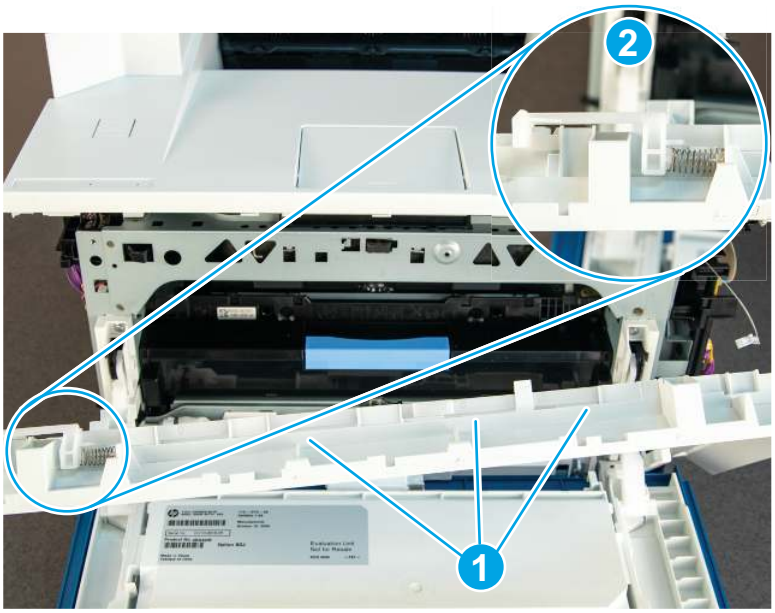Figure 4-434 Door release arm



3. Release four tabs (callout 1), and then remove the front cover (callout 2).

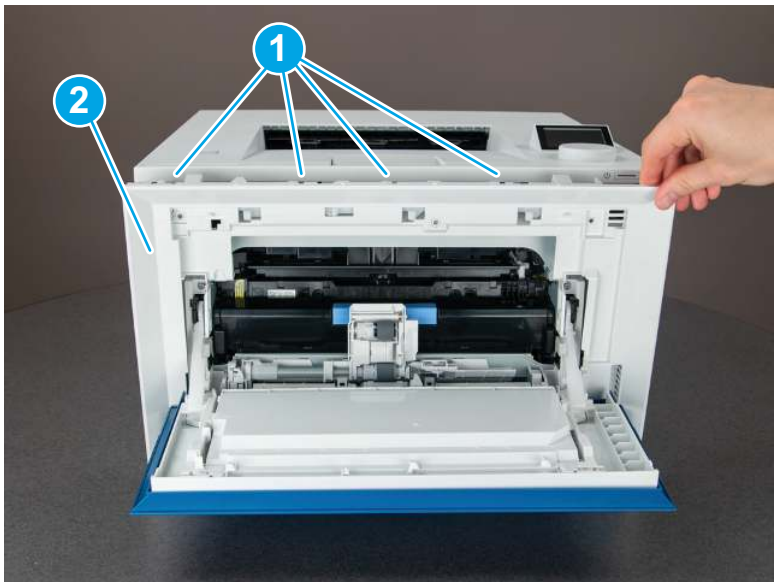Figure 4-435 Remove the cover




6. Remove the cartridge tray

Follow the procedure below to remove and replace the cartridge tray.


1. Release one tab (left side).

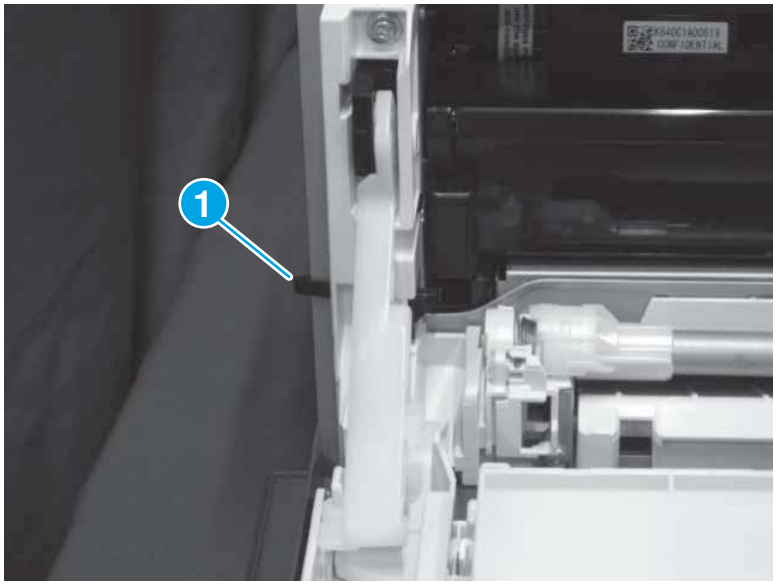Figure 4-436 Release one tab (left side)




2. Use a pair of needle-nose pliers to remove the stopper (callout 1) (left side).

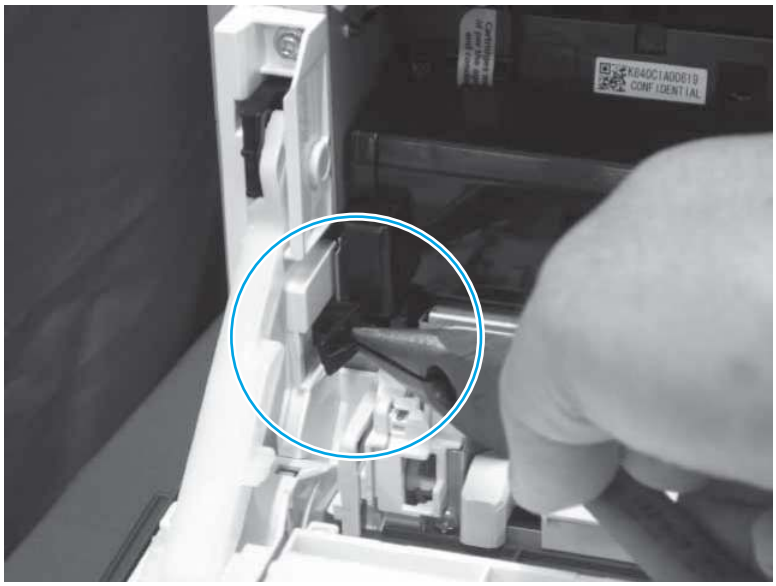Figure 4-437 Remove the stopper (left side)




3. Release one tab (right side).

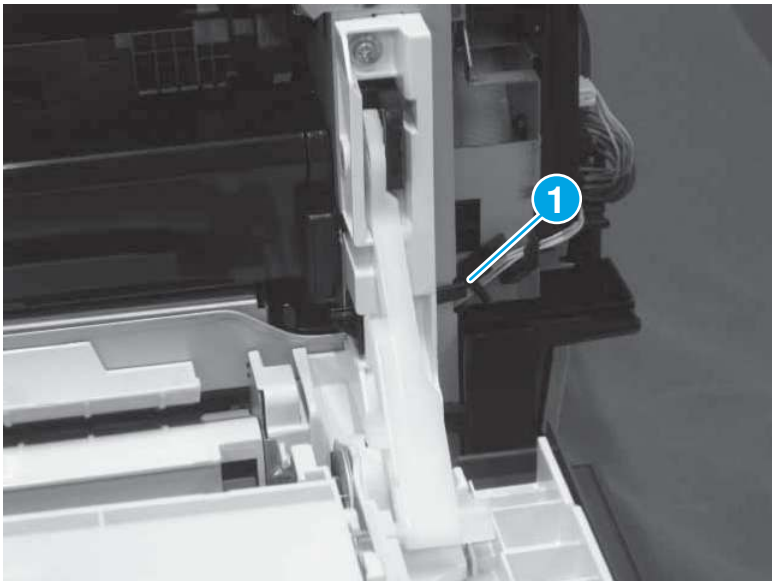Figure 4-438 Release on tab (right side)



4. Use a pair of needle-nose pliers to remove the stopper (callout 1) (right side).

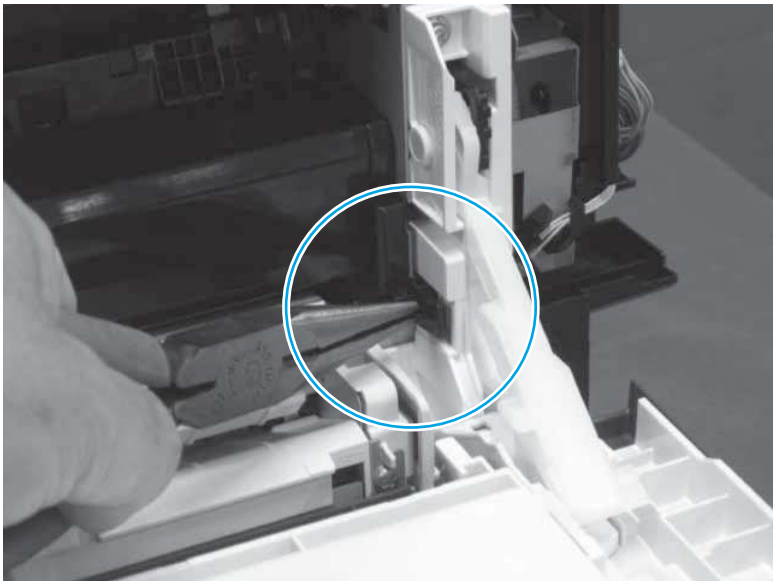
Figure 4-439 Remove the stopper (right side)



5. Pull the cartridge tray (callout 1) out of the printer to remove it.

NOTE: Slightly lift up on the front of the tray while removing it.

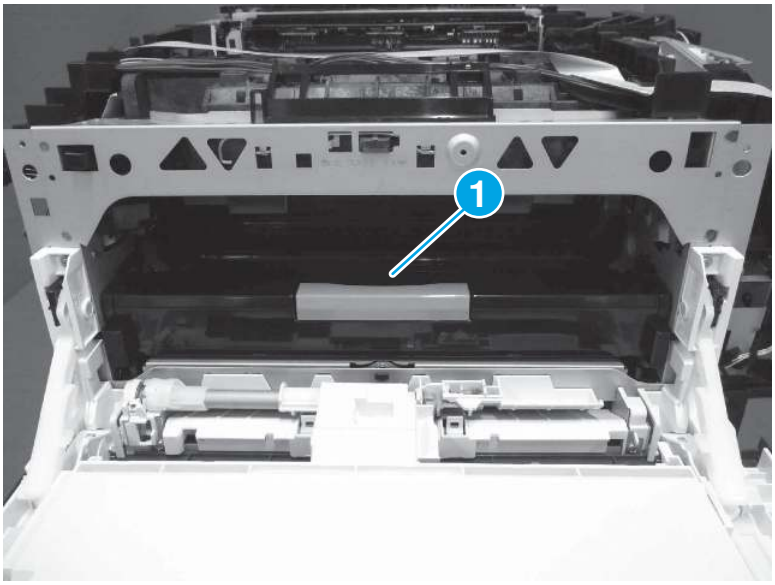Figure 4-440 Remove the cartridge tray



7. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.


8. Special installation instructions - Front cover

Follow the special instructions below to install the front cover.

NOTE: Front cover installation is **identical** for both the SFP and MFP models.


1. If the door release arm becomes dislodged when handling the cover, install it as shown below (callout 1, 2).

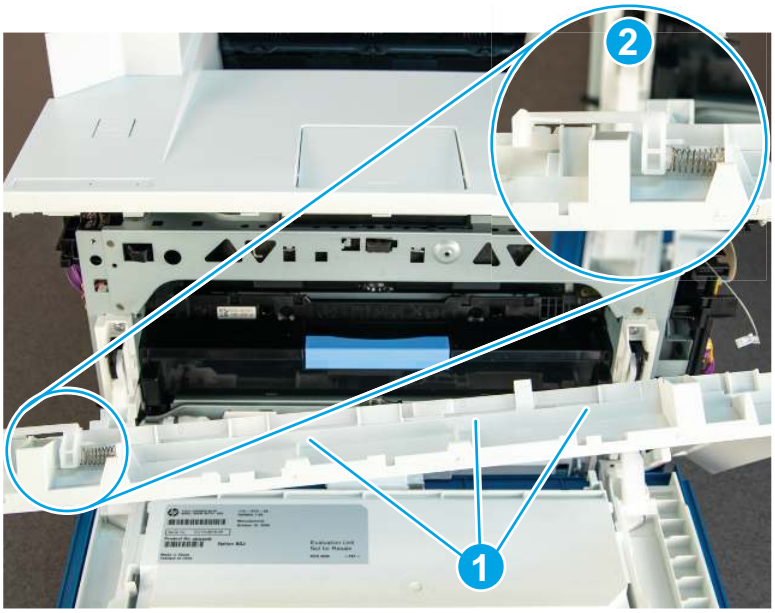Figure 4-441 **Door release arm installed**



2. At the right and left side of the front cover, align the holes (callout 1) in the cover with the alignment pins (callout 2) on the chassis.

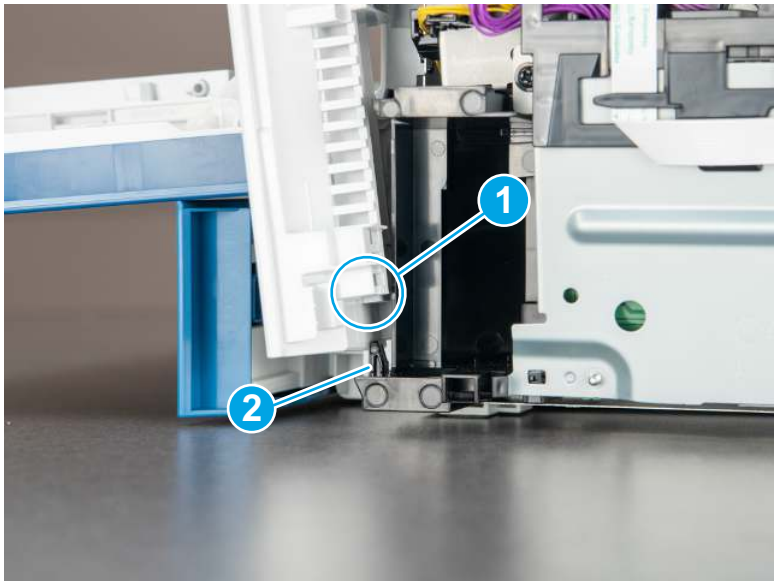
Figure 4-442 Cover alignment pins



3. Rotate the top of the cover towards the printer to install it.

IMPORTANT: Verify that the spring loaded door release button (on the left side of the cover) correctly functions.

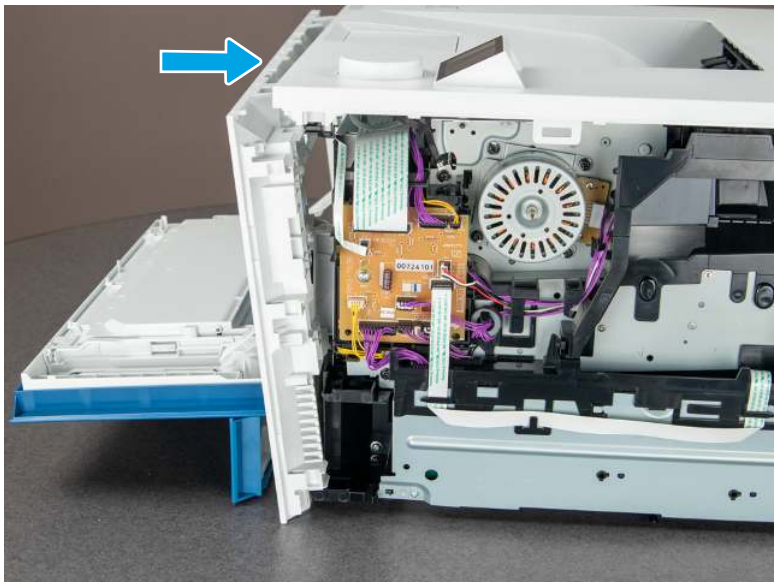Figure 4-443 Install the cover



Removal and replacement: Fuser/duplex drive assembly

Learn about fuser/duplex drive removal.

IMPORTANT: The power button **must** be used to turn the printer power off prior to removing the fuser. Unplugging the printer to turn the power off (without using the power button) does not disengage the fuser, making it impossible to remove.

View a video of removing and replacing the fuser/duplex drive assembly.

Mean time to repair: 20 minutes

Service level: Medium

Before performing service

Turn the printer power off

- Disconnect the power cable.

WARNING! To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-36 Part information

Part number	Part description
RM2-2731-000CN	Fuser assembly (110-127V)
RM2-2732-000CN	Fuser assembly (220-240V)
RM2-2841-000CN	Duplex drive assembly (SFP)
RM2-2842-000CN	Duplex drive assembly (MFP)

Required tools

- #2 Phillips screwdriver with a magnetic tip and a 152 mm (6 in) shaft length
- Small flat-blade screwdriver

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test

Print any pages necessary to make sure the printer is functioning correctly.

1. Remove the left cover (SFP)


Follow the procedure below to remove and replace the left cover (SFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.

TIP: There might be a small cover installed on the USB port located at the back of the printer. If installed, remove this cover now.


1. Remove one screw (callout 1).

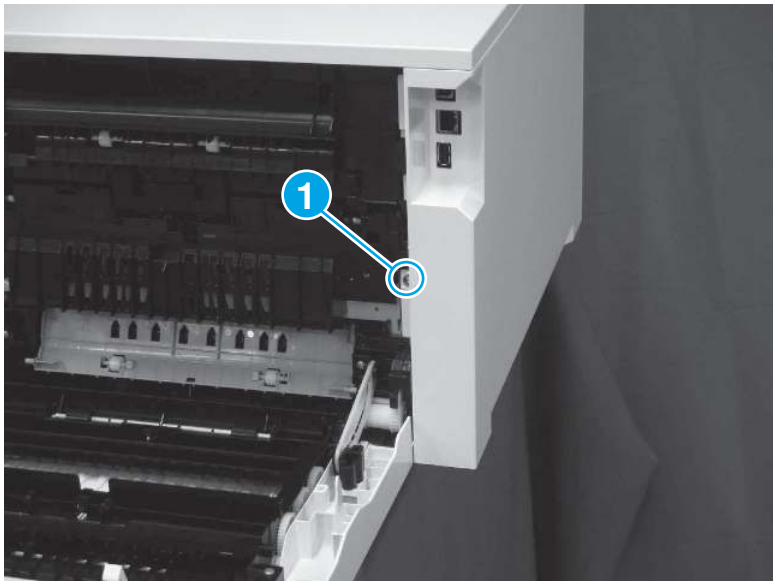Figure 4-444 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

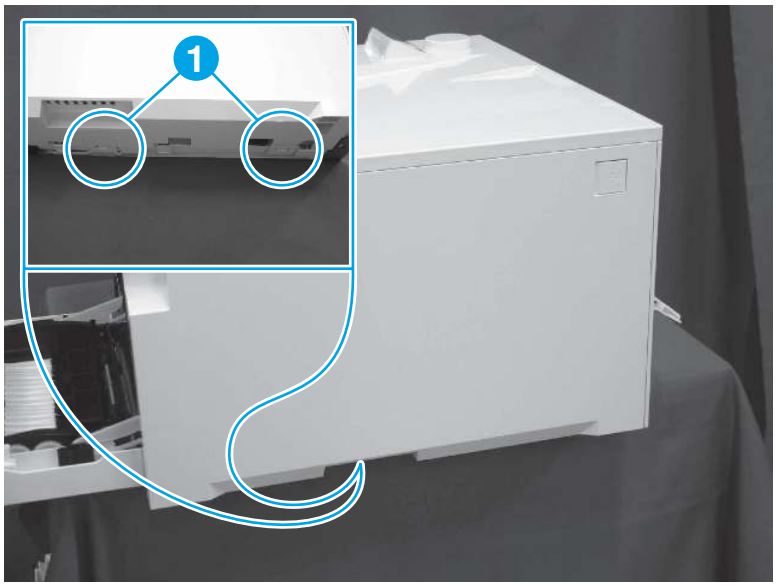Figure 4-445 Release two tabs




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

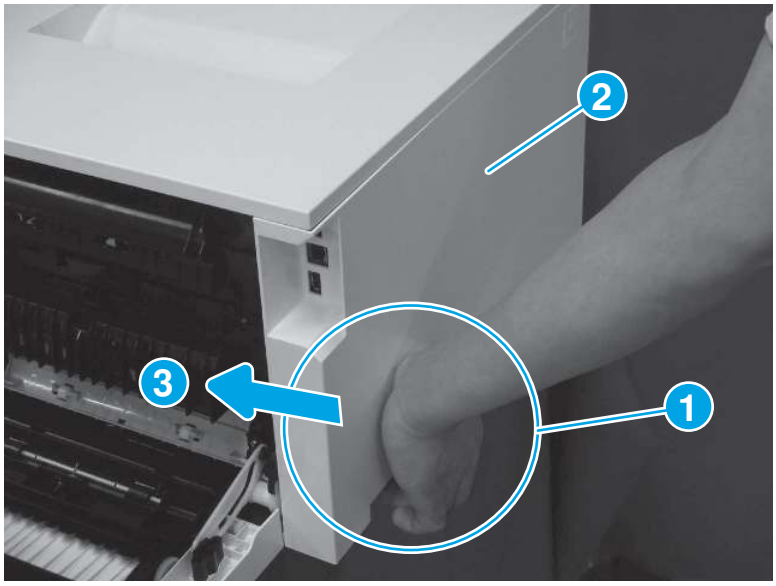Figure 4-446 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

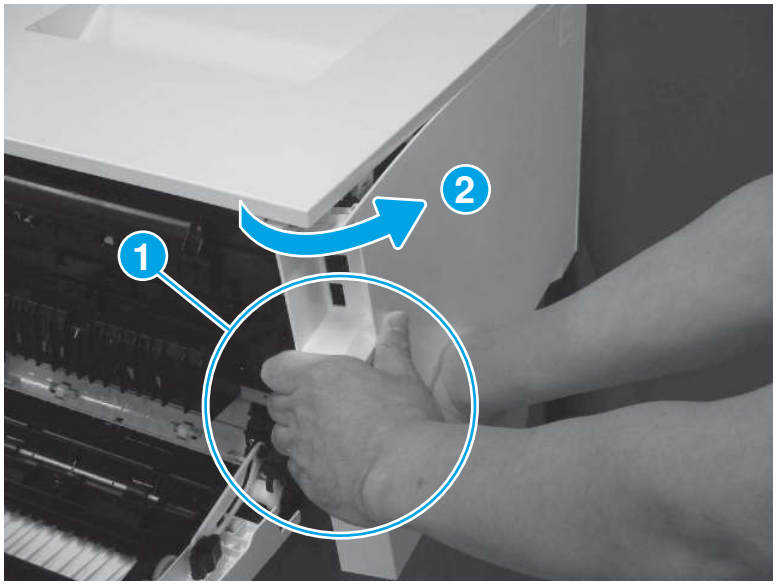Figure 4-447 Disengage the cover corner



5. Remove the left cover (callout 1).

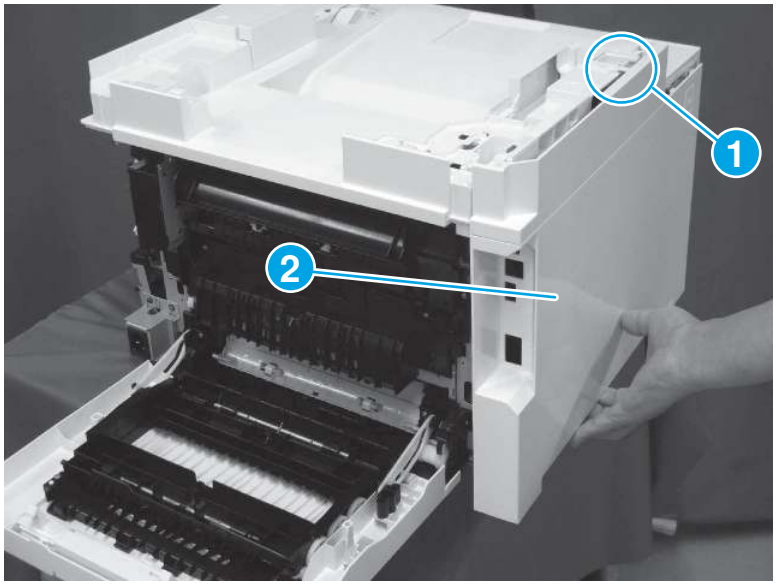Figure 4-448 **Remove the cover**



2. Remove the left cover (MFP)


Follow the procedure below to remove and replace the left cover (MFP).

NOTE: The following procedure is for an MFP printer only. If this assembly is being removed to gain access to dependency parts for a SFP printer, skip this step.

TIP: There might be a small cover installed on the USB port and/or the fax port located at the back of the printer. If installed, remove these covers now.


1. Remove one screw (callout 1).

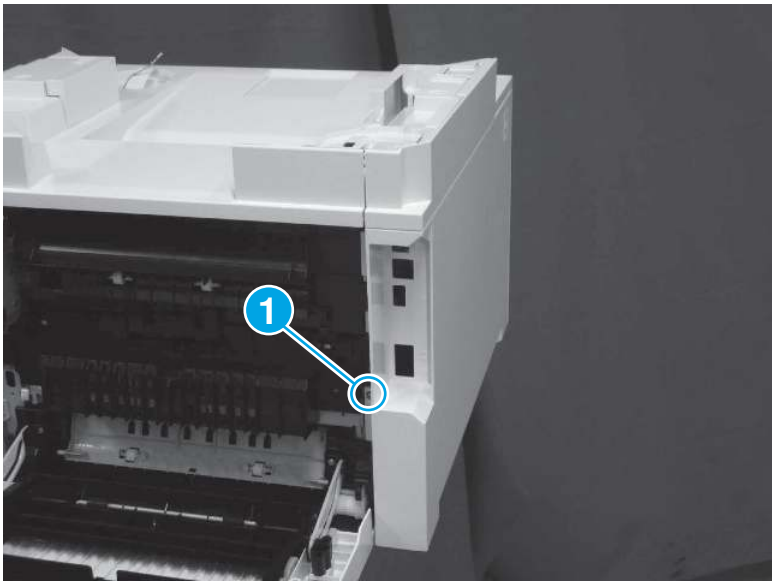Figure 4-449 **Remove one screw**




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

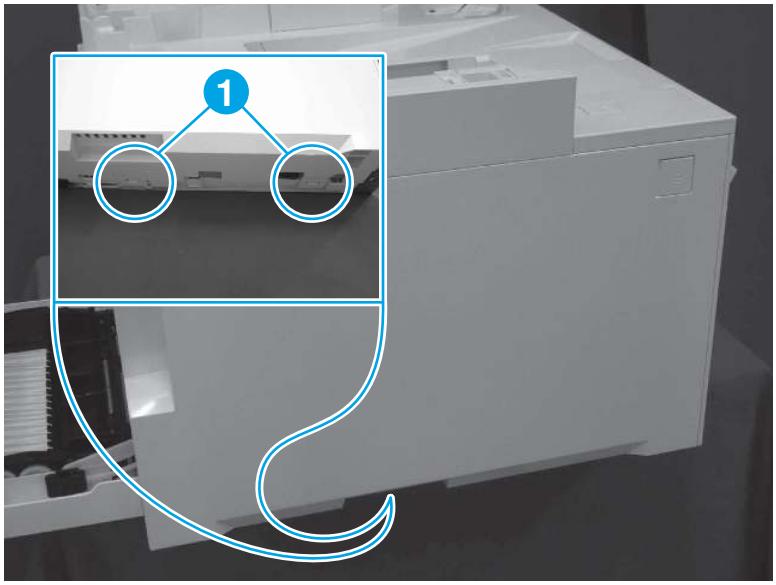Figure 4-450 Release two tabs




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

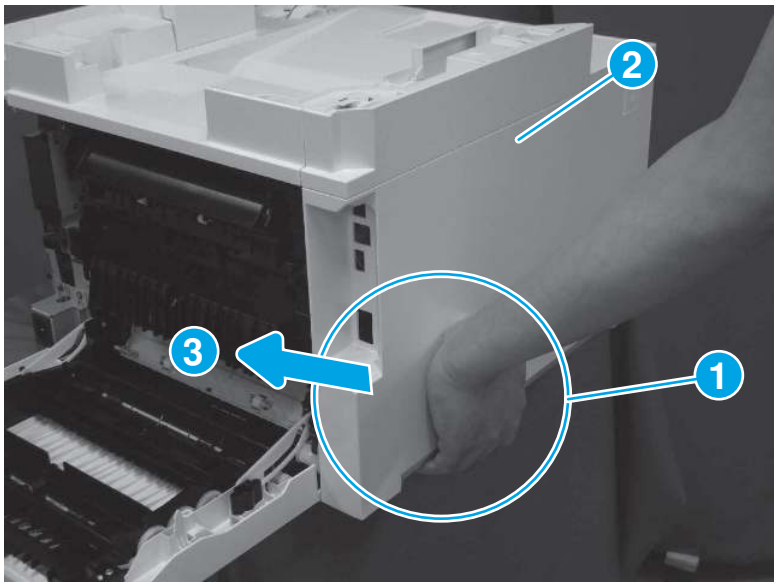Figure 4-451 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

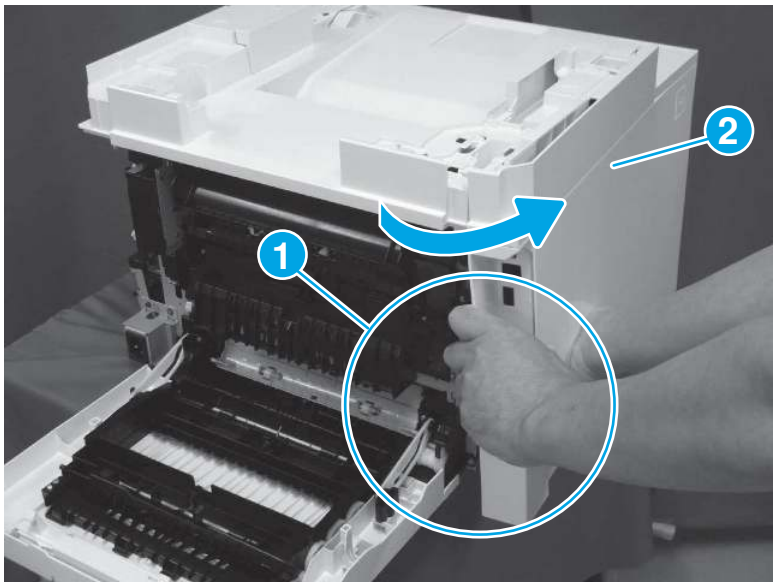Figure 4-452 Disengage the cover corner



5. Remove the left cover (callout 1).

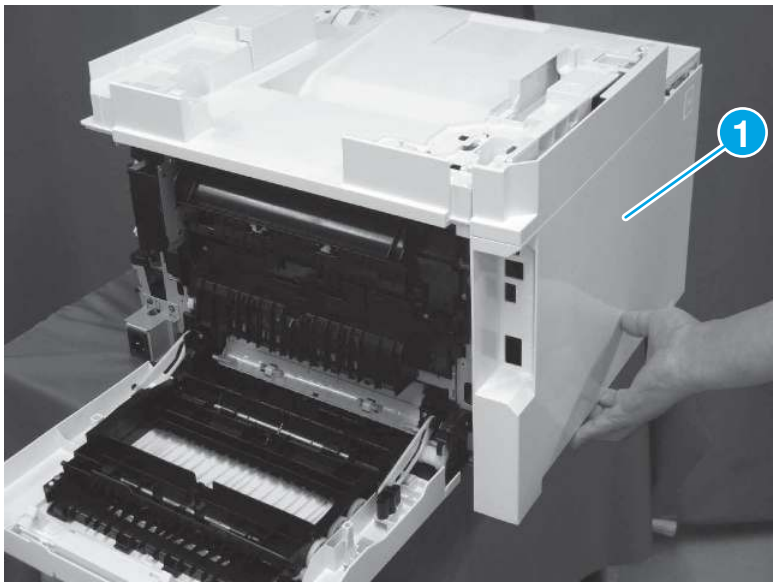Figure 4-453 Remove the cover




3. Remove the right cover (SFP)

Follow the procedure below to remove and replace the right cover (SFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.


1. Remove one screw (callout 1).

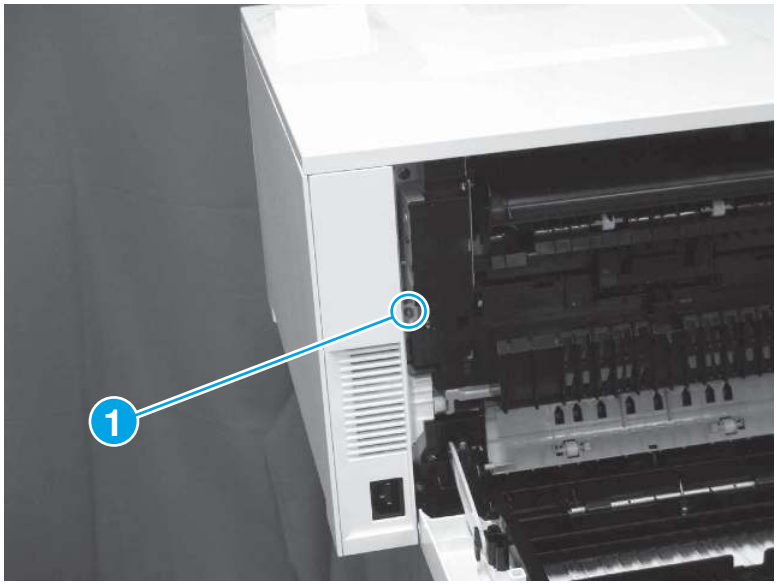Figure 4-454 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to three tabs (callout 1). Release three tabs.

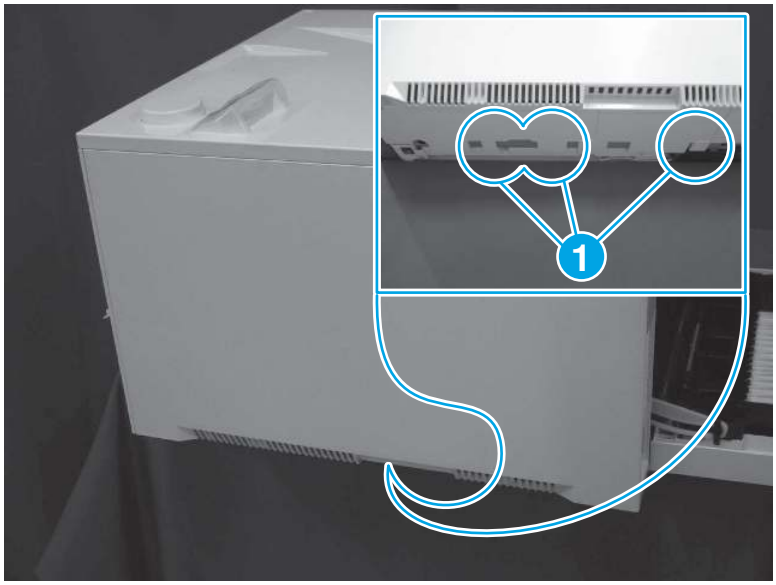Figure 4-455 Release three tabs




3. Press in on the side (callout 1) of the right cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

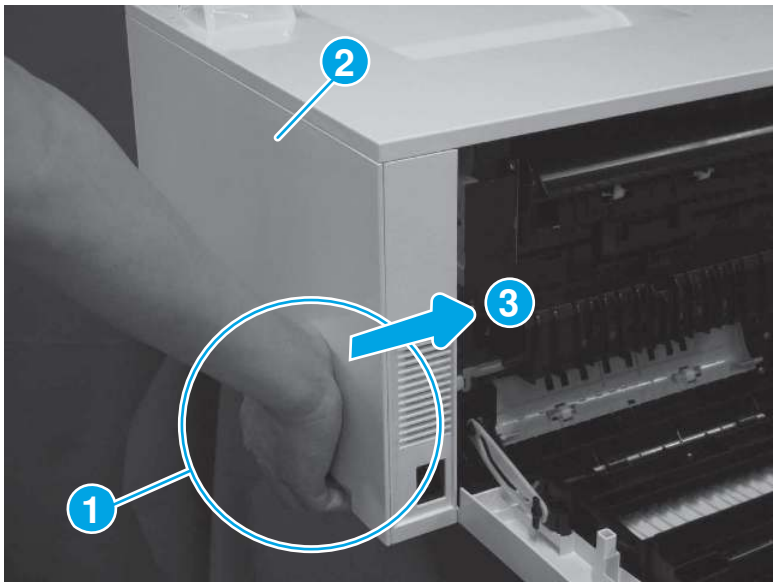Figure 4-456 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

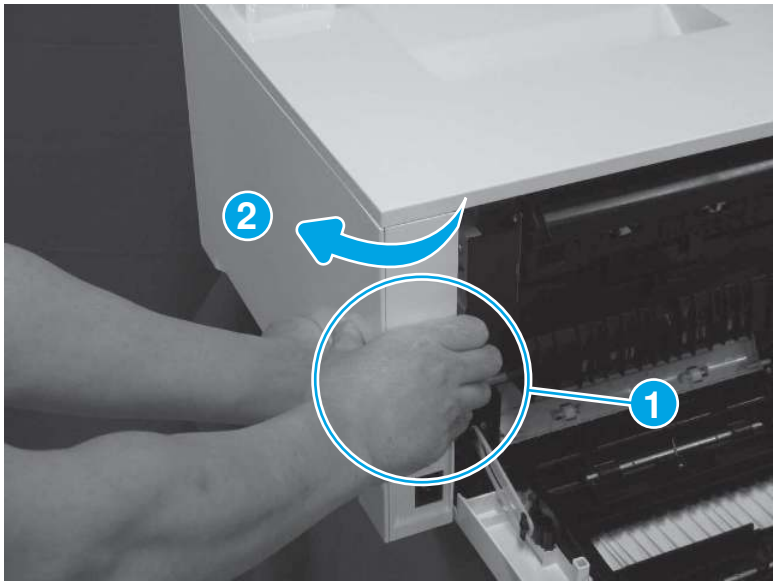Figure 4-457 Disengage the cover corner



5. Remove the right cover (callout 1).

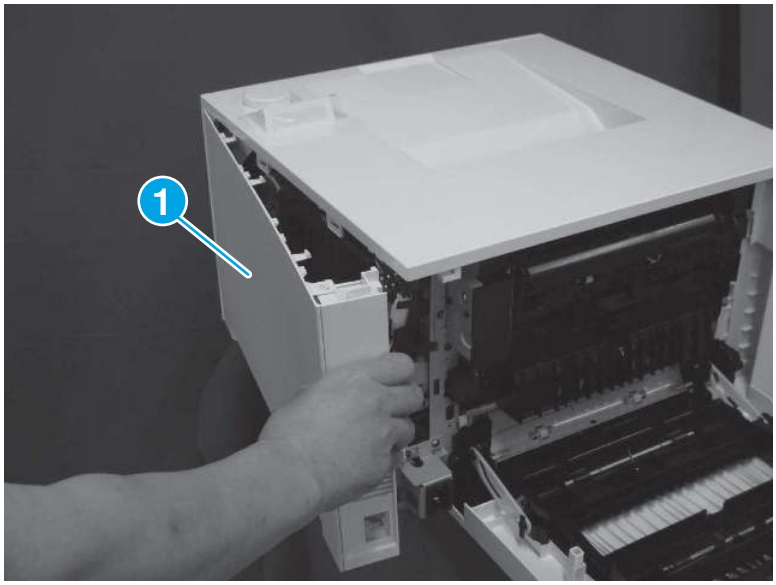Figure 4-458 Remove the cover




4. Remove the right cover (MFP)

Follow the procedure below to remove and replace the right cover (MFP).

NOTE: The following procedure is for an MFP printer only. If this assembly is being removed to gain access to dependency parts for a SFP printer, skip this step.


1. Remove one screw (callout 1).

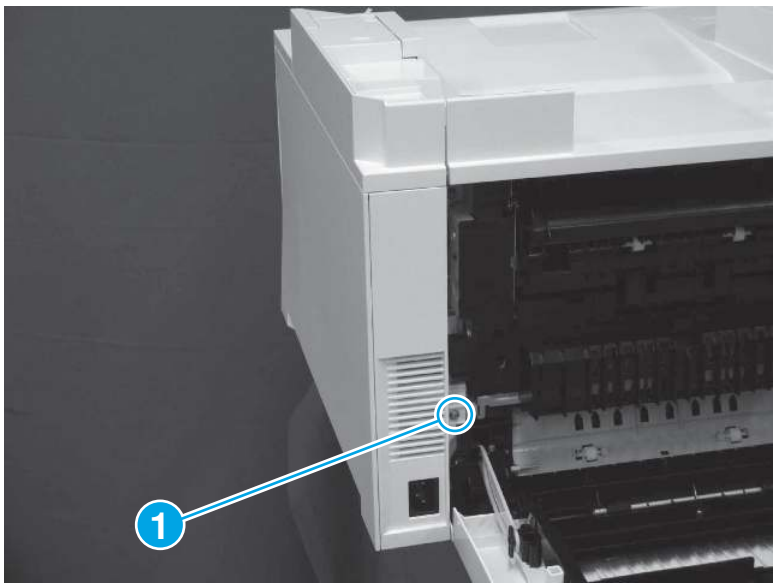Figure 4-459 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to three tabs (callout 1). Release three tabs.

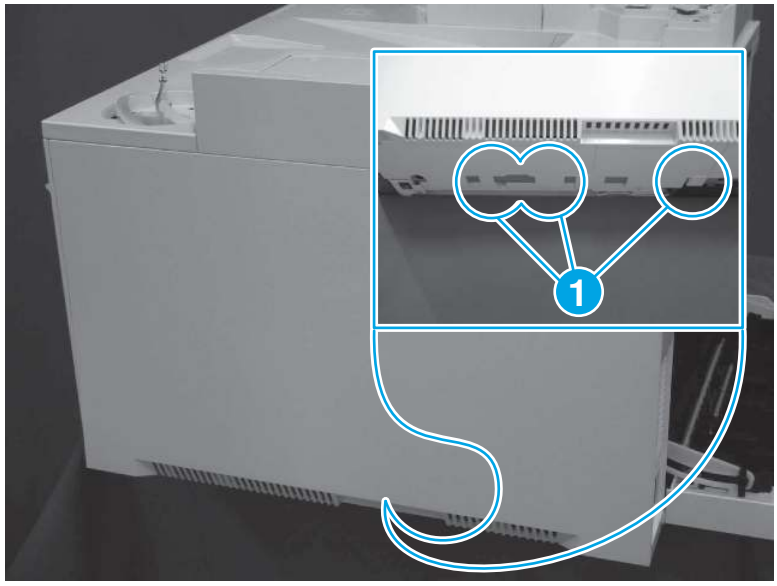Figure 4-460 Release three tabs




3. Press in on the side (callout 1) of the right cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

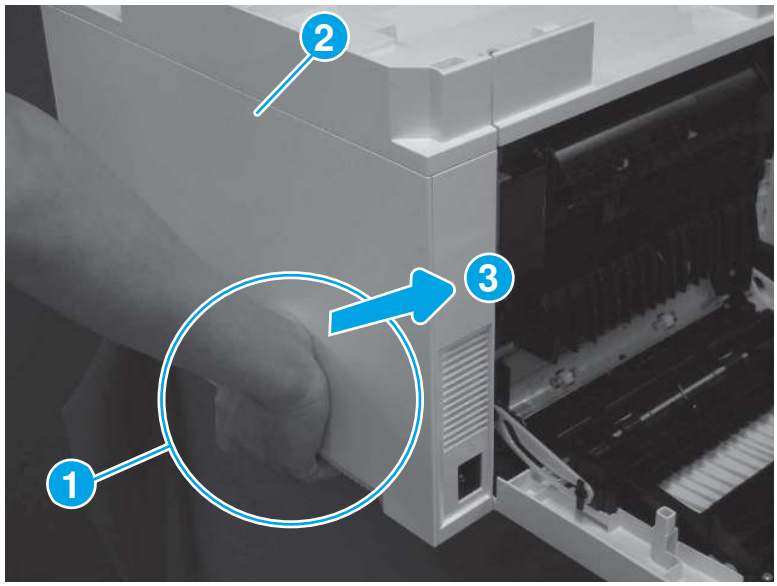Figure 4-461 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

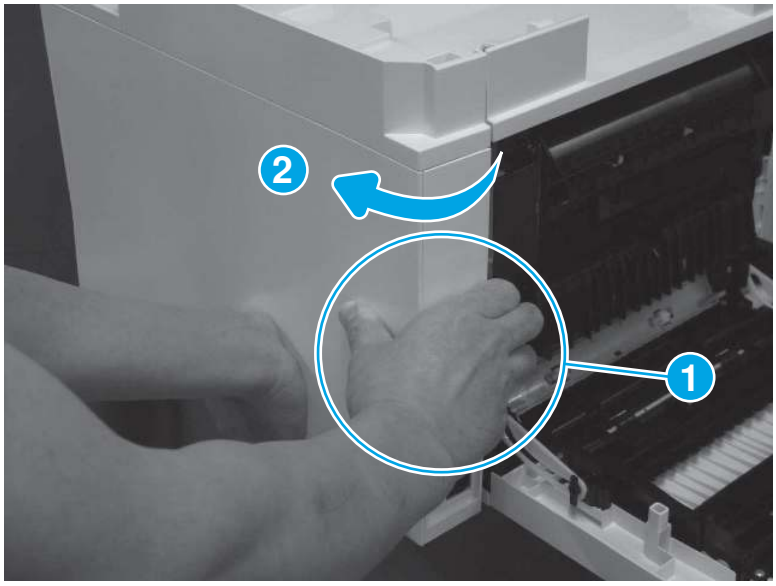Figure 4-462 Disengage the cover corner



5. Remove the right cover (callout 1).

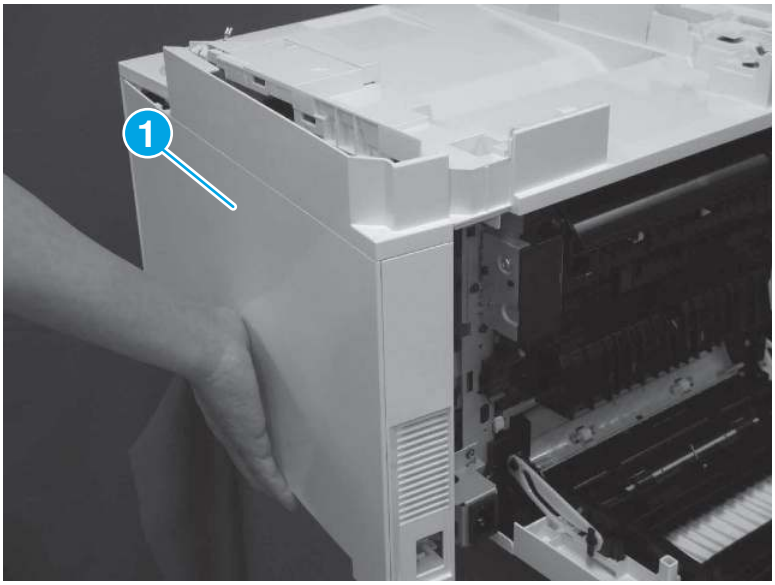Figure 4-463 Remove the cover



5. Remove the fuser/duplex drive assembly

Follow the procedure below to remove and replace the fuser.

⚠ CAUTION: The fuser is hot. Wait at least 30 minutes after turning the printer power off before removing the fuser.


IMPORTANT: The power button **must** be used to turn the printer power off prior to removing the fuser. Unplugging the printer to turn the power off (without using the power button) does not disengage the fuser, making it impossible to remove.

NOTE: The fuser and duplex drive are removed as one assembly. If the fuser is being replaced, remove the duplex drive from the discarded fuser and then install it on the replacement fuser.

Reinstallation tip: Make sure to follow the special installation instructions for this part or step (located after the unpack and recycle or cleaning section).


1. Disconnect two connectors (callout 1).

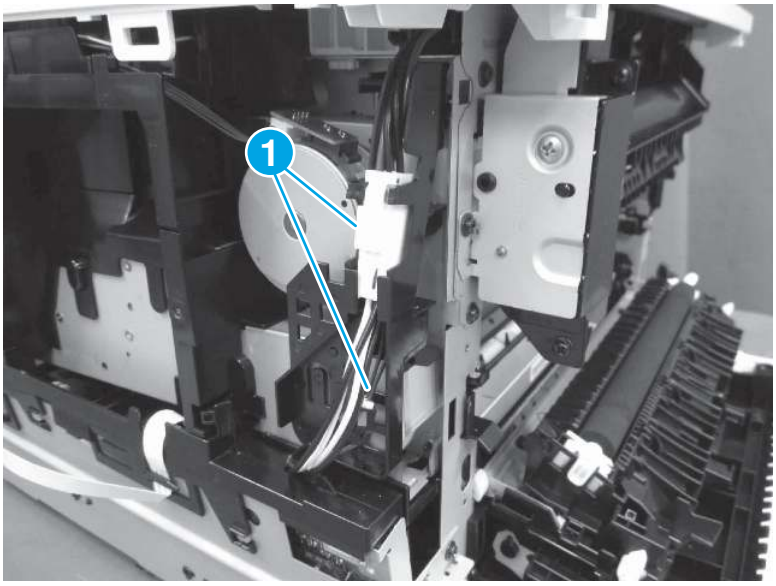Figure 4-464 Disconnect two connectors




2. Remove three screws (callout 1), release one tab (callout 2), and then remove the switchback guide (callout 3).

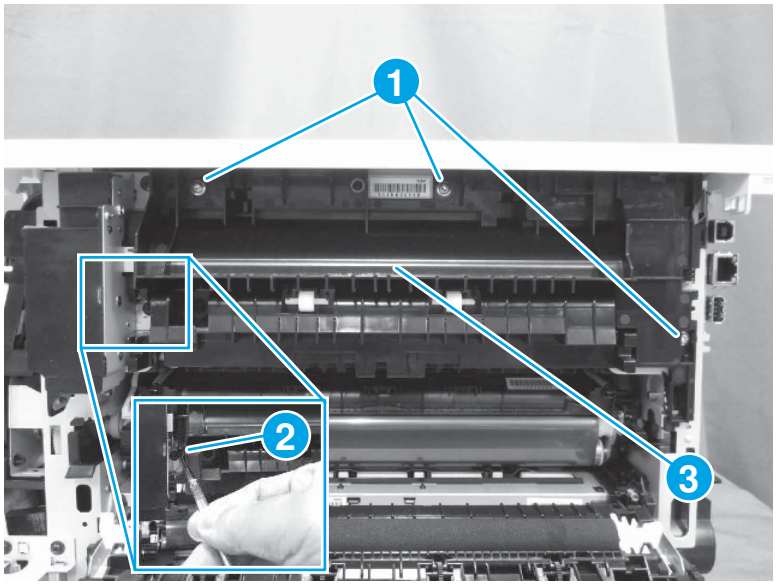Figure 4-465 Remove the switchback guide



3. Disconnect one connector.

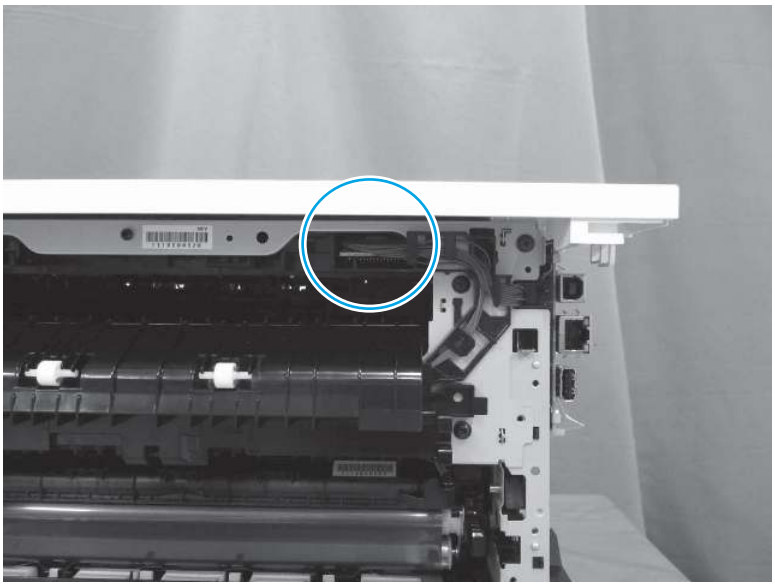Figure 4-466 **Disconnect one connector**




4. Remove three screws (callout 1), and then remove the fuser (callout 2) and duplex drive assembly (callout 3) together.

NOTE: **Fuser/duplex drive assembly dependency part removal**: If the fuser and duplex drive are being removed to gain access to other assemblies, stop and skip the remaining steps in this topic.


Fuser or duplex drive assembly replacement part removal: For a replacement fuser or duplex drive, use the steps below to remove the duplex drive assembly, and then install it on the replacement fuser.

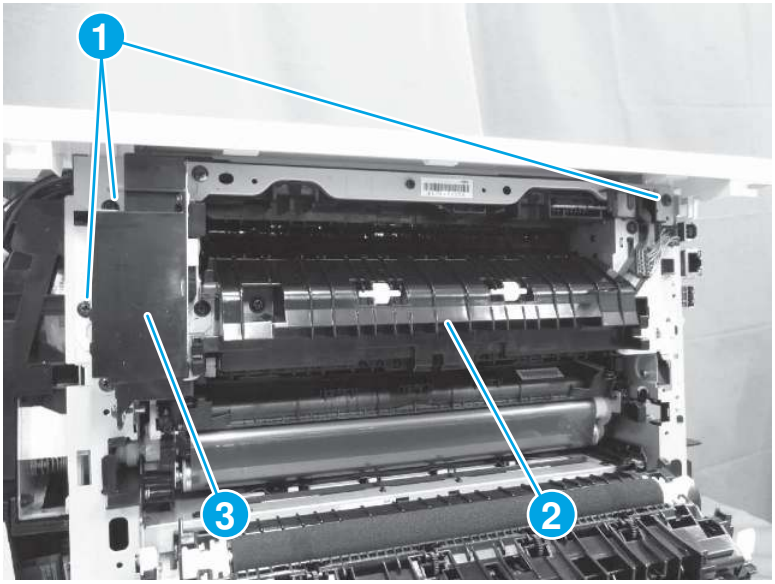Figure 4-467 **Remove the fuser and duplex drive assembly**




5. **Replacement fuser or duplex drive only**: Release one tab (callout 1), and then remove the cover (callout 2).

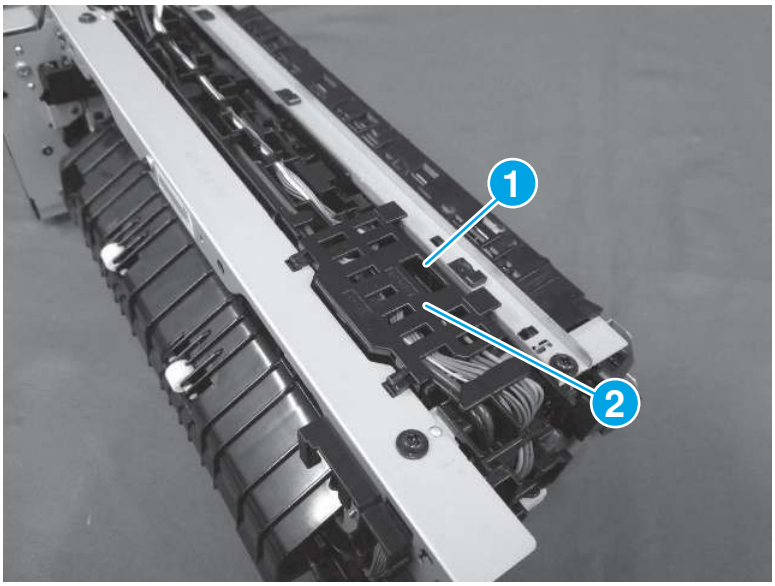Figure 4-468 **Remove the cover**




6. **Replacement fuser or duplex drive only**: Disconnect one connector (callout 1), and then release the cable (callout 2) from retainers (callout 3).

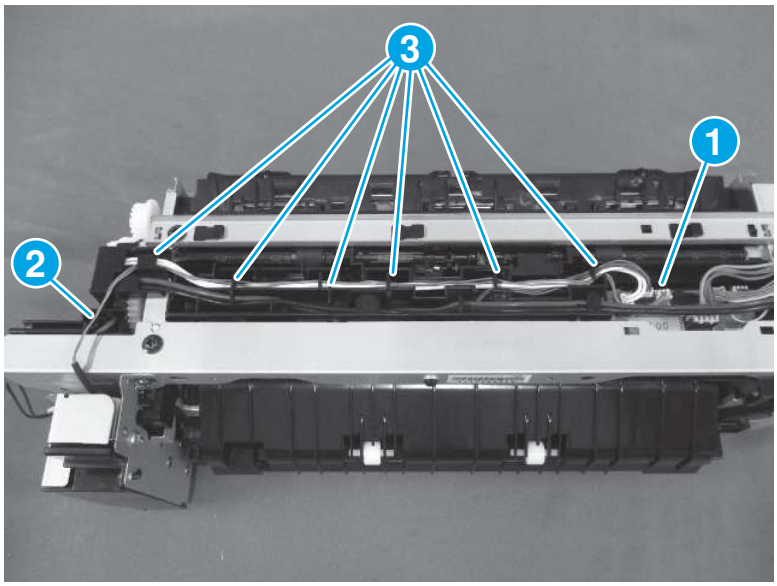Figure 4-469 **Disconnect one connector and release the cable**




7. **Replacement fuser or duplex drive only:** Remove three screws (callout 1).

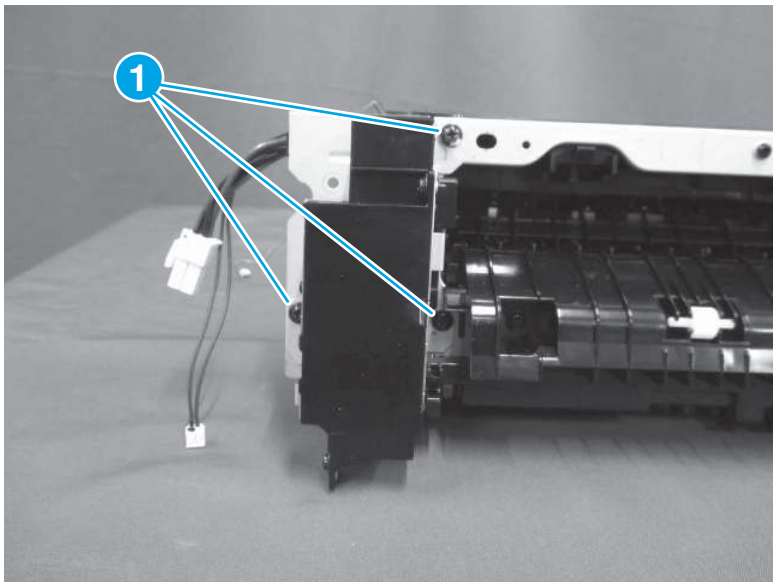Figure 4-470 **Remove three screws**



8. **Replacement fuser or duplex drive only:** Remove the duplex drive assembly.

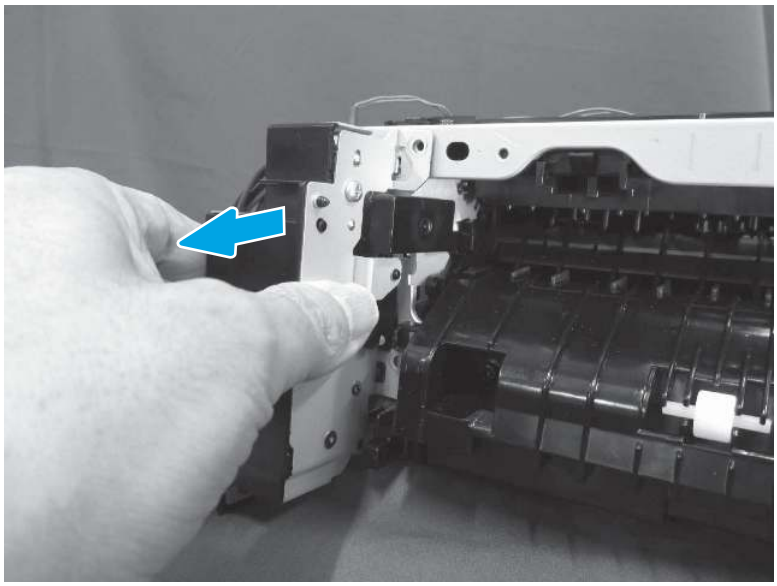Figure 4-471 **Remove the duplex drive assembly**



6. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.


NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.

7. Special installation instructions - Fuser/duplex drive assembly

Follow the special instructions below to install the fuser/duplex drive assembly.

1. **Replacement fuser only**: When the duplex drive assembly (callout 1) is installed, make sure that the boss (callout 2) on the drive lever fits into the guide of the flapper (callout 3).

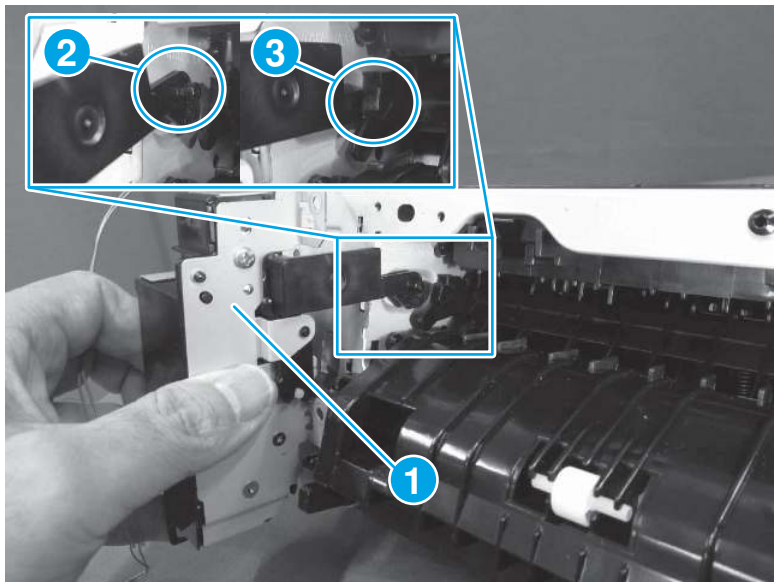
Figure 4-472 **Duplex drive lever and flapper**



2. **Replacement fuser only**: Actuate the duplex drive lever (callout 1) and make sure that the lever and the flapper (callout 2) move together.

   Reverse the removal steps to finish installing the duplex drive assembly on the fuser.

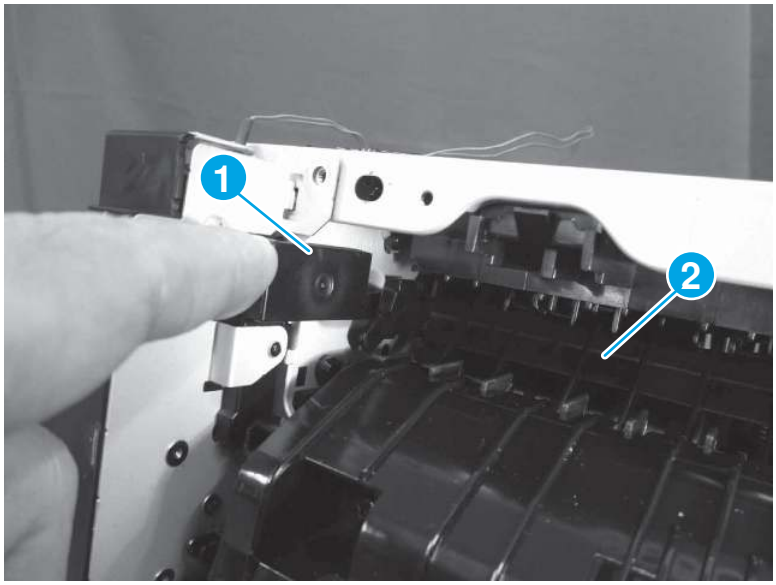
   Figure 4-473 **Check the lever and flapper**



3. **Fuser/duplex drive assembly**: Make sure that the gear on the printer is correctly positioned. The opening in the gear circumference must face out and away from the printer.


NOTE: If the gear is not correctly positioned, rotate it until it is correctly aligned.

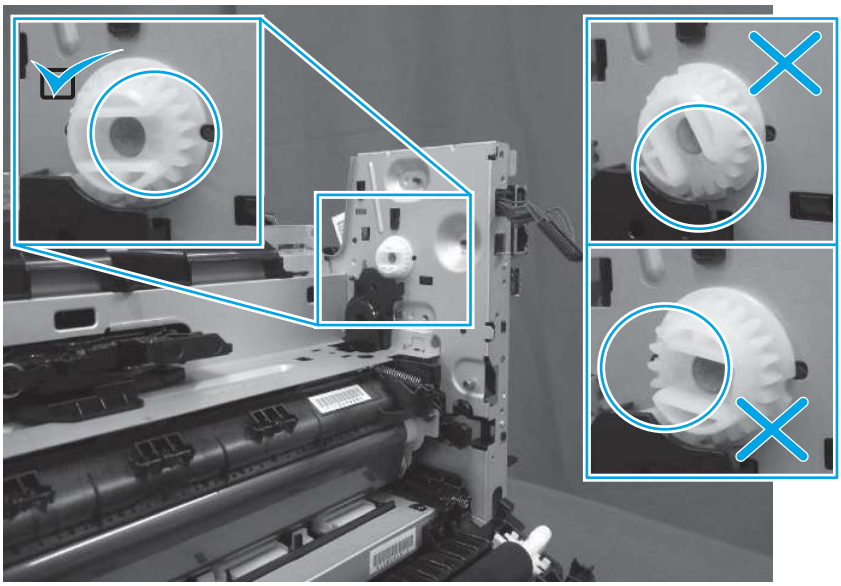Figure 4-474 **Check the gear**



4. **Fuser/duplex drive assembly**: Make sure that the fuser temperature fuse cable (callout 1) is positioned behind the thick cable (callout 2). This prevents the fuser cable from unnecessary movement.

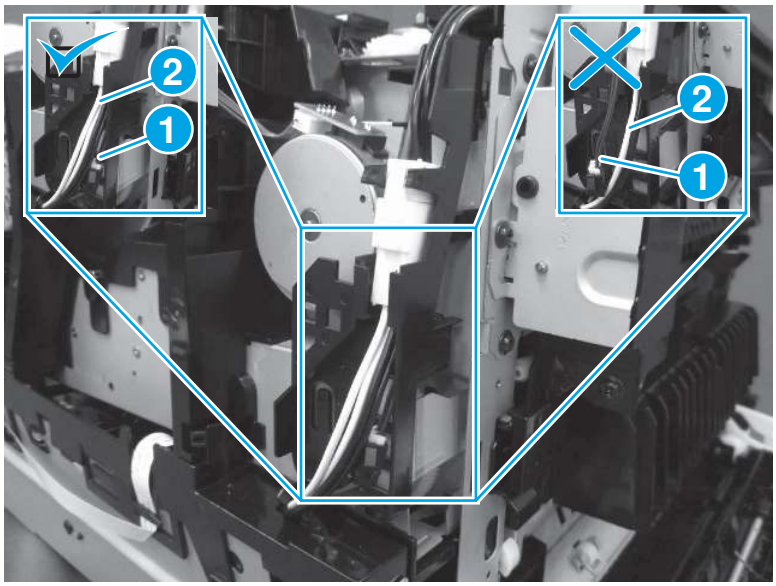Figure 4-475 **Check the fuser temperature fuse cable**



Removal and replacement: Laser/scanner assembly

Learn about laser/scanner removal.

View a video of removing and replacing the laser/scanner.

Mean time to repair: 35 minutes

Service level: Medium

Before performing service

Turn the printer power off

- Disconnect the power cable.

WARNING! To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-37 **Part information**

Part number	Part description
RM2-2630-000CN	Laser scanner assembly

Required tools

- #2 Phillips screwdriver with a magnetic tip and a 152 mm (6 in) shaft length

- Small flat-blade screwdriver

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test

Print any pages necessary to make sure the printer is functioning correctly.

1. Remove the left cover (SFP)


Follow the procedure below to remove and replace the left cover (SFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.

TIP: There might be a small cover installed on the USB port located at the back of the printer. If installed, remove this cover now.


1. Remove one screw (callout 1).

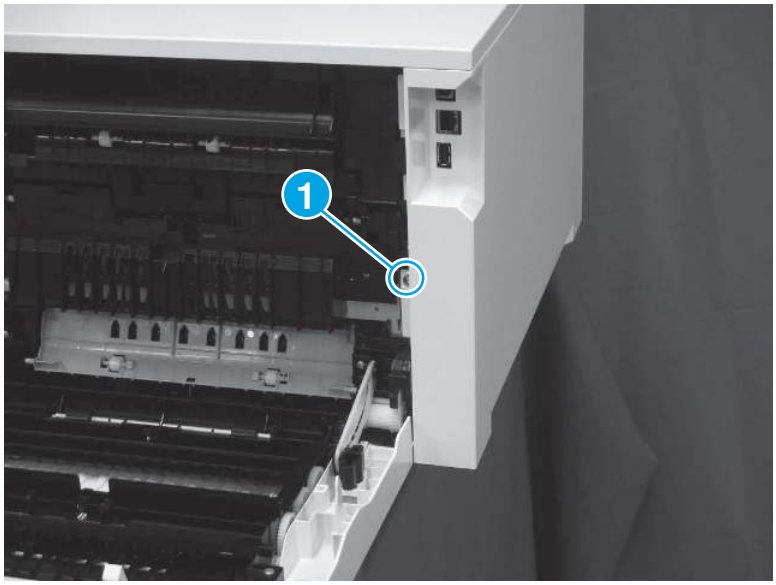Figure 4-476 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

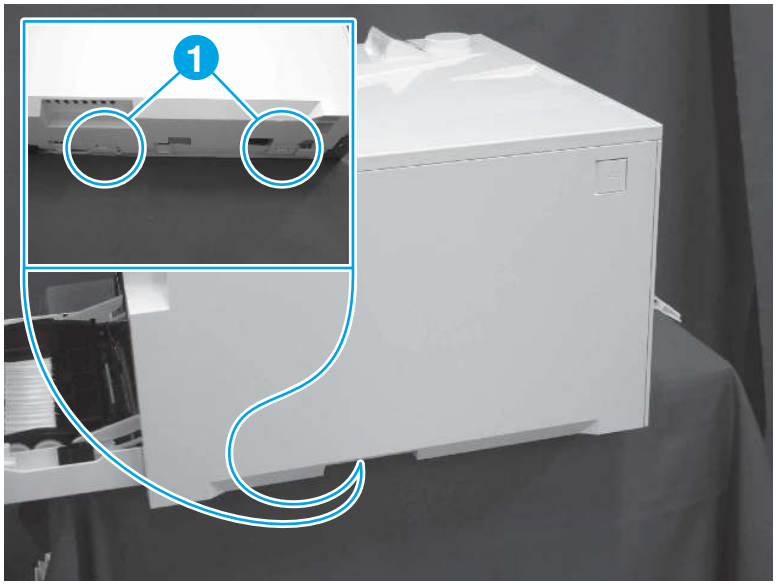Figure 4-477 Release two tabs




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

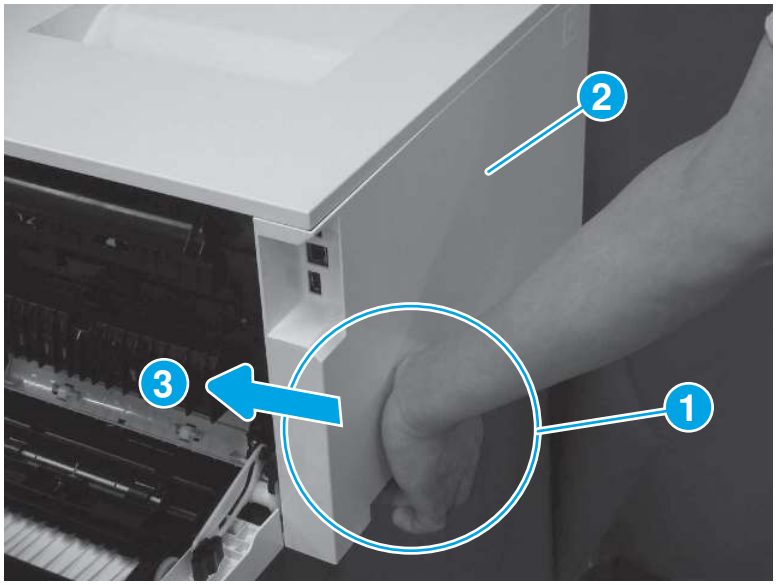Figure 4-478 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

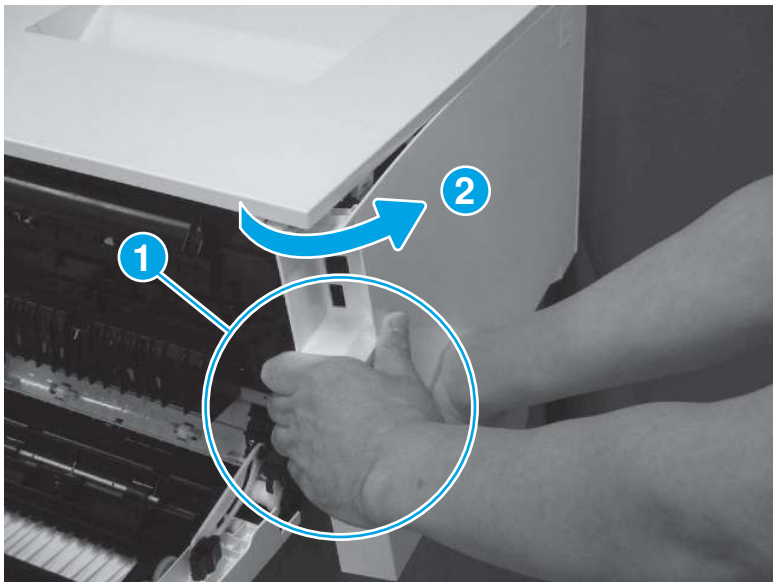Figure 4-479 Disengage the cover corner



5. Remove the left cover (callout 1).

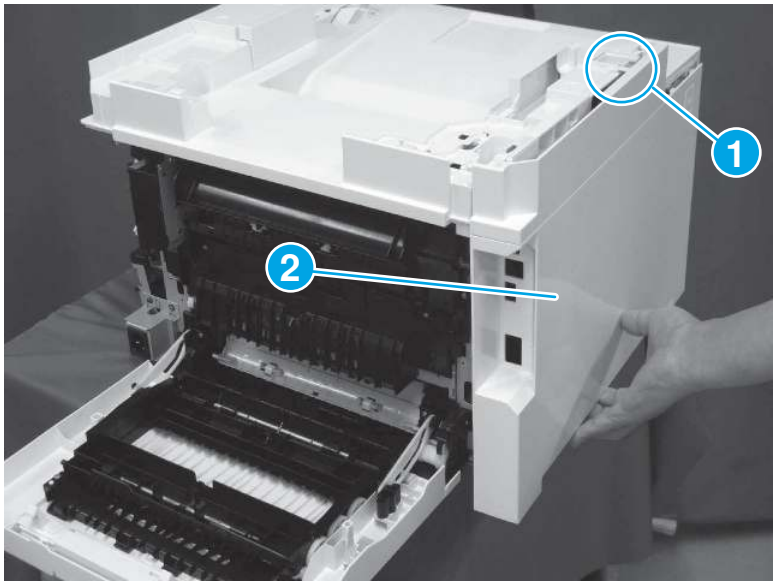Figure 4-480 Remove the cover



2. Remove the left cover (MFP)


Follow the procedure below to remove and replace the left cover (MFP).

NOTE: The following procedure is for an MFP printer only. If this assembly is being removed to gain access to dependency parts for a SFP printer, skip this step.

TIP: There might be a small cover installed on the USB port and/or the fax port located at the back of the printer. If installed, remove these covers now.


1. Remove one screw (callout 1).

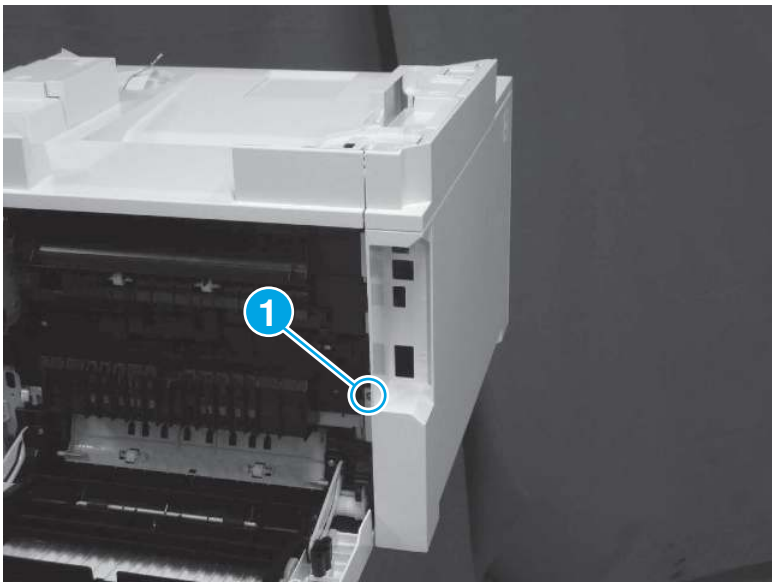Figure 4-481 **Remove one screw**




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

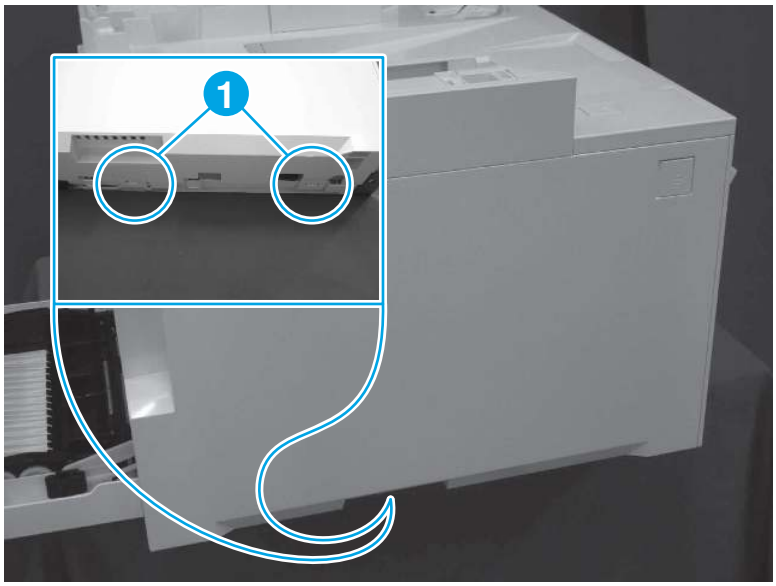Figure 4-482 **Release two tabs**




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

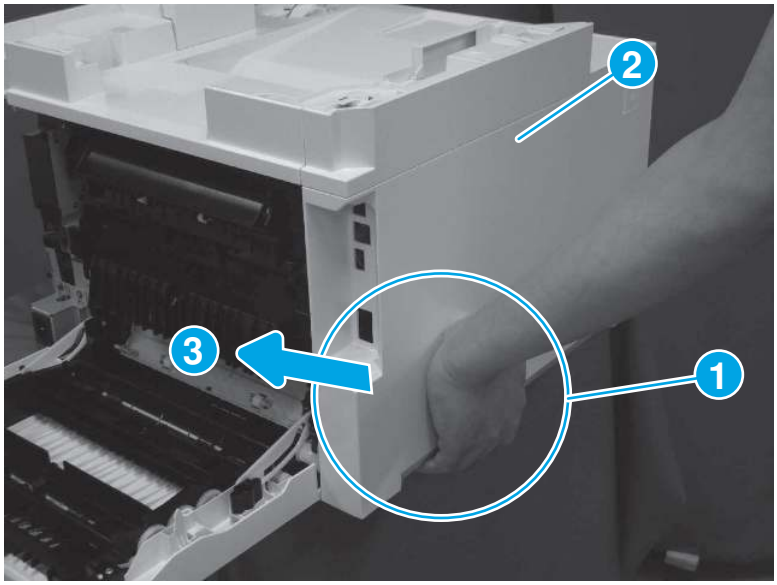Figure 4-483 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

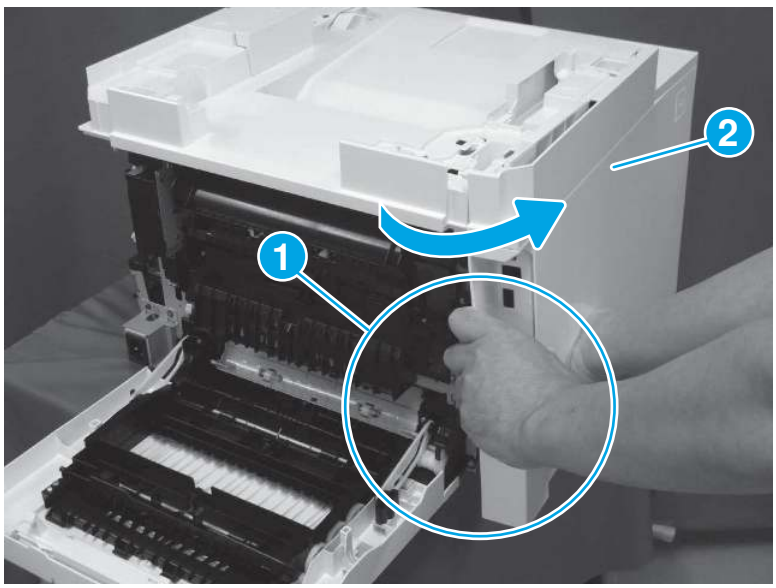Figure 4-484 Disengage the cover corner



5. Remove the left cover (callout 1).

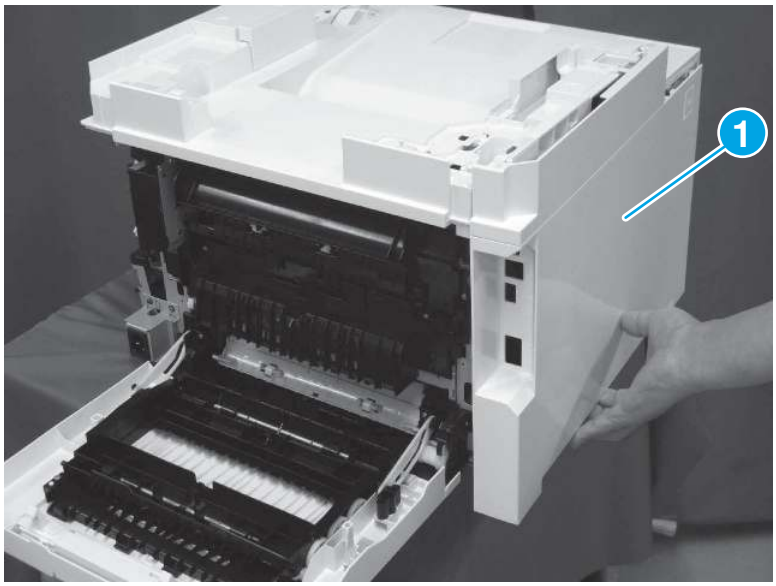Figure 4-485 Remove the cover



3. Remove the ISA (MFP)

Follow the procedure below to remove and replace the ISA.


1. Open the ISA, and then remove the ISA FFC cover (callout 1).

Figure 4-486 Remove the FFC cover



2. Disconnect three FFCs, and then remove one screw to release the ground cable.

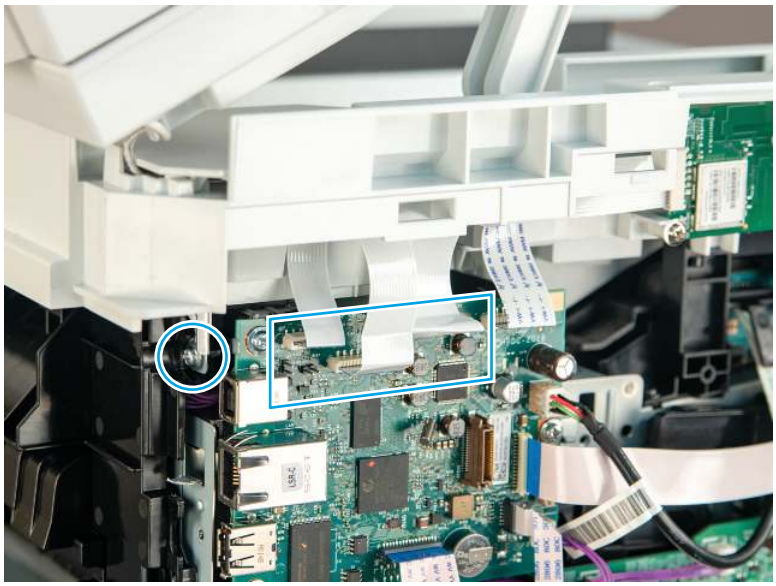Figure 4-487 Disconnect FFCs and remove screw



3. Release one tab (callout 1), and then rotate the ISA slider pin (callout 2) towards the front of the printer to release it. Remove the slider pin.


⚠ CAUTION: When the slider pin is removed, the ISA is not captive and can suddenly detach from the printer.

Figure 4-488 Remove the slider pin




4. Support the ISA, release the FFCs from the retainers, and then carefully pass the FFCs and the ground wire up through the slots in the top cover.

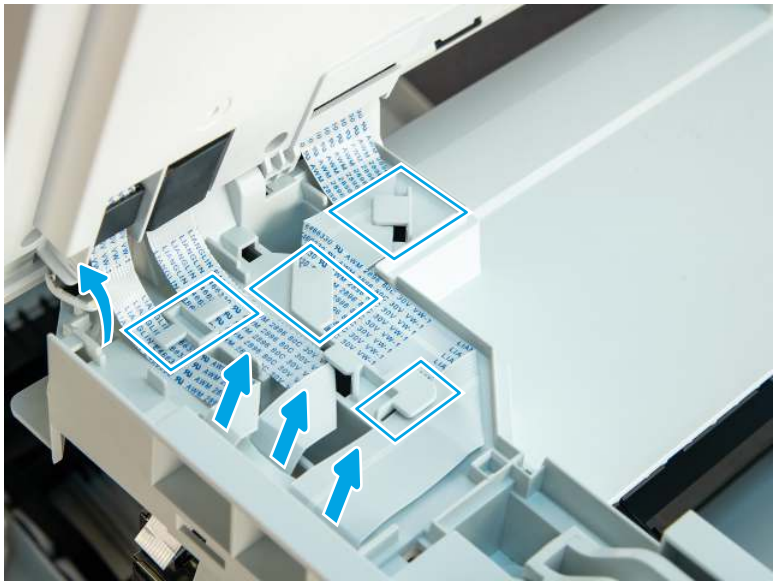Figure 4-489 Release the FFCs and ground wire



5. Slide ISA as shown below to release it.

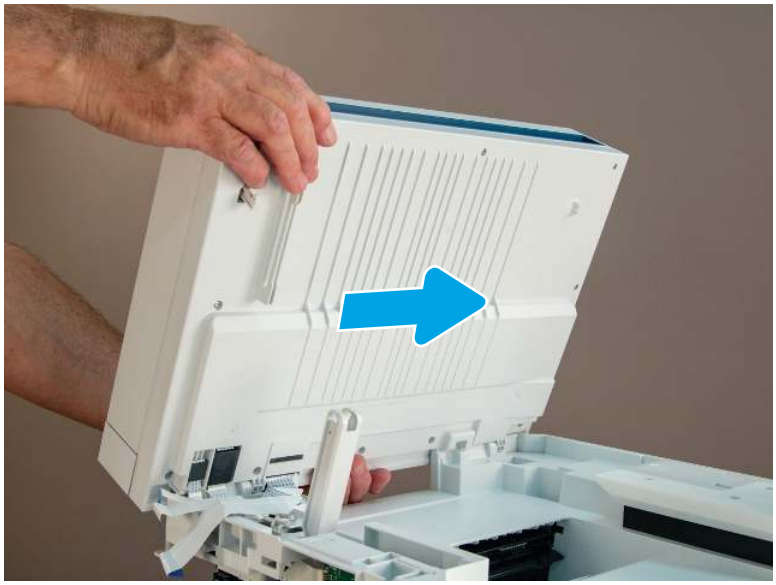Figure 4-490 Release the ISA



6. Remove the ISA.

Figure 4-491 Remove the ISA




4. Remove the right cover (SFP)

Follow the procedure below to remove and replace the right cover (SFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.


1. Remove one screw (callout 1).

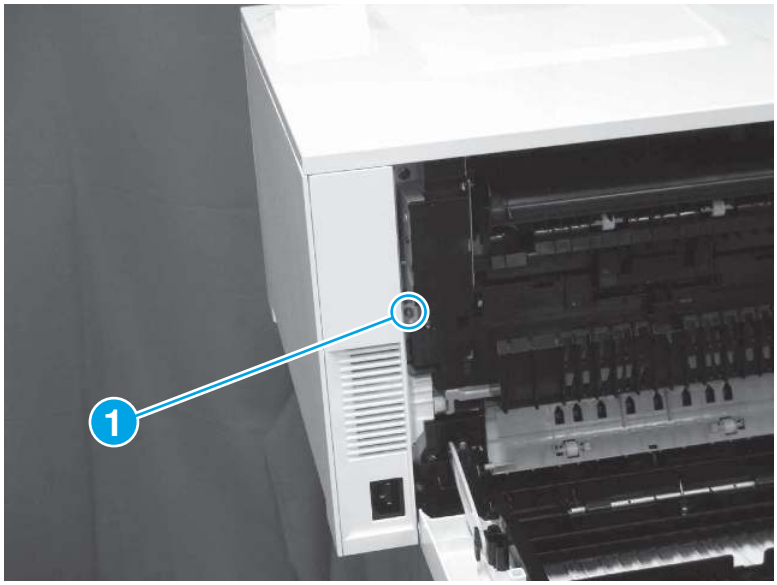Figure 4-492 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to three tabs (callout 1). Release three tabs.

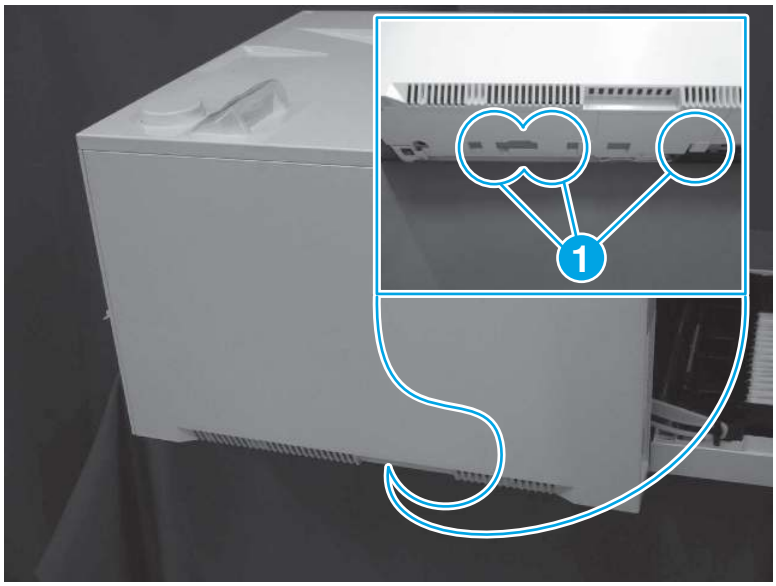Figure 4-493 Release three tabs




3. Press in on the side (callout 1) of the right cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

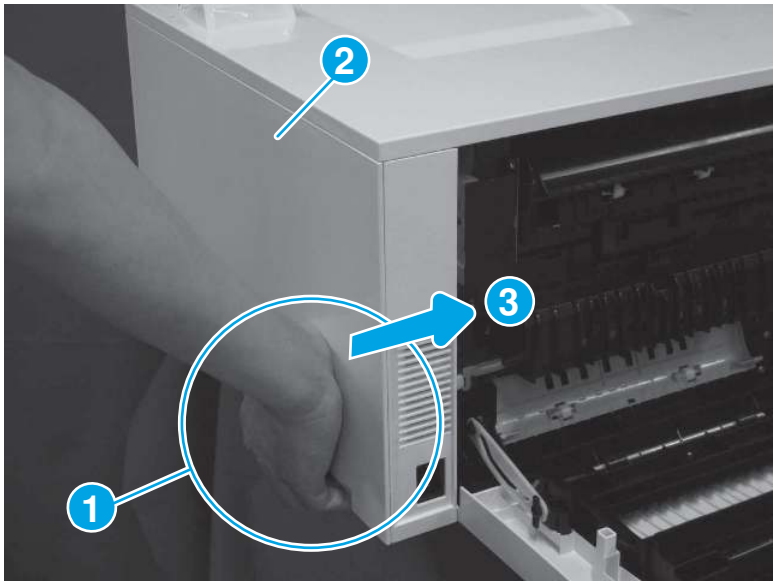Figure 4-494 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

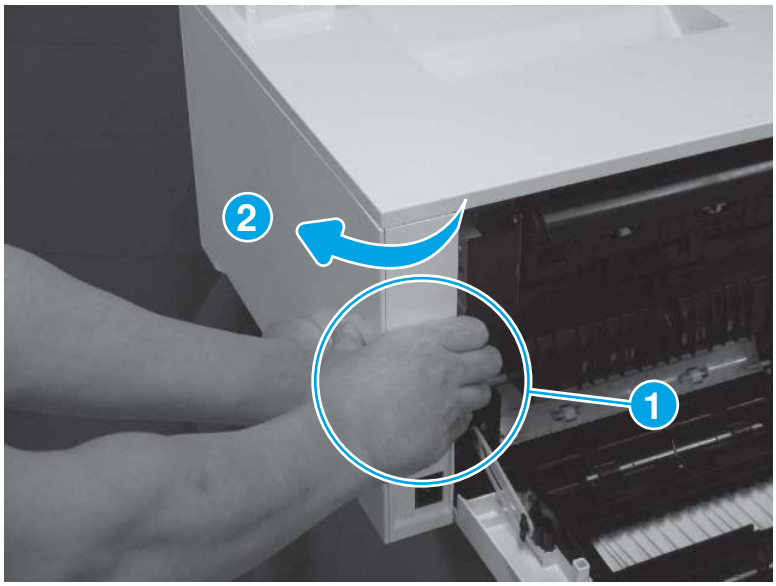Figure 4-495 Disengage the cover corner



5. Remove the right cover (callout 1).

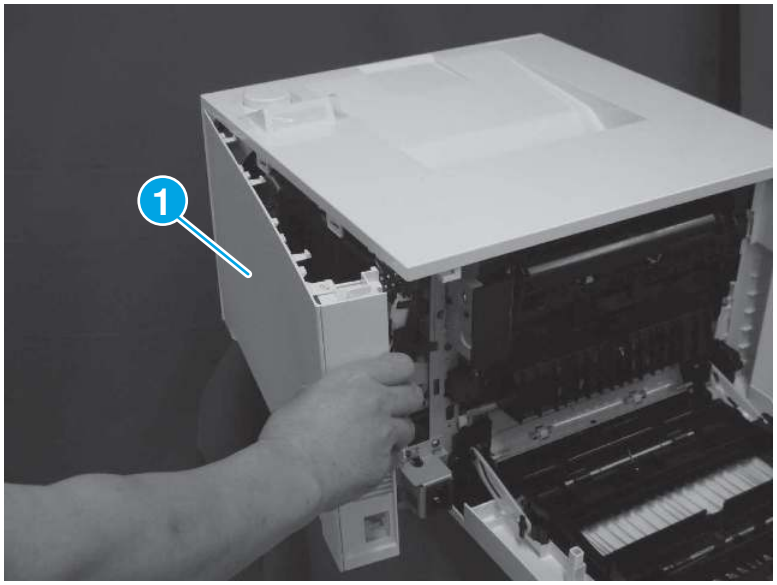Figure 4-496 Remove the cover




5. Remove the right cover (MFP)

Follow the procedure below to remove and replace the right cover (MFP).

NOTE: The following procedure is for an MFP printer only. If this assembly is being removed to gain access to dependency parts for a SFP printer, skip this step.


1. Remove one screw (callout 1).

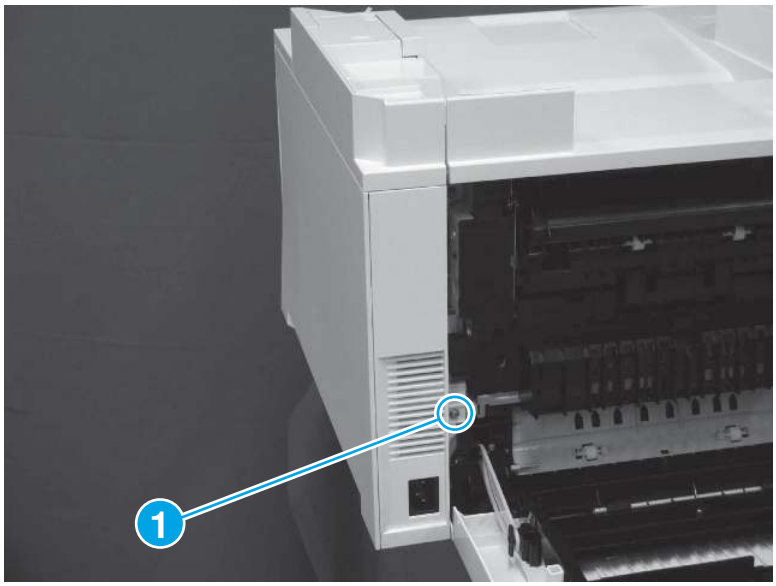Figure 4-497 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to three tabs (callout 1). Release three tabs.

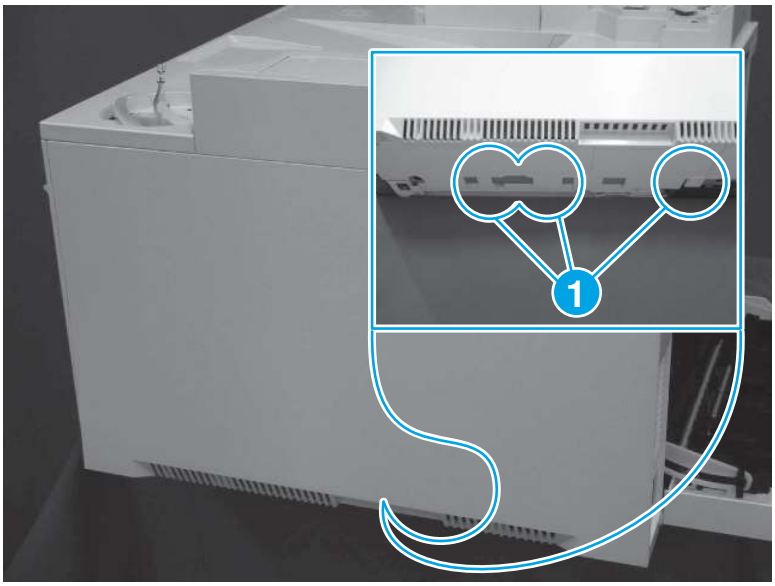Figure 4-498 Release three tabs




3. Press in on the side (callout 1) of the right cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

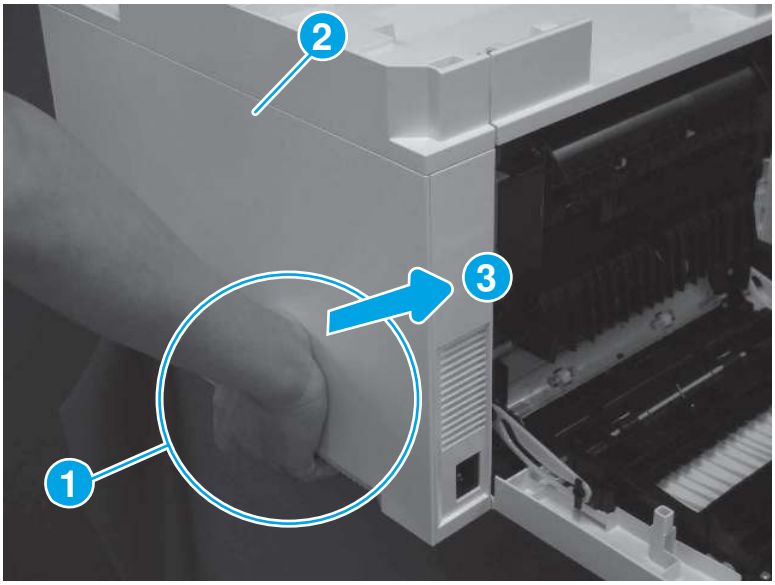Figure 4-499 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

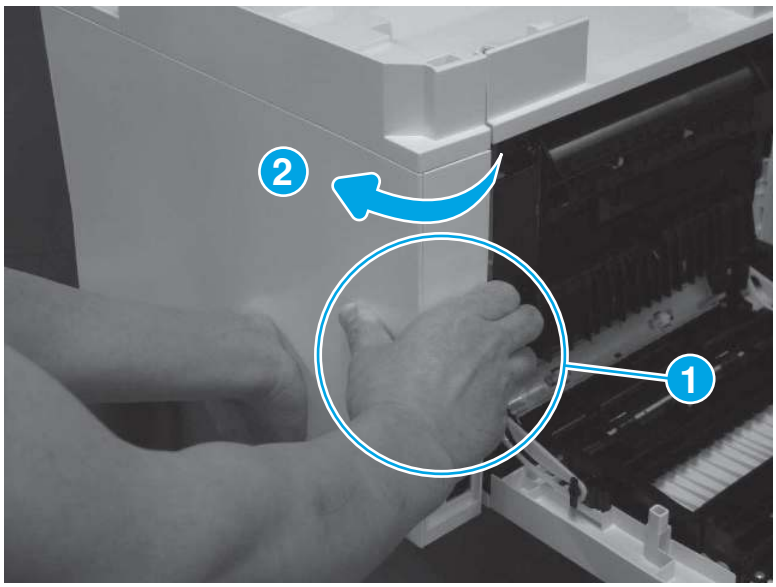Figure 4-500 Disengage the cover corner



5. Remove the right cover (callout 1).

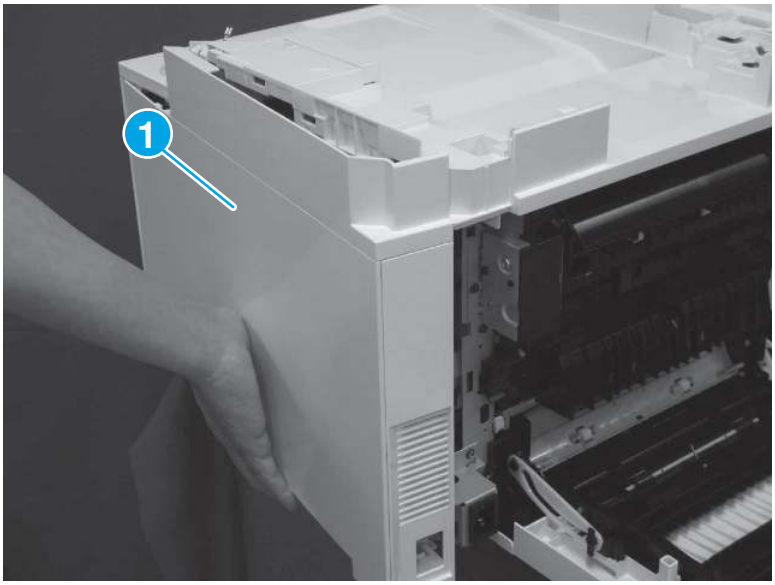Figure 4-501 **Remove the cover**



6. Remove the front cover


Follow the procedure below to remove and replace the front cover.

NOTE: Front cover removal is **identical** for both SFP and MFP models.

Reinstallation tip: Make sure to follow the special installation instructions for this part or step (located after the unpack and recycle or cleaning section).

1. Remove three screws (callout 1).

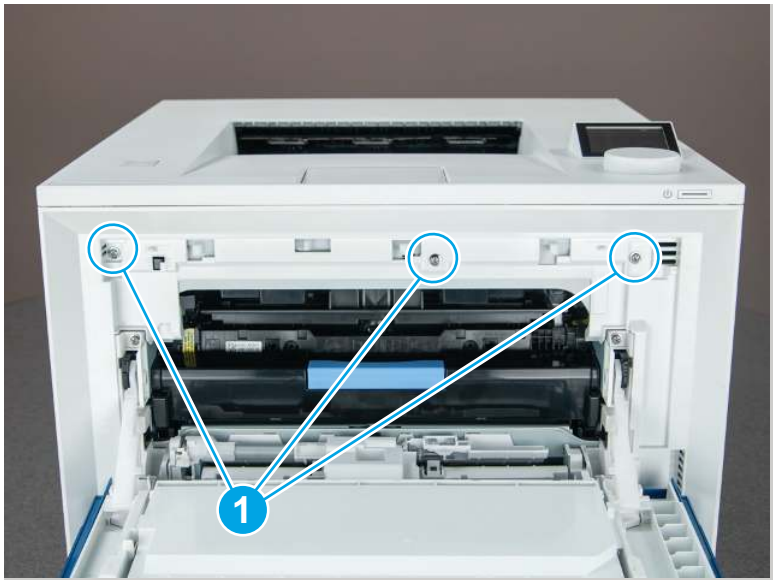
Figure 4-502 **Remove three screws**



2. Before proceeding, take note of the door release arm (callout 1). This arm can be easily dislodged when the cover is removed.


⚠ **CAUTION:** Do not lose the spring (callout 2) when removing the front cover.

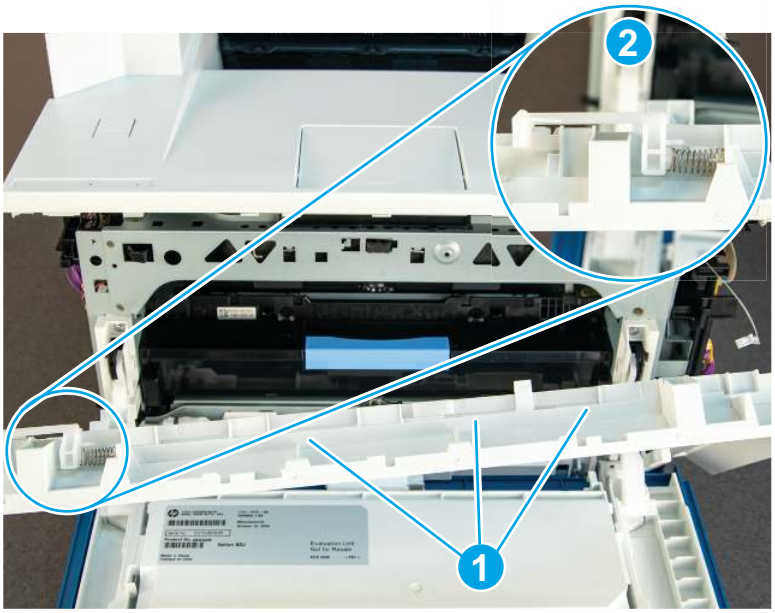Figure 4-503 Door release arm



3. Release four tabs (callout 1), and then remove the front cover (callout 2).

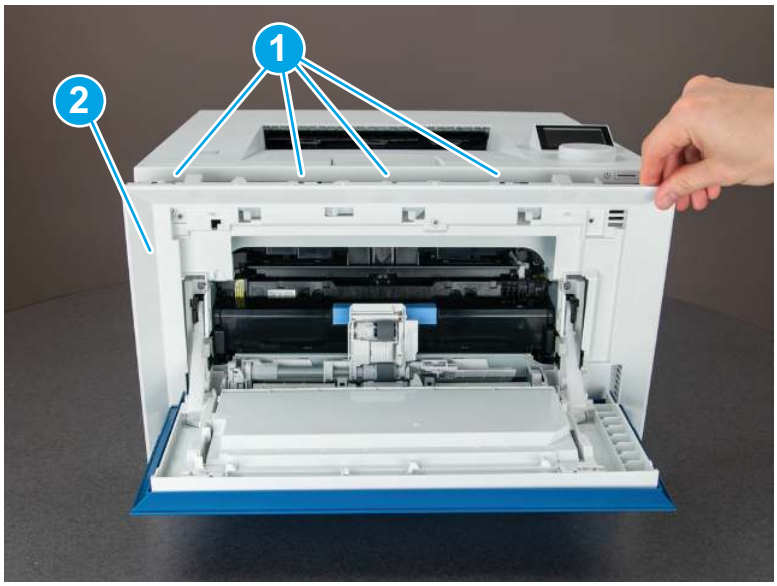Figure 4-504 Remove the cover



7. Remove the top cover (SFP)

Follow the procedure below to remove and replace the top cover (SFP).


NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.

1. **Wireless model only:** Raise and support the left side of the printer, remove one screw, and then separate the wireless PCA from the cover.

CAUTION: Do not attempt to completely remove the wireless PCA. Instead, gently move it out of the way.


TIP: To remove the screw without raising the printer, use a short-barrel screwdriver.

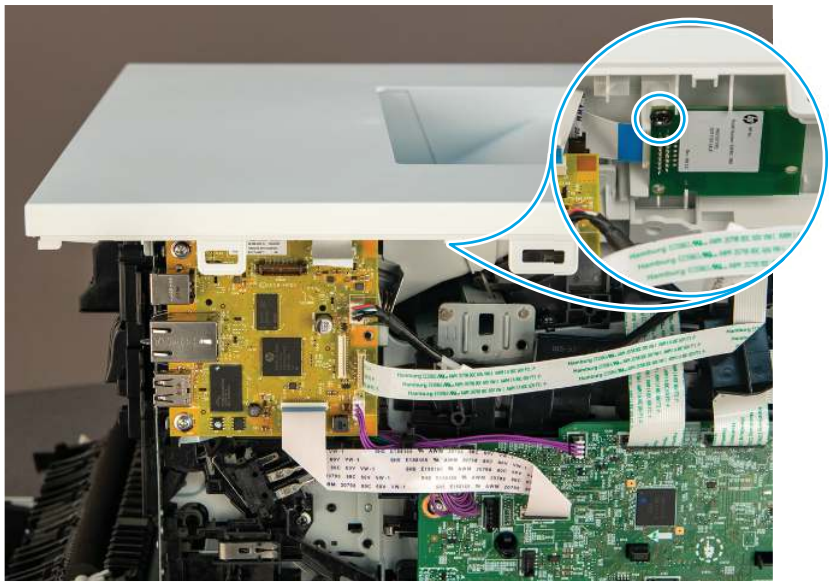Figure 4-505 **Remove one screw**



2. Disconnect one flat-flexible cable (FFC).

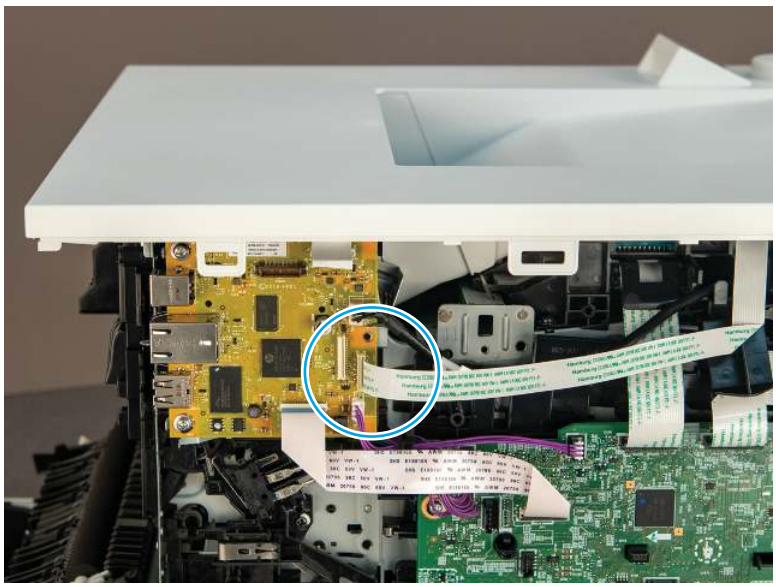Figure 4-506 **Disconnect one FFC**



3. Disconnect one FFC, and then remove one screw to release the ground wire.


NOTE: The front cover is shown installed in the figure below. However, this step is correct for removing the top cover.

Figure 4-507 Disconnect one FFC and remove one screw



4. Sliding the cover from the back of the printer towards the front to remove it.

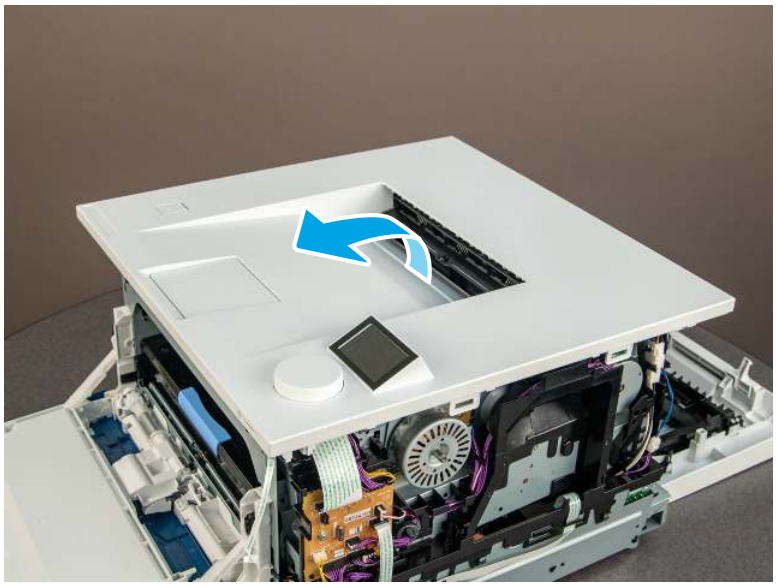Figure 4-508 Remove the cover




8. Remove the top cover (MFP)

Follow the procedure below to remove and replace the top cover (MFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.

1. Close the ISA lift arm.

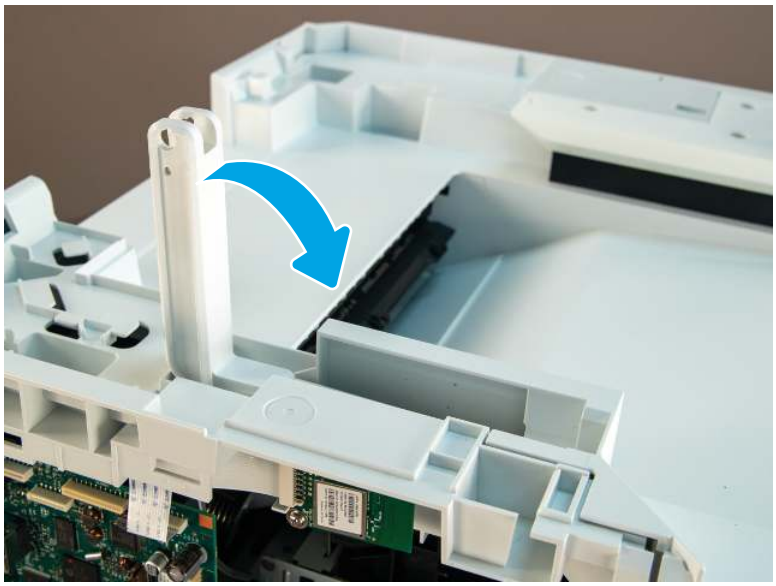
Figure 4-509 **Close the ISA lift arm**



2. Remove one screw.


⚠ **CAUTION:** The support arm is spring loaded and can unexpectedly spring into the open position. To avoid injury, do not place a finger in the screw well when the support arm is in the closed position.

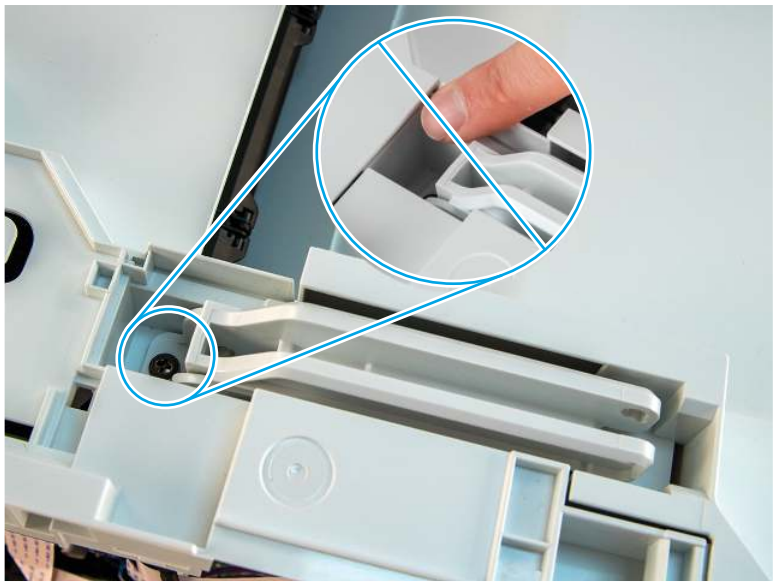Figure 4-510 **Remove one screw**



3. Rotate one end of the lift arm up (callout 1), and then slide the lift arm as shown below (callout 2) to release it. Remove the lift arm.

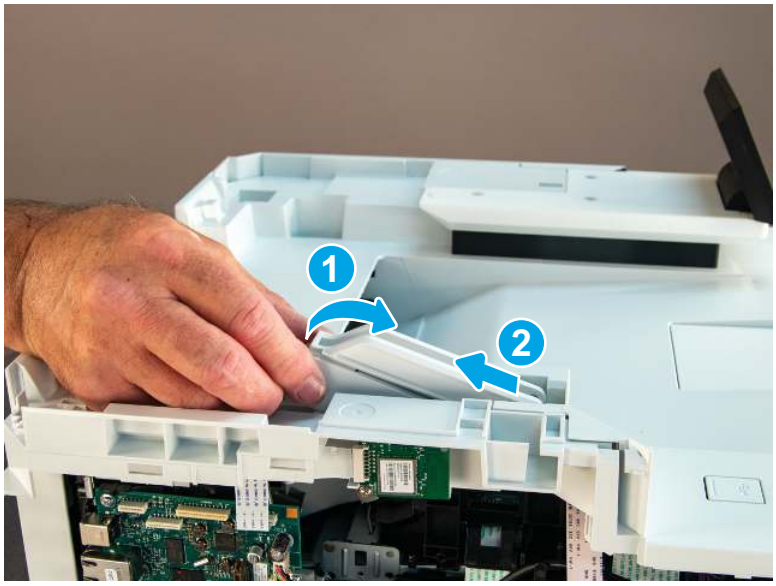Figure 4-511 Remove the lift arm




4. Do the following:

   a. Disconnect one FFC (control panel; callout 1).

   b. Remove one screw (callout 2), and then separate the wireless PCA from the top cover.


   NOTE: The wireless PCA does not need to be completely removed. Instead, release the FFC from the retainer (callout 3), and then gently move it out of the way.

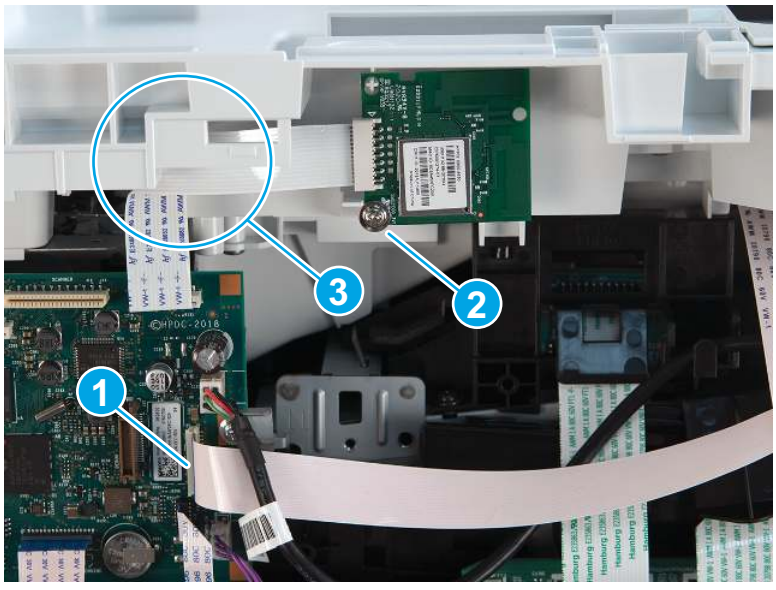Figure 4-512 Disconnect FFC and move the wireless PCA




5. Disconnect one FFC (power button), and then remove one screw (grounding sheet-metal plate).

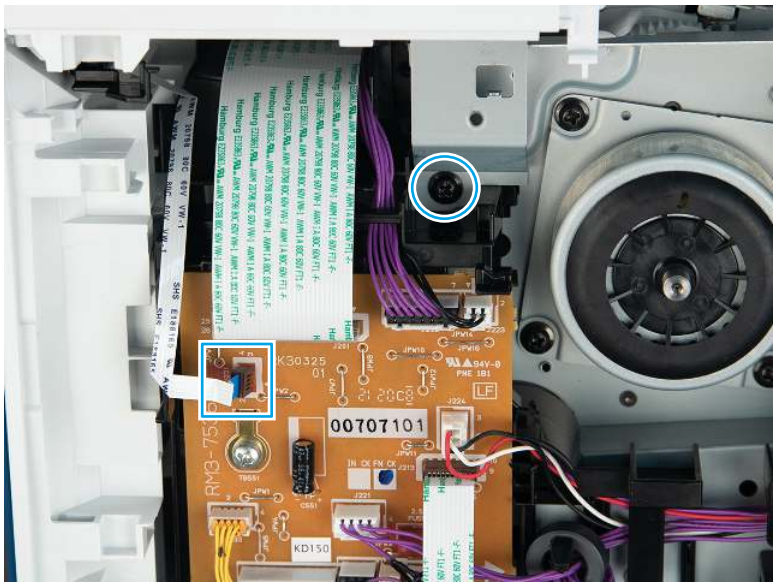Figure 4-513 Disconnect one FFC and remove one screw




6. Remove three screws.

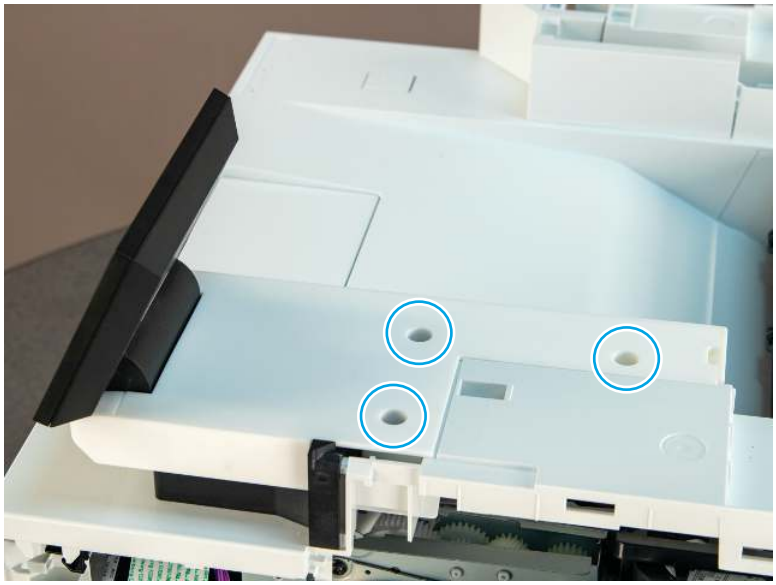Figure 4-514 Remove three screws



7. Release one tab and rotate one end of the base cover up (callout 1), and then slide the cover as shown (callout 2) to remove it.

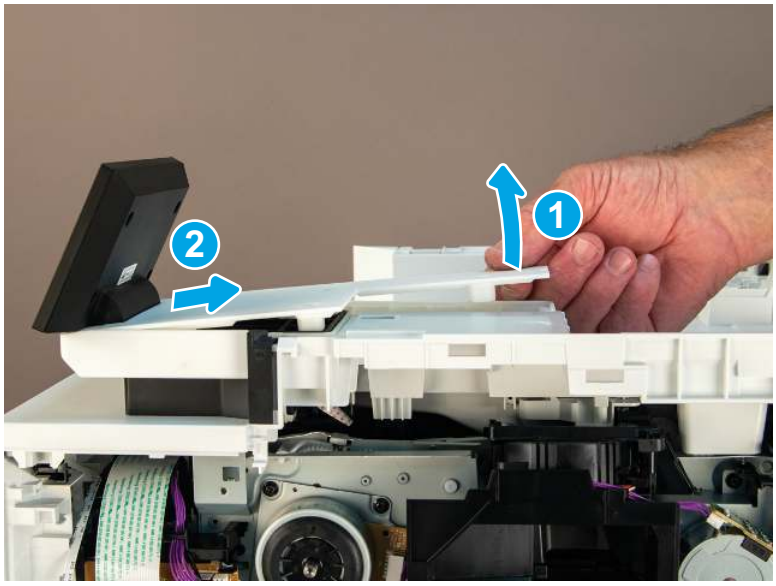Figure 4-515 Remove the cover



8. Disconnect two FFCs.

NOTE: Theses are zero-insertion force (ZIF) connectors. To remove the FFCs, first release the locking clip on the connector, and then pull the cable straight out of the connector.

TIP: For reinstallation, make sure that the line of the FFC is parallel with the body.

Figure 4-516 Disconnect two FFCs



9. Remove four screws.

NOTE: Two of the screws are self-tapping threads (black), and two of the screws are machine thread (silver).


Figure 4-517 Remove four screws



10. Lift the control panel and base straight up and off of the printer to remove them together.


NOTE: When handling the assembly, do not lose the ferrite (callout 1).

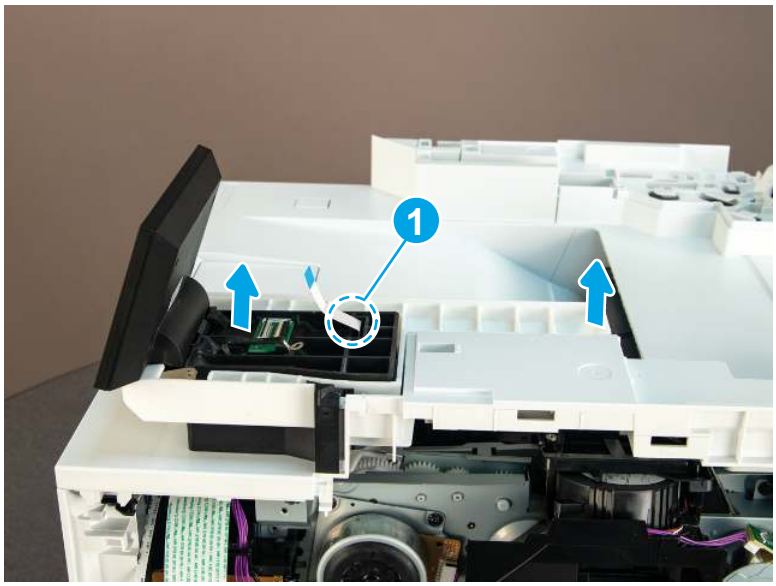Figure 4-518 Remove control panel and base



11. Remove three screws.

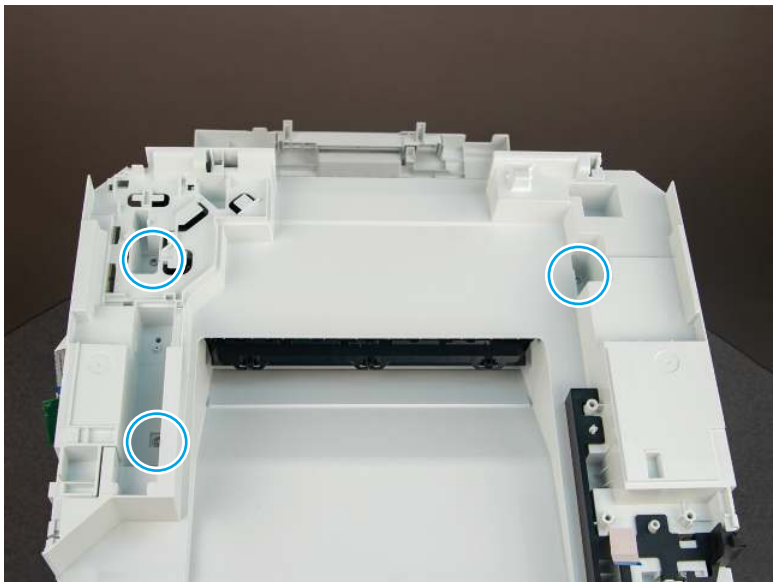
Figure 4-519 Remove three screws



12. Sliding the cover from the back of the printer to the front to remove it.

TIP: Slightly move the control-panel ground bracket (circled) back and forth to help release the top cover.

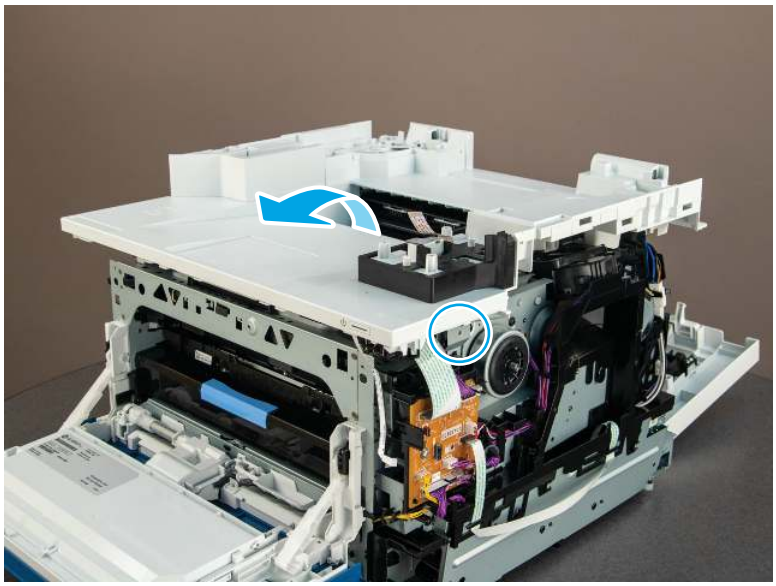Figure 4-520 Remove the cover



13. **When the cover is reinstalled**: Make sure that the front USB assembly is correctly positioned under the cover.

Figure 4-521 **Front USB assembly**




9. Remove the laser/scanner assembly

Follow the procedure below to remove and replace the laser/scanner.

Reinstallation tip: Make sure to follow the special installation instructions for this part or step (located after the unpack and recycle or cleaning section).


1. Disconnect one connector (callout 1), Remove one screw (callout 2), and then remove the USB cable (callout 3) and the plate (callout 4).

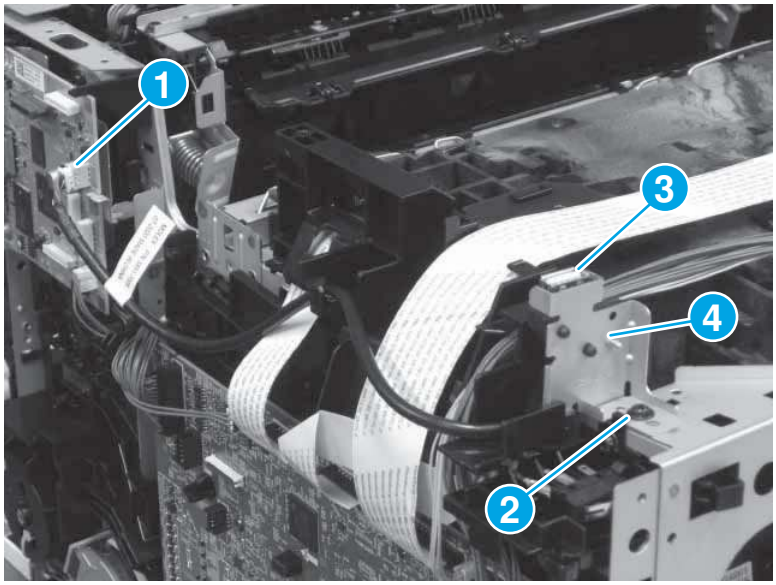Figure 4-522 **Disconnect one connector, remove one screw, remove USB cable**




2. Disconnect one flat-flexible cable and three connectors (callout 1).

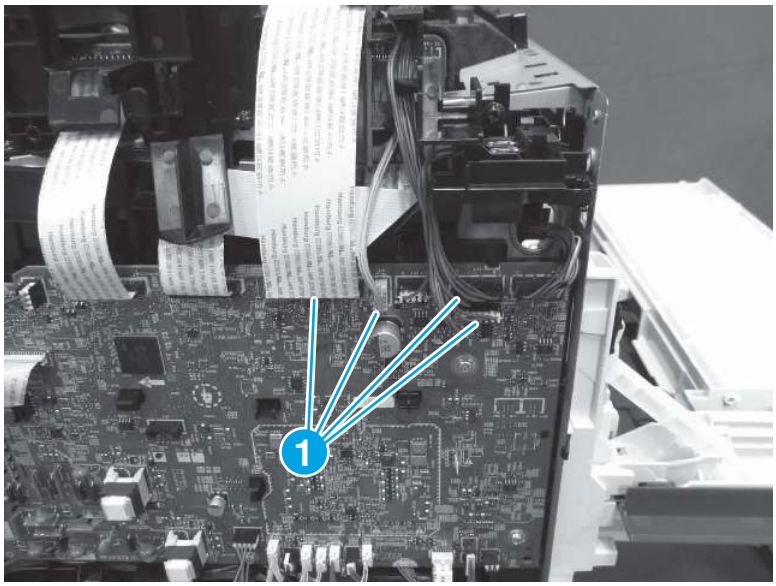Figure 4-523 Disconnect the FFC and connectors




3. Release the cable harness (callout 1) from the retainers (callout 2).

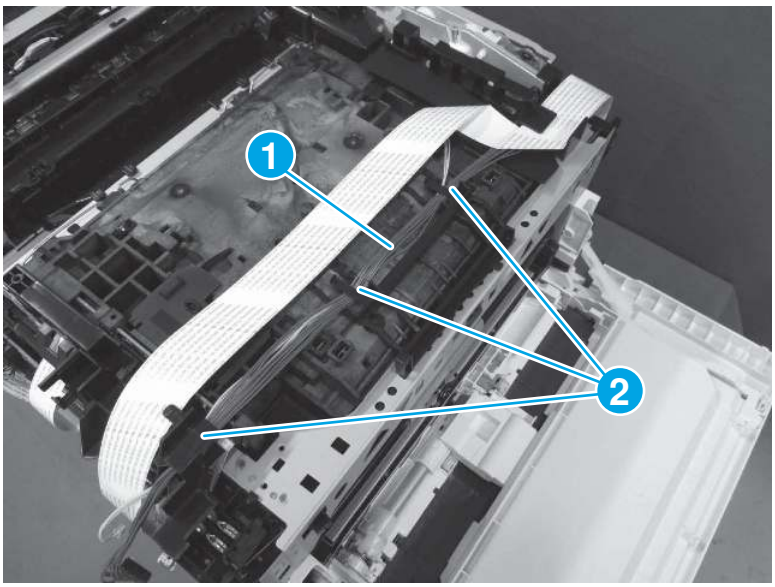Figure 4-524 Release the cable harness




4. Remove two screws (callout 1), and then remove the guide (callout 2).

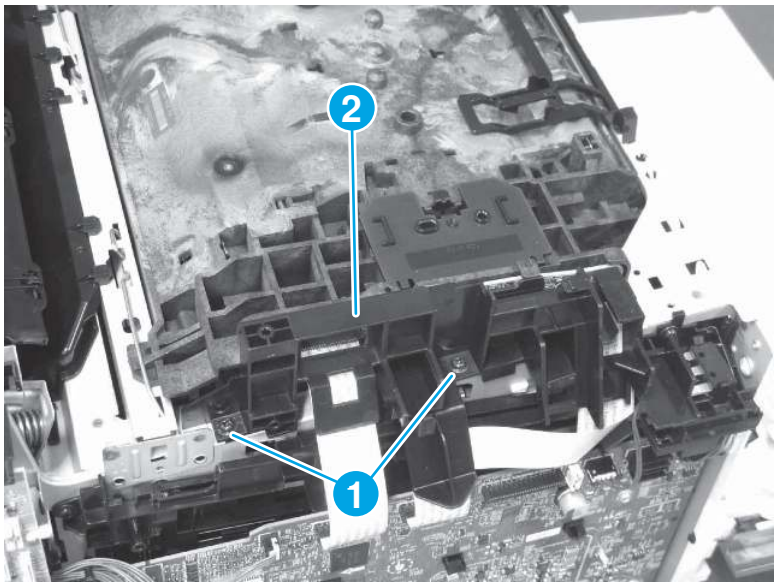Figure 4-525 **Remove the guide**




5. Disconnect two FFCs (callout 1).

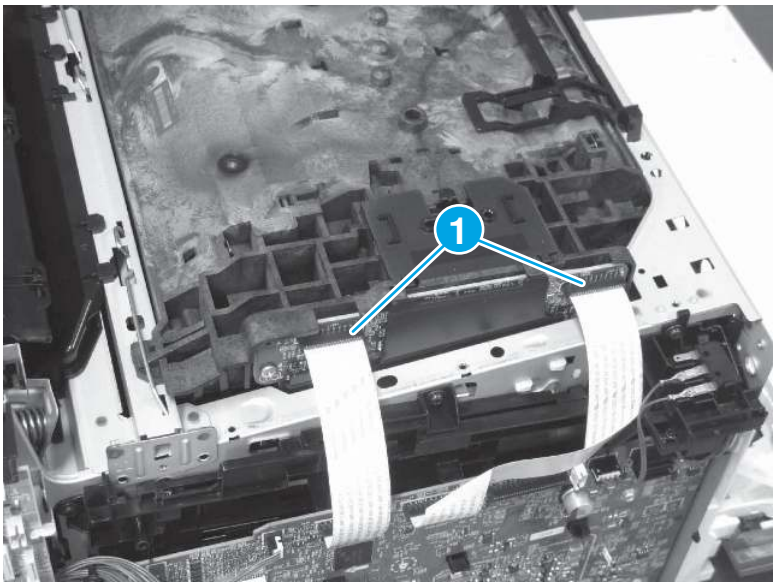Figure 4-526 **Disconnect two FFCs**




6. Release one tab (callout 1), slide the cable guide (callout 2) as shown to remove it, and then remove the scanner upper sheet (callout 3).

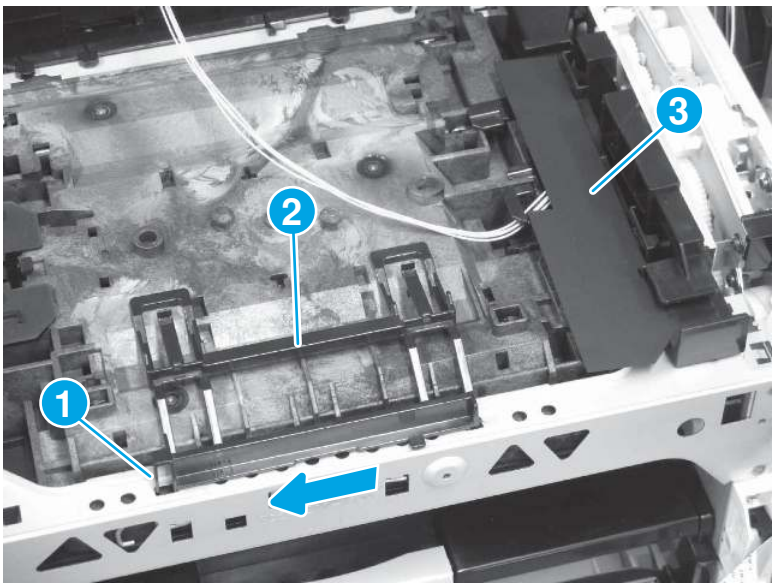Figure 4-527 Remove the scanner upper sheet



7. Press down on the spring (callout 1), and then slide the middle portion of the spring as shown below (callout 2). Unhook the left- and right-side springs (callout 3) to remove them.

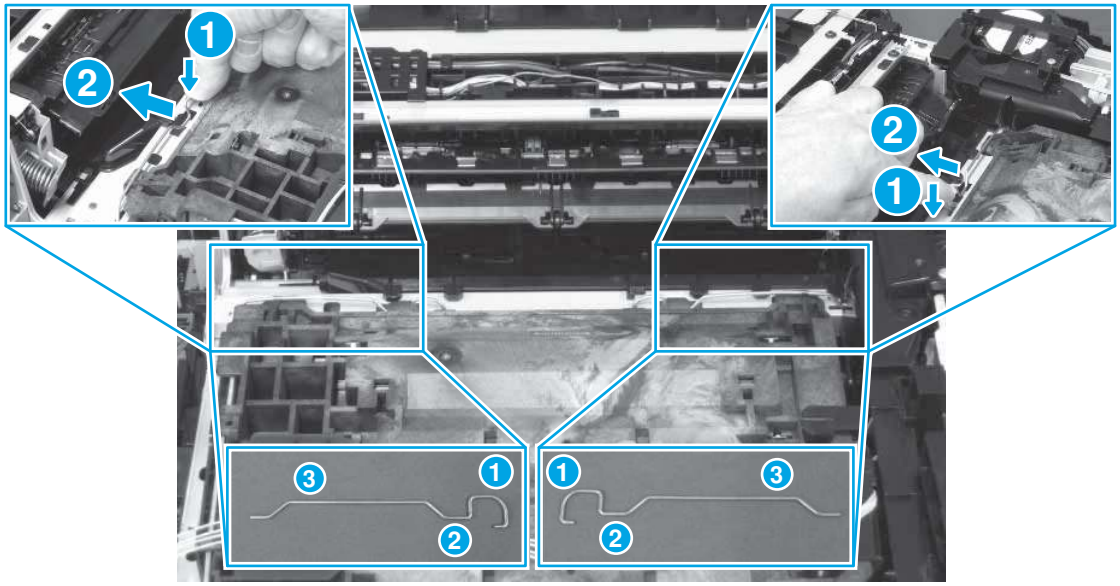
Figure 4-528 Remove two springs



8. Slightly lift up the laser/scanner assembly (callout 1) to release one boss (callout 2).


⚠ CAUTION: There is a spring (not shown) installed on the assembly that can become dislodged. Do not lose the spring while handling the assembly. Reinstall the spring if necessary.

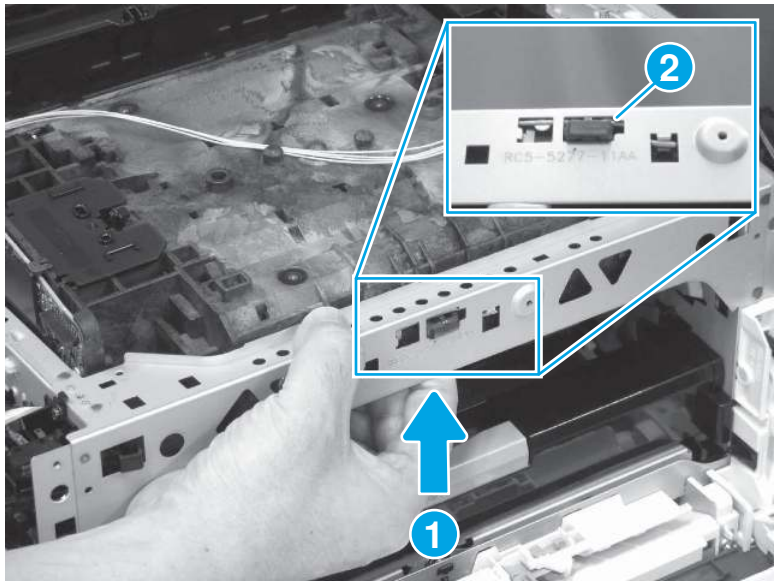Figure 4-529 Release the boss



9. Slide the laser/scanner as shown below, and then remove it.

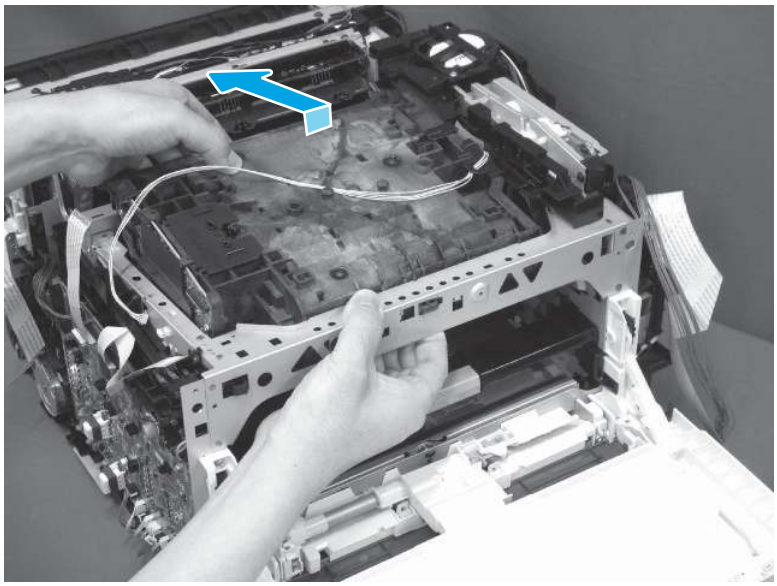Figure 4-530 Remove the laser/scanner assembly



10. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: 

Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.

11. Special installation instructions - Laser/scanner assembly

Follow the special instructions below to install a replacement laser/scanner assembly.


NOTE: **Lase/scanner assembly dependency part removal**: If the laser/scanner assembly was removed to gain access to other assemblies, stop and skip the special installation steps in this topic. Reverse the removal steps to install the assembly.

Laser/scanner assembly replacement part removal: For a replacement laser scanner, use the steps below to remove the cable cover, and then install it on the replacement laser/scanner.

1. Release two tabs (callout 1), and then separate the cable cover (callout 2) from the discarded laser/scanner assembly.


CAUTION: Do not attempt to completely remove the cover. It is still attached to the laser/scanner assembly by a cable.

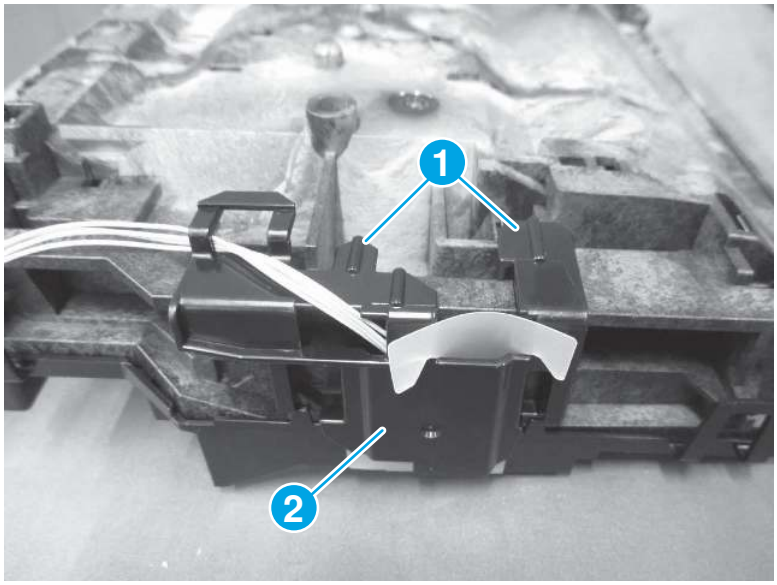Figure 4-531 Separate the cable cover from the discarded laser/scanner




2. Remove the sheet (callout 1) from the cover.

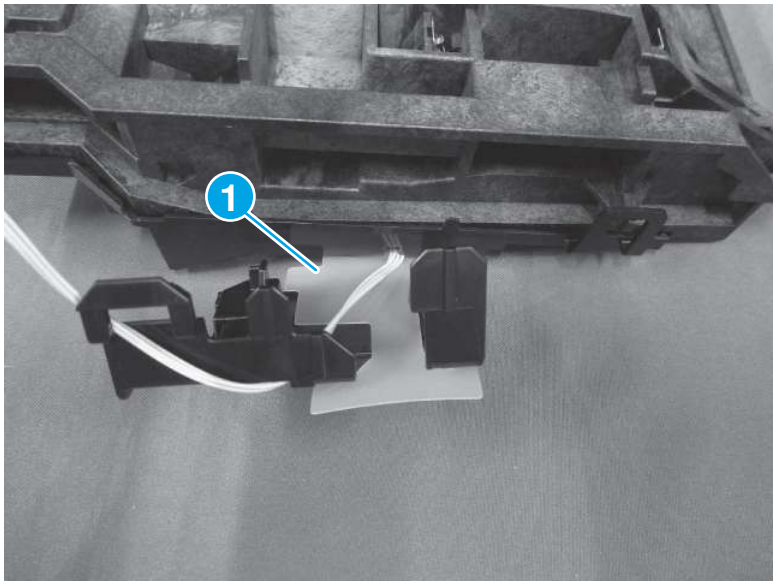Figure 4-532 Remove the sheet



3. Release the cable (callout 1) from the cover.

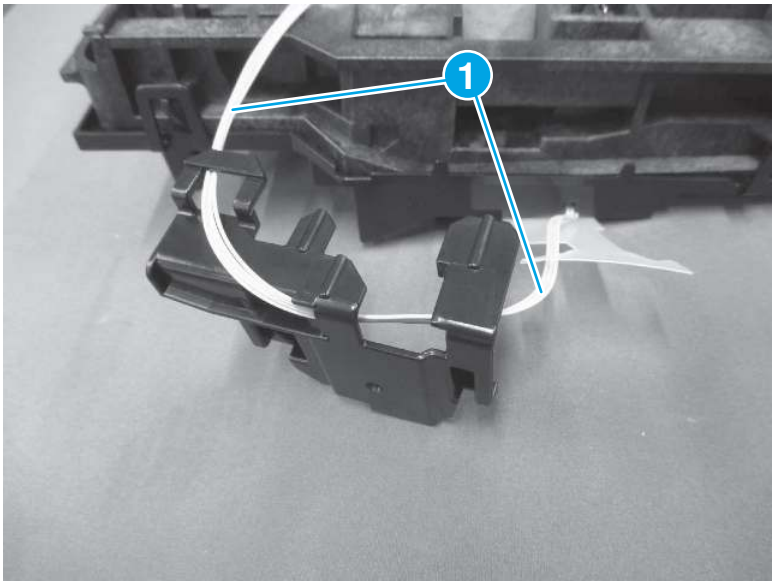Figure 4-533 **Release the cable**




4. When the cover is installed on the replacement laser/scanner, make sure that the lower tabs are correctly positioned in front of the laser/scanner chassis.

NOTE: If the tabs are incorrectly positioned, the cover will not lock in place.

- Correctly positioned tabs (callout 1).
- Incorrectly positioned tabs (callout 2).

Reverse the removal steps to finish installing the laser/scanner assembly.

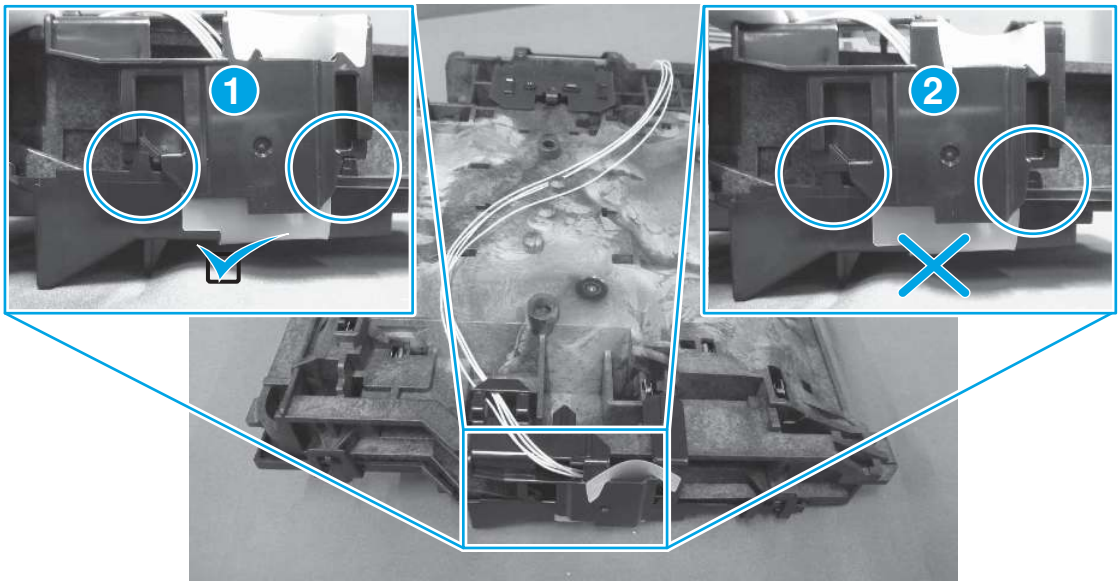Figure 4-534 **Install the cover**




12. Special installation instructions - Front cover

Follow the special instructions below to install the front cover.

NOTE: Front cover installation is **identical** for both the SFP and MFP models.

1. If the door release arm becomes dislodged when handling the cover, install it as shown below (callout 1, 2).

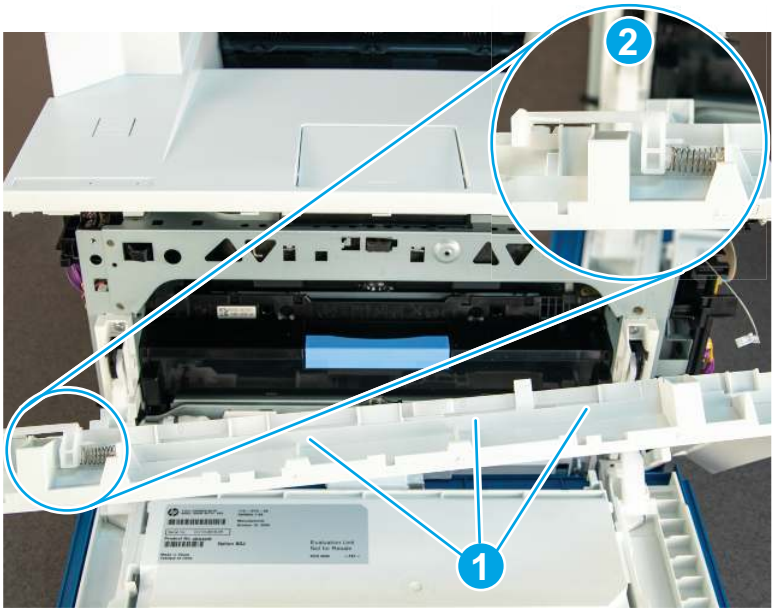Figure 4-535 Door release arm installed



2. At the right and left side of the front cover, align the holes (callout 1) in the cover with the alignment pins (callout 2) on the chassis.


Figure 4-536 Cover alignment pins



3. Rotate the top of the cover towards the printer to install it.

IMPORTANT: Verify that the spring loaded door release button (on the left side of the cover) correctly functions.

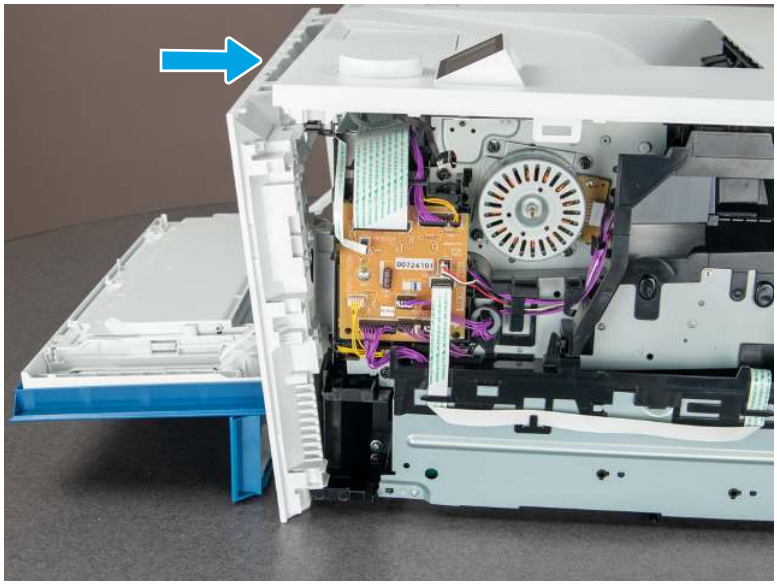Figure 4-537 Install the cover



Removal and replacement: Low-voltage power supply (LVPS)

Learn about LVPS removal.

Mean time to repair: 10 minutes

Service level: Medium

Before performing service

Turn the printer power off

- Disconnect the power cable.

WARNING! To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-38 Part information

Part number	Part description
RM2-2834-000CN	Low-voltage power supply (110-127V)
RM2-2835-000CN	Low-voltage power supply (220-240V)

Required tools

- #2 Phillips screwdriver with a magnetic tip and a 152 mm (6 in) shaft length

- Small flat-blade screwdriver

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test

Print any pages necessary to make sure the printer is functioning correctly.


1. Remove the right cover (SFP)

Follow the procedure below to remove and replace the right cover (SFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.


1. Remove one screw (callout 1).

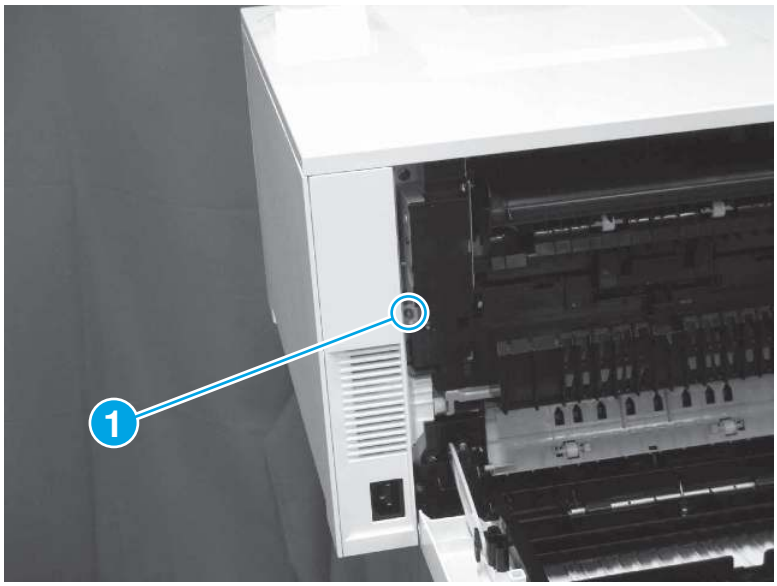Figure 4-538 **Remove one screw**




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to three tabs (callout 1). Release three tabs.

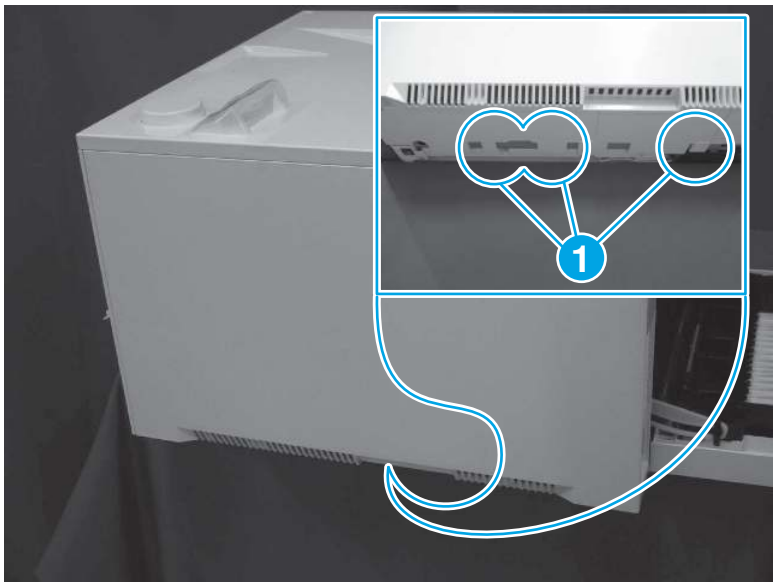Figure 4-539 Release three tabs




3. Press in on the side (callout 1) of the right cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

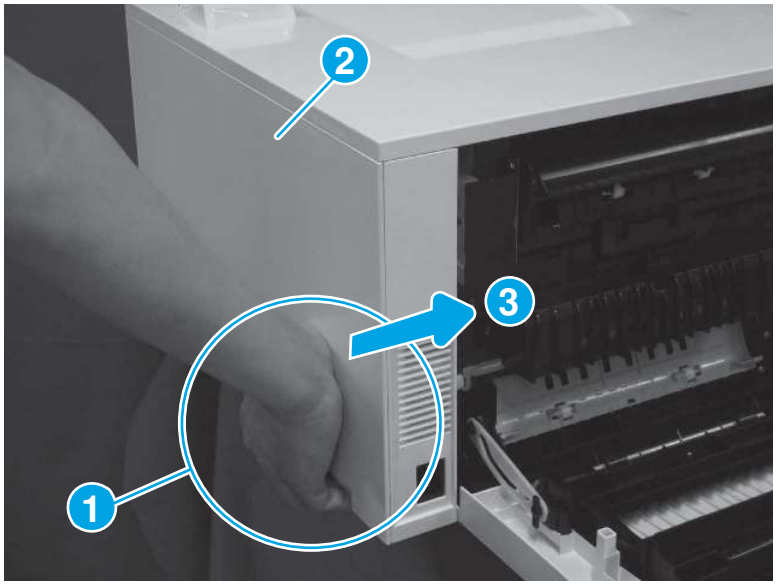Figure 4-540 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

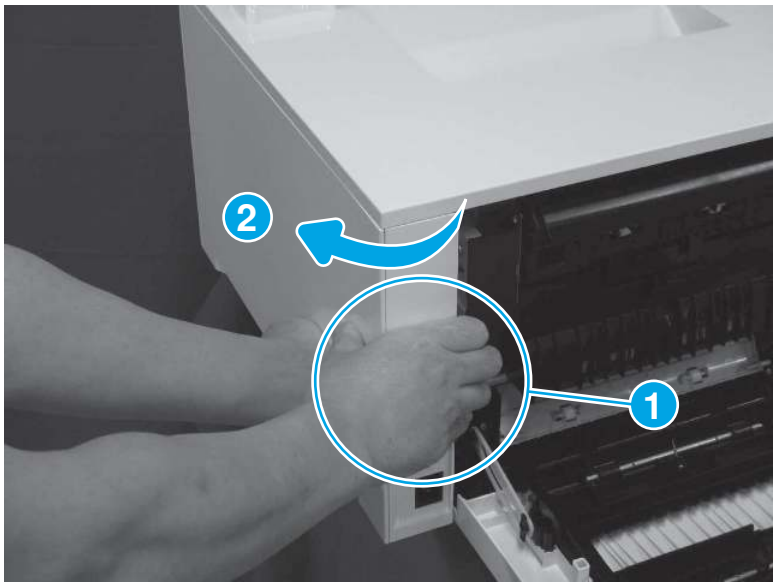Figure 4-541 Disengage the cover corner



5. Remove the right cover (callout 1).

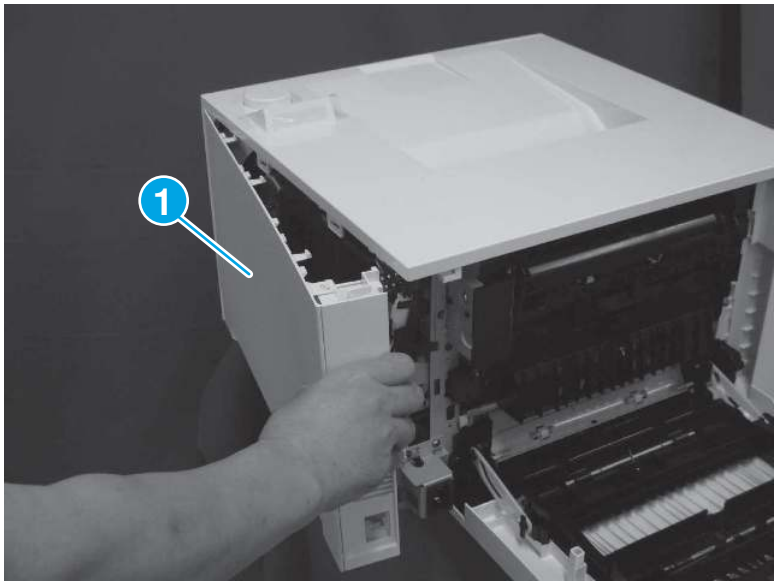Figure 4-542 Remove the cover




2. Remove the right cover (MFP)

Follow the procedure below to remove and replace the right cover (MFP).

NOTE: The following procedure is for an MFP printer only. If this assembly is being removed to gain access to dependency parts for a SFP printer, skip this step.


1. Remove one screw (callout 1).

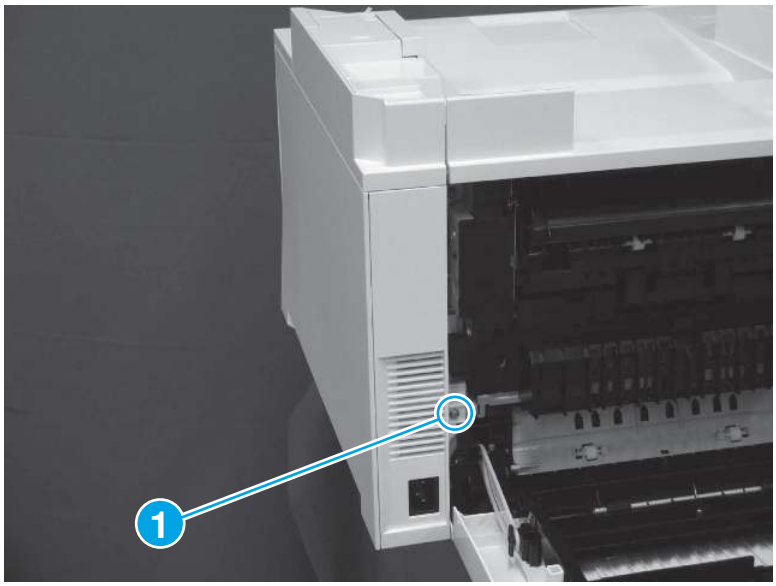Figure 4-543 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to three tabs (callout 1). Release three tabs.

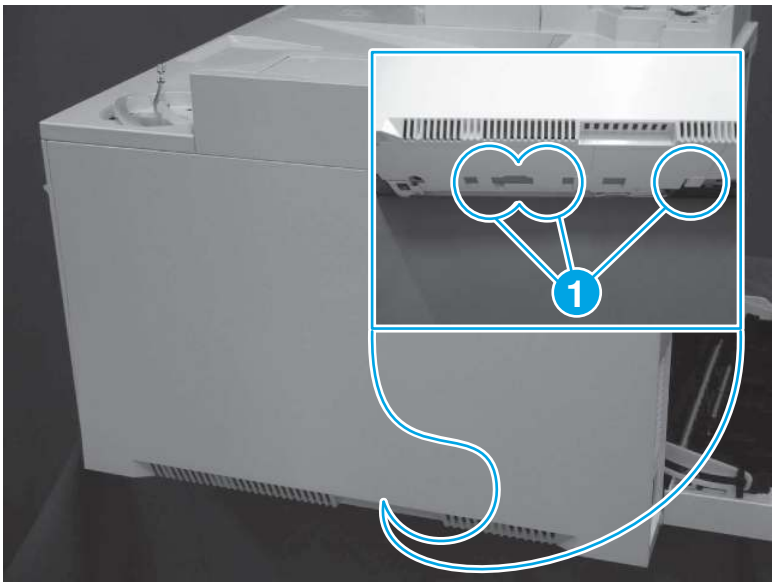Figure 4-544 Release three tabs




3. Press in on the side (callout 1) of the right cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

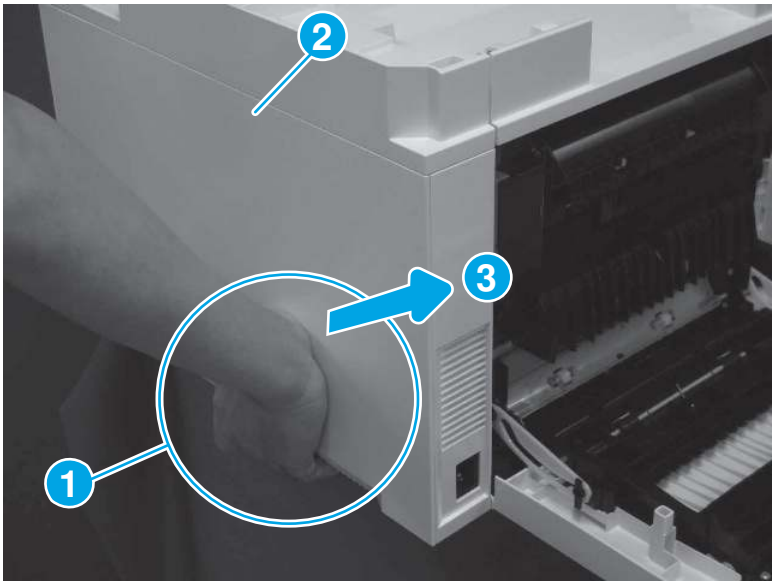Figure 4-545 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

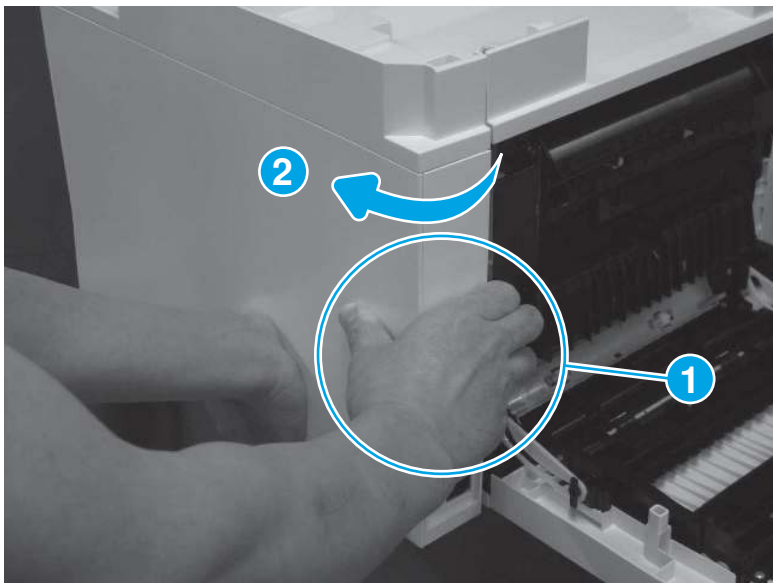Figure 4-546 Disengage the cover corner



5. Remove the right cover (callout 1).

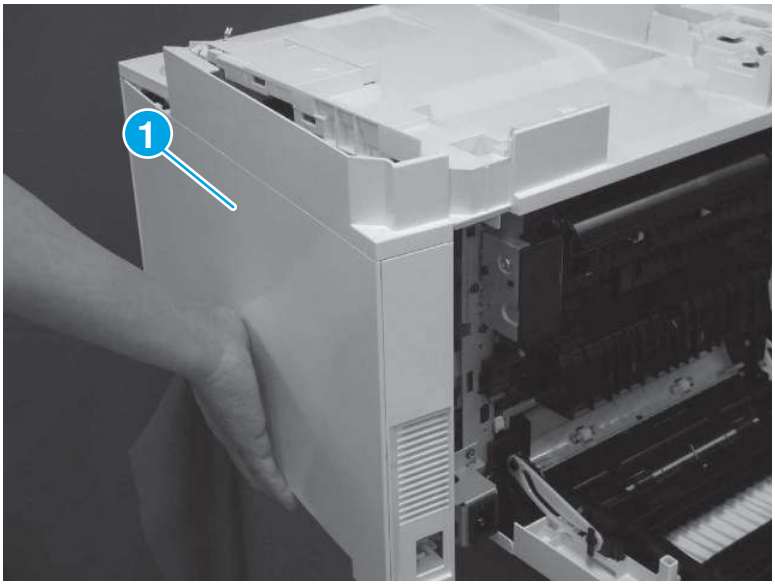Figure 4-547 **Remove the cover**




3. Remove the low-voltage power supply (LVPS)

Follow the procedure below to remove and replace the LVPS.

⚠ **CAUTION:** ESD sensitive part.


1. Disconnect one flat-flexible cable (FFC; callout 1) and one connector (callout 2), and then remove one screw (callout 3).

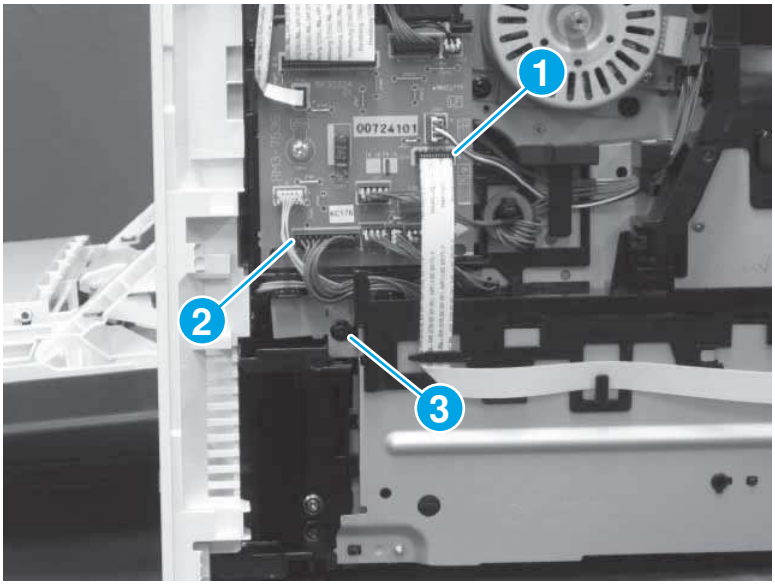Figure 4-548 **Disconnect FFC, connector, and remove one screw**




2. Disconnect two connectors (callout 1), and then remove two screws (callout 2).

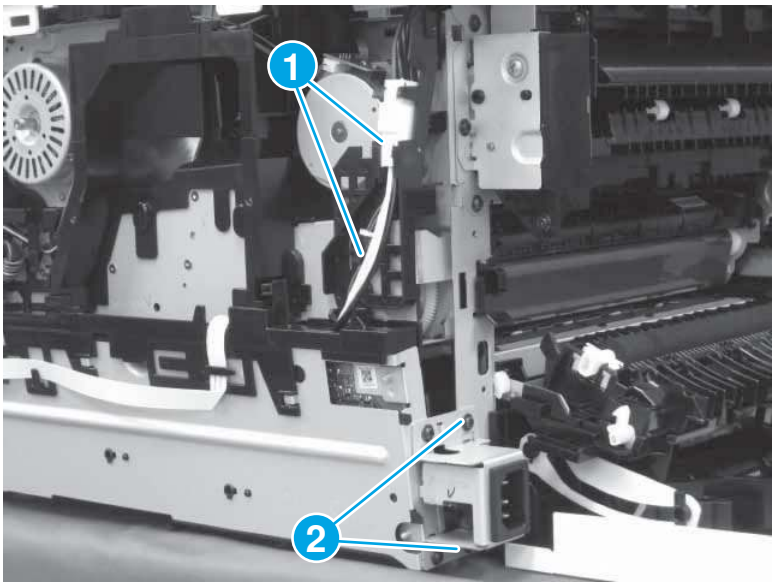Figure 4-549 Disconnect connectors and remove screws



3. Release three tabs (callout 1), and then remove the LVPS (callout 2).

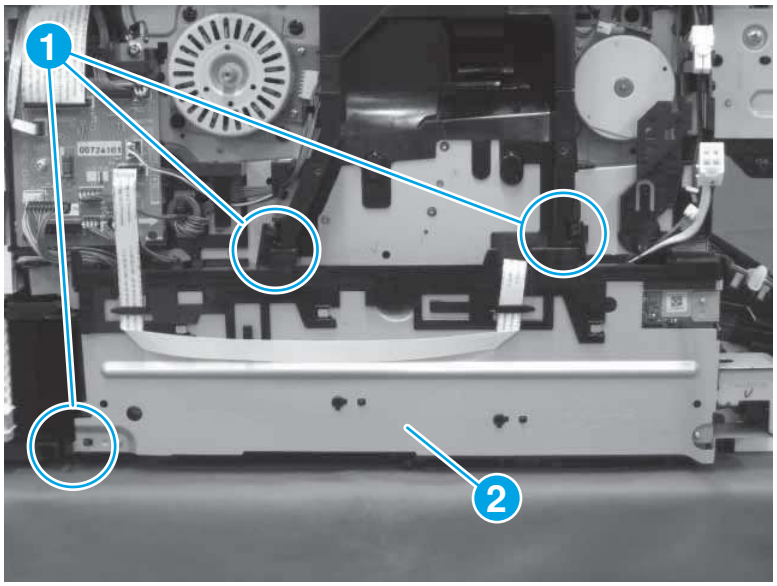Figure 4-550 Remove the LVPS



4. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: 

Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.

5. Special installation instructions - Low-voltage power supply (LVPS)


Follow the special instructions below to install a replacement LVPS.

CAUTION: 

ESD sensitive part.


1. When the LVPS is installed, make sure that the sheet-metal tab (callout 1) near the power receptacle is inserted in the slot (callout 2) in the chassis.

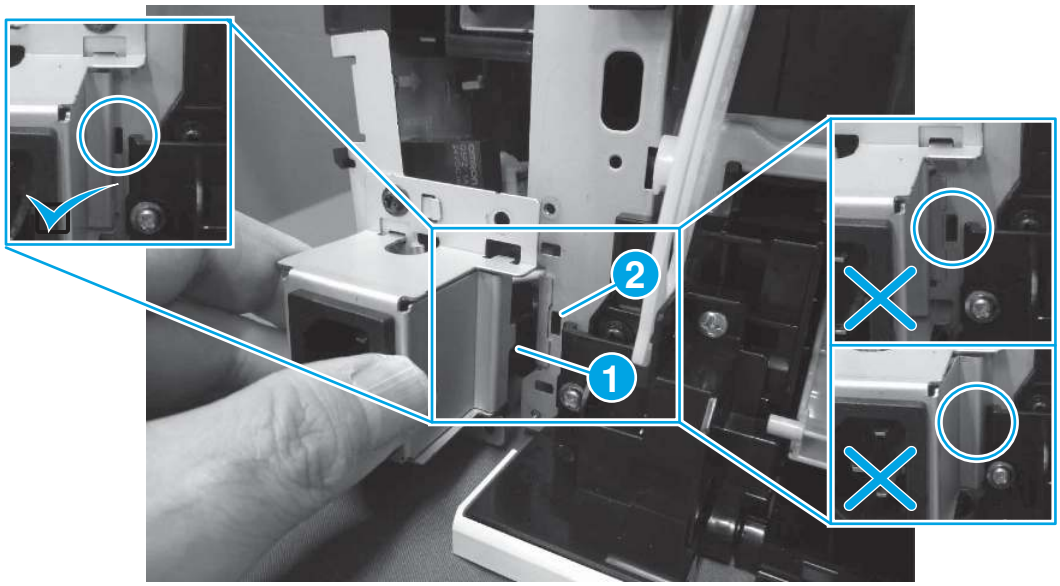Figure 4-551 Install the LVPS tab



2. Make sure that the fuser temperature fuse cable (callout 1) is positioned behind the thick cable (callout 2). This prevents the fuser cable from unnecessary movement.

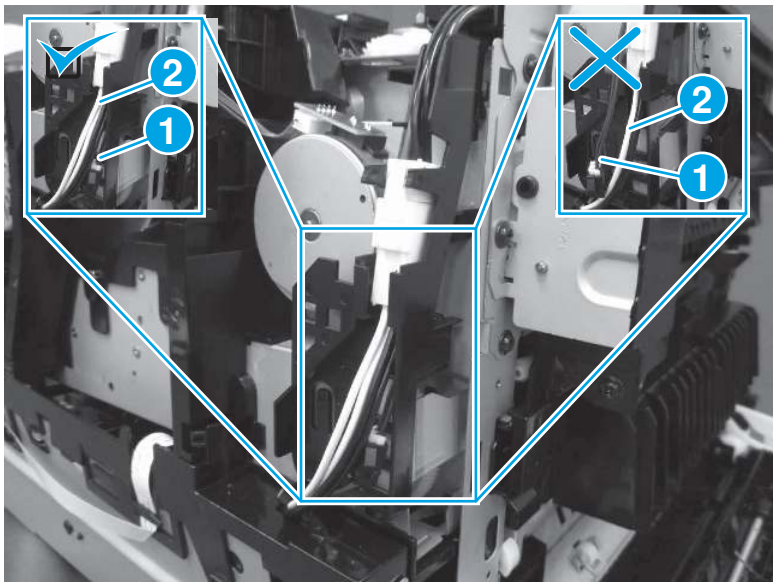Figure 4-552 Check the fuser temperature fuse cable



Removal and replacement: MP lower guide assembly

Learn about MP lower guide removal.

View a video of removing and replacing the MP lower guide.

Mean time to repair: 45 minutes (SFP)

Mean time to repair: 55 minutes (MFP)

Service level: Difficult (SFP/MFP)

Before performing service

Turn the printer power off

- Disconnect the power cable.

> ⚠ **WARNING!** To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-39 Part information

Part number	Part description
RM2-2749-000CN	Multipurpose guide assembly, lower

Required tools

- #2 Phillips screwdriver with a magnetic tip and a 152 mm (6 in) shaft length
- Small flat-blade screwdriver

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test

Print any pages necessary to make sure the printer is functioning correctly.


1. Remove the Tray 1 pickup roller assembly

Follow the procedure below to remove and replace the Tray 1 pickup roller assembly.

> **Reinstallation tip:** Make sure to follow the special installation instructions for this part or step (located after the unpack and recycle or cleaning section).


1. Open the cartridge door, and then depress the lever (callout 1) and slide it as shown below.

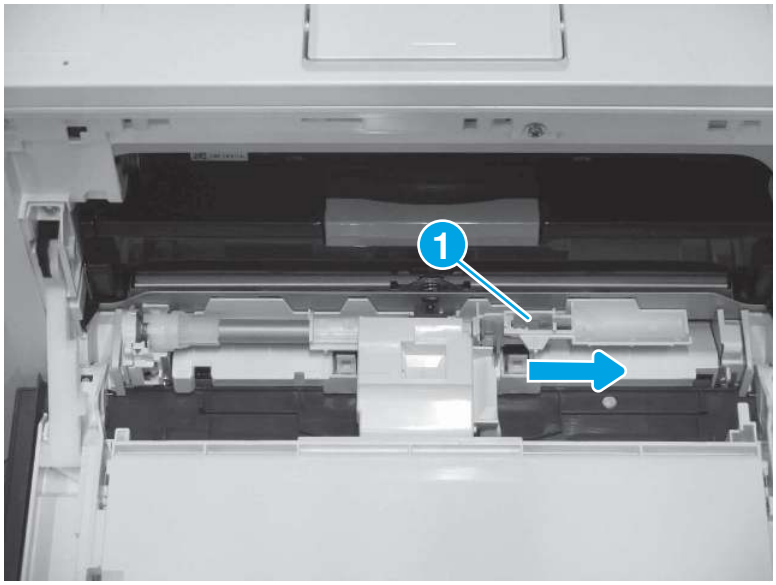Figure 4-553 Release the Tray 1 pickup roller assembly



2. Slide the pickup roller assembly (callout 1) as shown below to remove it.

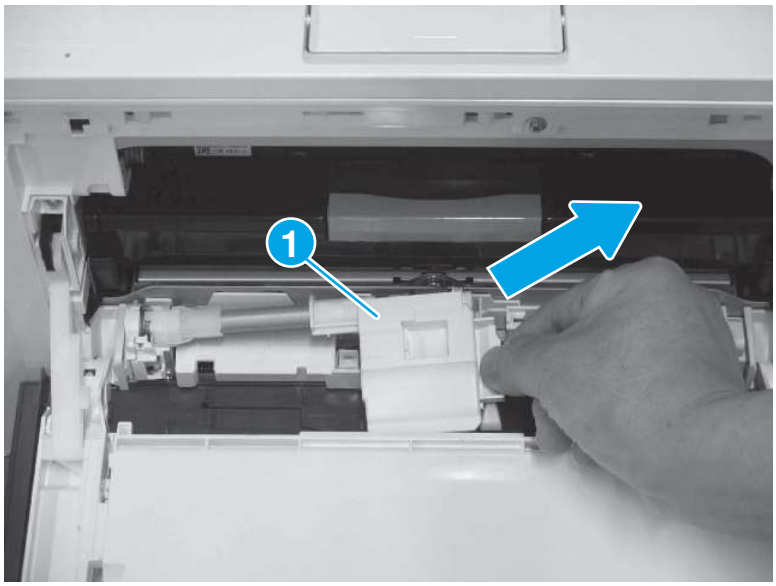Figure 4-554 Remove the Tray 1 pickup roller assembly




2. Remove the cartridge door assembly

Follow the procedure below to remove and replace the cartridge door assembly.


1. **Right-side door hinge**: Slightly pull Tray 1 away from the printer while releasing two tabs (callout 1) on the hinge.

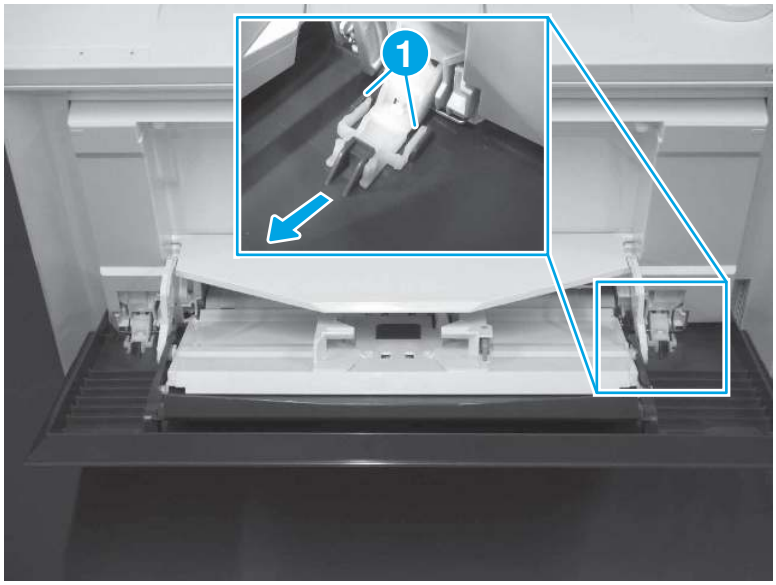Figure 4-555 **Release two tabs (right hinge)**




2. **Right-side door hinge**: Rotate the hinge up and away from the cover.

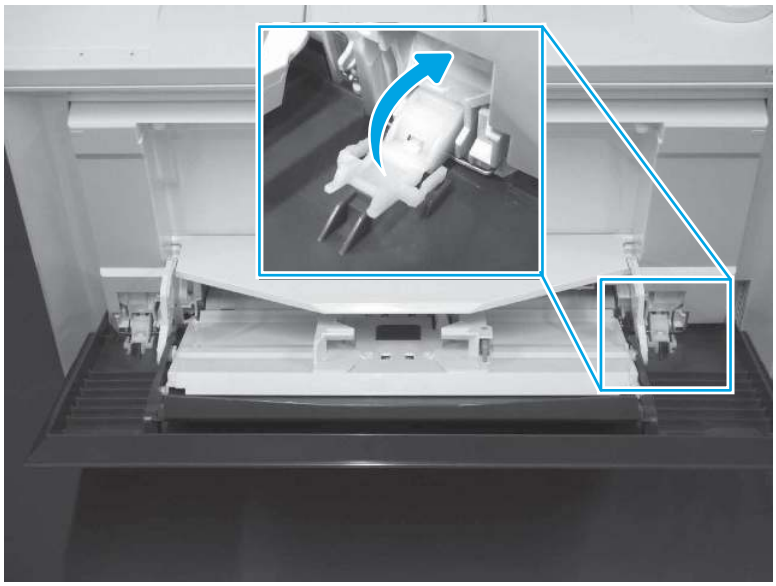Figure 4-556 **Remove the hinge (right side)**




3. **Left-side door hinge**: Slightly pull Tray 1 away from the printer while releasing two tabs (callout 1) on the hinge.

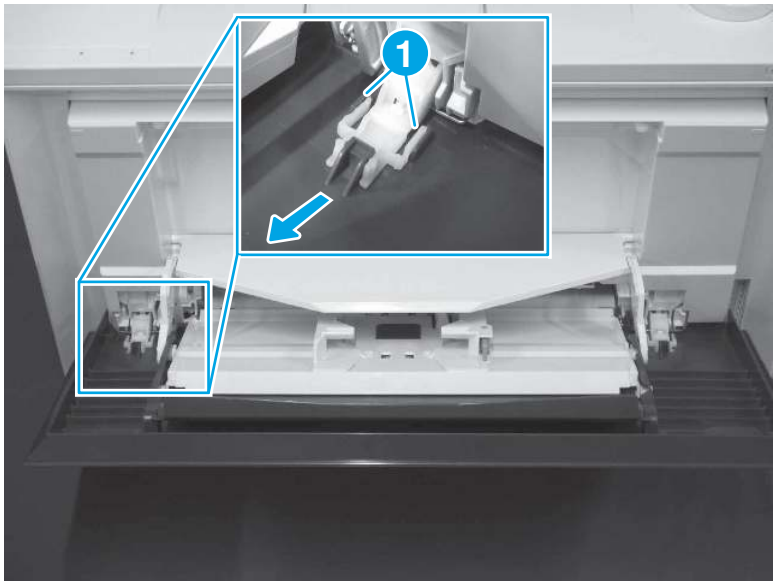Figure 4-557 **Release two tabs (left hinge)**




4. **Left-side door hinge**: Rotate the hinge up and away from the cover.

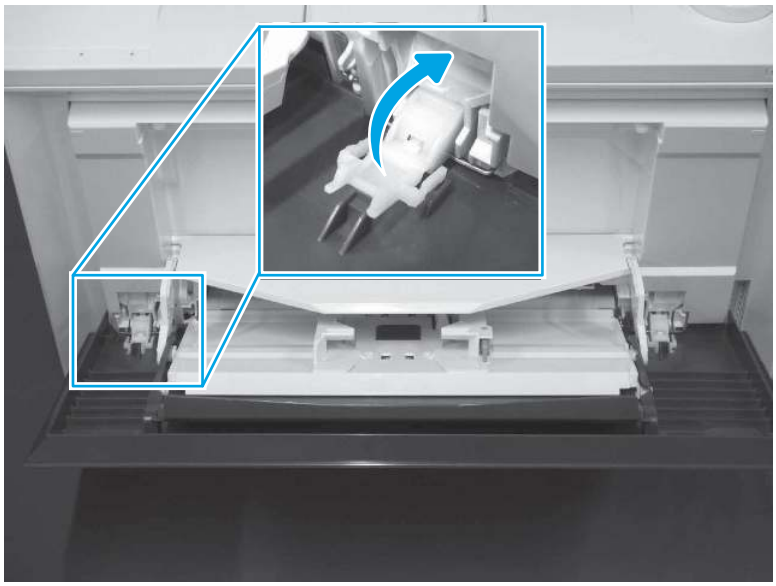Figure 4-558 **Remove the hinge (left side)**




5. Release Tray 1 from the right- and left-side retainer hooks.

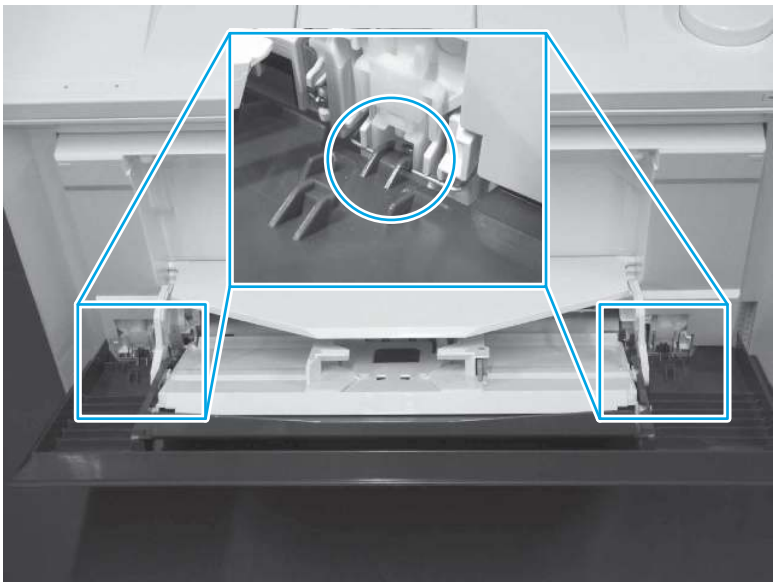Figure 4-559 **Release the retainer hooks**




6. Position Tray 1 (callout 1) in the upright position resting on the work surface.

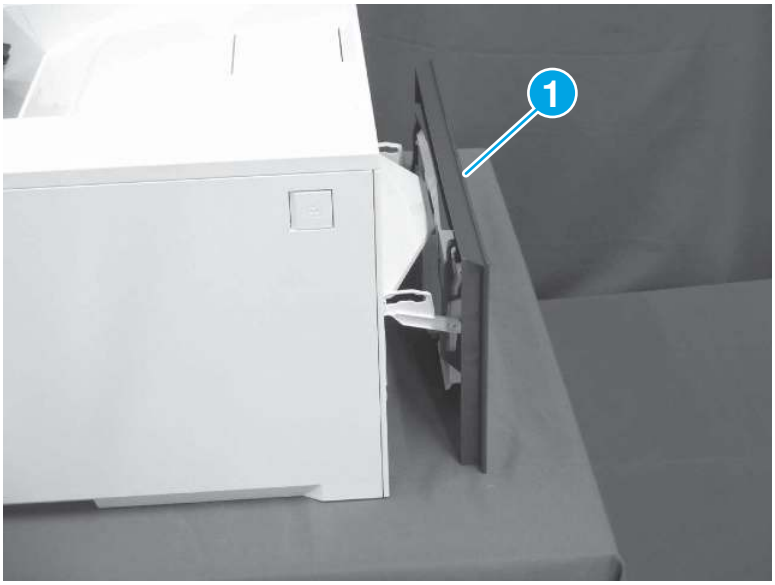Figure 4-560 **Position Tray 1**



7. Release the right- and left-side arms, and then remove Tray 1.

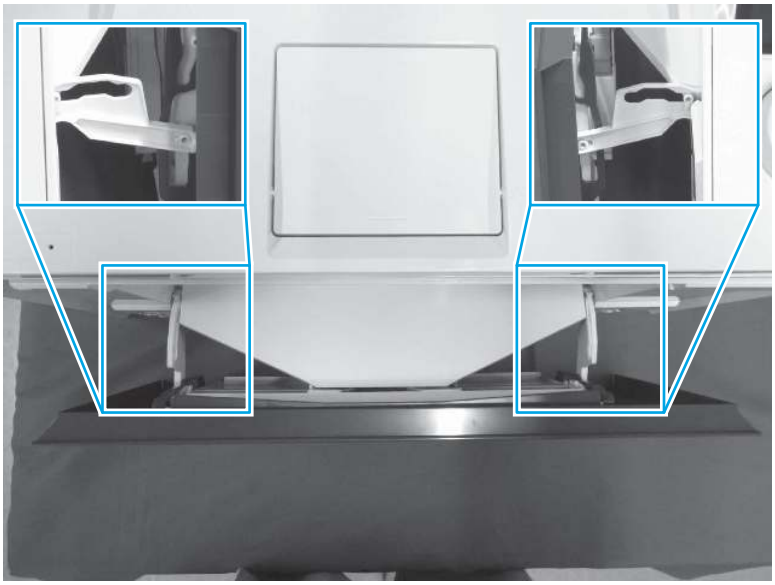
Figure 4-561 **Release the arms and remove the tray**



8. Use a small flat-blade screwdriver to remove the right- and left-side hinges.


Reinstallation tip: **For a replacement cover only**: Install these hinges on the replacement assembly.

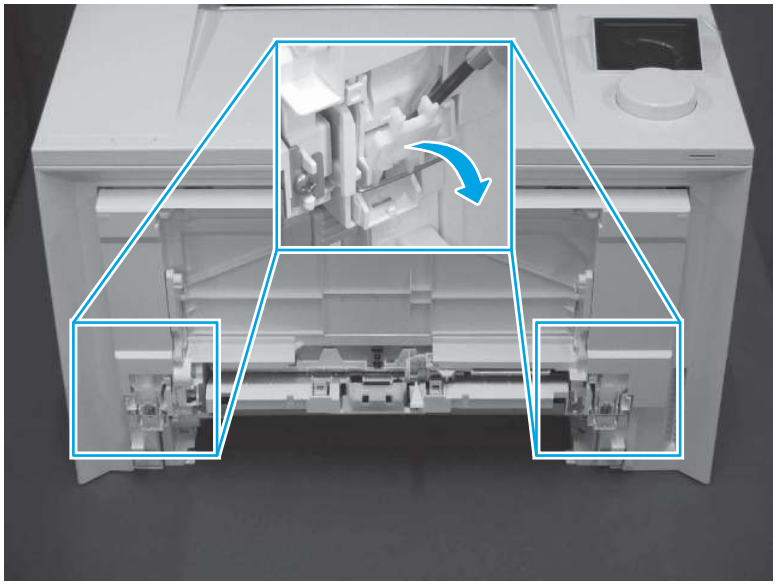Figure 4-562 **Remove the hinges**




9. Open the cartridge door.

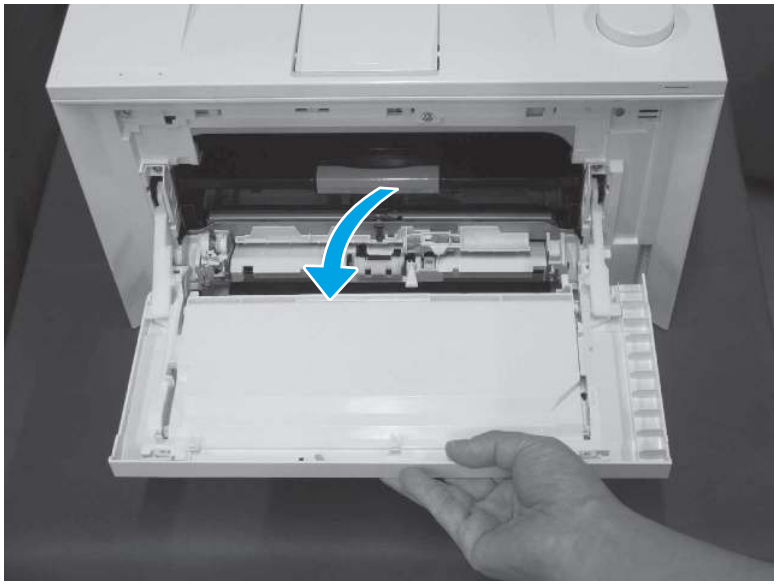Figure 4-563 **Open the door**



10. Remove the right- and left-side link arms (callout 1), and then remove the cartridge door (callout 2).

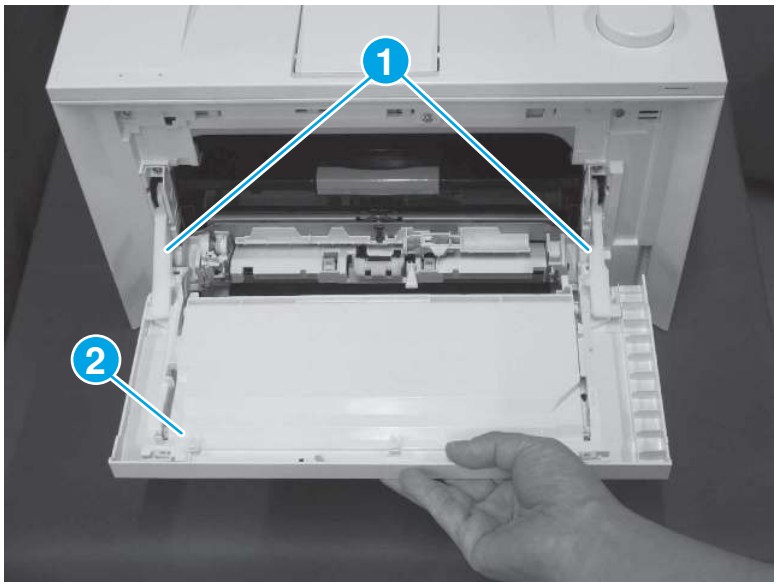Figure 4-564 **Remove the link arms and cartridge door**



3. Remove the left cover (SFP)


Follow the procedure below to remove and replace the left cover (SFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.

TIP: There might be a small cover installed on the USB port located at the back of the printer. If installed, remove this cover now.


1. Remove one screw (callout 1).

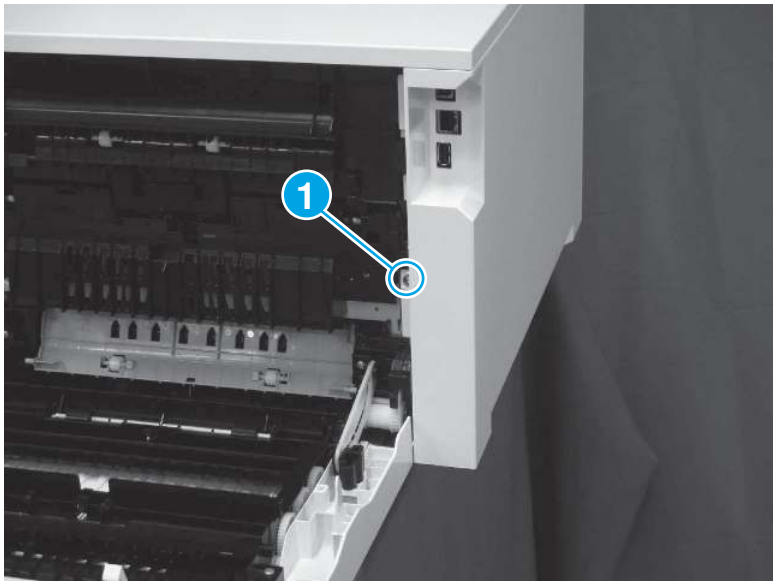Figure 4-565 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

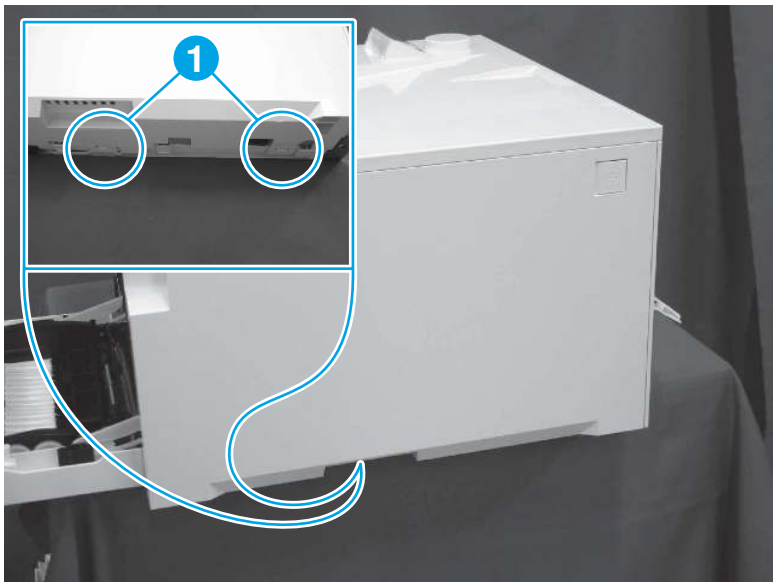Figure 4-566 Release two tabs




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

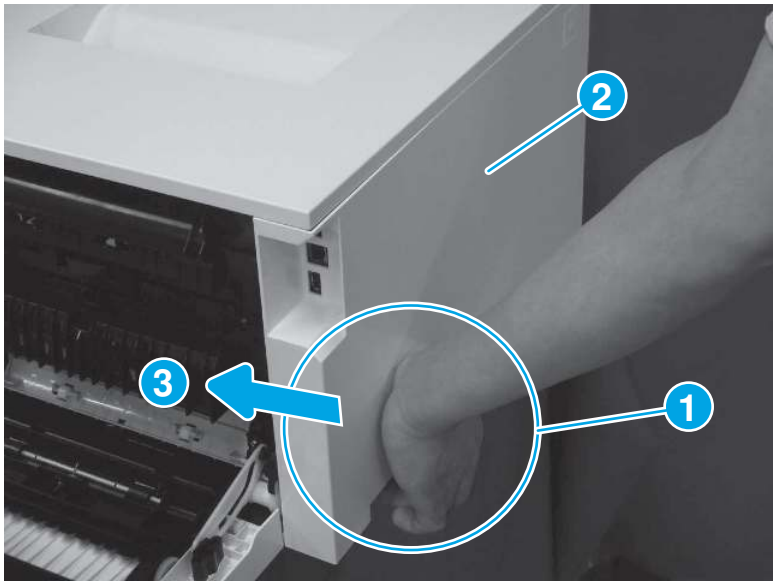Figure 4-567 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

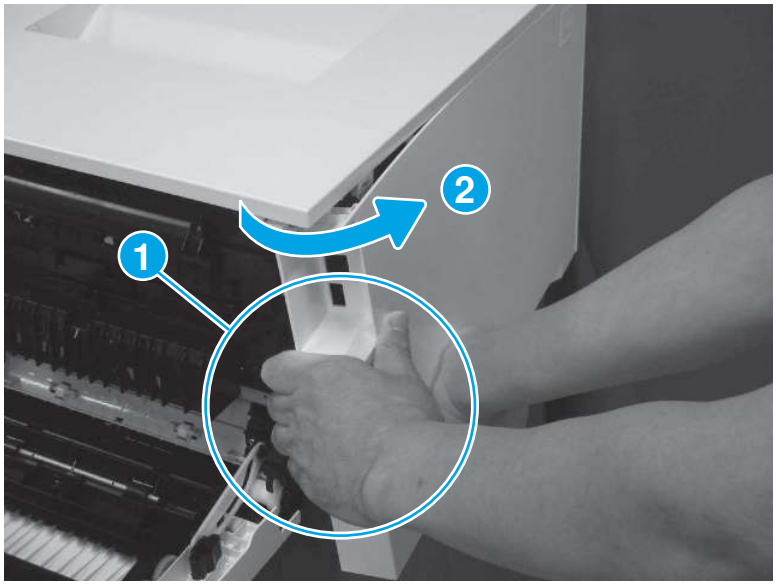Figure 4-568 Disengage the cover corner



5. Remove the left cover (callout 1).

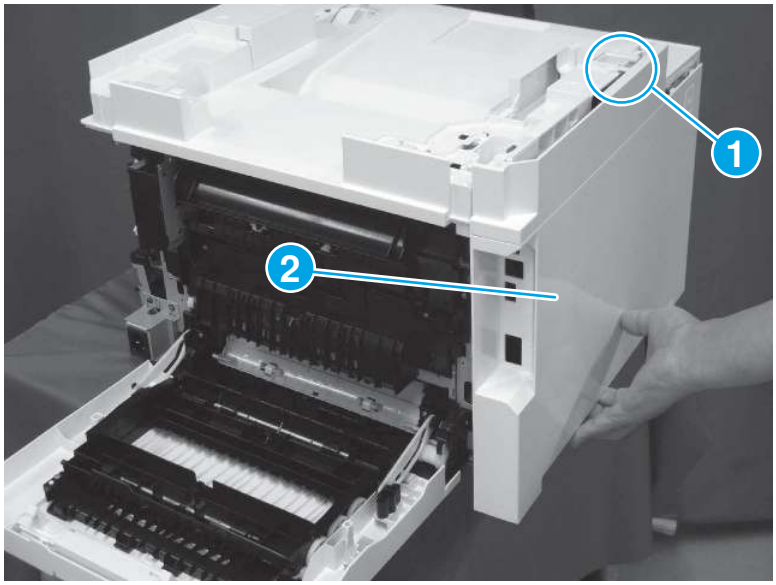Figure 4-569 **Remove the cover**



4. Remove the left cover (MFP)


Follow the procedure below to remove and replace the left cover (MFP).

NOTE: The following procedure is for an MFP printer only. If this assembly is being removed to gain access to dependency parts for a SFP printer, skip this step.

TIP: There might be a small cover installed on the USB port and/or the fax port located at the back of the printer. If installed, remove these covers now.


1. Remove one screw (callout 1).

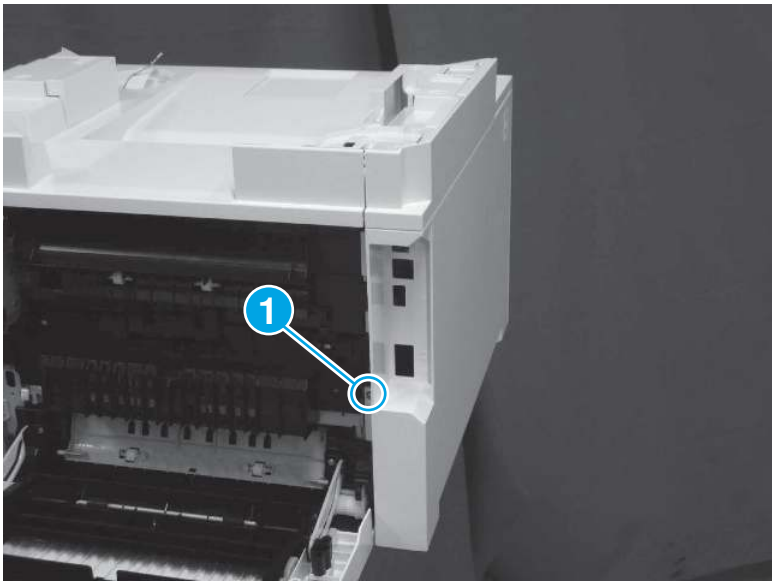Figure 4-570 **Remove one screw**




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

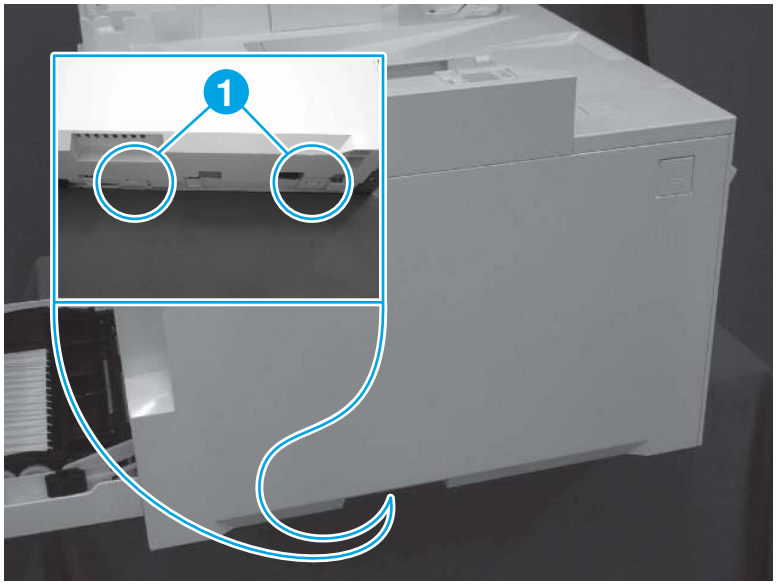Figure 4-571 Release two tabs




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

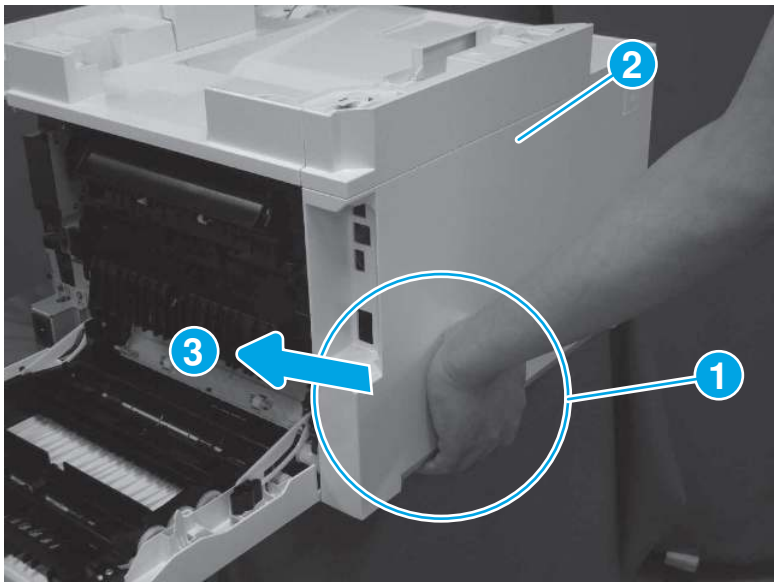Figure 4-572 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

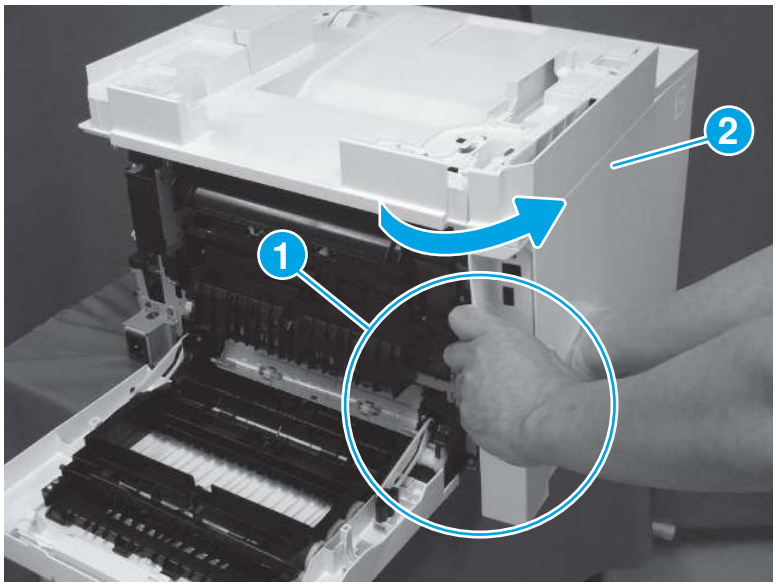Figure 4-573 Disengage the cover corner



5. Remove the left cover (callout 1).

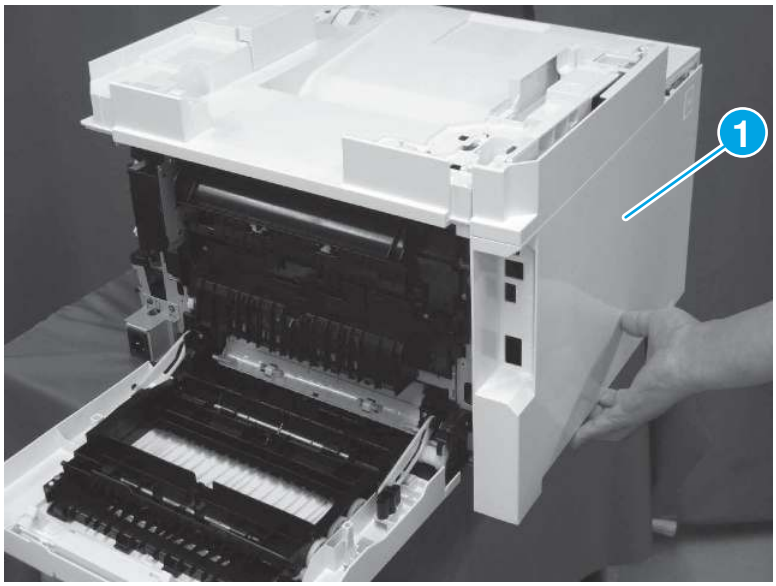Figure 4-574 Remove the cover



5. Remove the ISA (MFP)

Follow the procedure below to remove and replace the ISA.


1. Open the ISA, and then remove the ISA FFC cover (callout 1).

Figure 4-575 Remove the FFC cover



2. Disconnect three FFCs, and then remove one screw to release the ground cable.

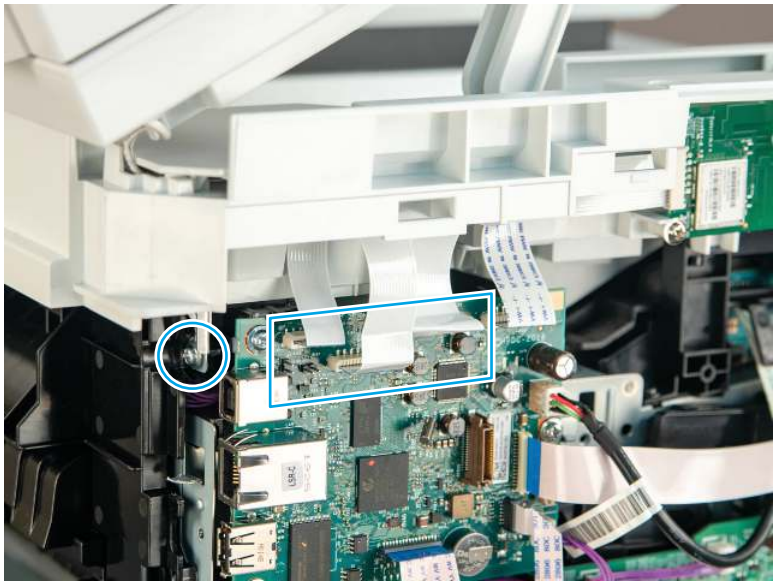Figure 4-576 Disconnect FFCs and remove screw



3. Release one tab (callout 1), and then rotate the ISA slider pin (callout 2) towards the front of the printer to release it. Remove the slider pin.


⚠ CAUTION: When the slider pin is removed, the ISA is not captive and can suddenly detach from the printer.

Figure 4-577 Remove the slider pin




4. Support the ISA, release the FFCs from the retainers, and then carefully pass the FFCs and the ground wire up through the slots in the top cover.

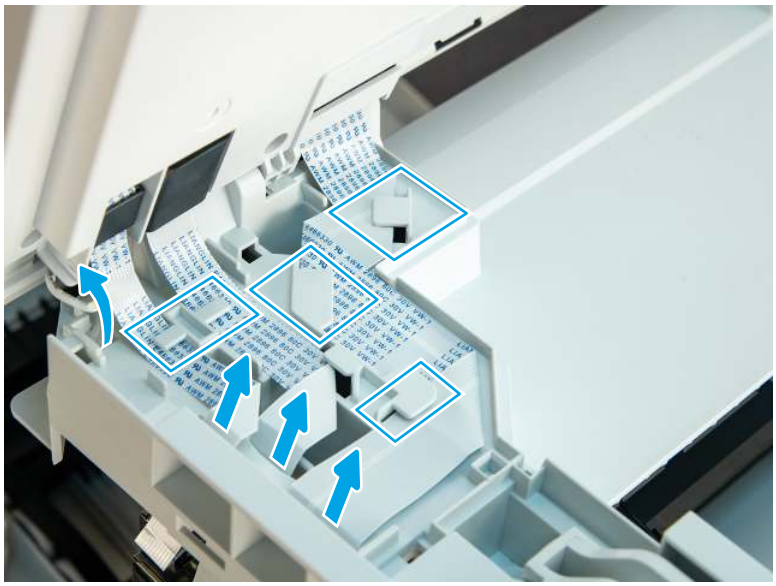Figure 4-578 Release the FFCs and ground wire



5. Slide ISA as shown below to release it.

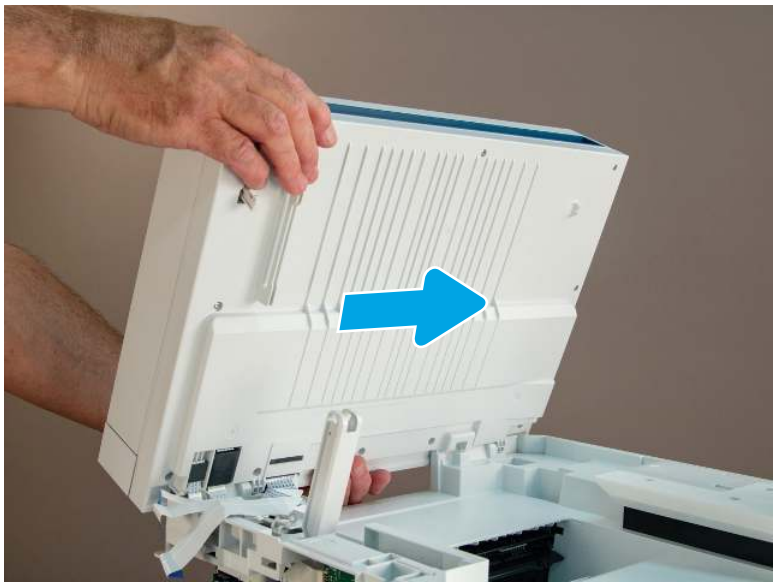Figure 4-579 Release the ISA



6. Remove the ISA.

Figure 4-580 Remove the ISA




6. Remove the right cover (SFP)

Follow the procedure below to remove and replace the right cover (SFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.


1. Remove one screw (callout 1).

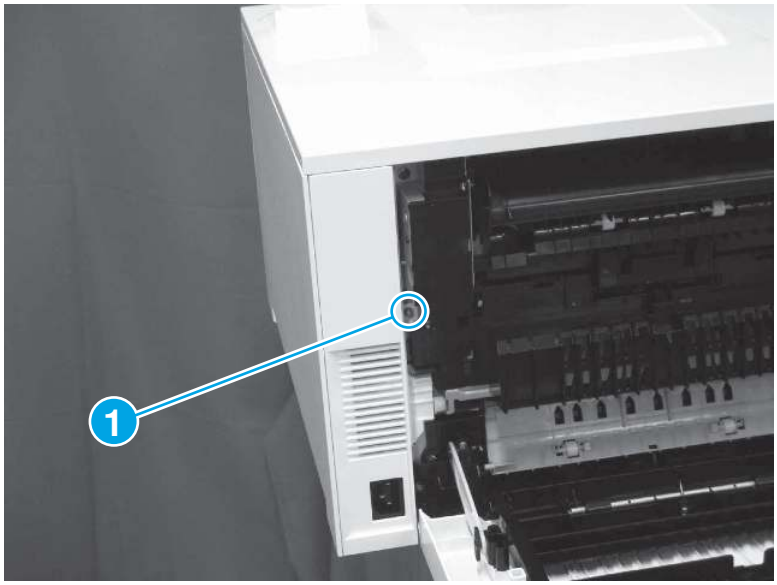Figure 4-581 **Remove one screw**




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to three tabs (callout 1). Release three tabs.

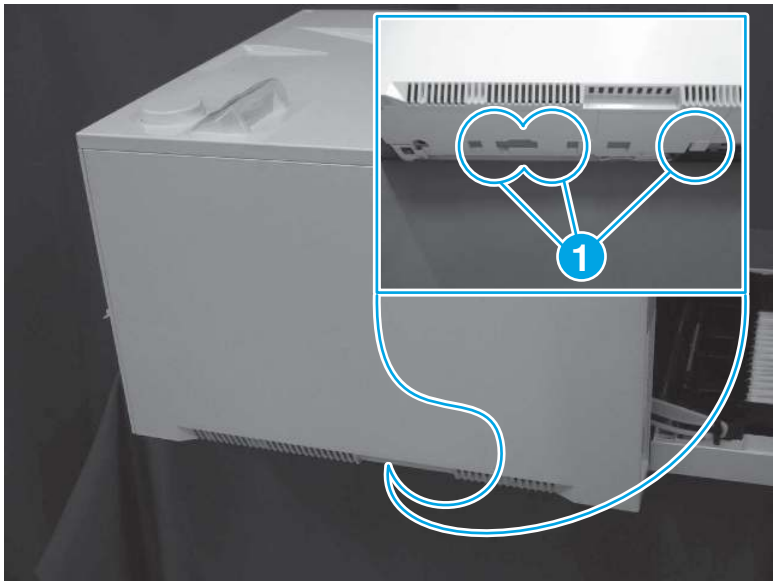Figure 4-582 **Release three tabs**




3. Press in on the side (callout 1) of the right cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

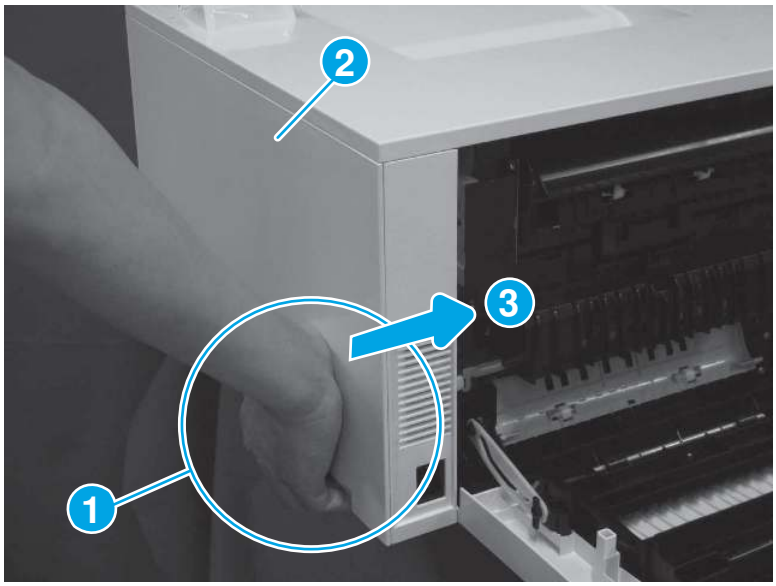Figure 4-583 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

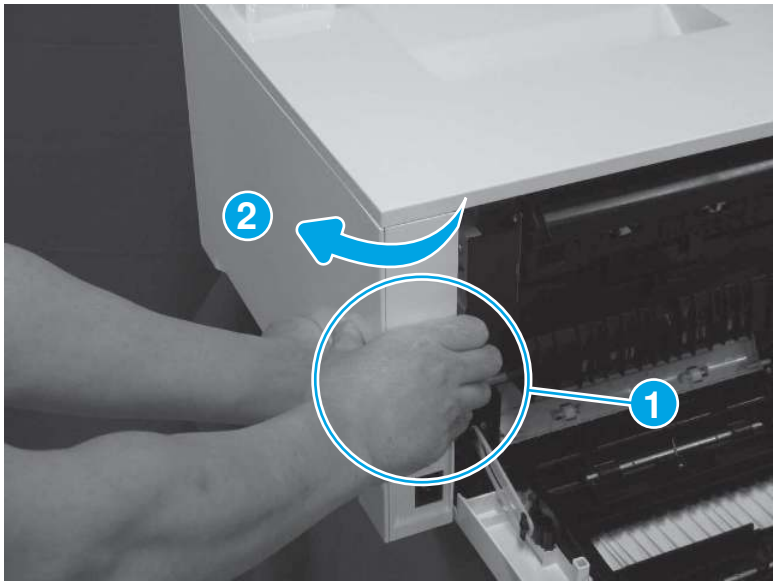Figure 4-584 Disengage the cover corner



5. Remove the right cover (callout 1).

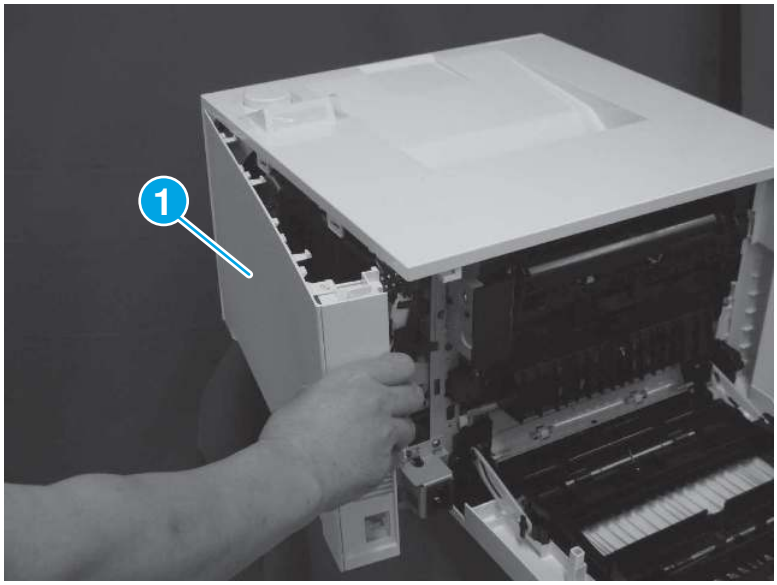Figure 4-585 **Remove the cover**




7. Remove the right cover (MFP)

Follow the procedure below to remove and replace the right cover (MFP).

NOTE: The following procedure is for an MFP printer only. If this assembly is being removed to gain access to dependency parts for a SFP printer, skip this step.


1. Remove one screw (callout 1).

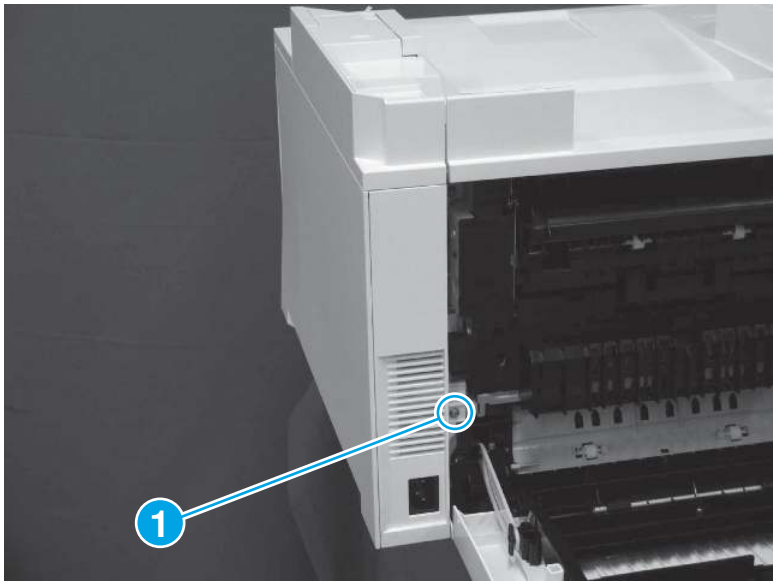Figure 4-586 **Remove one screw**




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to three tabs (callout 1). Release three tabs.

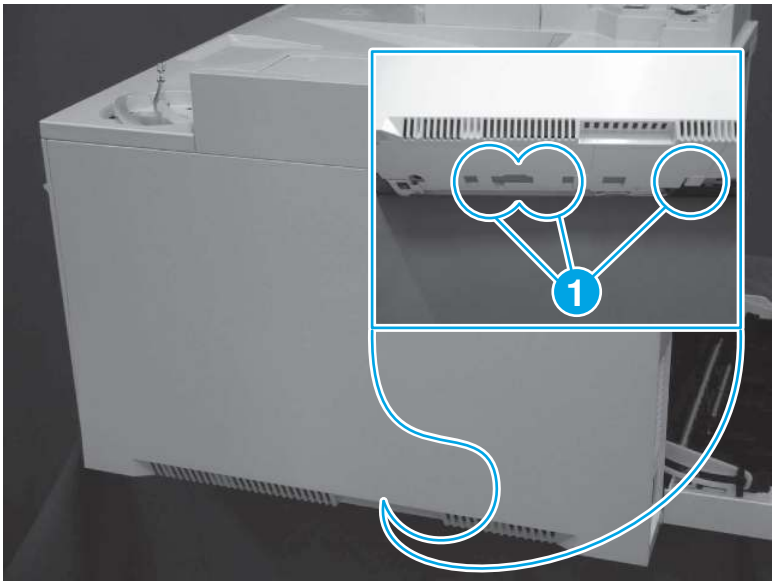Figure 4-587 Release three tabs




3. Press in on the side (callout 1) of the right cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

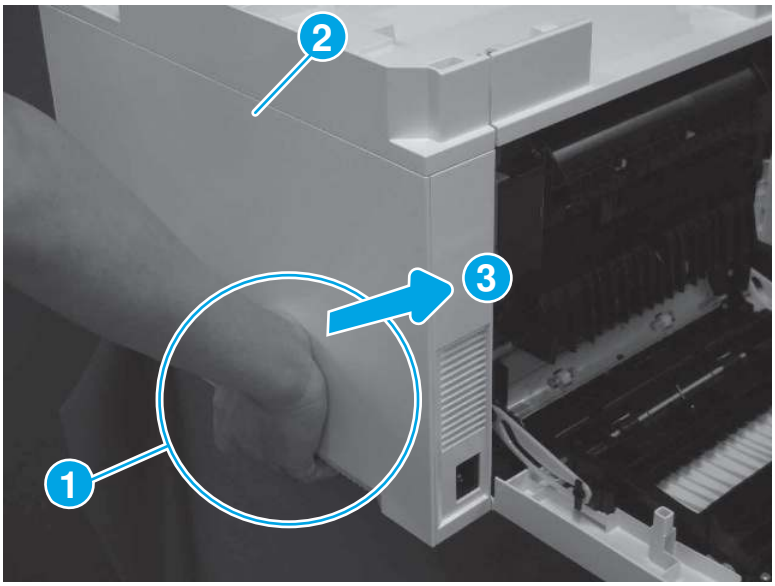Figure 4-588 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

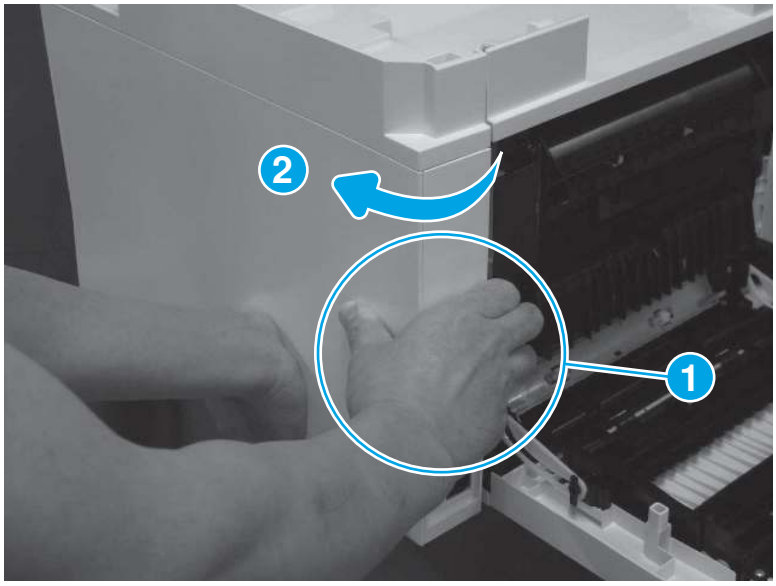Figure 4-589 **Disengage the cover corner**



5. Remove the right cover (callout 1).

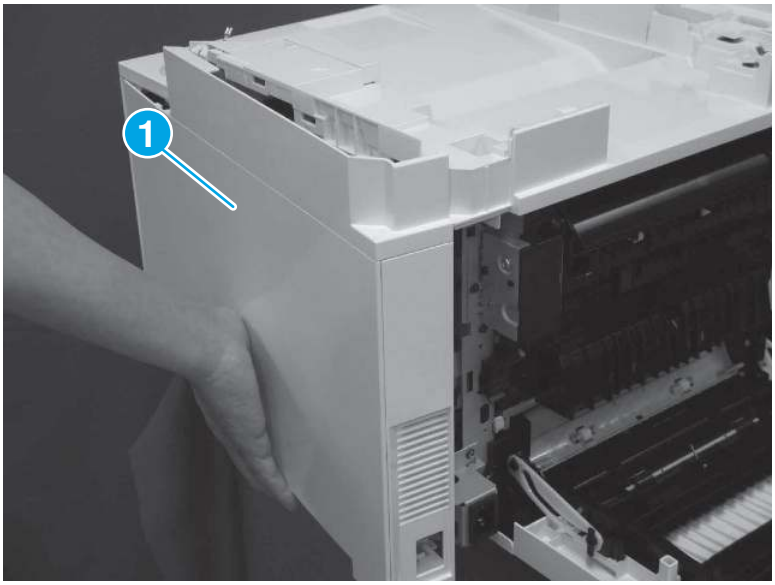Figure 4-590 **Remove the cover**



8. Remove the front cover


Follow the procedure below to remove and replace the front cover.

NOTE: Front cover removal is **identical** for both SFP and MFP models.

Reinstallation tip: Make sure to follow the special installation instructions for this part or step (located after the unpack and recycle or cleaning section).

1. Remove three screws (callout 1).

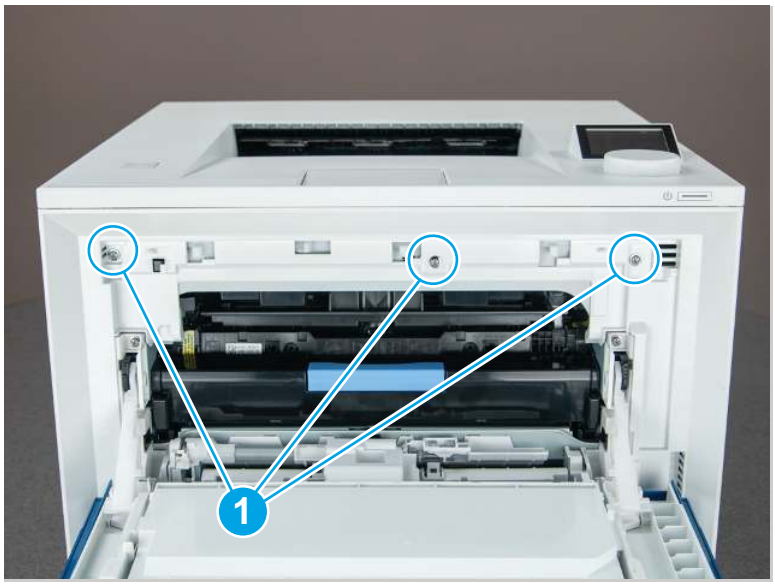
Figure 4-591 Remove three screws



2. Before proceeding, take note of the door release arm (callout 1). This arm can be easily dislodged when the cover is removed.


⚠ CAUTION: Do not lose the spring (callout 2) when removing the front cover.

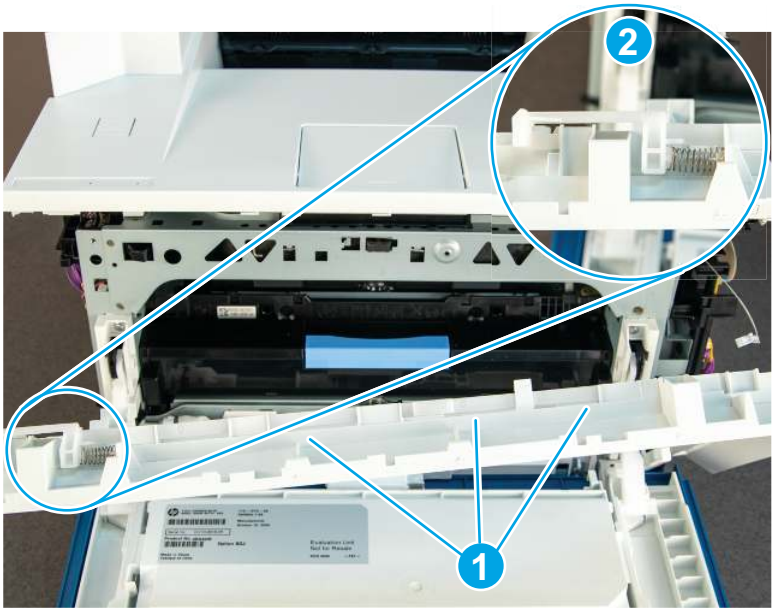Figure 4-592 Door release arm



3. Release four tabs (callout 1), and then remove the front cover (callout 2).

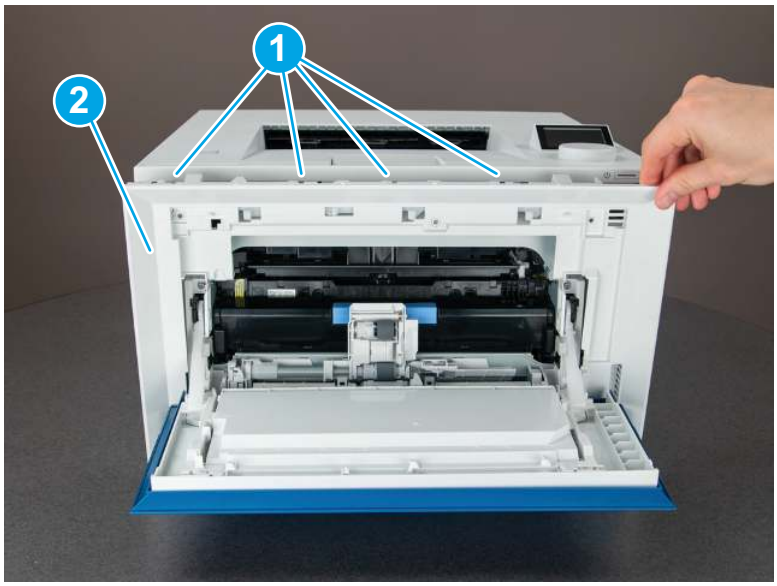Figure 4-593 **Remove the cover**



9. Remove the top cover (SFP)

Follow the procedure below to remove and replace the top cover (SFP).


NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.

1. **Wireless model only**: Raise and support the left side of the printer, remove one screw, and then separate the wireless PCA from the cover.

CAUTION: Do not attempt to completely remove the wireless PCA. Instead, gently move it out of the way.


TIP: To remove the screw without raising the printer, use a short-barrel screwdriver.

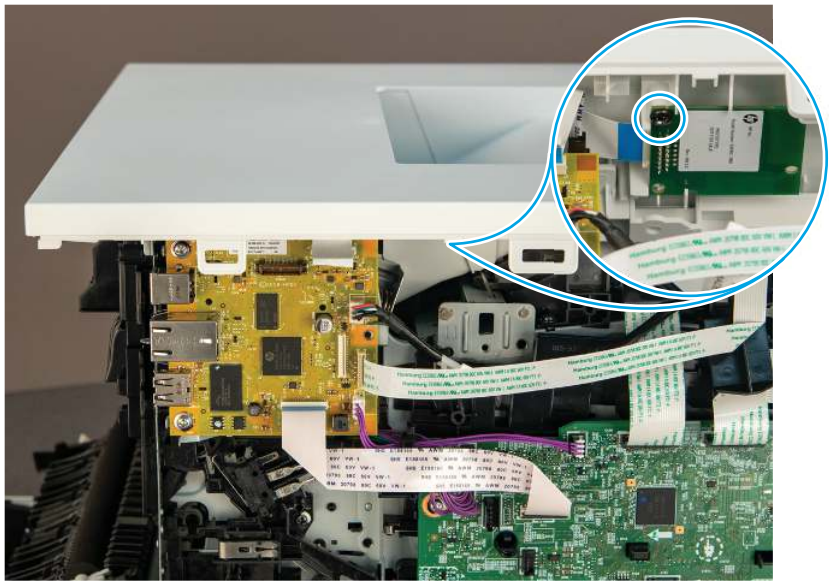Figure 4-594 Remove one screw



2. Disconnect one flat-flexible cable (FFC).

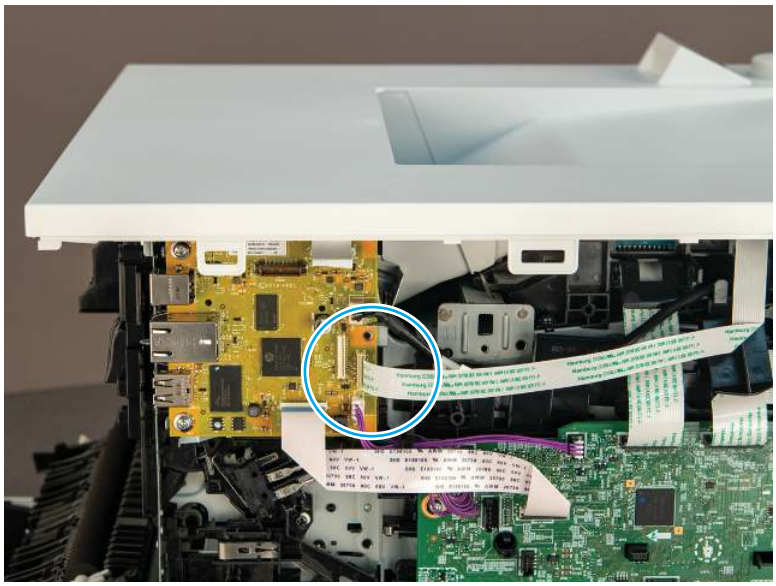Figure 4-595 Disconnect one FFC



3. Disconnect one FFC, and then remove one screw to release the ground wire.


NOTE: The front cover is shown installed in the figure below. However, this step is correct for removing the top cover.

Figure 4-596 Disconnect one FFC and remove one screw



4. Sliding the cover from the back of the printer towards the front to remove it.

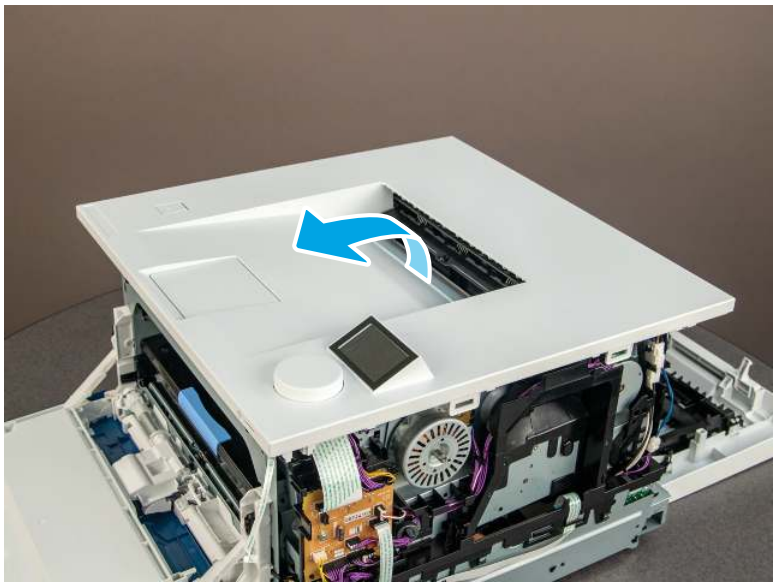Figure 4-597 Remove the cover




10. Remove the top cover (MFP)

Follow the procedure below to remove and replace the top cover (MFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.

1. Close the ISA lift arm.

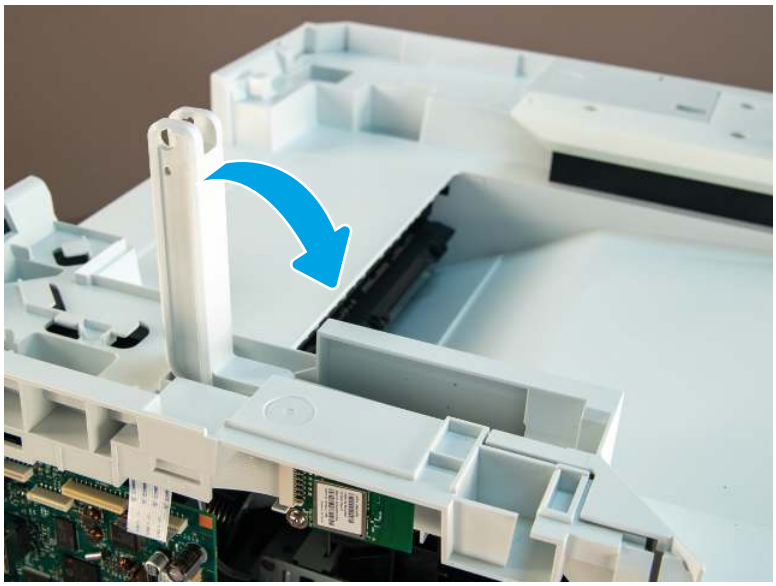
Figure 4-598 Close the ISA lift arm



2. Remove one screw.


⚠ CAUTION: The support arm is spring loaded and can unexpectedly spring into the open position. To avoid injury, do not place a finger in the screw well when the support arm is in the closed position.

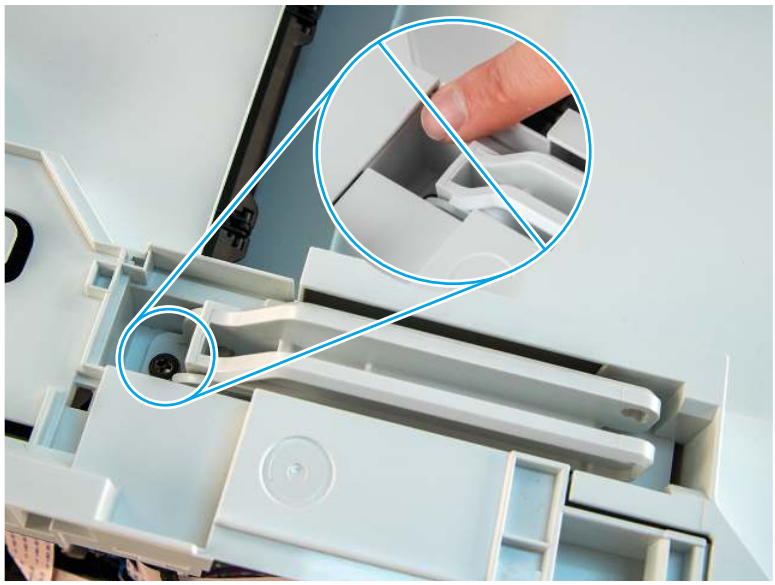Figure 4-599 Remove one screw



3. Rotate one end of the lift arm up (callout 1), and then slide the lift arm as shown below (callout 2) to release it. Remove the lift arm.

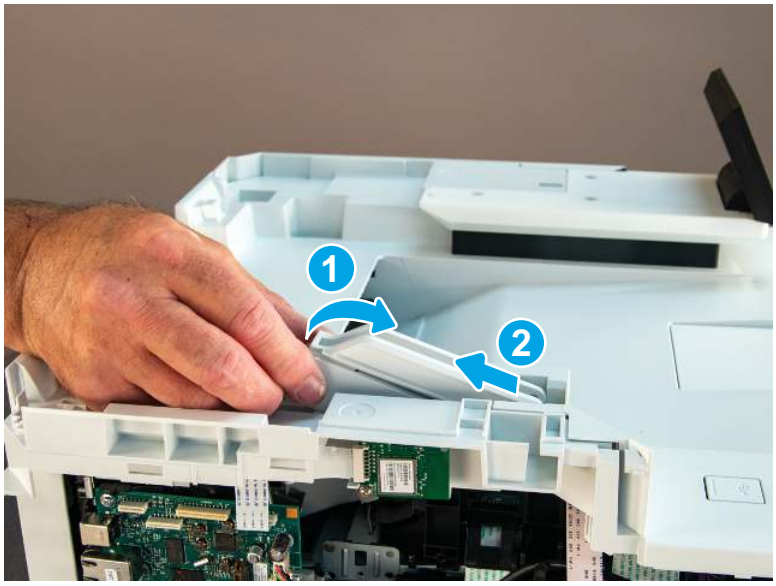Figure 4-600 Remove the lift arm




4. Do the following:

   a. Disconnect one FFC (control panel; callout 1).

   b. Remove one screw (callout 2), and then separate the wireless PCA from the top cover.


NOTE: The wireless PCA does not need to be completely removed. Instead, release the FFC from the retainer (callout 3), and then gently move it out of the way.

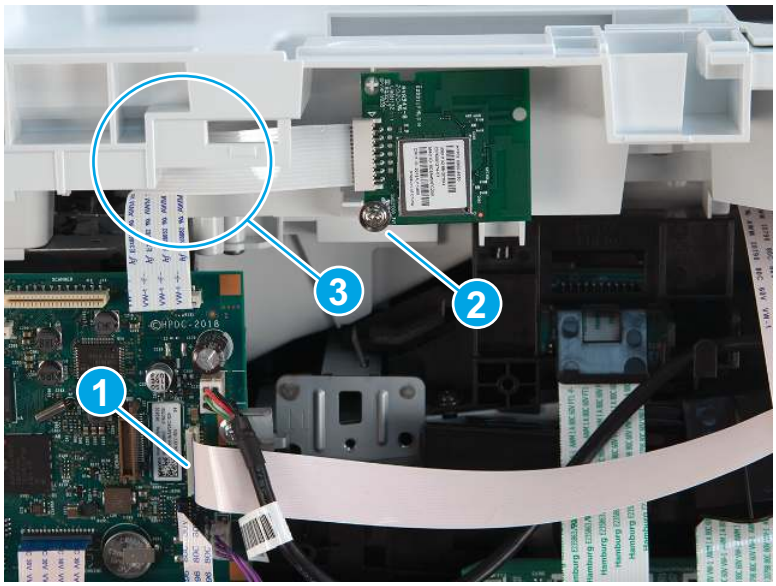Figure 4-601 Disconnect FFC and move the wireless PCA




5. Disconnect one FFC (power button), and then remove one screw (grounding sheet-metal plate).

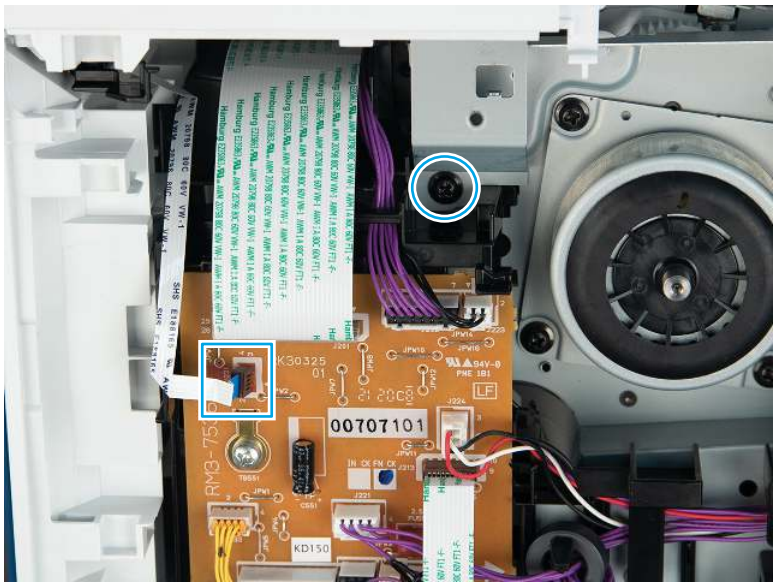Figure 4-602 Disconnect one FFC and remove one screw




6. Remove three screws.

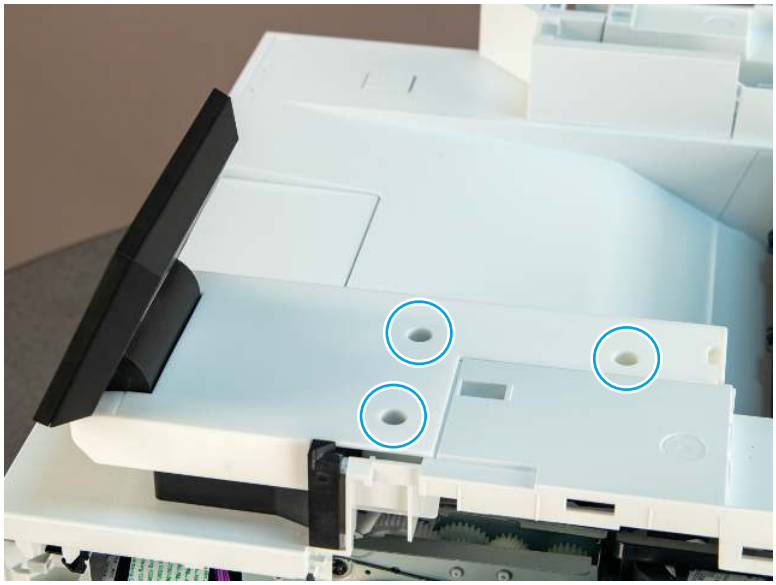Figure 4-603 Remove three screws



7. Release one tab and rotate one end of the base cover up (callout 1), and then slide the cover as shown (callout 2) to remove it.

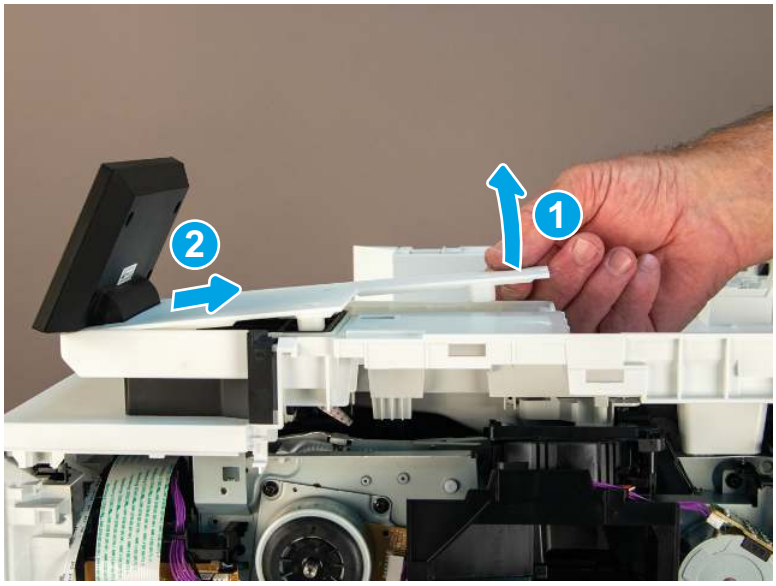Figure 4-604 Remove the cover



8. Disconnect two FFCs.

NOTE: Theses are zero-insertion force (ZIF) connectors. To remove the FFCs, first release the locking clip on the connector, and then pull the cable straight out of the connector.

TIP: For reinstallation, make sure that the line of the FFC is parallel with the body.

Figure 4-605 Disconnect two FFCs



9. Remove four screws.

NOTE: Two of the screws are self-tapping threads (black), and two of the screws are machine thread (silver).


Figure 4-606 Remove four screws



10. Lift the control panel and base straight up and off of the printer to remove them together.


NOTE: When handling the assembly, do not lose the ferrite (callout 1).

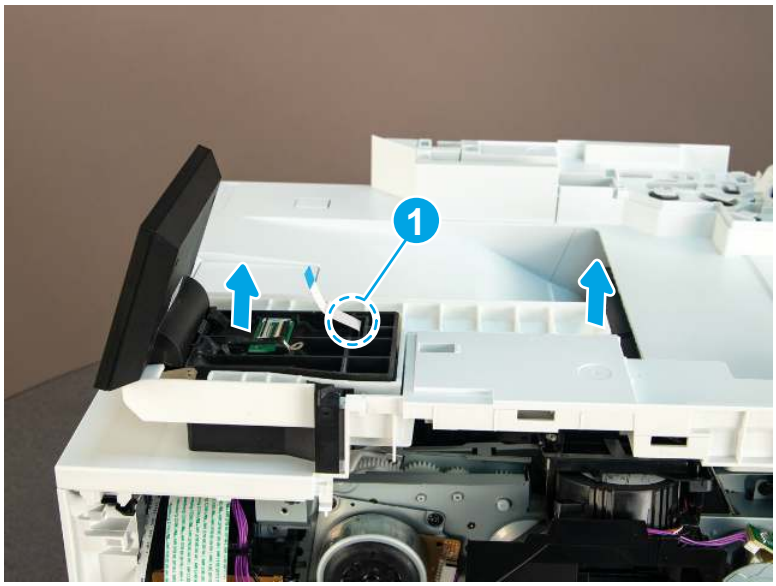Figure 4-607 Remove control panel and base



11. Remove three screws.

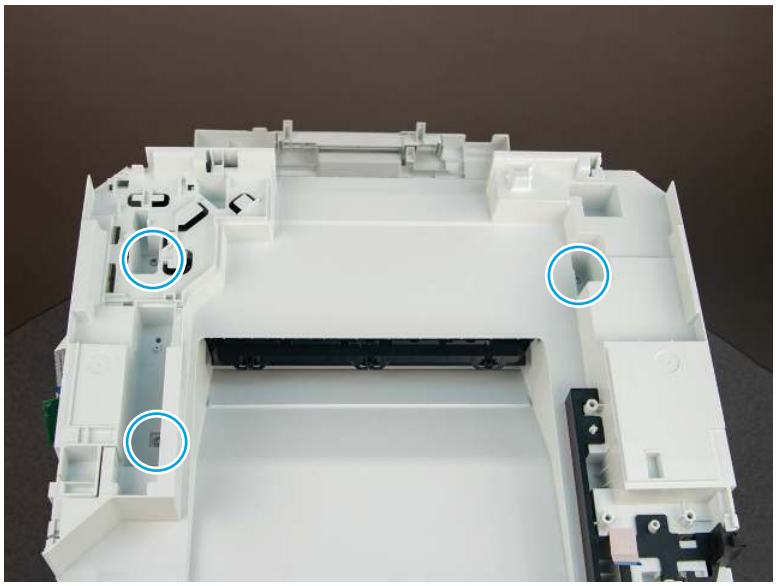
Figure 4-608 **Remove three screws**



12. Sliding the cover from the back of the printer to the front to remove it.

TIP: Slightly move the control-panel ground bracket (circled) back and forth to help release the top cover.

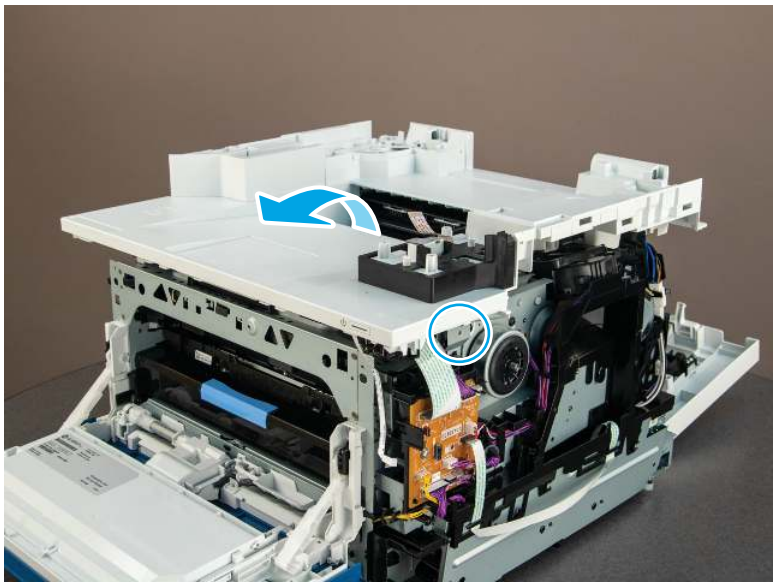Figure 4-609 **Remove the cover**



13. **When the cover is reinstalled**: Make sure that the front USB assembly is correctly positioned under the cover.

Figure 4-610 **Front USB assembly**




11. Remove the low-voltage power supply (LVPS)

Follow the procedure below to remove and replace the LVPS.

⚠ CAUTION: ESD sensitive part.


1. Disconnect one flat-flexible cable (FFC; callout 1) and one connector (callout 2), and then remove one screw (callout 3).

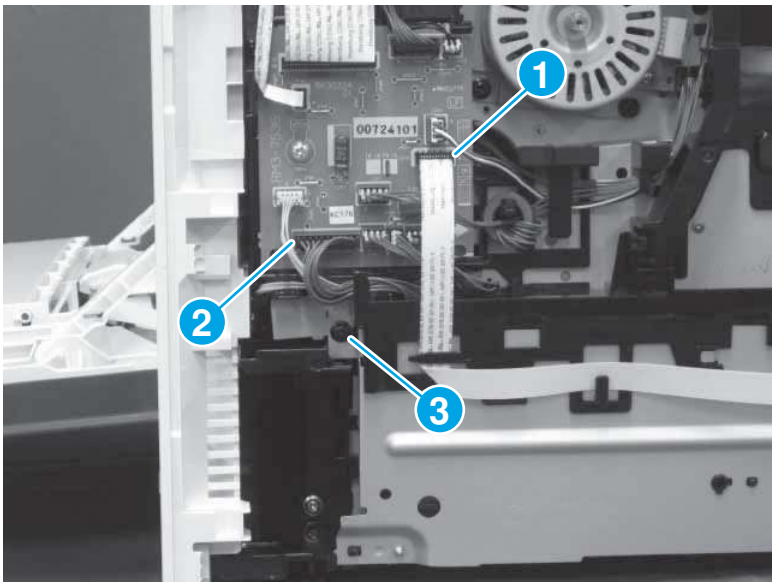Figure 4-611 **Disconnect FFC, connector, and remove one screw**




2. Disconnect two connectors (callout 1), and then remove two screws (callout 2).

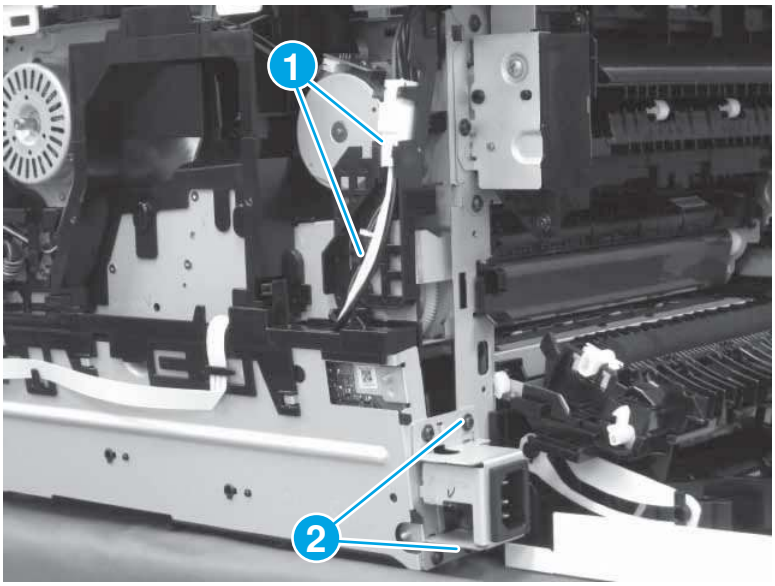Figure 4-612 **Disconnect connectors and remove screws**



3. Release three tabs (callout 1), and then remove the LVPS (callout 2).

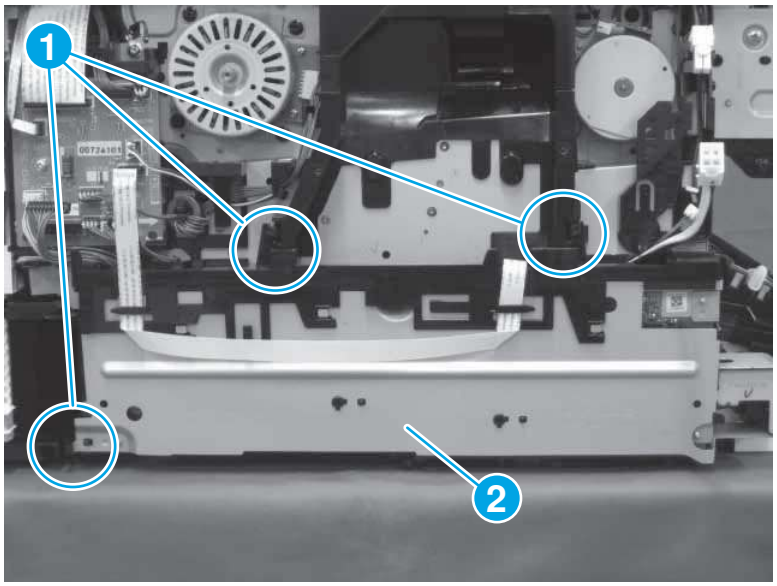Figure 4-613 **Remove the LVPS**




12. Remove the MP lower guide

Follow the procedure below to remove and replace the MP lower guide.

1. Remove one screw (callout 1), release one tab (callout 2), and then slide the cover as shown below to remove it.

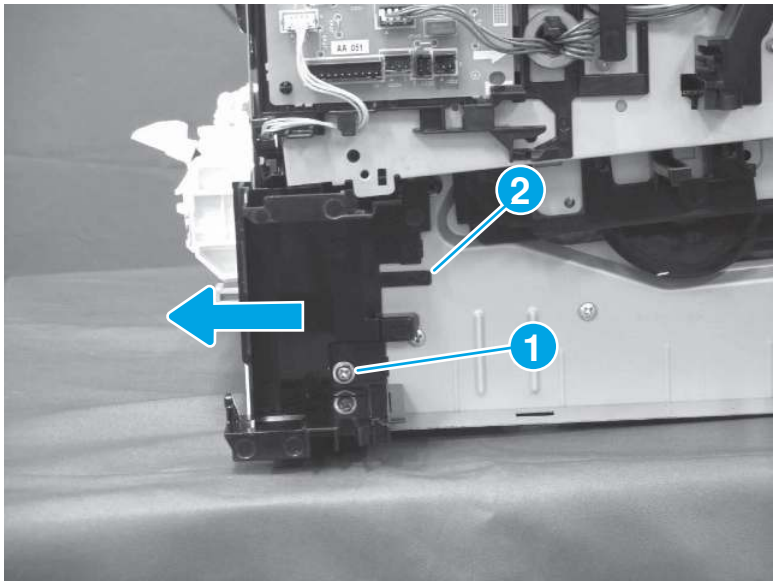Figure 4-614 Remove the cover



2. Do the following:


   a. Disconnect one connector (callout 1).

   b. Release the cable (callout 2) from the guide (callout 3).

   c. Release one tab (callout 4).


   d. Rotate the guide (callout 5) as shown below to remove it.

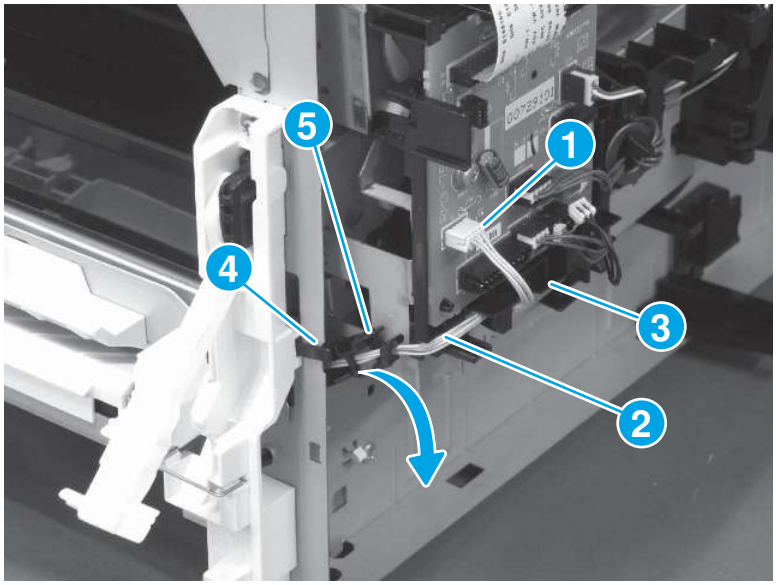Figure 4-615 Remove the guide




3. Release the cable (callout 1) from the guide (callout 2).

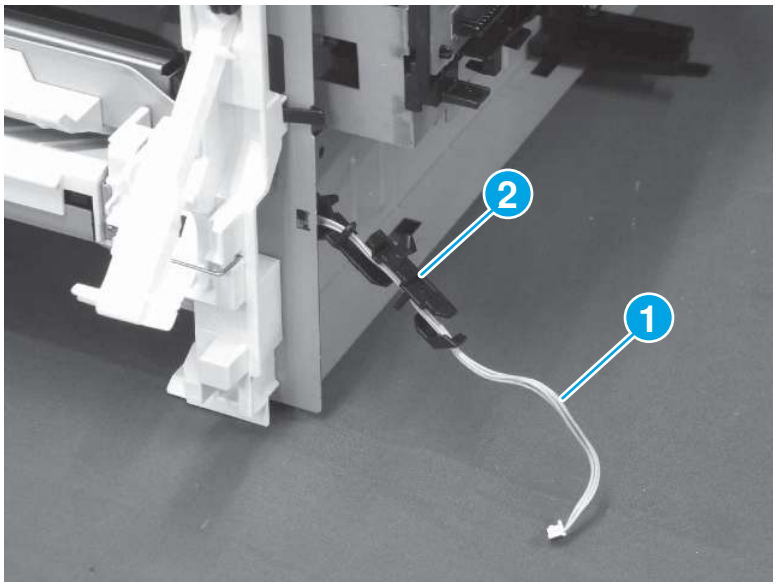Figure 4-616 Release the cable




4. Remove two screws (callout 1).

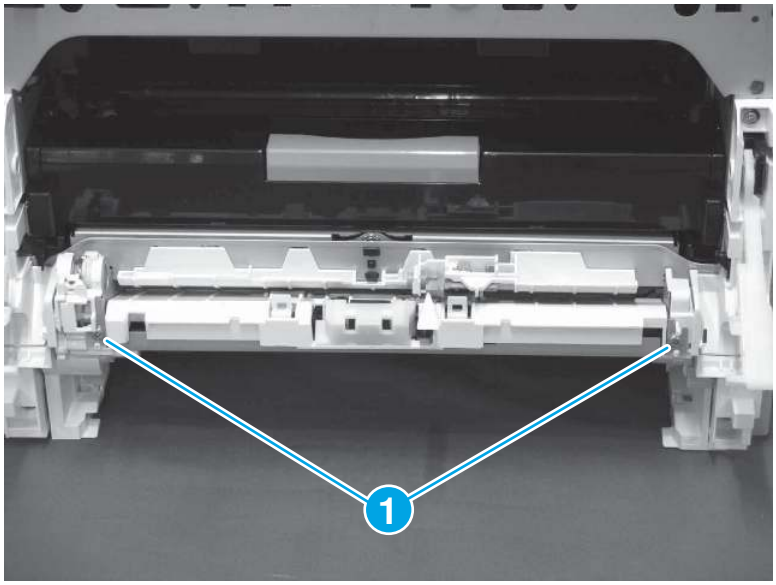Figure 4-617 Remove two screws




5. Open the holder (callout 1) and plate (callout 2), and then pull the MP lower guide (callout 3) out.

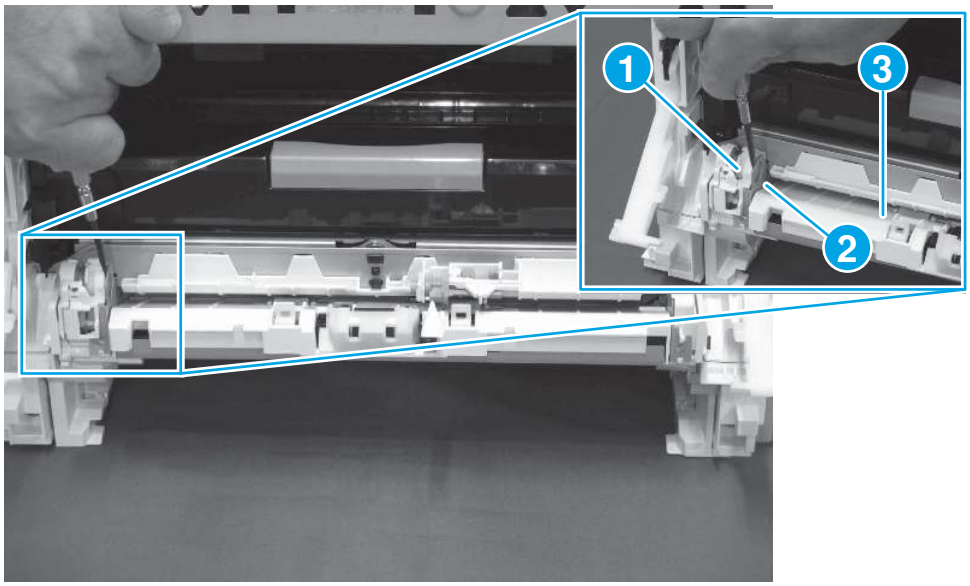Figure 4-618 Release the MP lower guide



6. Pull the cable (callout 1) as shown below, and then remove the MP lower guide (callout 2).

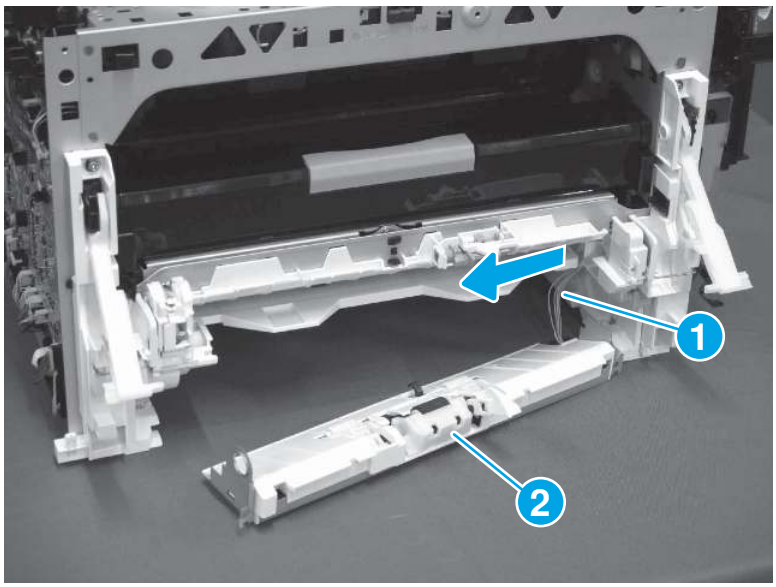Figure 4-619 Remove the MP lower guide



13. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: 

Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.

14. Special installation instructions - Low-voltage power supply (LVPS)


Follow the special instructions below to install a replacement LVPS.

CAUTION: 

ESD sensitive part.


1. When the LVPS is installed, make sure that the sheet-metal tab (callout 1) near the power receptacle is inserted in the slot (callout 2) in the chassis.

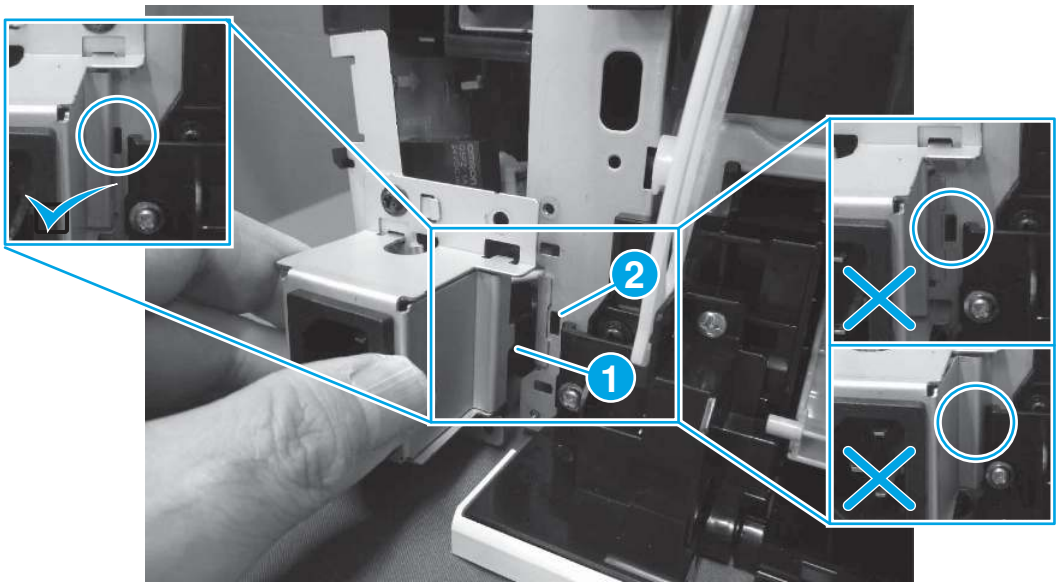Figure 4-620 Install the LVPS tab



2. Make sure that the fuser temperature fuse cable (callout 1) is positioned behind the thick cable (callout 2). This prevents the fuser cable from unnecessary movement.

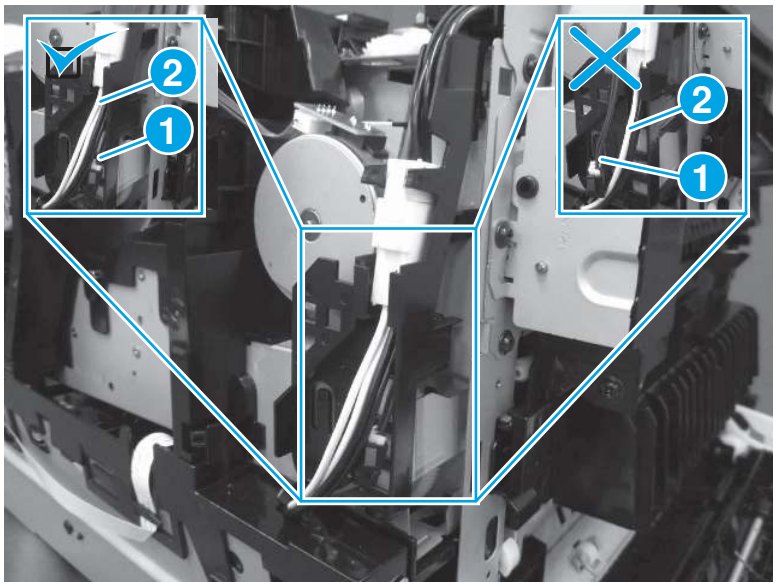Figure 4-621 Check the fuser temperature fuse cable




15. Special installation instructions - Tray 1 pickup roller assembly

Follow the special instructions below to install the Tray 1 pickup roller assembly.

- When the Tray 1 pickup roller assembly (callout 1) is installed, make sure that the alignment tab (callout 2) is in the slot (callout 3) on the assembly shaft.

TIP: When correctly installed, the tab fits completely into the slot (callout 4).

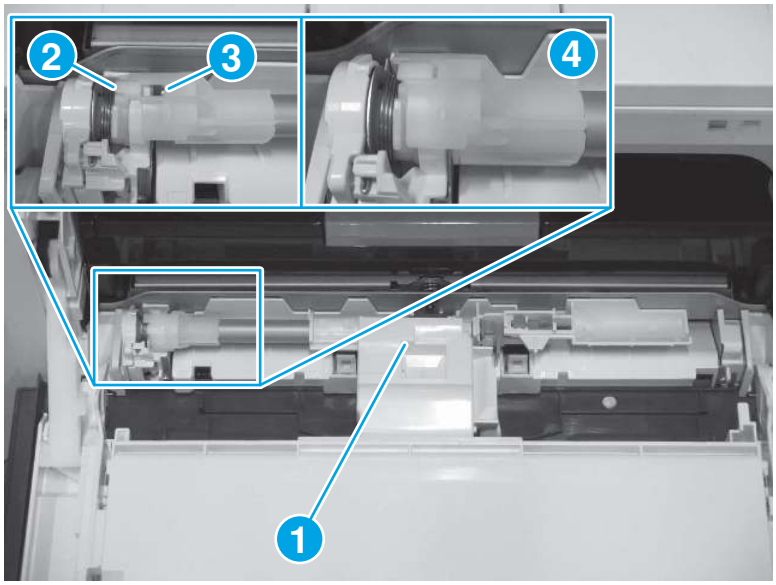Figure 4-622 Install the Tray 1 pickup roller assembly




16. Special installation instructions - Front cover

Follow the special instructions below to install the front cover.

NOTE: Front cover installation is **identical** for both the SFP and MFP models.


1. If the door release arm becomes dislodged when handling the cover, install it as shown below (callout 1, 2).

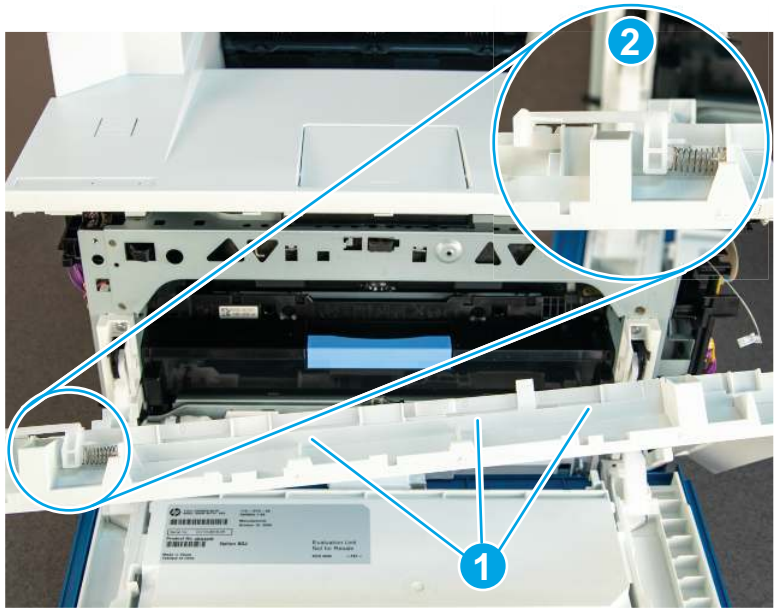Figure 4-623 Door release arm installed



2. At the right and left side of the front cover, align the holes (callout 1) in the cover with the alignment pins (callout 2) on the chassis.

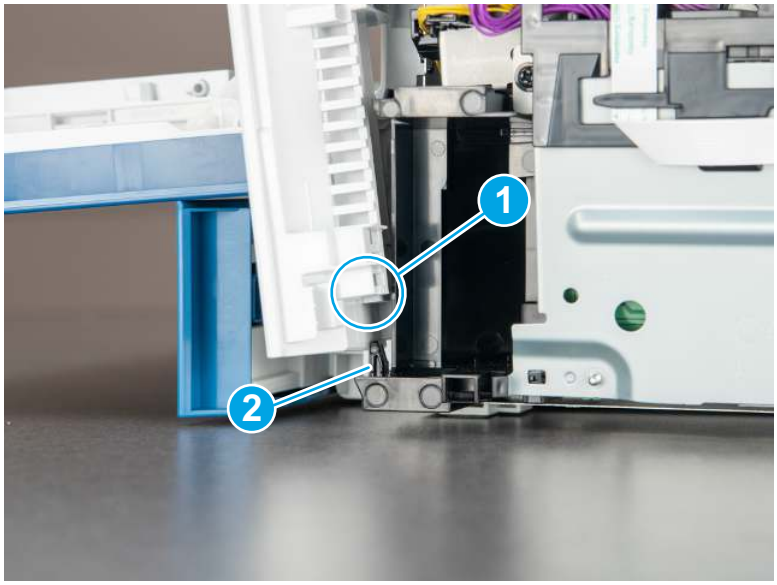
Figure 4-624 Cover alignment pins



3. Rotate the top of the cover towards the printer to install it.

IMPORTANT: Verify that the spring loaded door release button (on the left side of the cover) correctly functions.

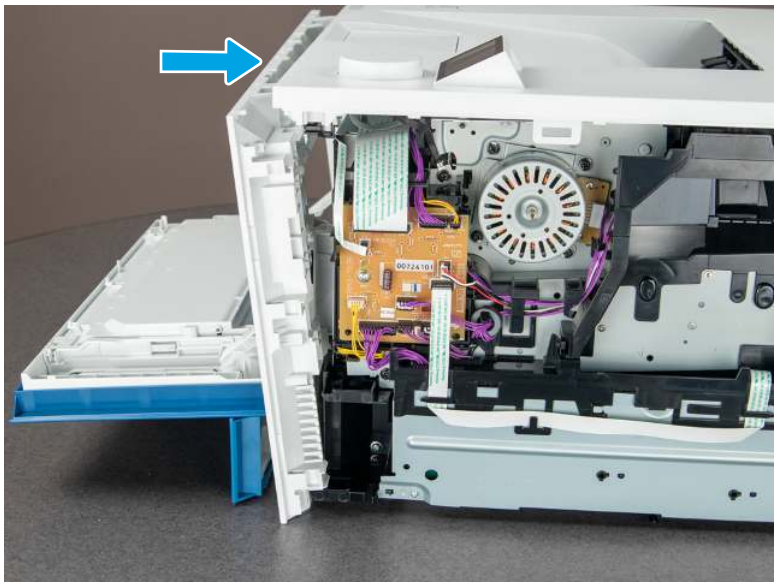Figure 4-625 Install the cover



Removal and replacement: Engine controller PCA

Learn about engine controller PCA removal.

IMPORTANT: When a formatter PCA or ECU/DC controller is replaced a pairing operation must be completed to make the printer functional.

HP is currently developing an application based process to pair the formatter and ECU/DC controller.

This application is expected to be available on or about March 2023 for this printer. If a formatter or ECU/DC controller **must** be replaced prior to the availability of the pairing process, HP recommends a whole unit replacement.

This service manual will be re-released with instructions about how to use the HP formatter and ECU/DC controller pairing application as soon as the information becomes available.

Mean time to repair: 15 minutes

Service level: Medium

Before performing service

Turn the printer power off

- Disconnect the power cable.

⚠ **WARNING!** To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-40 Part information

Part number	Part description
RM3-7577-010CN	Engine controller PCA

Required tools

- #2 Phillips screwdriver with a magnetic tip and a 152 mm (6 in) shaft length

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test

Print any pages necessary to make sure the printer is functioning correctly.

1. Remove the left cover (SFP)


Follow the procedure below to remove and replace the left cover (SFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.

TIP: There might be a small cover installed on the USB port located at the back of the printer. If installed, remove this cover now.


1. Remove one screw (callout 1).

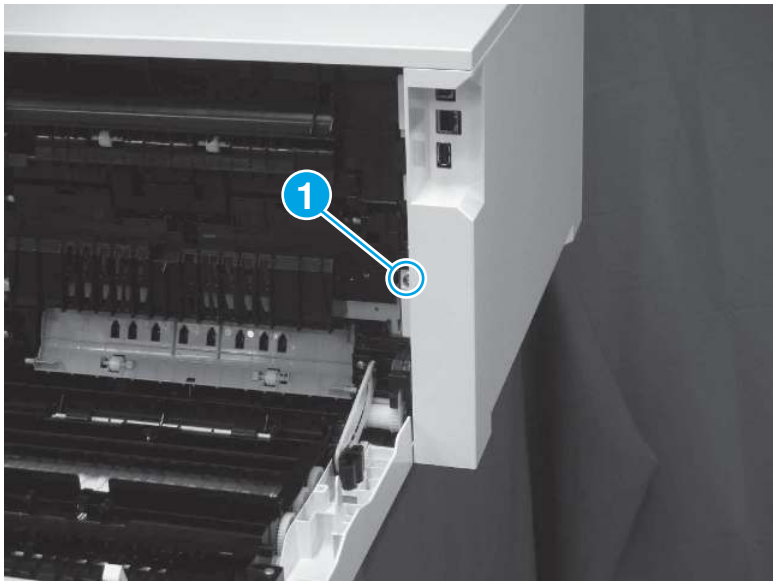Figure 4-626 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

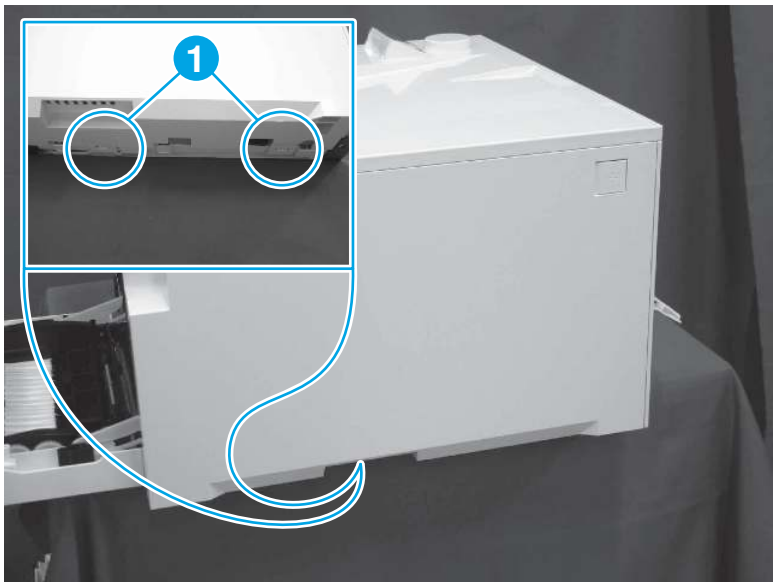Figure 4-627 Release two tabs




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

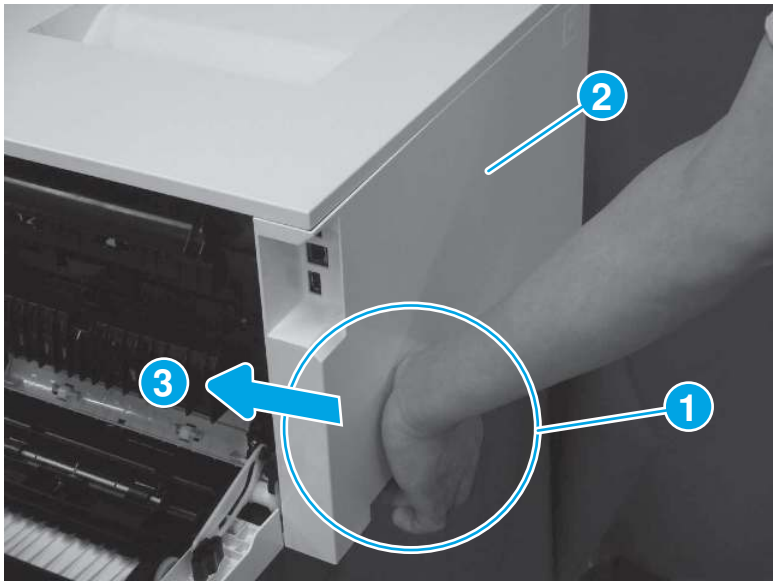Figure 4-628 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

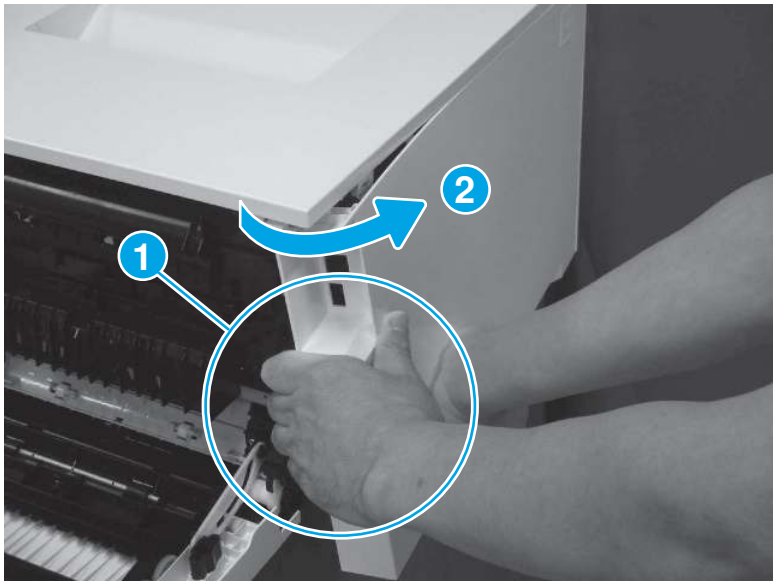Figure 4-629 Disengage the cover corner



5. Remove the left cover (callout 1).

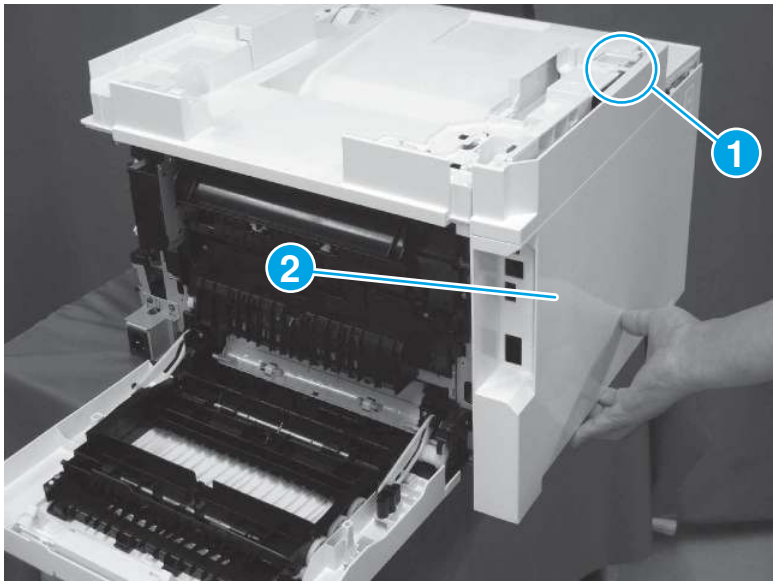Figure 4-630 Remove the cover



2. Remove the left cover (MFP)


Follow the procedure below to remove and replace the left cover (MFP).

NOTE: The following procedure is for an MFP printer only. If this assembly is being removed to gain access to dependency parts for a SFP printer, skip this step.

TIP: There might be a small cover installed on the USB port and/or the fax port located at the back of the printer. If installed, remove these covers now.


1. Remove one screw (callout 1).

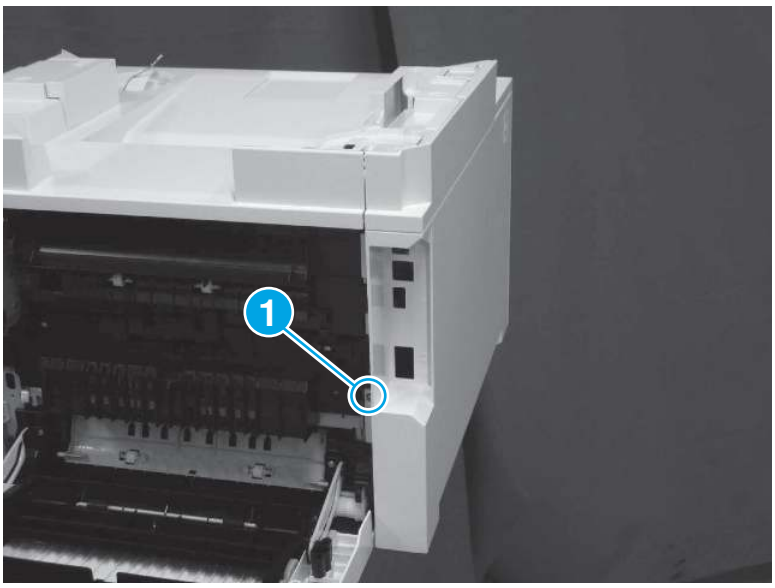Figure 4-631 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

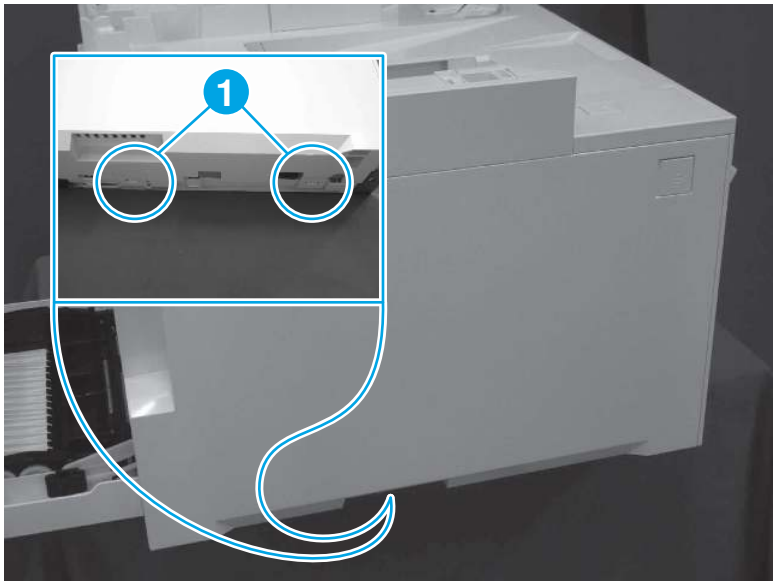Figure 4-632 Release two tabs




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

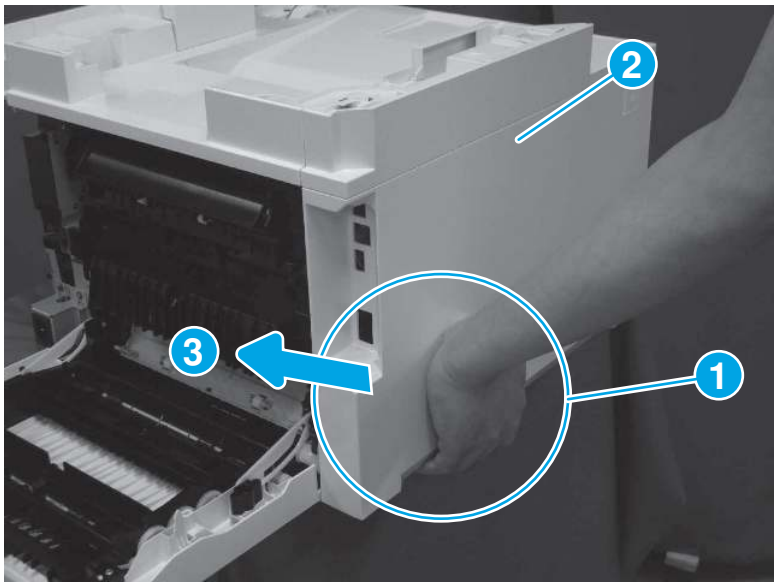Figure 4-633 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

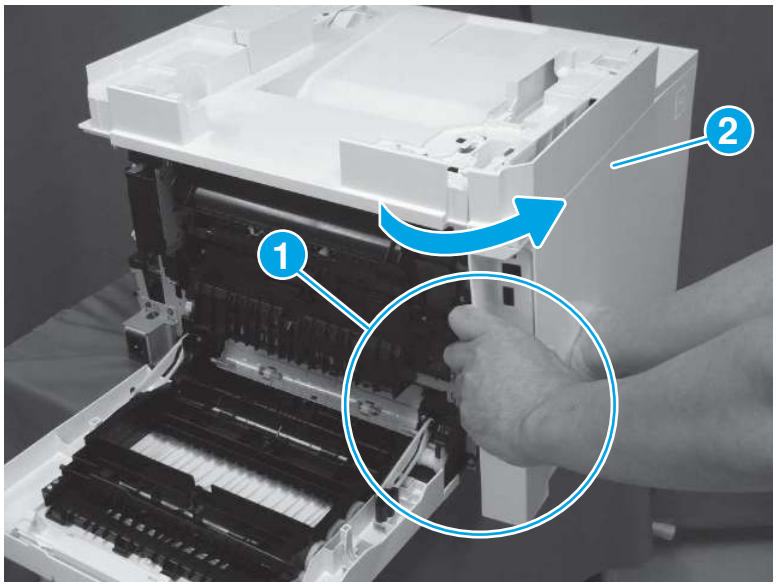Figure 4-634 Disengage the cover corner



5. Remove the left cover (callout 1).

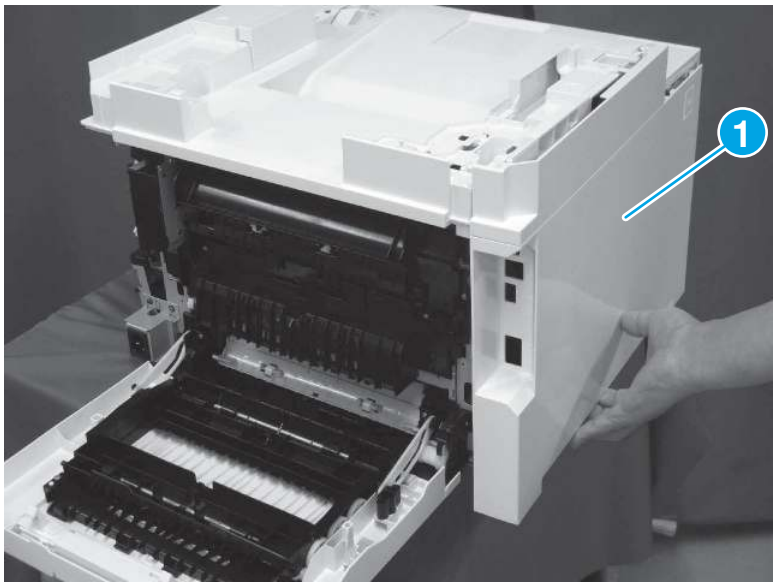Figure 4-635 Remove the cover




3. Remove the engine controller PCA

Follow the procedure below to remove and replace the engine controller PCA (ECU).

⚠ CAUTION: ESD sensitive part.

1. Before proceeding, take note that there is an environmental sensor mounted on the engine controller PCA. **Do not** apply pressure to this sensor to avoid damaging it.

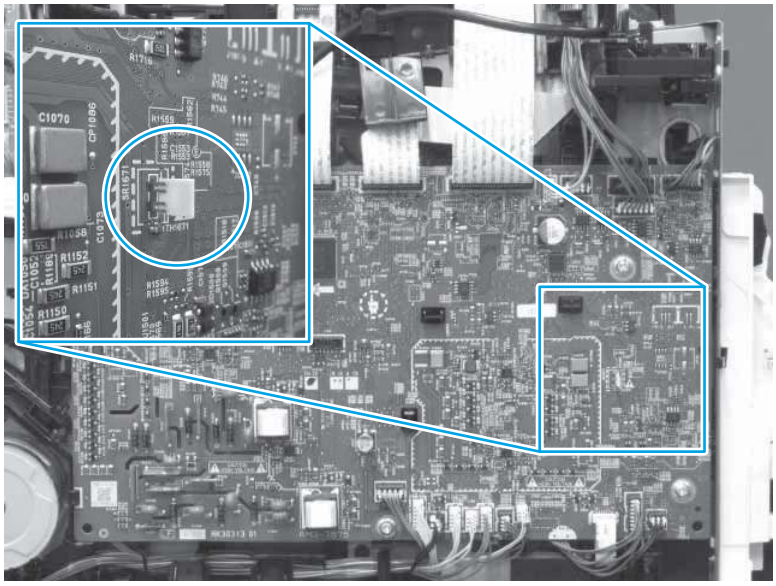Figure 4-636 **Engine controller environmental sensor location**




2. Disconnect all of the connectors on the engine controller PCA, and then remove four screws (callout 1).

⚠ CAUTION: Before proceeding take note of the media width sensors connectors and wire harnesses at ECU PCA locations J163 (media width sensor 2; yellow wire harness) and J165 (media width sensor 1; red wire harness). These connectors and wire harness are interchangeable. The PCA is embossed with **YELLOW** (connector J163) and **RED** (connector J165).

Make sure that the correct wire harness is plugged into the appropriate connector to avoid unexpected printer operation.

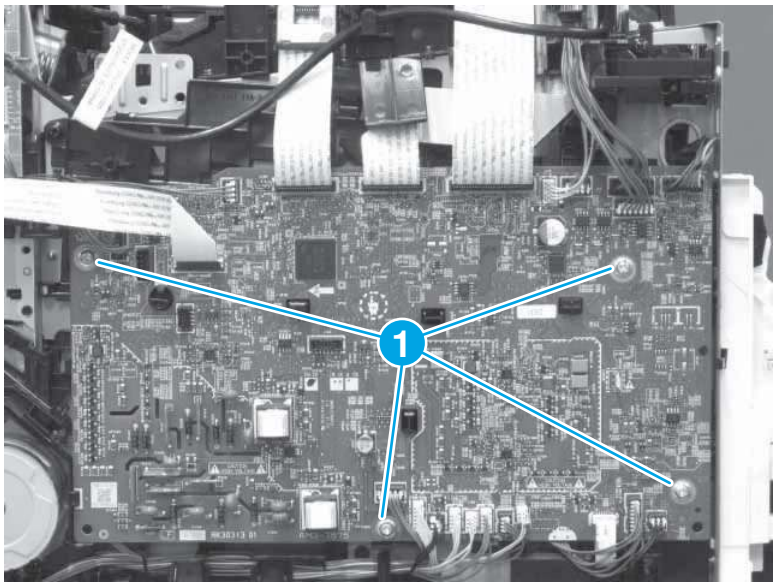Figure 4-637 **Disconnect connectors and remove screws**




3. Release four tabs (callout 1), and then remove the engine controller PCA (callout 2).

CAUTION: There are three clear plastic light guides installed in the PCB holder behind the PCA that are not captive. Do not lose these parts when the PCA is removed.

Reinstallation tip: If a replacement formatter is being installed, **make sure** to read and follow the special installation instructions in the topic (located immediately after the unpack and recycle step).

The ECU/DCC must be paired with the formatter to be functional.

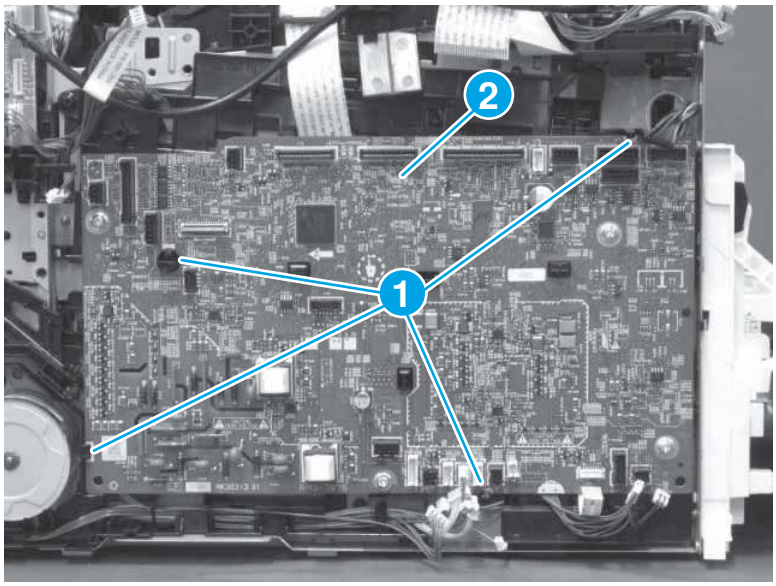Figure 4-638 **Remove the engine controller PCA**



4. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.

5. HP Onsite Repair Application

This topic describes the steps to pair a formatter and DC controller (DCC) / Engine controller unit (ECU).

When a formatter or DCC/ECU is replaced a pairing operation must be completed to make the printer functional. Use the HP Onsite Repair Application (App) to complete this procedure.

CAUTION: Only install a new (unpaired) **Service Formatter PCA** or **Service DC controller (DCC) / Engine controller unit (ECU)** when a replacement PCA is required.

IMPORTANT: If both a formatter **and** DCC/ECU need to be replaced, they must be installed and paired sequentially (one at a time). Do not replace both PCAs at the same time. Always replace one PCA, perform the pairing operation, and then replace and pair the second PCA.

To use the HP Onsite Repair App, first review the following:

- Hardware requirements for using the HP Onsite Repair App
- Create an HP Onsite Repair App account or sign-in

Hardware requirements for using the HP Onsite Repair App

The repair application has the following hardware requirements:

- Android device (Android OS 7.1 or later)



- Internet access



- USB OTG cable

IMPORTANT: Make sure that the OTG cable connector fits the Android device USB connector.

  - Android device connector (Micro-USB or Type-C; callout 1)
  - Type-A USB printer cable connector (callout 2)



- Standard A-B USB printer cable



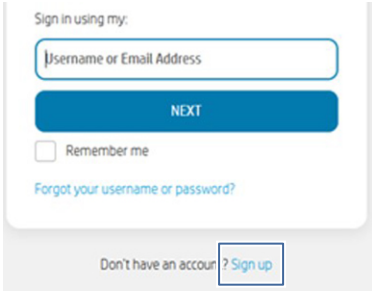
Create an HP Onsite Repair App account or sign-in

The HP Onsite Repair App requires an HPID account.

1. If you do not already have an HPID account, create one now.


NOTE: If you already have an HPID account, skip this step and go to **Step 2**.

   a. Open the HP Onsite Repair App, and then select the Sign up item.




b. On the Sign up screen, type in the following account information:

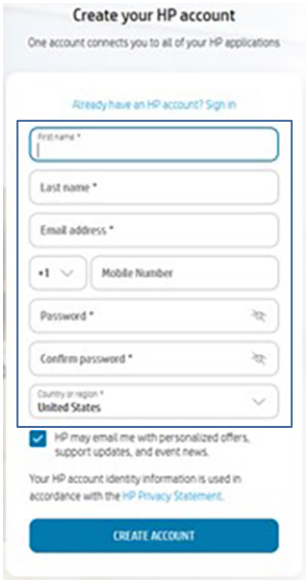- First and last name
- Email address (no need to per-register your email account)
- Mobile phone number
- Password and password confirmation
- Change the default country or region if necessary




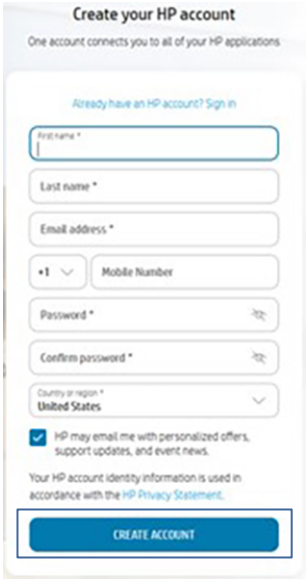c. Select the CREATE ACCOUNT button to create the user account.



2. Open the HP Onsite Repair App, and then do the following:

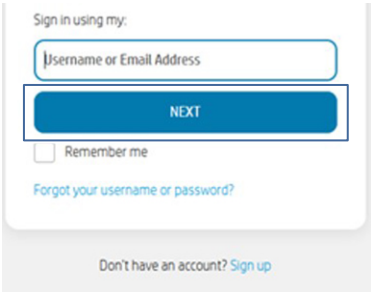   a. At the sign-in screen, enter your user-name or email address, and then select the NEXT button.



   b. From the HP Onsite Repair App operations screen, you can begin the formatter and DCC/ECU pairing process.

      The app can only perform a formatter and DCC/ECU pairing operation. There is no need for disassociating the printer from the HP account as the customer receives the same printer back after servicing.

IMPORTANT: If the printer was previously setup and claimed on the HP portal (on-boarded), a printer user or administrator must complete the on-boarding process again. Previous on-board information is not retained when using the HP Onsite Repair App to pair a formatter and DCC/ECU.

On-boarding is optional and only needed if the printer was previously on-boarded.



Step 1 - HP Onsite Repair App: Pairing type identification

Follow these steps to identify the type of formatter and DCC / ECU pairing required.

⚠ CAUTION: Only install a new (unpaired) **Service Formatter PCA** or **Service DC controller (DCC) / Engine controller unit (ECU)** when a replacement PCA is required.

For a replacement assembly, do not install a previously used (paired) PCA.

1. Use the instructions in the printer *Service Manual* to remove and replace either the formatter or DCC/ECU.

IMPORTANT: If both a formatter **and** DCC/ECU need to be replaced, they must be installed and paired sequentially (one at a time). Do not replace both PCAs at the same time. Always replace one PCA, perform the pairing operation, and then replace and pair the second PCA.

2. Do one of the following:

- **Formatter replacement**

  a. The message Initializing, a Language prompt, or hpsmart.com/setup appears on the control-panel display.

  NOTE: If an error message appears, make sure that the replacement formatter is an unused brand-new **Service Formatter PCA**.

  Do not install replacement previously used PCAs (paired) in this printer.

  b. Go to *Step 2 - HP Onsite Repair APP: Prepare a formatter for pairing*.

- **DCC/ECU replacement**

  a. The message Ready appears on the control-panel display. However, the repair process is **not** complete.

  NOTE: If an error message appears, make sure that the replacement DCC/ECU is an unused brand-new **Service DC controller (DCC) / Engine controller unit (ECU)**.

Do not install replacement previously used PCAs (paired) in this printer.

b. Go to ***Step 3 - HP Onsite Repair App: Pairing operation***.

Step 2 - HP Onsite Repair App: Prepare a formatter for pairing

Follow these steps to prepare a formatter for pairing.

IMPORTANT: If both a formatter **and** DCC/ECU need to be replaced, they must be installed and paired sequentially (one at a time). Do not replace both PCAs at the same time. Always replace one PCA, perform the pairing operation, and then replace and pair the second PCA.

NOTE: If a formatter is **not** being paired, skip this step. Go to ***Step 3 - HP Onsite App: Pairing operation***.

When a replacement formatter is installed, the printer serial number must be configured on the formatter before pairing.

Use the control panel to access the Service Menu > System Configuration > Serial Number menus.

NOTE: Detailed instructions are provided below.

Use the printer serial number found on a label adhered to the printer.

1. Configure the printer serial number on the replacement formatter:
   a. Turn the printer power on. When prompted, select a Language setting.
   b. Select a Country/Region setting.
   c. When the **Connection Method** screen appears, select the USB/Connect Later option.
   d. A warning message appears on the control-panel display describing the benefits of connecting to a network or the internet.

      At the bottom of the screen, select the Skip Connecting option.
   e. When the Date and Time menu appears, set the date and time.

      NOTE: If needed, select the Continue option.
   f. When the message **Thank you for choosing HP!** appears, select the Continue option.
   g. From the Home screen, open the following menus:
      - Menu
      - Tools
      - Service

      To access the Service menu, enter the default service personal identification number (PIN): **12345678**, and then select the Sign In item.

      IMPORTANT: The default PIN for all service formatters is **12345678**.
   h. Open the System Configuration sub menu.
   i. Select the Serial Number field, and then click the **back arrow** or **X** (touchscreen MFP models) to delete the default serial number.

j. Enter the serial number found on a label inside the printer front door.

NOTE: If the Service ID is known, enter it into the Service ID field now.

k. Exit the menus, turn the printer power off, and then turn it on again.

2. When initialized, the printer is ready for the pairing operation. Go to ***Step 3 - HP Onsite Repair App: Pairing operation***.

Step 3 - HP Onsite Repair App: Pairing operation


Follow these steps to complete the pairing operation.

IMPORTANT: If both a formatter **and** DCC/ECU need to be replaced, they must be installed and paired sequentially (one at a time). Do not replace both PCAs at the same time. Always replace one PCA, perform the pairing operation, and then replace and pair the second PCA.

1. Use a USB OTG cable (Micro-USB or Type-C) and a standard A-B USB cable to connect an Android device to the printer.

NOTE: Verify that the Android device is connected to the internet.

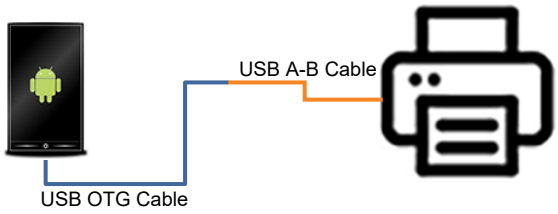
Figure 4-639 Android to printer connection



2. Open and log into the HP Onsite Repair App, and then select the **Re-pair (Authorized Parts Replacement)** button.

NOTE: For more information about logging into the app, or how to create a new account, see ***Create an HP Onsite Repair App account or sign-in***.

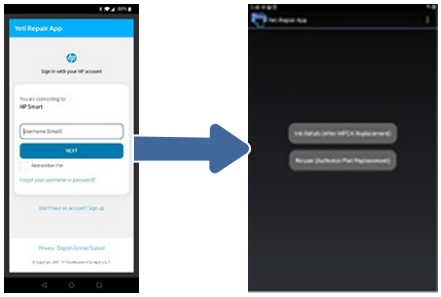
Figure 4-640 Log in and select Re-pair



3. Select the **OK** button to confirm the Android device is connected to the printer, and then select the **OK** button to continue the operation.

NOTE: Make sure that the Android device is correctly connected to the printer using the OTG and A-B USB cables.

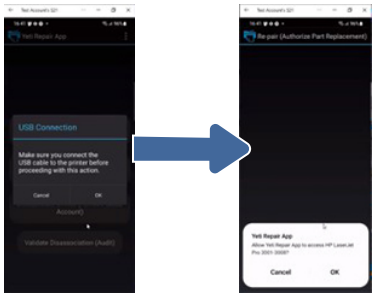
Figure 4-641 Select OK to confirm and continue



4. Select the **OK** button to confirm the displayed printer serial number, and then select the **OK** button to retrieve the printer *Fingerprint*.


NOTE: Make sure that the displayed serial number matches the serial number printed on the label adhered to the printer.

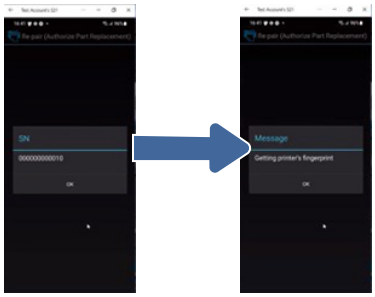Figure 4-642 Select OK to accept the printer serial number and Fingerprint




5. Select the **OK** button to send a Repair Authorization Request to the HP Stratus Cloud on the internet and retrieve the printer *Persona*.

Figure 4-643 Select OK to retrieve the printer Persona



6. Select the **OK** button to retrieve the printer *Fingerprint*.

Figure 4-644 Select OK to retrieve the printer Fingerprint




7. The message **The repair transaction was completed successfully** appears when the formatter and DCC/ECU pairing operation is complete. Select the **OK** button to send a Repair Acknowledgment Request to the HP Stratus Cloud on the internet.

IMPORTANT: If the printer was previously setup and claimed on the HP portal (on-boarded), a printer user or administrator must complete the on-boarding process again. Previous on-board information is not retained when using the HP Onsite Repair App to pair a formatter and DCC/ECU.

On-boarding is optional and only needed if the printer was previously on-boarded.

Figure 4-645 **Select OK to acknowledge the pairing**



Removal and replacement: Formatter PCA

Learn about formatter PCA removal.

IMPORTANT: When a formatter PCA or ECU/DC controller is replaced a pairing operation must be completed to make the printer functional.

HP is currently developing an application based process to pair the formatter and ECU/DC controller.

This application is expected to be available on or about March 2023 for this printer. If a formatter or ECU/DC controller **must** be replaced prior to the availability of the pairing process, HP recommends a whole unit replacement.

This service manual will be re-released with instructions about how to use the HP formatter and ECU/DC controller pairing application as soon as the information becomes available.

Mean time to repair: 5 minutes

Service level: Easy

Before performing service

Turn the printer power off

- Disconnect the power cable.

WARNING! To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-41 Part information

Part number	Part description
4RA85-67001	Formatter PCA 4201dn and 4201dne
4RA86-67001	Formatter PCA 4201dw and 4201dwe
4RA87-67001	Formatter PCA 4202dn and 4202dne
4RA88-67001	Formatter PCA 4202dw and 4202dwe
5HH48-67001	Formatter PCA 4203dw
5HH53-67001	Formatter PCA 4203cdn
4RA80-67001	Formatter PCA 4301dw and 4301dwe
4RA81-67001	Formatter PCA 4301fdn and 4301fdne
4RA82-67001	Formatter PCA 4301fdw and 4301fdwe
4RA83-67001	Formatter PCA 4302dw and 4302dwe
4RA84-67001	Formatter PCA 4302fdn and 4302fdne
5HH64-67001	Formatter PCA 4302fdw and 4302fdwe
5HH65-67001	Formatter PCA 4303dw
5HH66-67001	Formatter PCA 4303fdn
5HH67-67001	Formatter PCA 4303fdw

Required tools

- #2 Phillips screwdriver with a magnetic tip and a 152 mm (6 in) shaft length

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test

Print any pages necessary to make sure the printer is functioning correctly.

1. Remove the left cover (SFP)


Follow the procedure below to remove and replace the left cover (SFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.

TIP: There might be a small cover installed on the USB port located at the back of the printer. If installed, remove this cover now.


1. Remove one screw (callout 1).

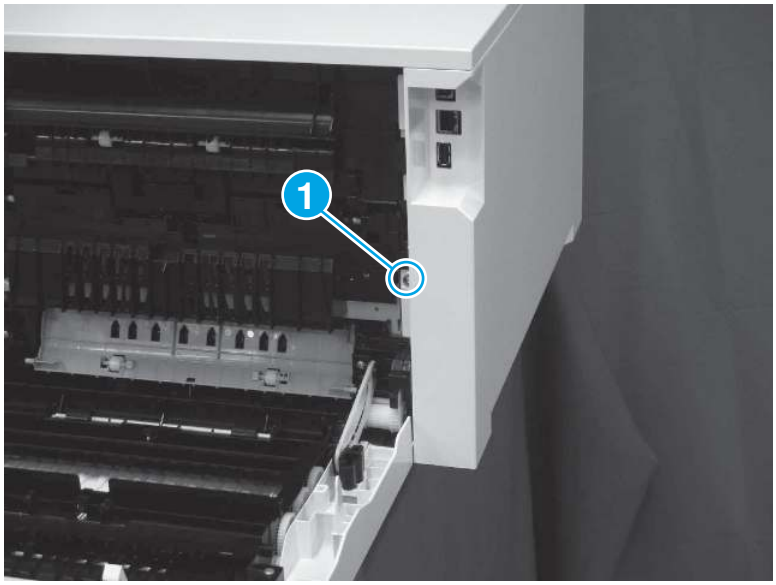Figure 4-646 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

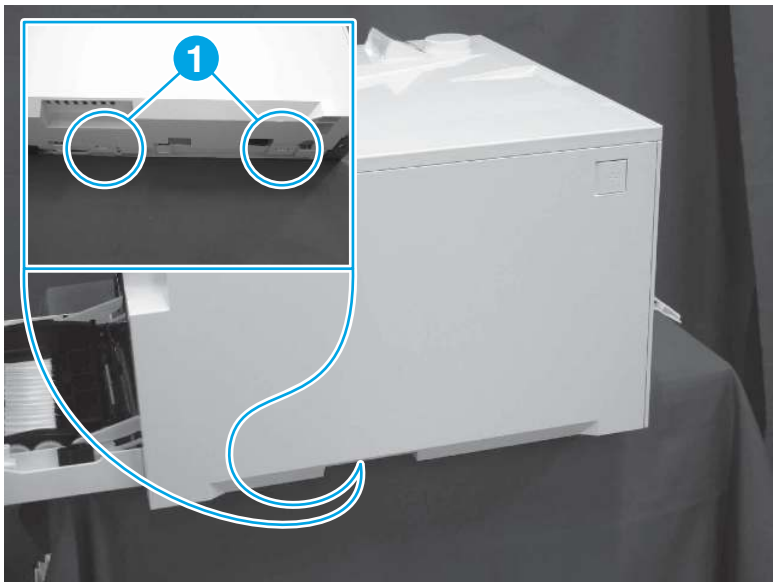Figure 4-647 Release two tabs




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

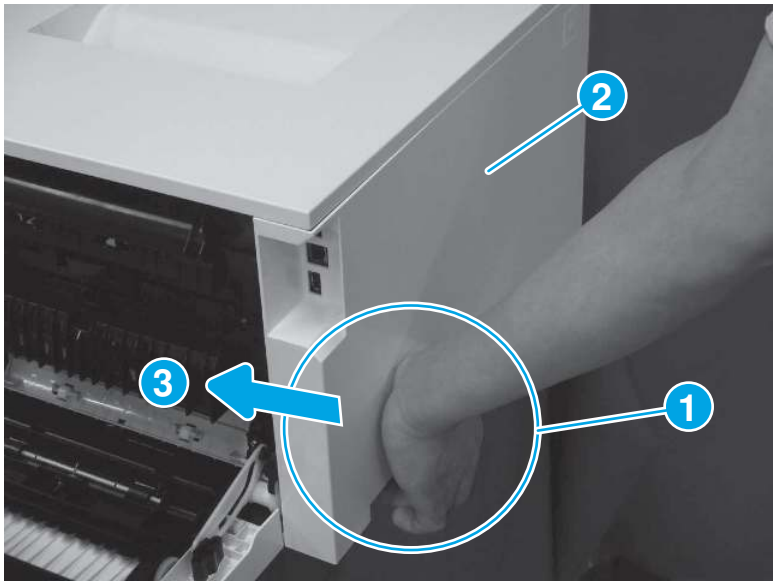Figure 4-648 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

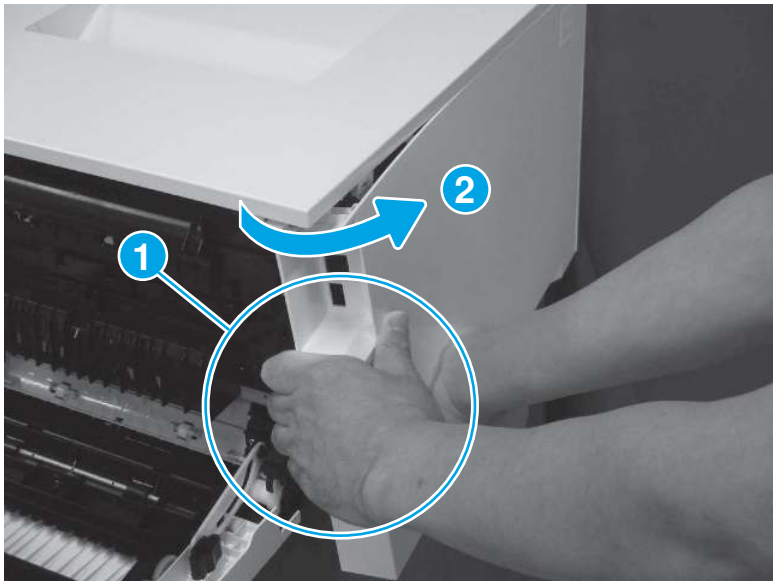Figure 4-649 Disengage the cover corner



5. Remove the left cover (callout 1).

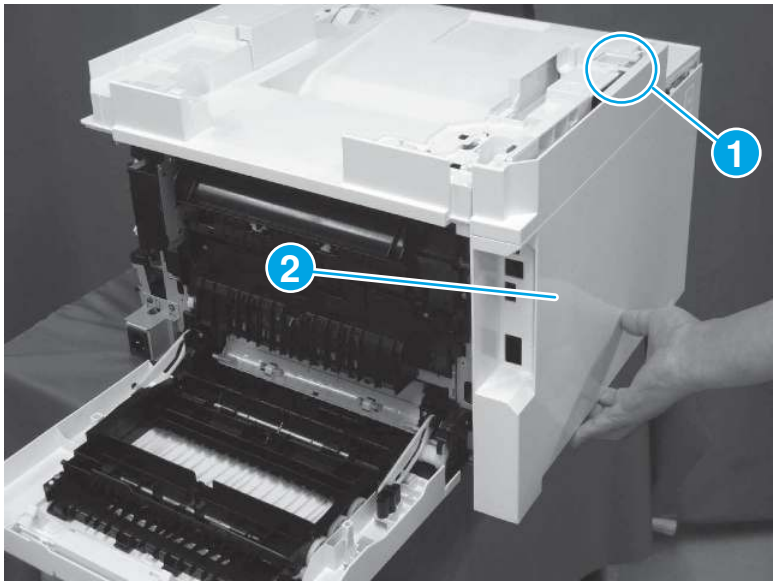Figure 4-650 **Remove the cover**



2. Remove the left cover (MFP)


Follow the procedure below to remove and replace the left cover (MFP).

NOTE: The following procedure is for an MFP printer only. If this assembly is being removed to gain access to dependency parts for a SFP printer, skip this step.

TIP: There might be a small cover installed on the USB port and/or the fax port located at the back of the printer. If installed, remove these covers now.


1. Remove one screw (callout 1).

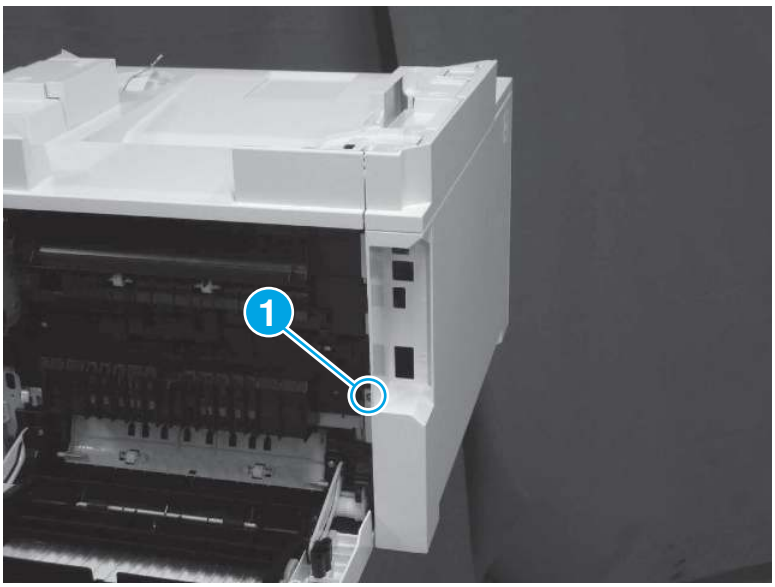Figure 4-651 **Remove one screw**




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

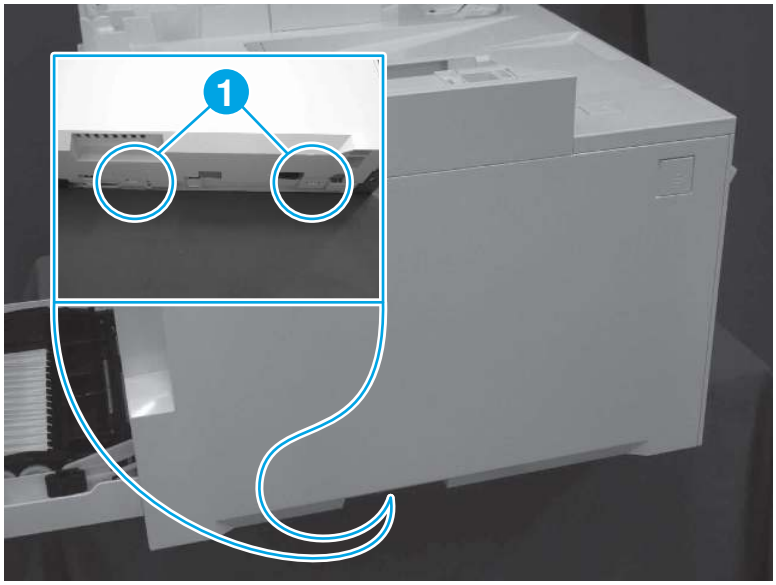Figure 4-652 Release two tabs




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

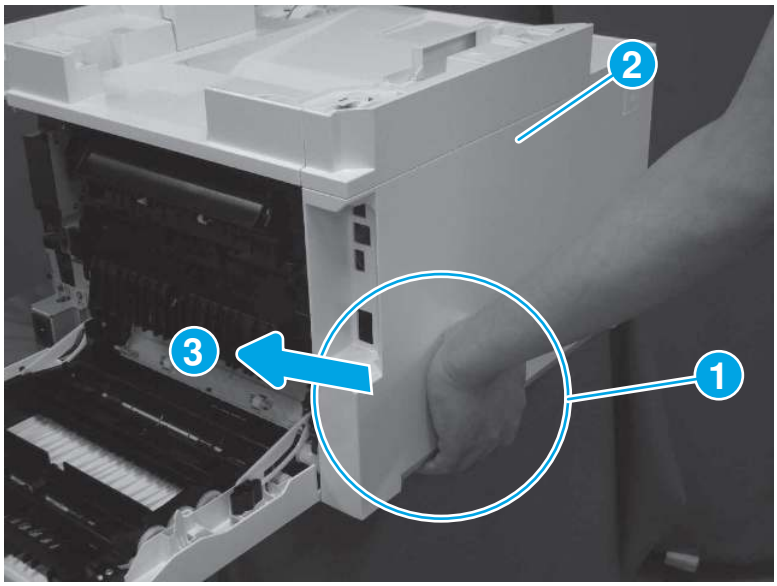Figure 4-653 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

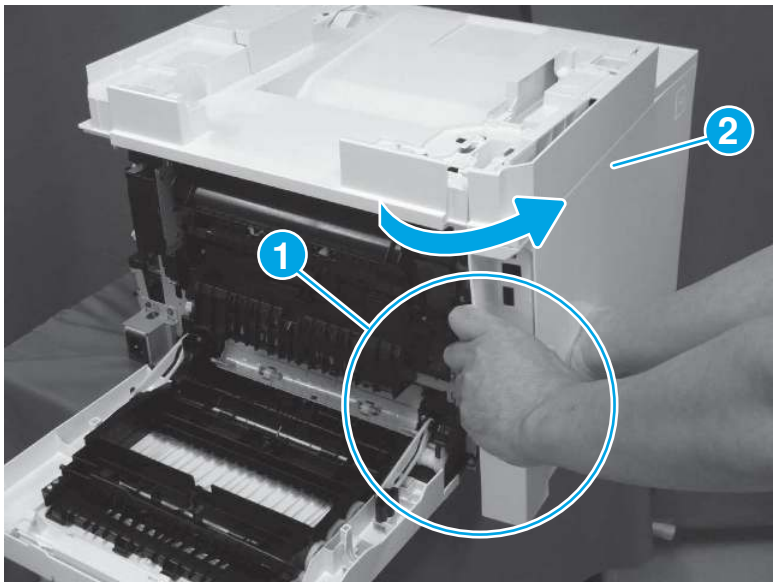Figure 4-654 Disengage the cover corner



5. Remove the left cover (callout 1).

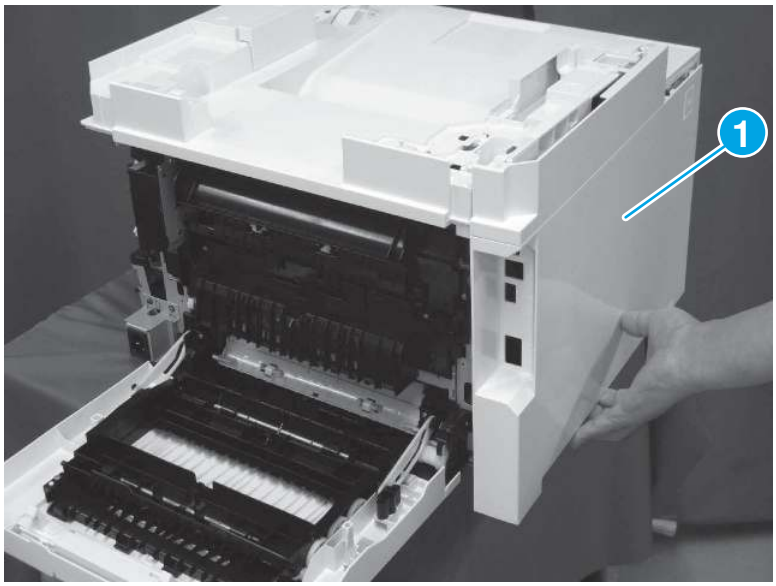Figure 4-655 Remove the cover



3. Remove the formatter PCA

Follow the procedure below to remove and replace the formatter PCA.

⚠ CAUTION: ESD sensitive part.

1. Disconnect all of the connectors on the formatter PCA.

Figure 4-656 **Disconnect all of the connectors (SFP/MFP)**




2. Remove three screws, and then remove the formatter PCA.

Reinstallation tip: If a replacement formatter is being installed, make sure to read and follow the special installation instructions in the topic (located immediately after the unpack and recycle step).

The formatter must be paired with the ECU/DCC to be functional.

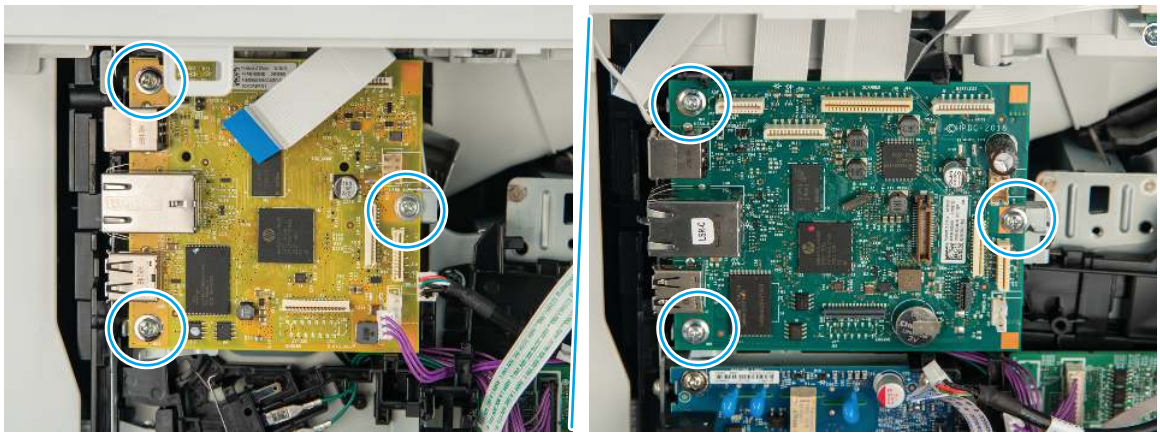Figure 4-657 **Remove the formatter PCA (SFP/MFP)**



4. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: 

Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.

5. HP Onsite Repair Application

This topic describes the steps to pair a formatter and DC controller (DCC) / Engine controller unit (ECU).

When a formatter or DCC/ECU is replaced a pairing operation must be completed to make the printer functional. Use the HP Onsite Repair Application (App) to complete this procedure.

CAUTION: Only install a new (unpaired) **Service Formatter PCA** or **Service DC controller (DCC) / Engine controller unit (ECU)** when a replacement PCA is required.

IMPORTANT: If both a formatter **and** DCC/ECU need to be replaced, they must be installed and paired sequentially (one at a time). Do not replace both PCAs at the same time. Always replace one PCA, perform the pairing operation, and then replace and pair the second PCA.

To use the HP Onsite Repair App, first review the following:

- Hardware requirements for using the HP Onsite Repair App
- Create an HP Onsite Repair App account or sign-in

Hardware requirements for using the HP Onsite Repair App

The repair application has the following hardware requirements:

- Android device (Android OS 7.1 or later)



- Internet access



- USB OTG cable

IMPORTANT: Make sure that the OTG cable connector fits the Android device USB connector.

  - Android device connector (Micro-USB or Type-C; callout 1)
  - Type-A USB printer cable connector (callout 2)



- Standard A-B USB printer cable



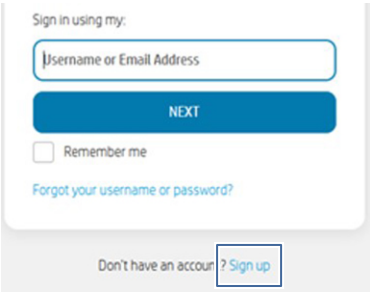
Create an HP Onsite Repair App account or sign-in

The HP Onsite Repair App requires an HPID account.

1. If you do not already have an HPID account, create one now.


NOTE: If you already have an HPID account, skip this step and go to **Step 2**.

a. Open the HP Onsite Repair App, and then select the Sign up item.




b. On the Sign up screen, type in the following account information:

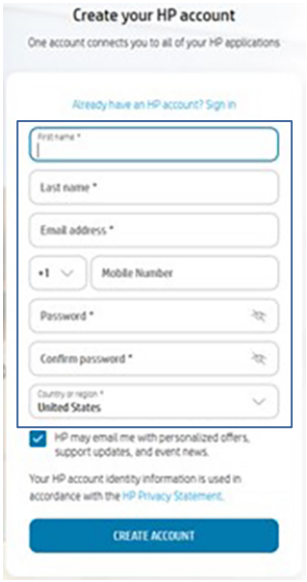- First and last name
- Email address (no need to per-register your email account)
- Mobile phone number
- Password and password confirmation
- Change the default country or region if necessary




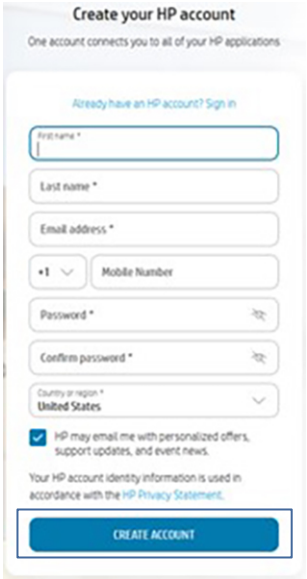c. Select the CREATE ACCOUNT button to create the user account.



2. Open the HP Onsite Repair App, and then do the following:

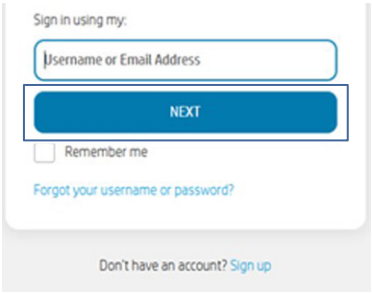   a. At the sign-in screen, enter your user-name or email address, and then select the NEXT button.



   b. From the HP Onsite Repair App operations screen, you can begin the formatter and DCC/ECU pairing process.

      The app can only perform a formatter and DCC/ECU pairing operation. There is no need for disassociating the printer from the HP account as the customer receives the same printer back after servicing.

IMPORTANT: If the printer was previously setup and claimed on the HP portal (on-boarded), a printer user or administrator must complete the on-boarding process again. Previous on-board information is not retained when using the HP Onsite Repair App to pair a formatter and DCC/ECU.

On-boarding is optional and only needed if the printer was previously on-boarded.



Step 1 - HP Onsite Repair App: Pairing type identification

Follow these steps to identify the type of formatter and DCC / ECU pairing required.

⚠ CAUTION: Only install a new (unpaired) **Service Formatter PCA** or **Service DC controller (DCC) / Engine controller unit (ECU)** when a replacement PCA is required.

For a replacement assembly, do not install a previously used (paired) PCA.

1. Use the instructions in the printer *Service Manual* to remove and replace either the formatter or DCC/ECU.

IMPORTANT: If both a formatter **and** DCC/ECU need to be replaced, they must be installed and paired sequentially (one at a time). Do not replace both PCAs at the same time. Always replace one PCA, perform the pairing operation, and then replace and pair the second PCA.

2. Do one of the following:

- **Formatter replacement**

  a. The message Initializing, a Language prompt, or hpsmart.com/setup appears on the control-panel display.

  NOTE: If an error message appears, make sure that the replacement formatter is an unused brand-new **Service Formatter PCA**.

  Do not install replacement previously used PCAs (paired) in this printer.

  b. Go to *Step 2 - HP Onsite Repair APP: Prepare a formatter for pairing*.

- **DCC/ECU replacement**

  a. The message Ready appears on the control-panel display. However, the repair process is **not** complete.

  NOTE: If an error message appears, make sure that the replacement DCC/ECU is an unused brand-new **Service DC controller (DCC) / Engine controller unit (ECU)**.

Do not install replacement previously used PCAs (paired) in this printer.

b. Go to ***Step 3 - HP Onsite Repair App: Pairing operation***.

Step 2 - HP Onsite Repair App: Prepare a formatter for pairing

Follow these steps to prepare a formatter for pairing.

IMPORTANT: If both a formatter **and** DCC/ECU need to be replaced, they must be installed and paired sequentially (one at a time). Do not replace both PCAs at the same time. Always replace one PCA, perform the pairing operation, and then replace and pair the second PCA.

NOTE: If a formatter is **not** being paired, skip this step. Go to ***Step 3 - HP Onsite App: Pairing operation***.

When a replacement formatter is installed, the printer serial number must be configured on the formatter before pairing.

Use the control panel to access the Service Menu > System Configuration > Serial Number menus.

NOTE: Detailed instructions are provided below.

Use the printer serial number found on a label adhered to the printer.

1. Configure the printer serial number on the replacement formatter:
   a. Turn the printer power on. When prompted, select a Language setting.
   b. Select a Country/Region setting.
   c. When the **Connection Method** screen appears, select the USB/Connect Later option.
   d. A warning message appears on the control-panel display describing the benefits of connecting to a network or the internet.

      At the bottom of the screen, select the Skip Connecting option.
   e. When the Date and Time menu appears, set the date and time.

      NOTE: If needed, select the Continue option.
   f. When the message **Thank you for choosing HP!** appears, select the Continue option.
   g. From the Home screen, open the following menus:
      - Menu
      - Tools
      - Service

      To access the Service menu, enter the default service personal identification number (PIN): **12345678**, and then select the Sign In item.

      IMPORTANT: The default PIN for all service formatters is **12345678**.
   h. Open the System Configuration sub menu.
   i. Select the Serial Number field, and then click the **back arrow** or **X** (touchscreen MFP models) to delete the default serial number.

j. Enter the serial number found on a label inside the printer front door.

NOTE: If the Service ID is known, enter it into the Service ID field now.

k. Exit the menus, turn the printer power off, and then turn it on again.

2. When initialized, the printer is ready for the pairing operation. Go to ***Step 3 - HP Onsite Repair App: Pairing operation***.

Step 3 - HP Onsite Repair App: Pairing operation


Follow these steps to complete the pairing operation.

IMPORTANT: If both a formatter **and** DCC/ECU need to be replaced, they must be installed and paired sequentially (one at a time). Do not replace both PCAs at the same time. Always replace one PCA, perform the pairing operation, and then replace and pair the second PCA.

1. Use a USB OTG cable (Micro-USB or Type-C) and a standard A-B USB cable to connect an Android device to the printer.

NOTE: Verify that the Android device is connected to the internet.

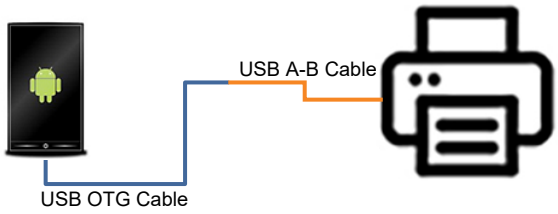
Figure 4-658 Android to printer connection



2. Open and log into the HP Onsite Repair App, and then select the **Re-pair (Authorized Parts Replacement)** button.

NOTE: For more information about logging into the app, or how to create a new account, see ***Create an HP Onsite Repair App account or sign-in***.

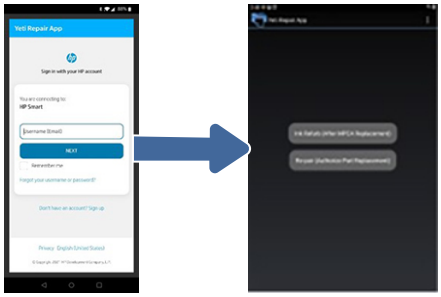
Figure 4-659 Log in and select Re-pair



3. Select the **OK** button to confirm the Android device is connected to the printer, and then select the **OK** button to continue the operation.

NOTE: Make sure that the Android device is correctly connected to the printer using the OTG and A-B USB cables.

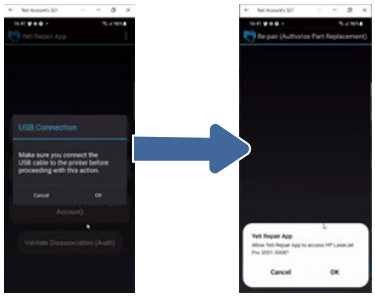
Figure 4-660 Select OK to confirm and continue



4. Select the **OK** button to confirm the displayed printer serial number, and then select the **OK** button to retrieve the printer *Fingerprint*.


NOTE: Make sure that the displayed serial number matches the serial number printed on the label adhered to the printer.

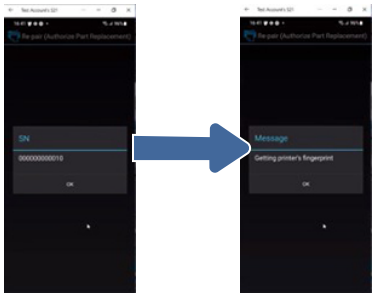Figure 4-661 Select OK to accept the printer serial number and Fingerprint




5. Select the **OK** button to send a Repair Authorization Request to the HP Stratus Cloud on the internet and retrieve the printer *Persona*.

Figure 4-662 Select OK to retrieve the printer Persona



6. Select the **OK** button to retrieve the printer *Fingerprint*.

Figure 4-663 Select OK to retrieve the printer Fingerprint




7. The message **The repair transaction was completed successfully** appears when the formatter and DCC/ECU pairing operation is complete. Select the **OK** button to send a Repair Acknowledgment Request to the HP Stratus Cloud on the internet.

IMPORTANT: If the printer was previously setup and claimed on the HP portal (on-boarded), a printer user or administrator must complete the on-boarding process again. Previous on-board information is not retained when using the HP Onsite Repair App to pair a formatter and DCC/ECU.

On-boarding is optional and only needed if the printer was previously on-boarded.

Figure 4-664 **Select OK to acknowledge the pairing**



Removal and replacement: Interlock holder assembly

Learn about interlock holder assembly removal.

Mean time to repair: 60 minutes

Service level: Difficult

Before performing service

Turn the printer power off

- Disconnect the power cable.

WARNING! To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-42 **Part information**

Part number	Part description
RM2-2759-000CN	Interlock holder assembly

Required tools

- #2 Phillips screwdriver with a magnetic tip and a 152 mm (6 in) shaft length

After performing service

Turn the printer power on

- Connect the power cable.

- Use the power switch to turn the power on.

Post service test

Print any pages necessary to make sure the printer is functioning correctly.

1. Remove the left cover (SFP)


Follow the procedure below to remove and replace the left cover (SFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.

TIP: There might be a small cover installed on the USB port located at the back of the printer. If installed, remove this cover now.


1. Remove one screw (callout 1).

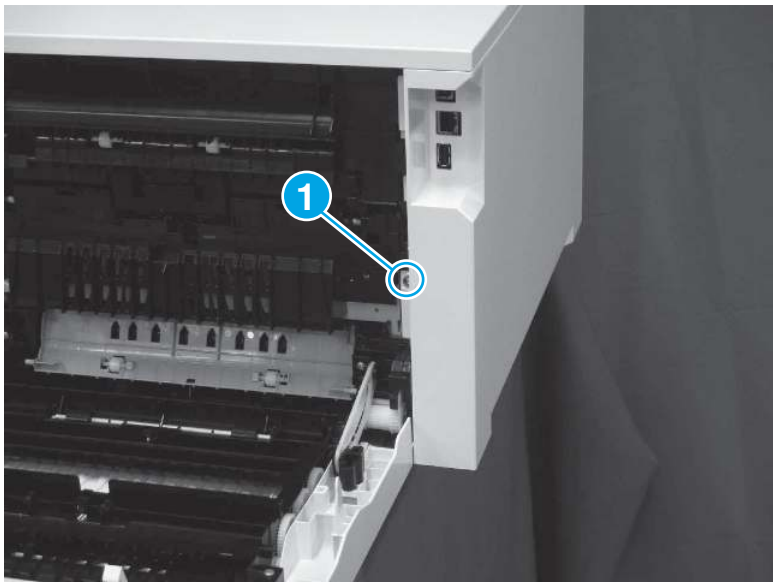Figure 4-665 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

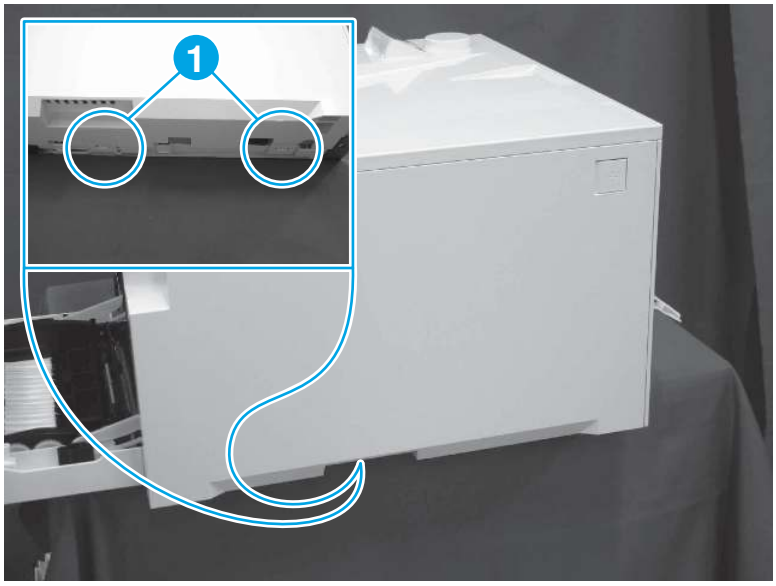Figure 4-666 Release two tabs




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

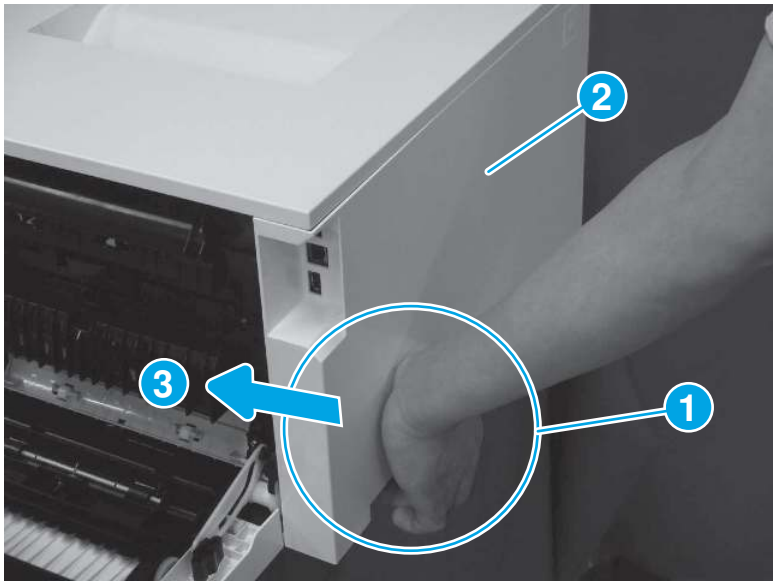Figure 4-667 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

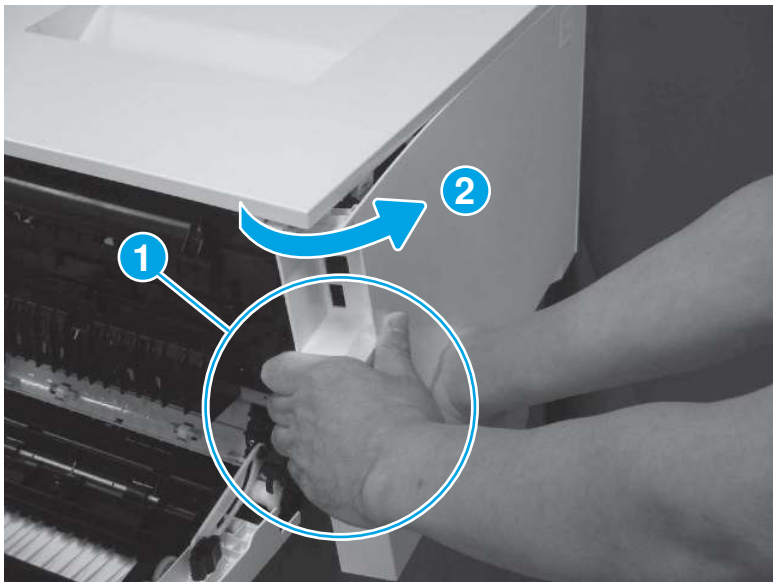Figure 4-668 Disengage the cover corner



5. Remove the left cover (callout 1).

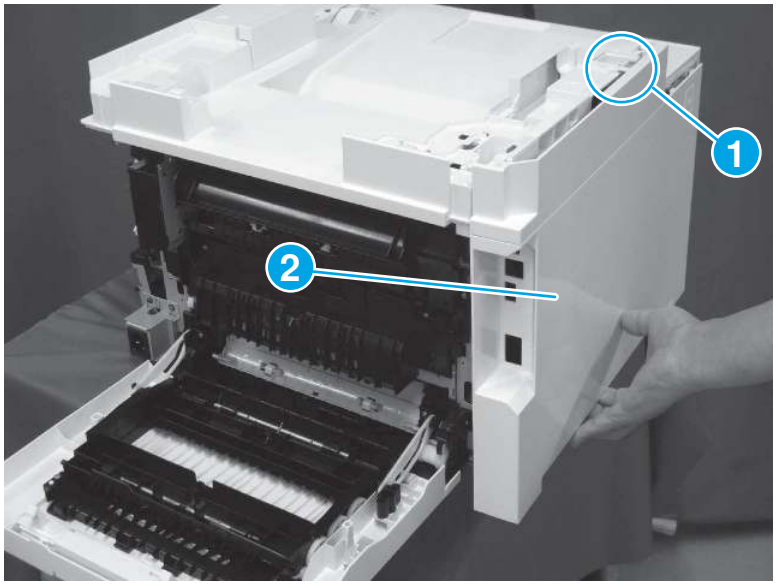Figure 4-669 Remove the cover



2. Remove the left cover (MFP)


Follow the procedure below to remove and replace the left cover (MFP).

NOTE: The following procedure is for an MFP printer only. If this assembly is being removed to gain access to dependency parts for a SFP printer, skip this step.

TIP: There might be a small cover installed on the USB port and/or the fax port located at the back of the printer. If installed, remove these covers now.


1. Remove one screw (callout 1).

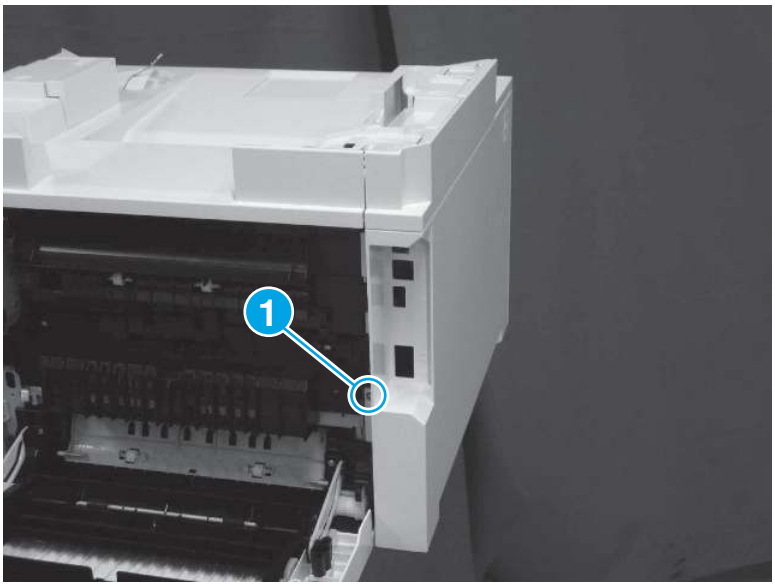Figure 4-670 **Remove one screw**




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

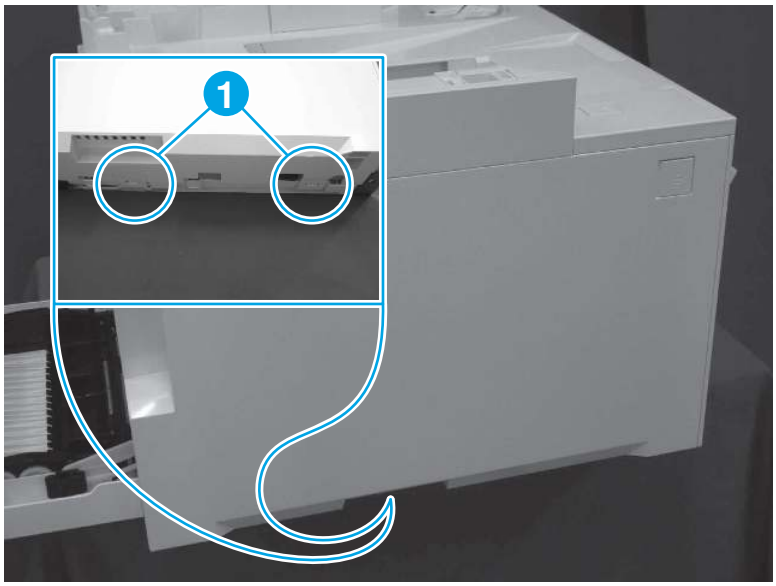Figure 4-671 **Release two tabs**




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

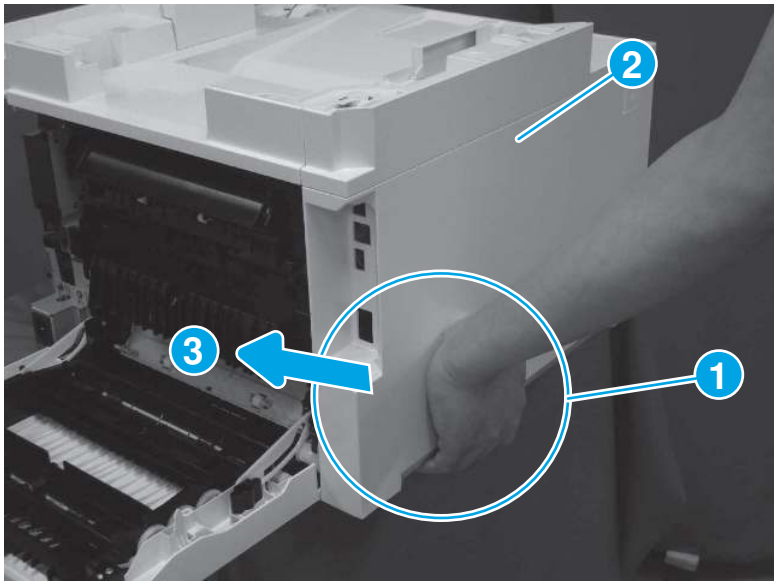Figure 4-672 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

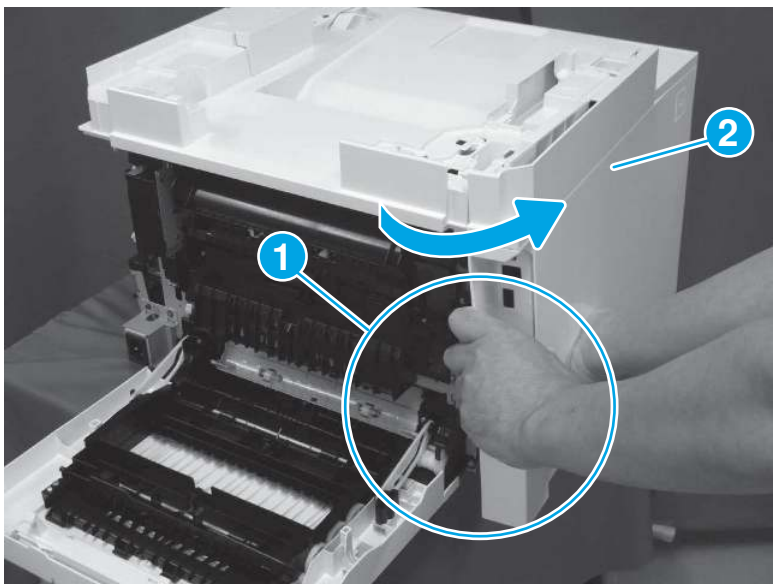Figure 4-673 Disengage the cover corner



5. Remove the left cover (callout 1).

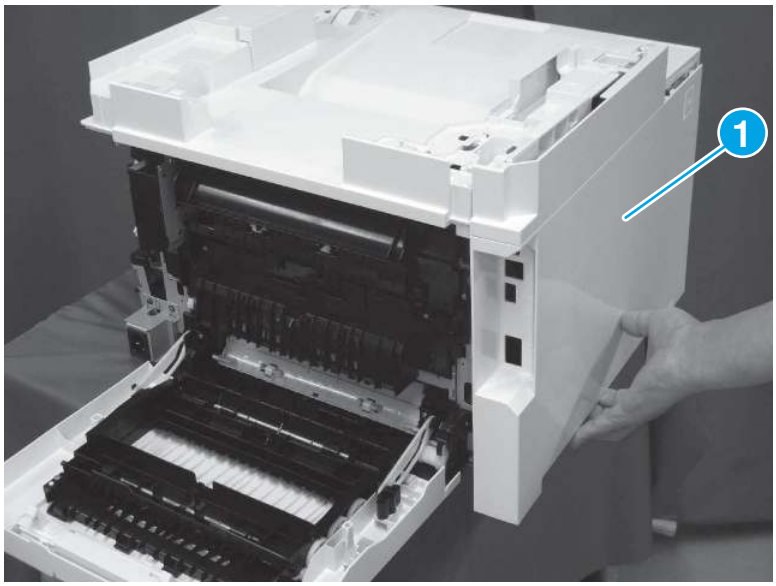Figure 4-674 **Remove the cover**




3. Remove the Fax PCA and bracket (MFP)

Follow the procedure below to remove the fax PCA and bracket(MFP)

1. Disconnect one FCC connector (callout 1), remove three screws (callout 2), and then remove the fax PCA.

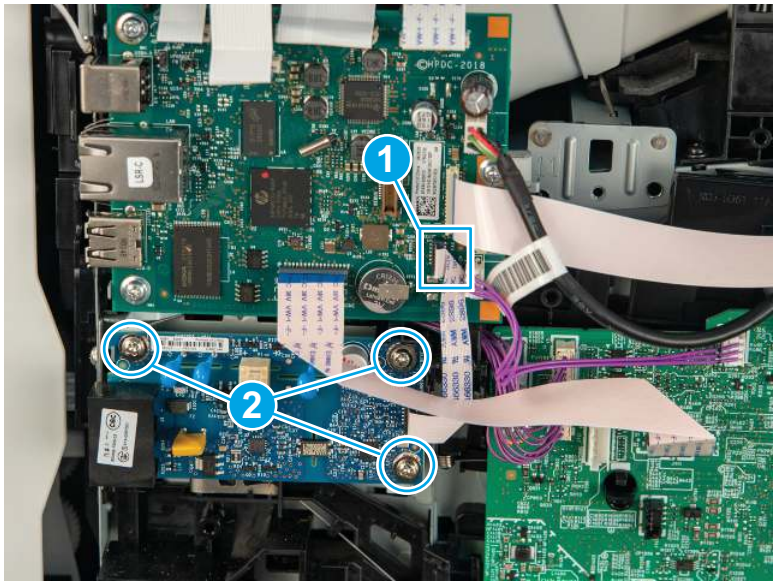
Figure 4-675 **Remove the fax PCA**



2. Remove three screws (callout 1), and then remove the fax sheet-metal mounting bracket.

TIP: For better access to one of the screws, loosen (but do not remove) one screw (not shown) to allow the black plastic bracket (callout 2) to move out of the way.

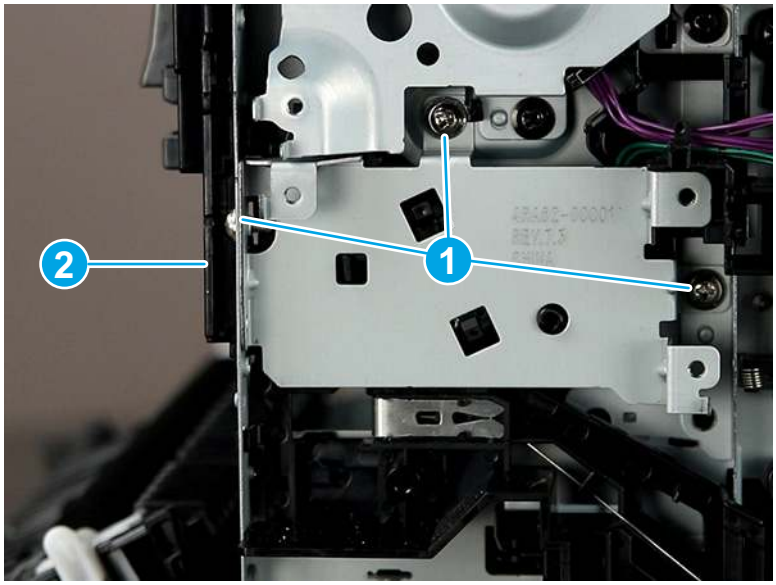Figure 4-676 Remove the bracket



4. Remove the ISA (MFP)

Follow the procedure below to remove and replace the ISA.


1. Open the ISA, and then remove the ISA FFC cover (callout 1).

Figure 4-677 Remove the FFC cover



2. Disconnect three FFCs, and then remove one screw to release the ground cable.

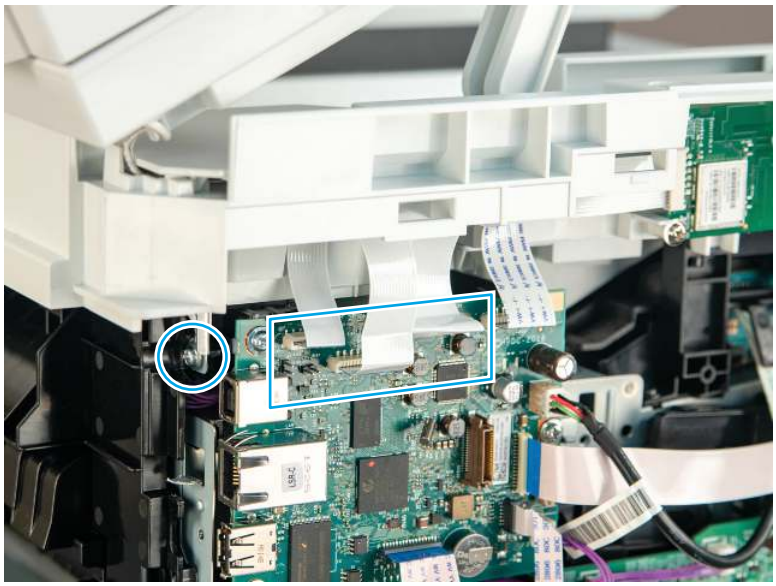Figure 4-678 Disconnect FFCs and remove screw



3. Release one tab (callout 1), and then rotate the ISA slider pin (callout 2) towards the front of the printer to release it. Remove the slider pin.


⚠ CAUTION: When the slider pin is removed, the ISA is not captive and can suddenly detach from the printer.

Figure 4-679 Remove the slider pin




4. Support the ISA, release the FFCs from the retainers, and then carefully pass the FFCs and the ground wire up through the slots in the top cover.

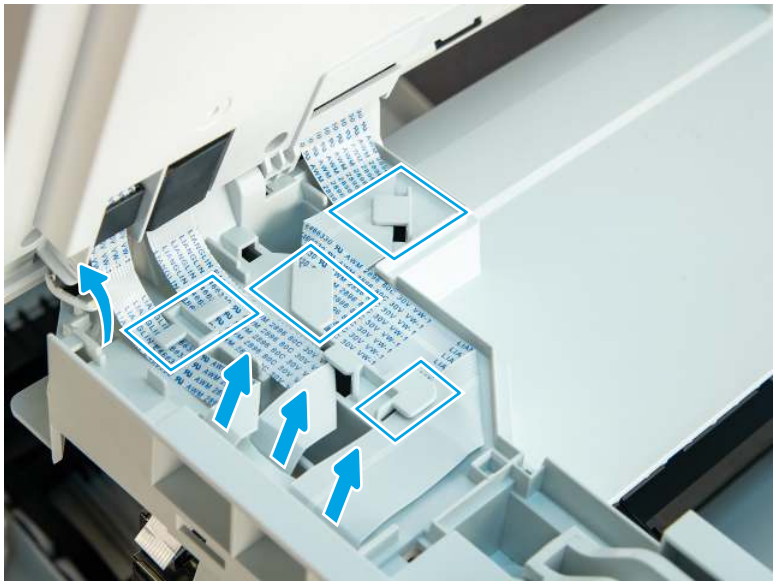Figure 4-680 Release the FFCs and ground wire



5. Slide ISA as shown below to release it.

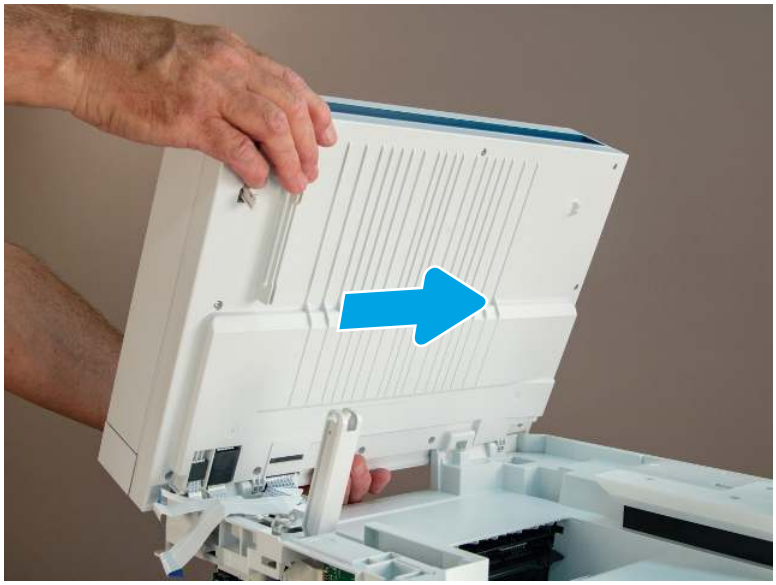Figure 4-681 Release the ISA



6. Remove the ISA.

Figure 4-682 **Remove the ISA**




5. Remove the engine controller PCA

Follow the procedure below to remove and replace the engine controller PCA (ECU).

⚠ CAUTION: ESD sensitive part.

1. Before proceeding, take note that there is an environmental sensor mounted on the engine controller PCA. **Do not** apply pressure to this sensor to avoid damaging it.

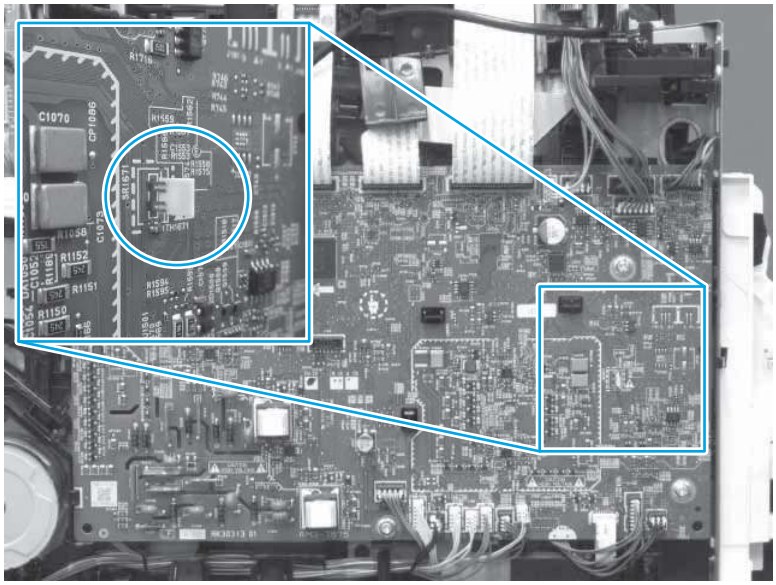Figure 4-683 **Engine controller environmental sensor location**




2. Disconnect all of the connectors on the engine controller PCA, and then remove four screws (callout 1).

⚠ **CAUTION:** Before proceeding take note of the media width sensors connectors and wire harnesses at ECU PCA locations J163 (media width sensor 2; yellow wire harness) and J165 (media width sensor 1; red wire harness). These connectors and wire harness are interchangeable. The PCA is embossed with **YELLOW** (connector J163) and **RED** (connector J165).

Make sure that the correct wire harness is plugged into the appropriate connector to avoid unexpected printer operation.

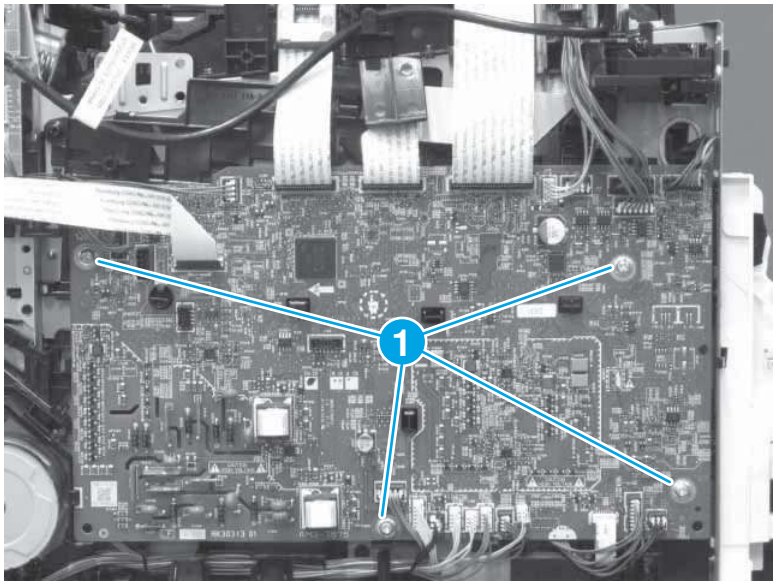Figure 4-684 **Disconnect connectors and remove screws**




3. Release four tabs (callout 1), and then remove the engine controller PCA (callout 2).

⚠ **CAUTION:** There are three clear plastic light guides installed in the PCB holder behind the PCA that are not captive. Do not lose these parts when the PCA is removed.

Reinstallation tip: If a replacement formatter is being installed, **make sure** to read and follow the special installation instructions in the topic (located immediately after the unpack and recycle step).

The ECU/DCC must be paired with the formatter to be functional.

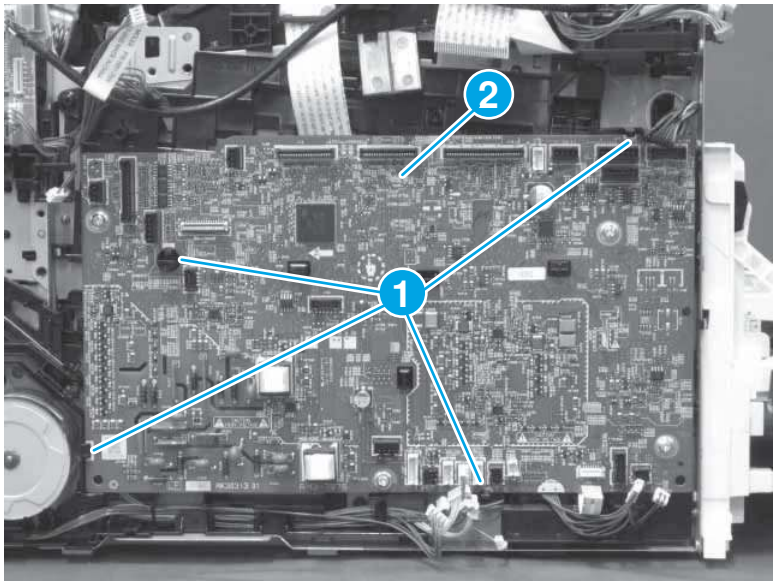Figure 4-685 Remove the engine controller PCA




6. Remove the right cover (SFP)

Follow the procedure below to remove and replace the right cover (SFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.


1. Remove one screw (callout 1).

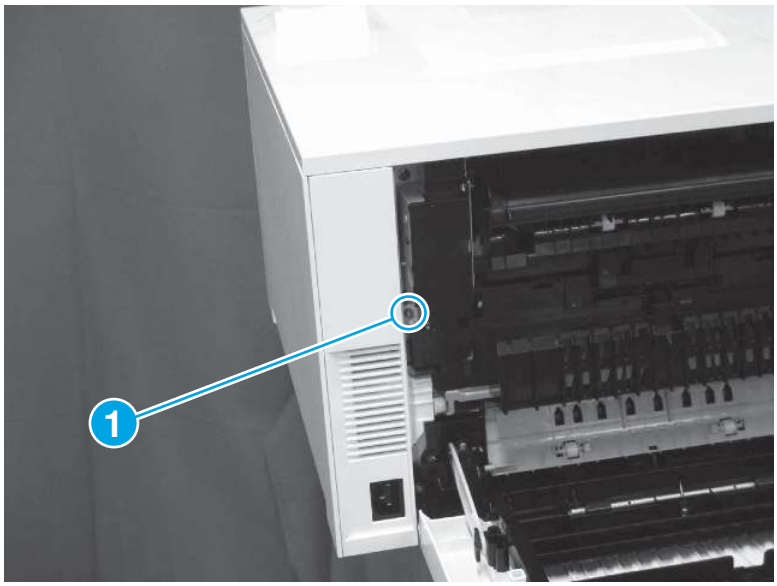Figure 4-686 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to three tabs (callout 1). Release three tabs.

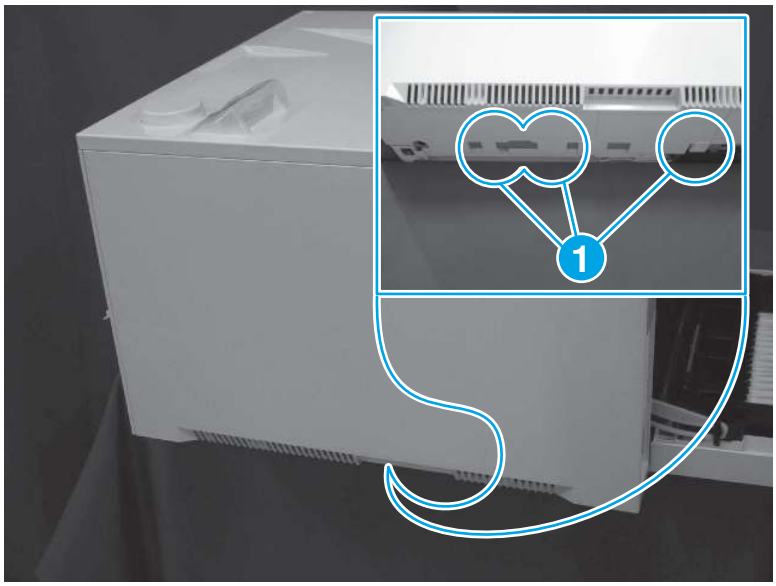Figure 4-687 Release three tabs




3. Press in on the side (callout 1) of the right cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

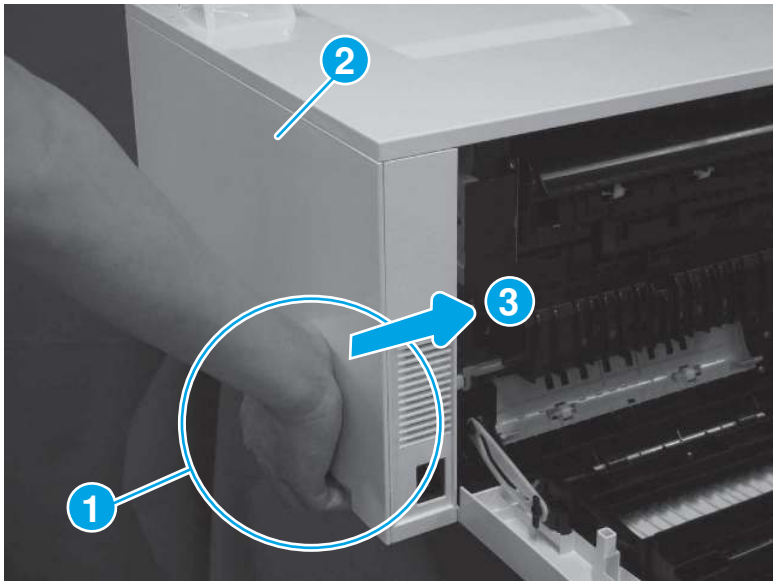Figure 4-688 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

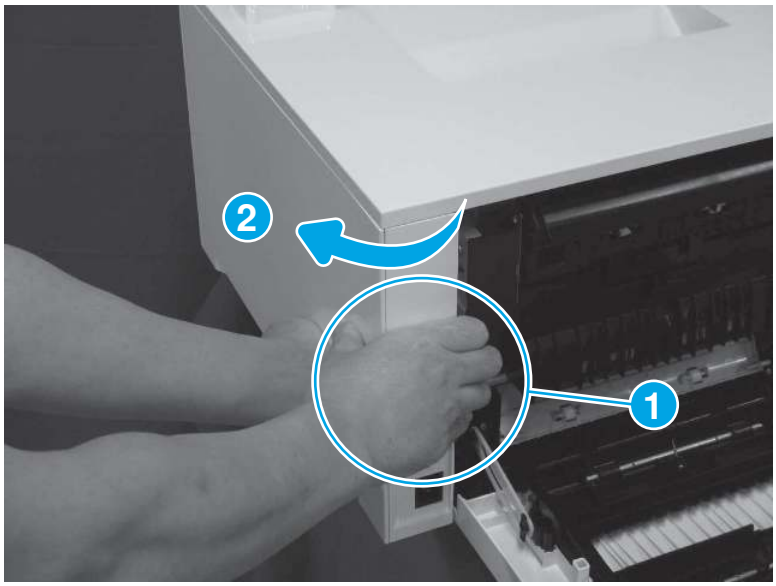Figure 4-689 Disengage the cover corner



5. Remove the right cover (callout 1).

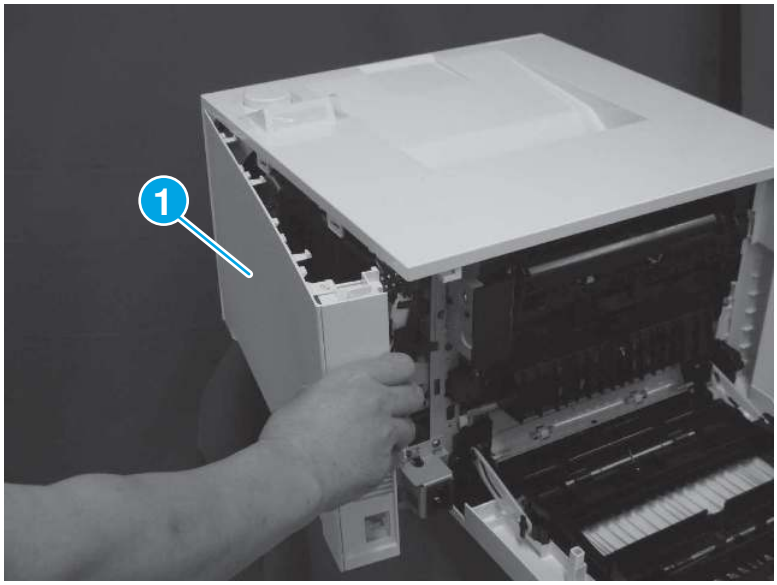Figure 4-690 Remove the cover




7. Remove the right cover (MFP)

Follow the procedure below to remove and replace the right cover (MFP).

NOTE: The following procedure is for an MFP printer only. If this assembly is being removed to gain access to dependency parts for a SFP printer, skip this step.


1. Remove one screw (callout 1).

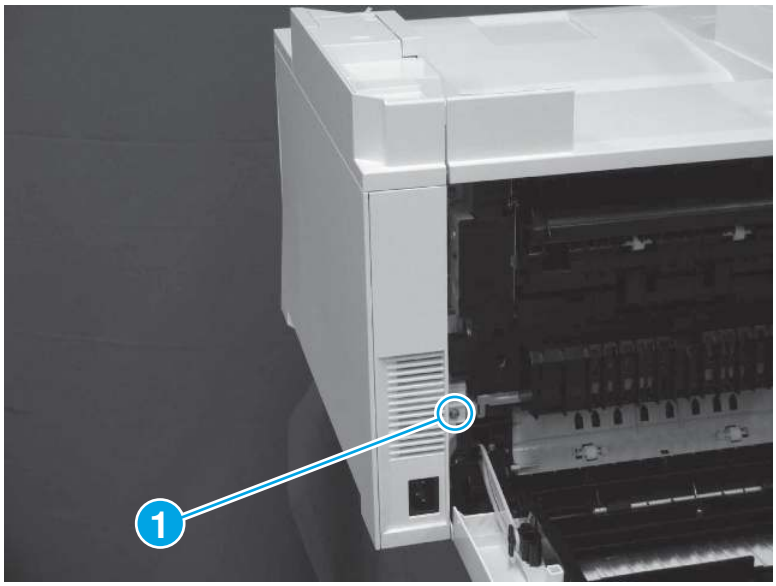Figure 4-691 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to three tabs (callout 1). Release three tabs.

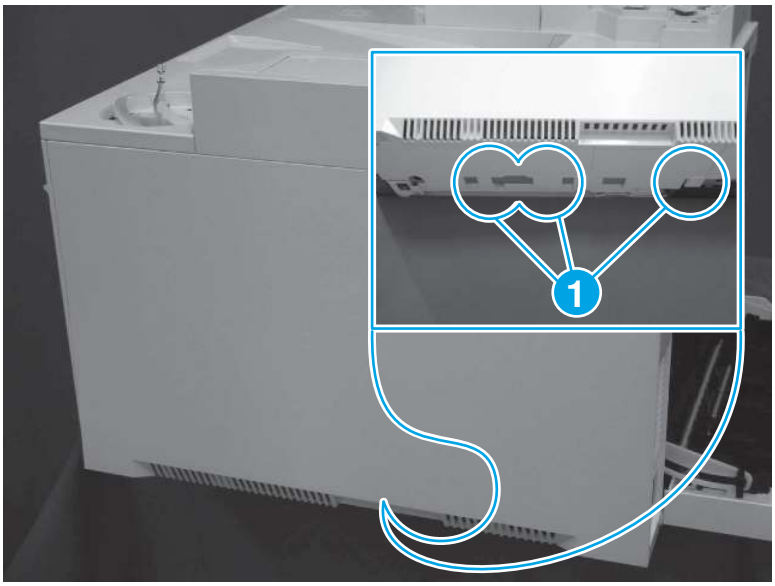Figure 4-692 Release three tabs




3. Press in on the side (callout 1) of the right cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

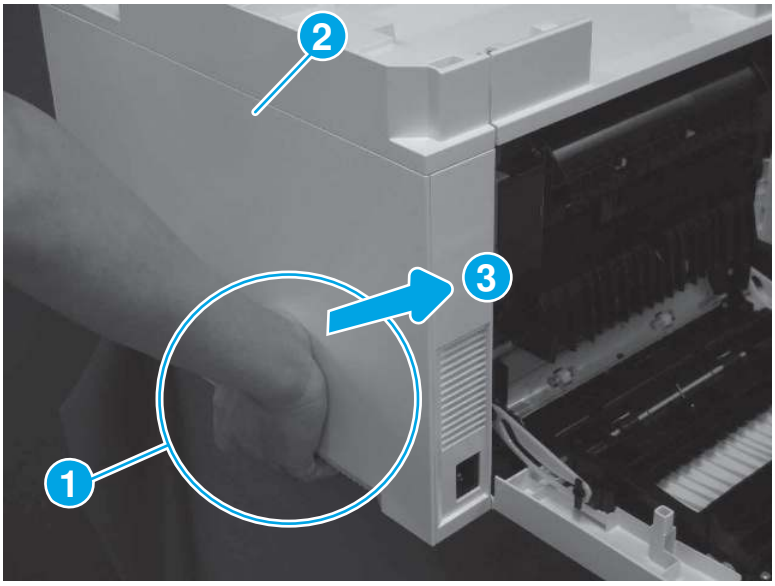Figure 4-693 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

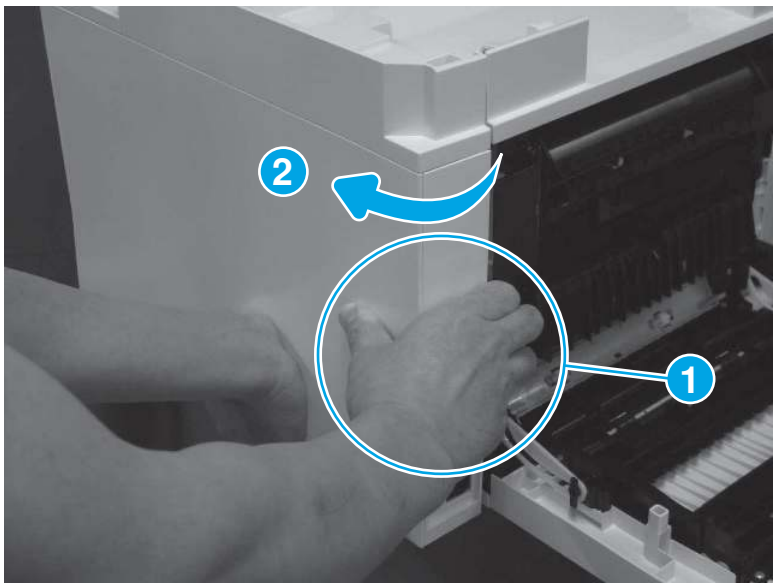Figure 4-694 Disengage the cover corner



5. Remove the right cover (callout 1).

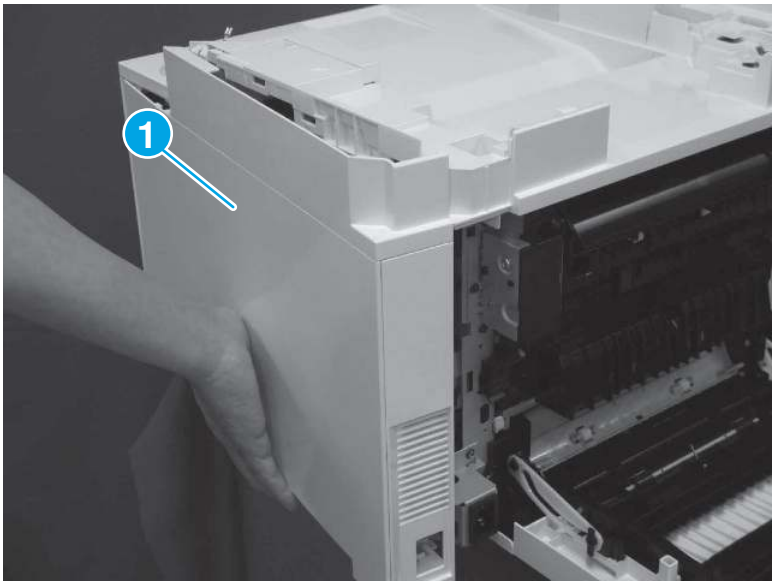Figure 4-695 **Remove the cover**



8. Remove the front cover


Follow the procedure below to remove and replace the front cover.

NOTE: Front cover removal is **identical** for both SFP and MFP models.

Reinstallation tip: Make sure to follow the special installation instructions for this part or step (located after the unpack and recycle or cleaning section).

1. Remove three screws (callout 1).

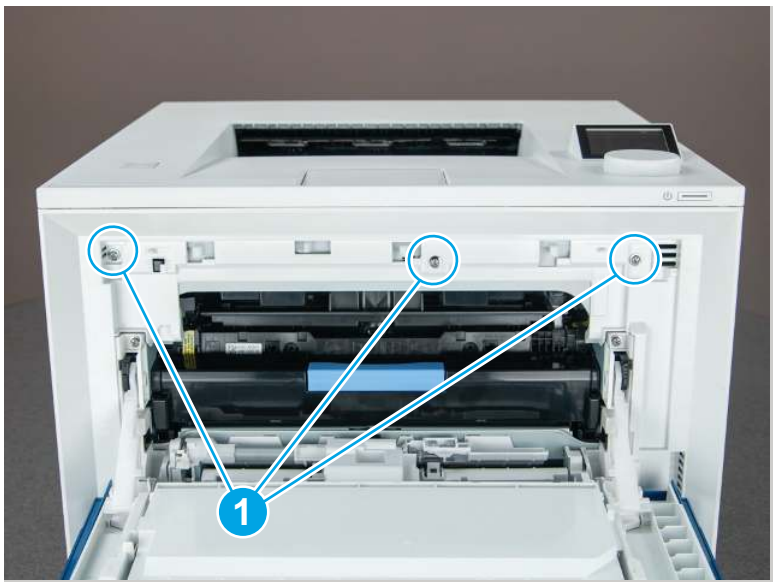
Figure 4-696 **Remove three screws**



2. Before proceeding, take note of the door release arm (callout 1). This arm can be easily dislodged when the cover is removed.


⚠ CAUTION: Do not lose the spring (callout 2) when removing the front cover.

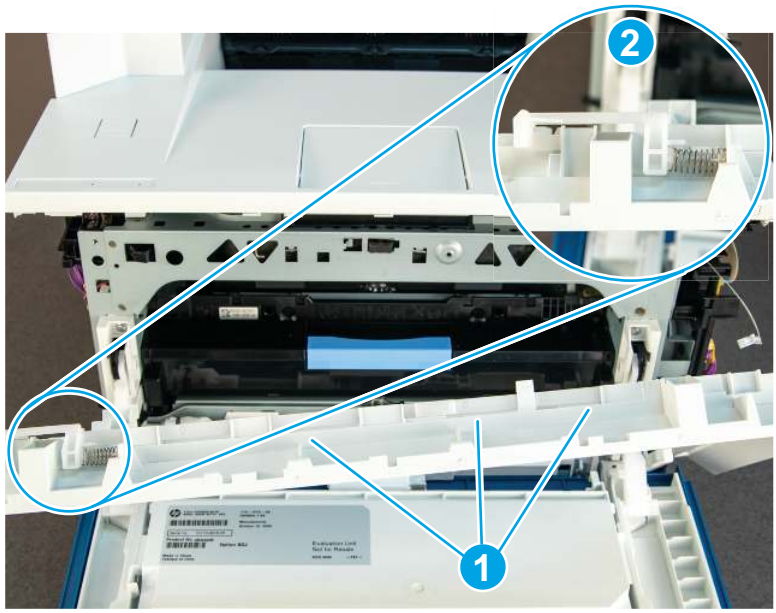Figure 4-697 Door release arm



3. Release four tabs (callout 1), and then remove the front cover (callout 2).

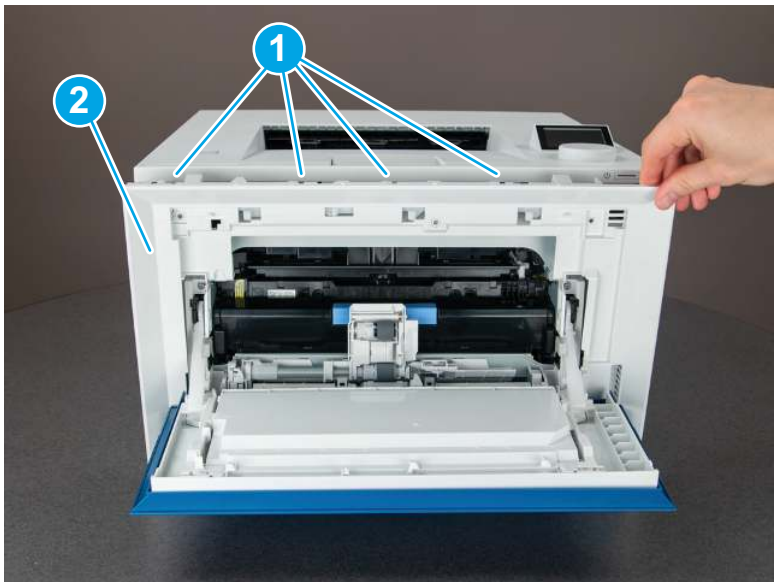Figure 4-698 Remove the cover



9. Remove the top cover (SFP)

Follow the procedure below to remove and replace the top cover (SFP).


NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.

1. **Wireless model only**: Raise and support the left side of the printer, remove one screw, and then separate the wireless PCA from the cover.

CAUTION: Do not attempt to completely remove the wireless PCA. Instead, gently move it out of the way.


TIP: To remove the screw without raising the printer, use a short-barrel screwdriver.

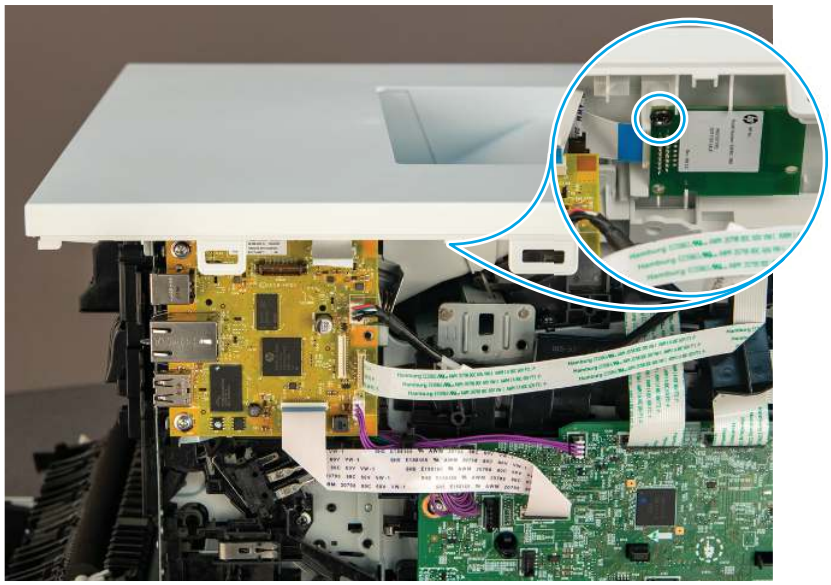Figure 4-699 Remove one screw



2. Disconnect one flat-flexible cable (FFC).

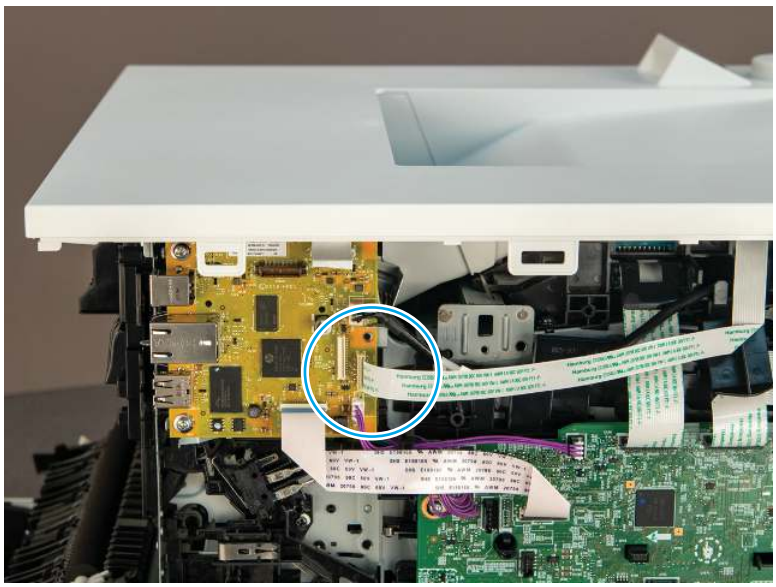Figure 4-700 Disconnect one FFC



3. Disconnect one FFC, and then remove one screw to release the ground wire.


NOTE: The front cover is shown installed in the figure below. However, this step is correct for removing the top cover.

Figure 4-701 Disconnect one FFC and remove one screw



4. Sliding the cover from the back of the printer towards the front to remove it.

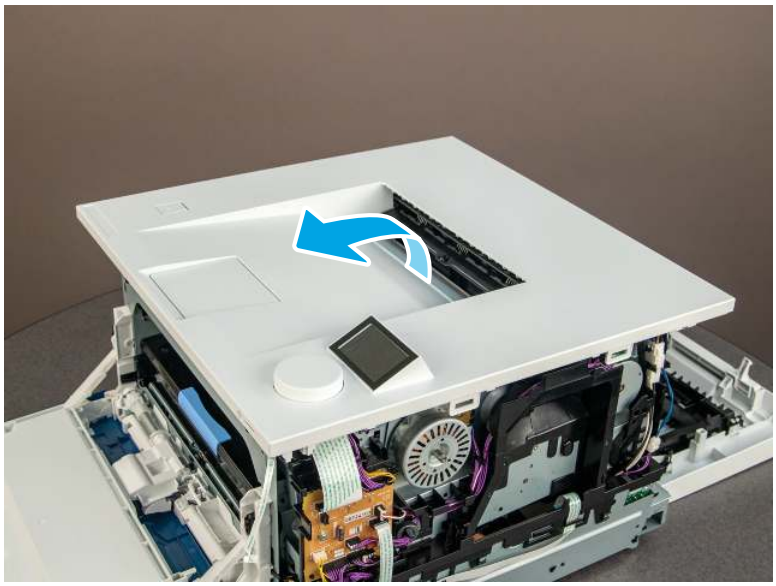Figure 4-702 Remove the cover




10. Remove the top cover (MFP)

Follow the procedure below to remove and replace the top cover (MFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.

1. Close the ISA lift arm.

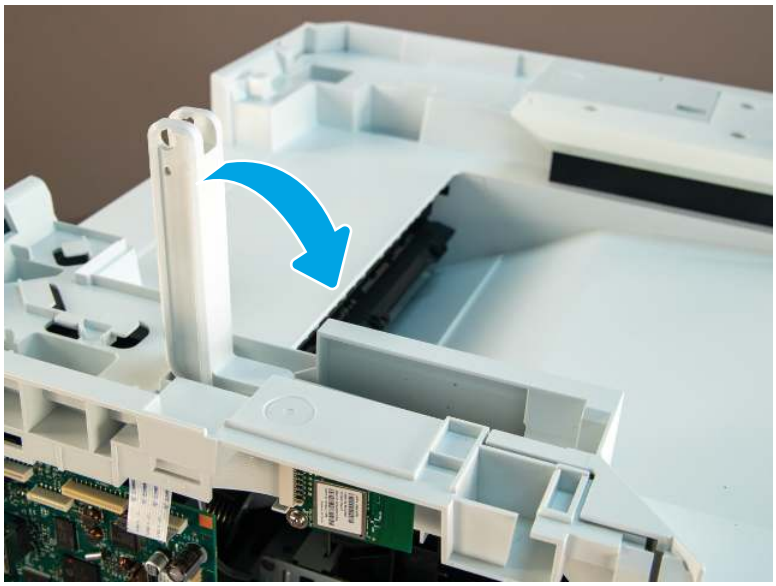
Figure 4-703 **Close the ISA lift arm**



2. Remove one screw.


⚠ **CAUTION:** The support arm is spring loaded and can unexpectedly spring into the open position. To avoid injury, do not place a finger in the screw well when the support arm is in the closed position.

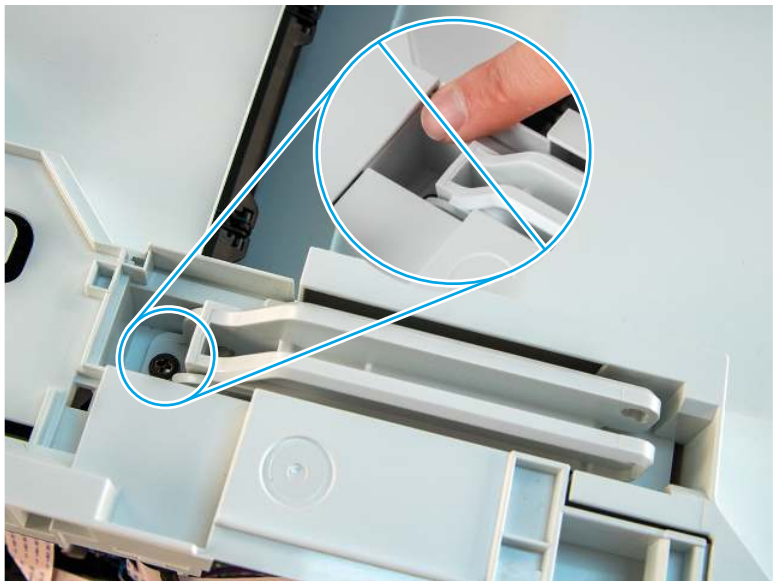Figure 4-704 **Remove one screw**



3. Rotate one end of the lift arm up (callout 1), and then slide the lift arm as shown below (callout 2) to release it. Remove the lift arm.

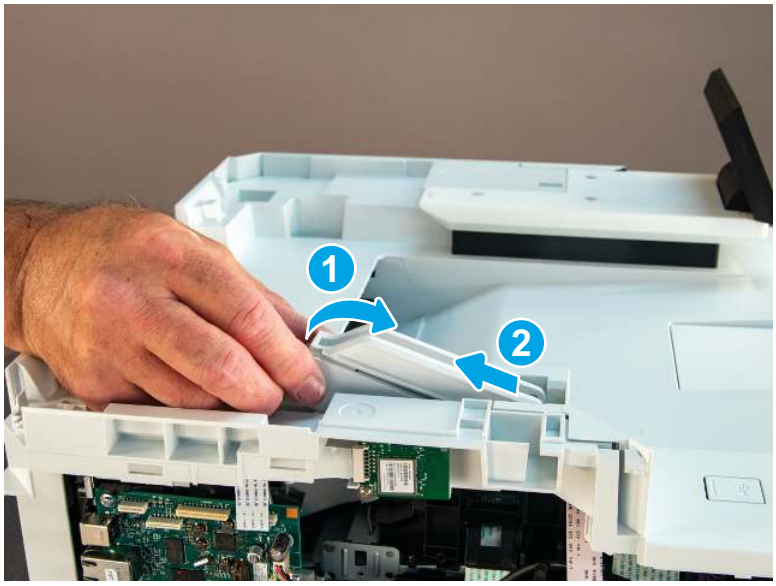Figure 4-705 Remove the lift arm




4. Do the following:

   a. Disconnect one FFC (control panel; callout 1).

   b. Remove one screw (callout 2), and then separate the wireless PCA from the top cover.


NOTE: The wireless PCA does not need to be completely removed. Instead, release the FFC from the retainer (callout 3), and then gently move it out of the way.

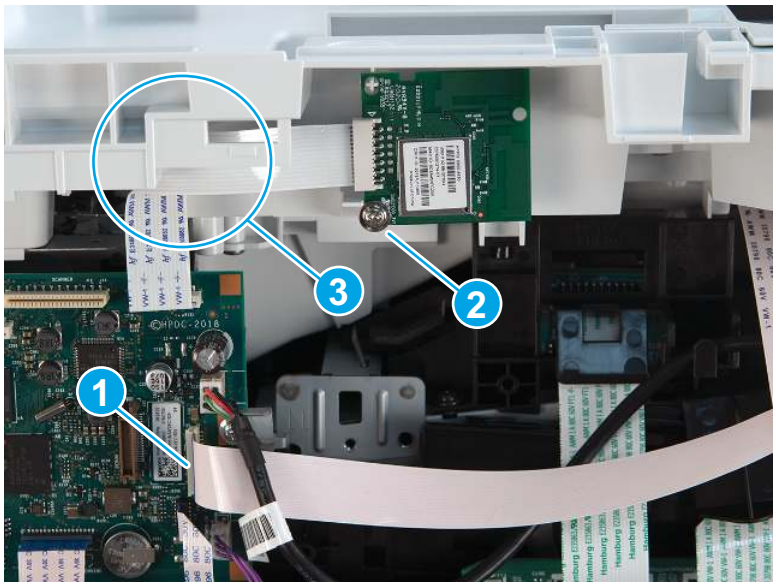Figure 4-706 Disconnect FFC and move the wireless PCA




5. Disconnect one FFC (power button), and then remove one screw (grounding sheet-metal plate).

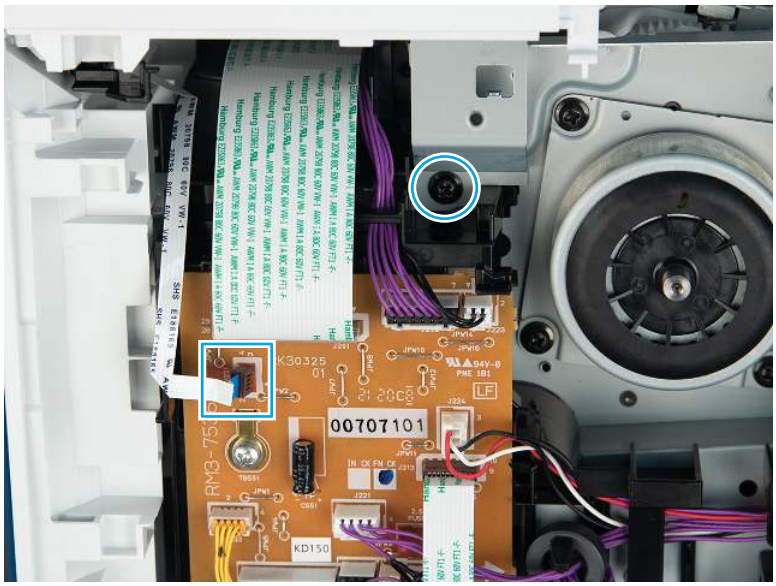Figure 4-707 Disconnect one FFC and remove one screw




6. Remove three screws.

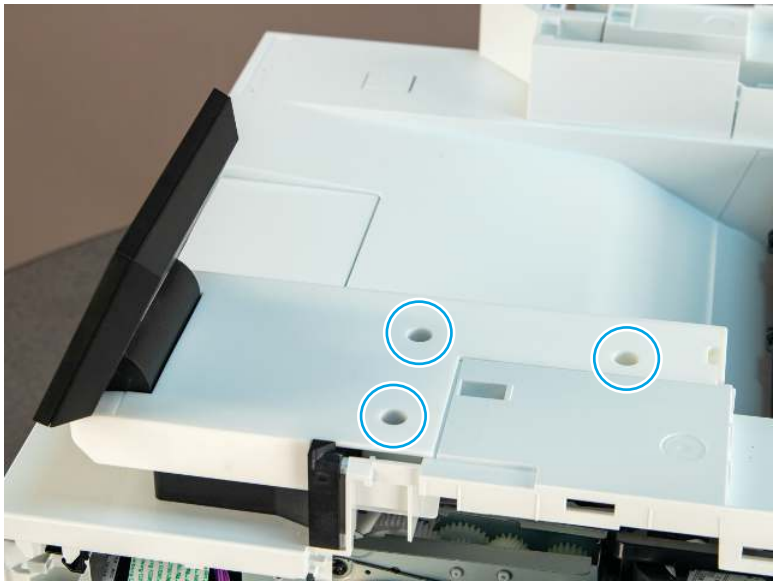Figure 4-708 Remove three screws



7. Release one tab and rotate one end of the base cover up (callout 1), and then slide the cover as shown (callout 2) to remove it.

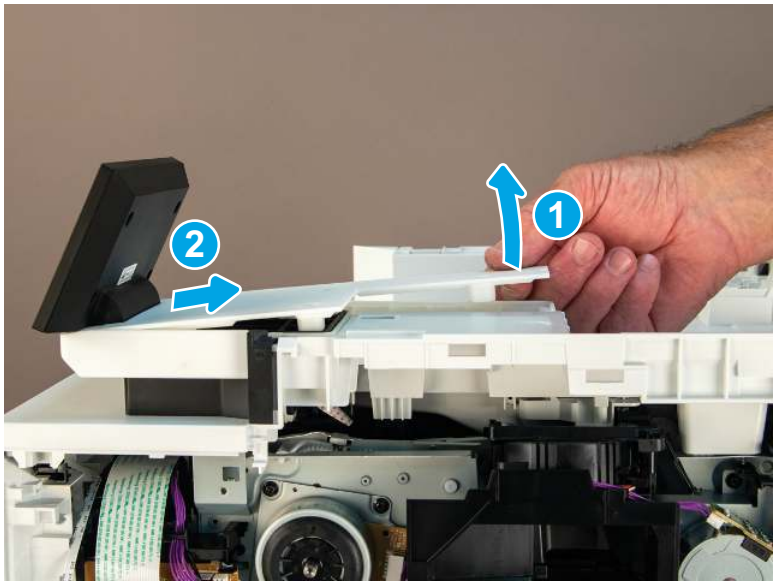Figure 4-709 Remove the cover



8. Disconnect two FFCs.

NOTE: Theses are zero-insertion force (ZIF) connectors. To remove the FFCs, first release the locking clip on the connector, and then pull the cable straight out of the connector.

TIP: For reinstallation, make sure that the line of the FFC is parallel with the body.

Figure 4-710 Disconnect two FFCs



9. Remove four screws.

NOTE: Two of the screws are self-tapping threads (black), and two of the screws are machine thread (silver).


Figure 4-711 Remove four screws



10. Lift the control panel and base straight up and off of the printer to remove them together.


NOTE: When handling the assembly, do not lose the ferrite (callout 1).

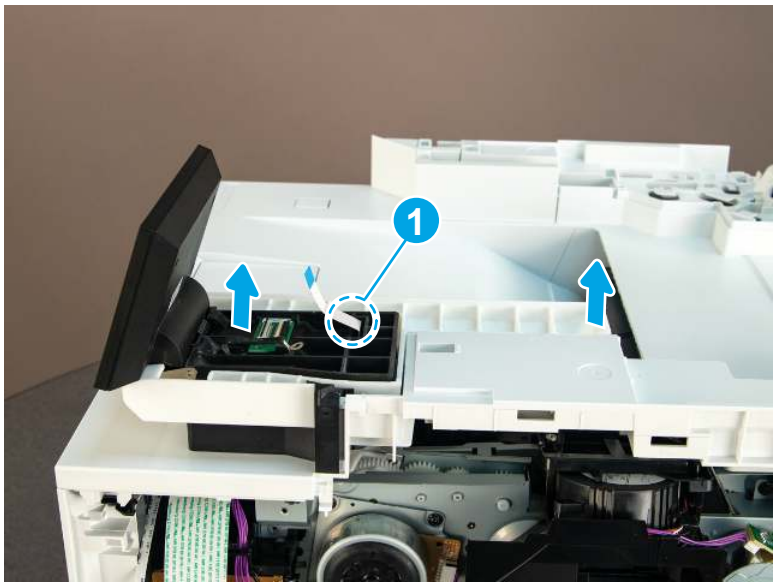Figure 4-712 Remove control panel and base



11. Remove three screws.

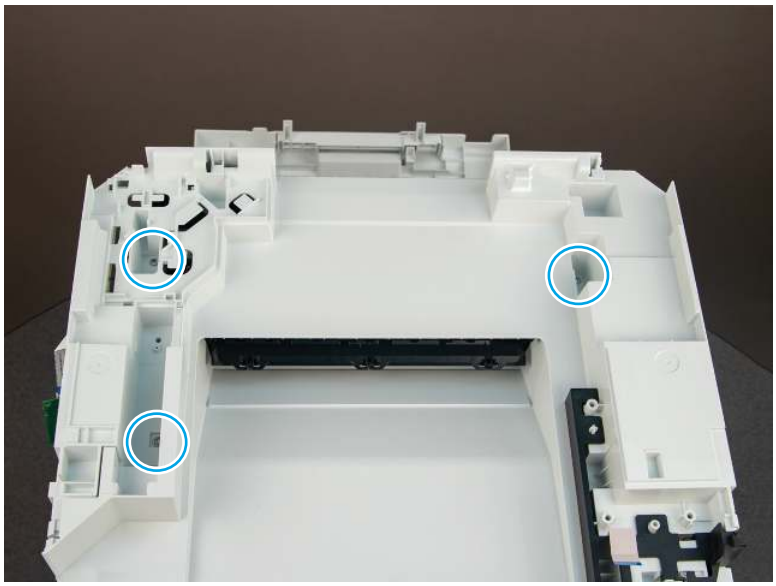
Figure 4-713 Remove three screws



12. Sliding the cover from the back of the printer to the front to remove it.

TIP: Slightly move the control-panel ground bracket (circled) back and forth to help release the top cover.

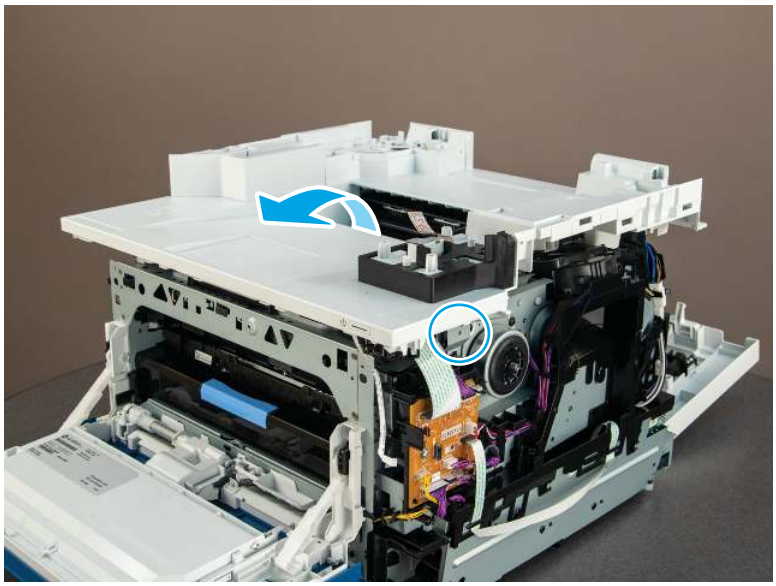Figure 4-714 Remove the cover



13. **When the cover is reinstalled**: Make sure that the front USB assembly is correctly positioned under the cover.

Figure 4-715 Front USB assembly



11. Remove the formatter PCA

Follow the procedure below to remove and replace the formatter PCA.

⚠ **CAUTION:** ESD sensitive part.

1. Disconnect all of the connectors on the formatter PCA.

Figure 4-716 Disconnect all of the connectors (SFP/MFP)




2. Remove three screws, and then remove the formatter PCA.

Reinstallation tip: If a replacement formatter is being installed, make sure to read and follow the special installation instructions in the topic (located immediately after the unpack and recycle step).

The formatter must be paired with the ECU/DCC to be functional.

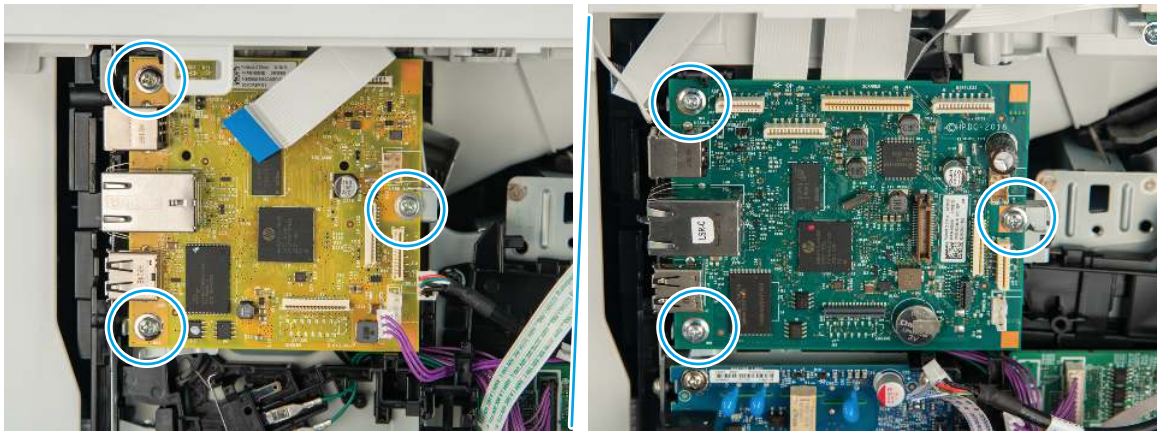Figure 4-717 Remove the formatter PCA (SFP/MFP)




12. Remove the interlock holder assembly

Follow the procedure below to remove and replace the interlock holder assembly.

1. Remove three screws (callout 1, and then remove the plate (callout 2).

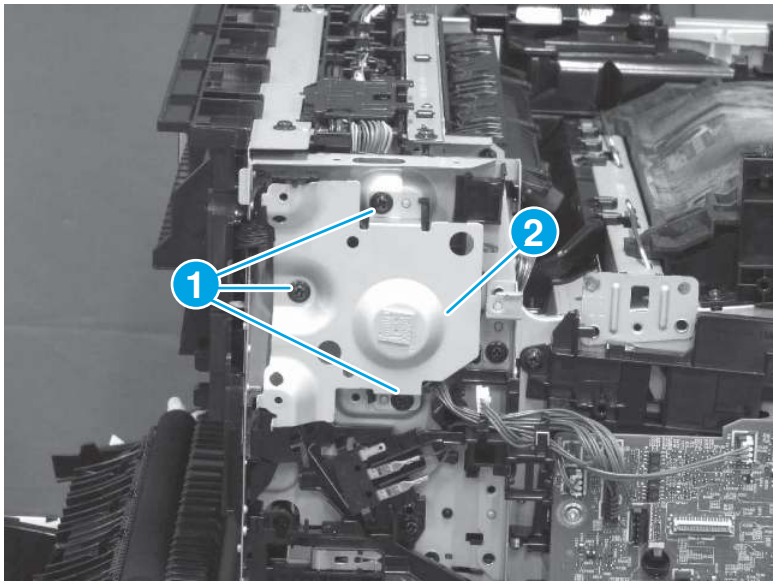
Figure 4-718 Remove the plate



2. Release the cable (callout 1) from the guides (callout 2), release two tabs (callout 3), and then separate the interlock switch (callout 4) from the holder.


⚠ CAUTION: Do not attempt to completely remove the interlock switch. It is still connected to the wire cables.

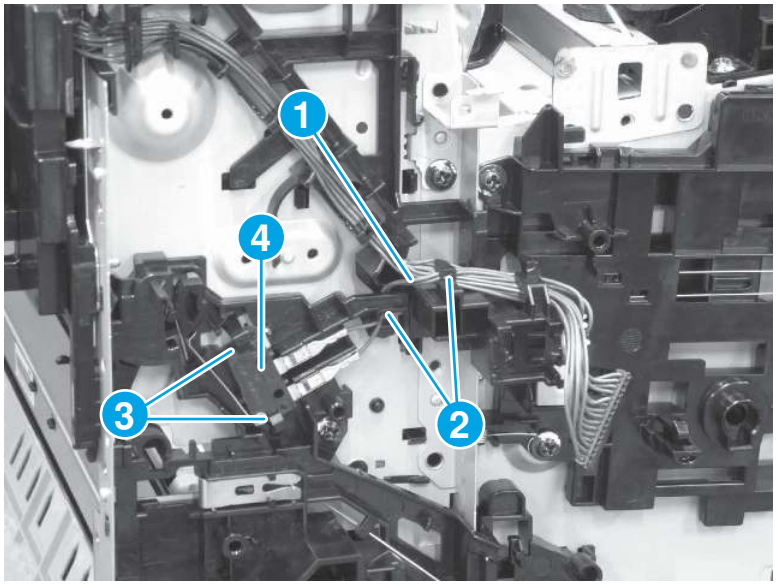Figure 4-719 Separate the interlock switch from the holder



3. Remove one screw (callout 1), release four tabs (callout 2), and then remove the interlock holder assembly (callout 3).

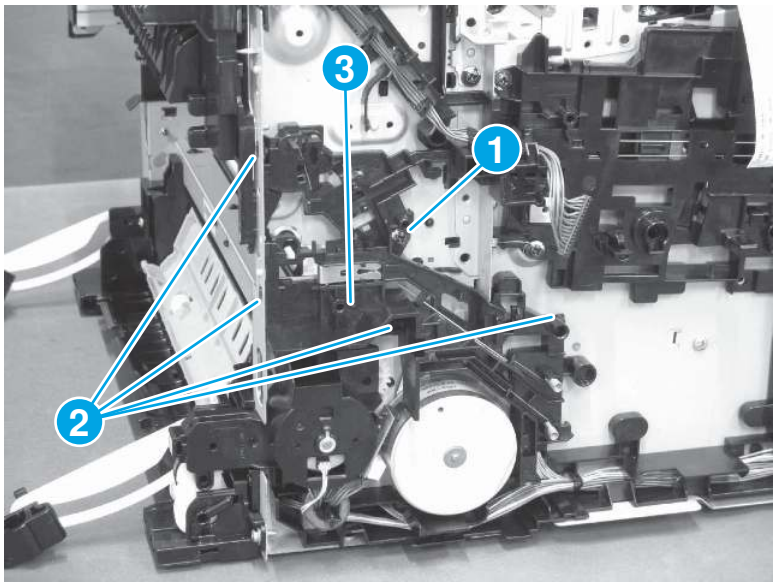Figure 4-720 Remove the interlock holder assembly



13. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: 

Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.


14. Special installation instructions - Front cover

Follow the special instructions below to install the front cover.

NOTE: Front cover installation is **identical** for both the SFP and MFP models.


1. If the door release arm becomes dislodged when handling the cover, install it as shown below (callout 1, 2).

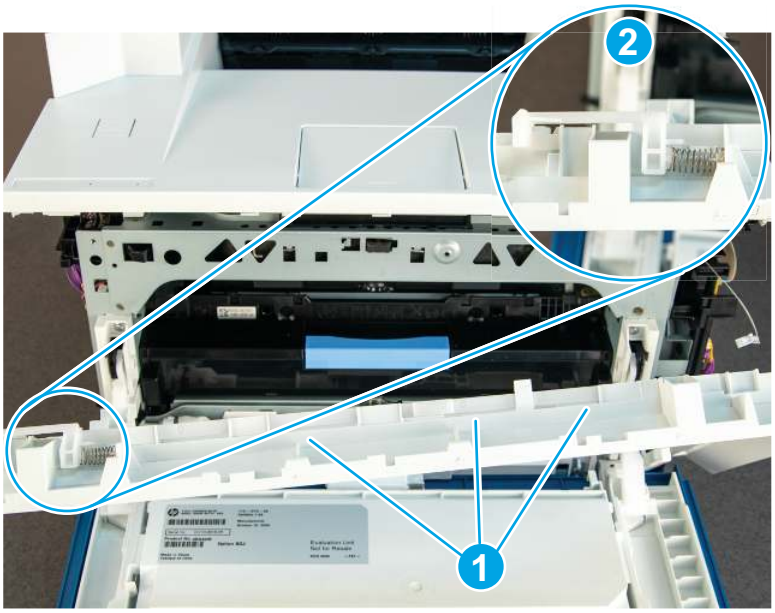Figure 4-721 Door release arm installed



2. At the right and left side of the front cover, align the holes (callout 1) in the cover with the alignment pins (callout 2) on the chassis.

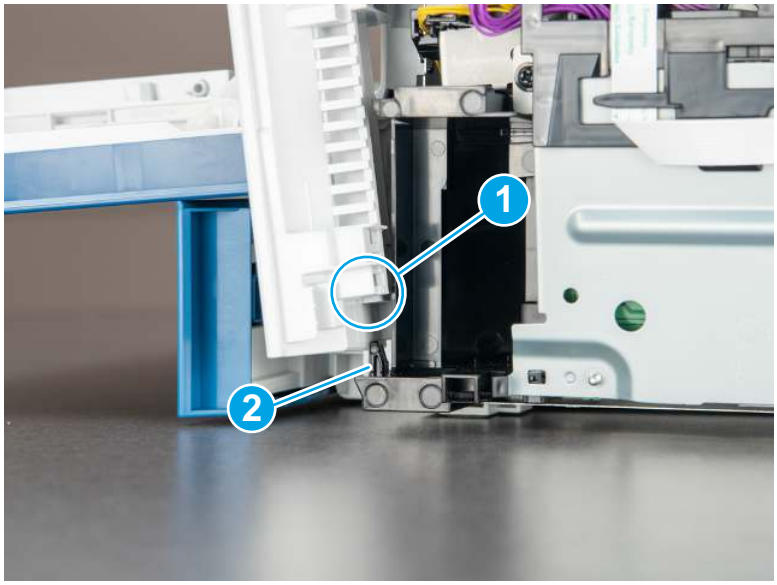
Figure 4-722 Cover alignment pins



3. Rotate the top of the cover towards the printer to install it.

IMPORTANT: Verify that the spring loaded door release button (on the left side of the cover) correctly functions.

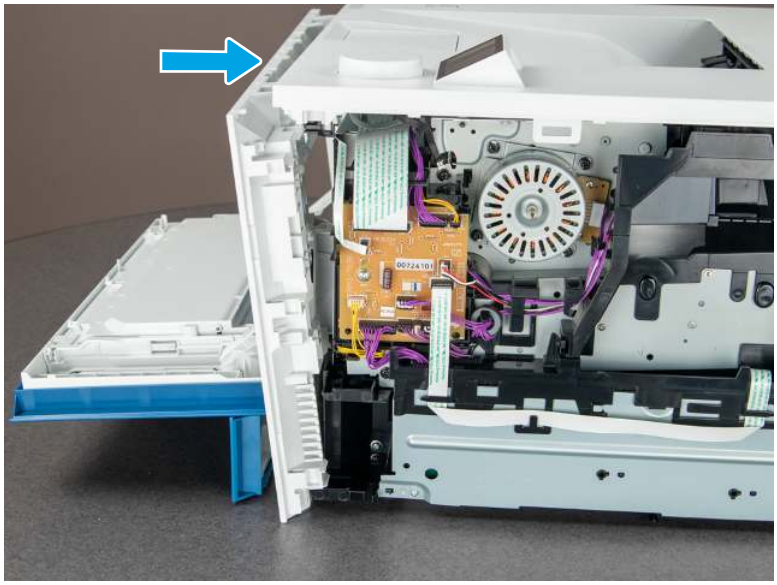Figure 4-723 Install the cover



Removal and replacement: PCA holder assembly

Learn about PCA holder assembly removal.

View a video of removing and replacing the PCA holder assembly.

Mean time to repair: 80 minutes

Service level: Difficult

Before performing service

Turn the printer power off

- Disconnect the power cable.

WARNING! To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-43 Part information

Part number	Part description
RM2-2819-000CN	PCA holder assembly

Required tools

- #2 Phillips screwdriver with a magnetic tip and a 152 mm (6 in) shaft length

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test

Print any pages necessary to make sure the printer is functioning correctly.

1. Remove the left cover (SFP)


Follow the procedure below to remove and replace the left cover (SFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.

TIP: There might be a small cover installed on the USB port located at the back of the printer. If installed, remove this cover now.


1. Remove one screw (callout 1).

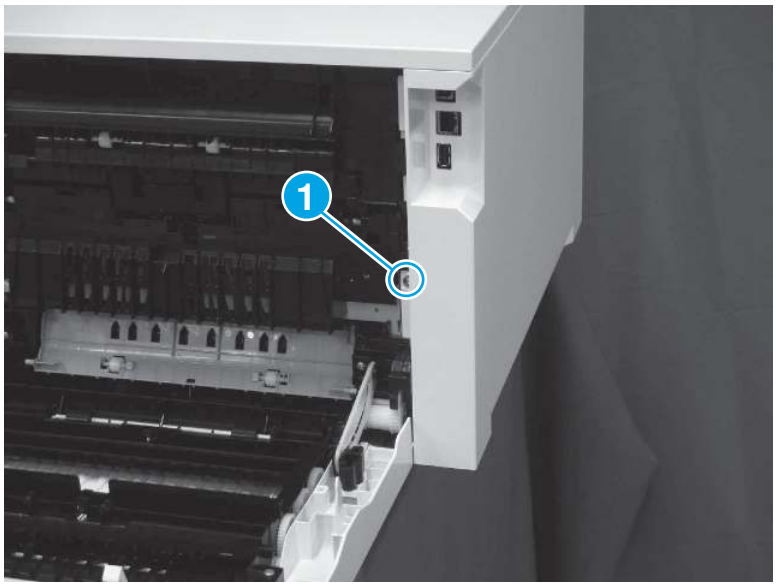Figure 4-724 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

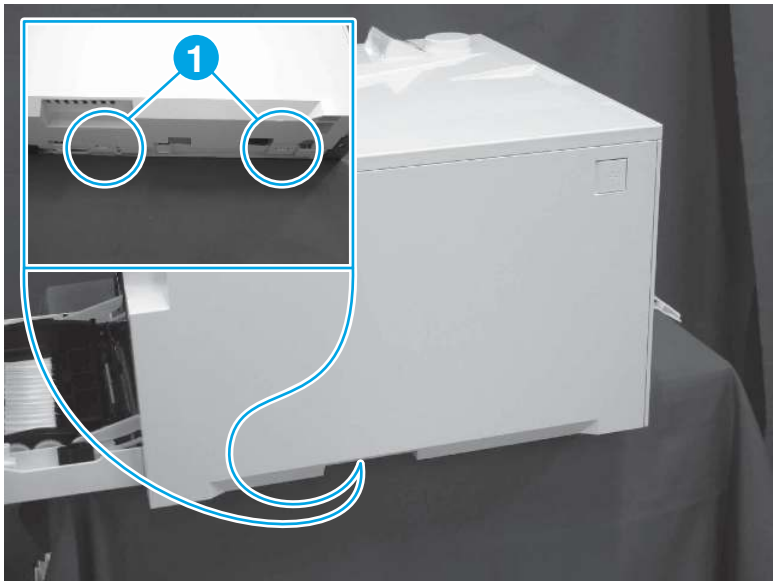Figure 4-725 Release two tabs




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

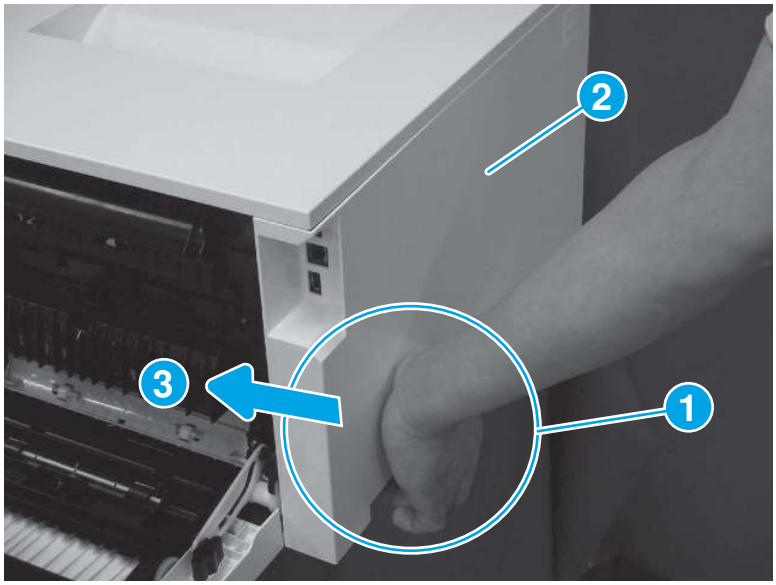Figure 4-726 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

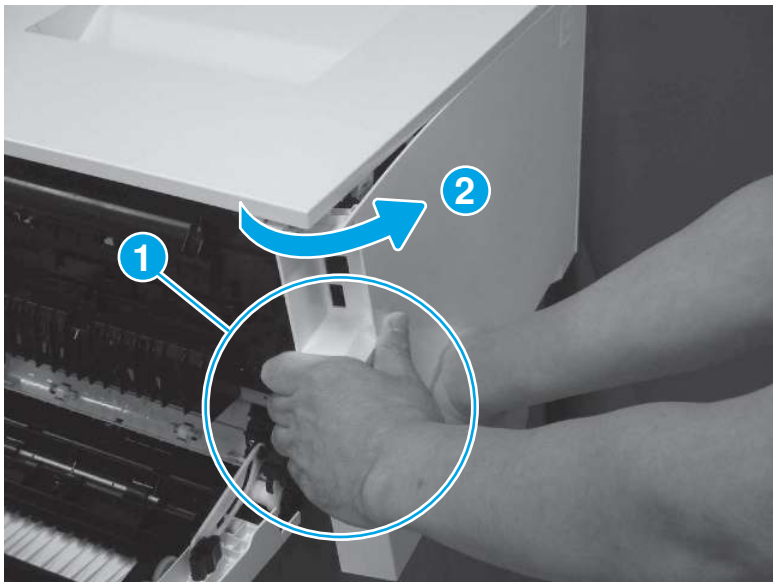Figure 4-727 Disengage the cover corner



5. Remove the left cover (callout 1).

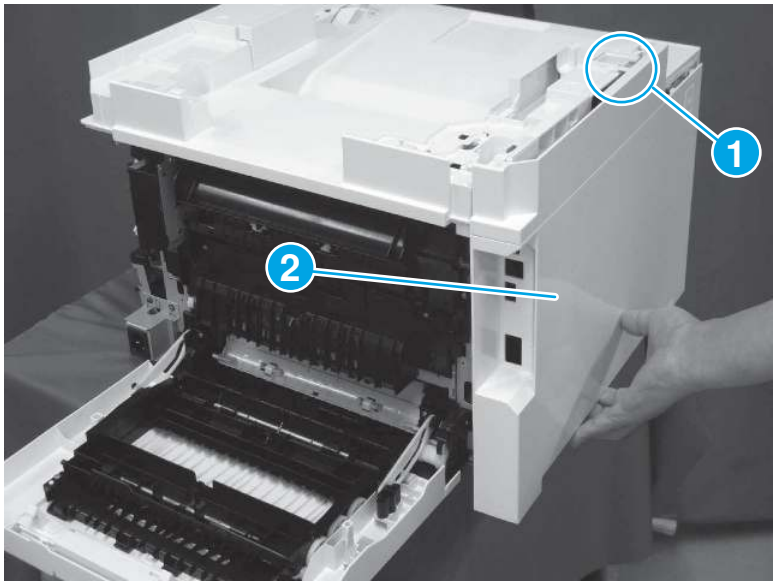Figure 4-728 Remove the cover



2. Remove the left cover (MFP)


Follow the procedure below to remove and replace the left cover (MFP).

NOTE: The following procedure is for an MFP printer only. If this assembly is being removed to gain access to dependency parts for a SFP printer, skip this step.

TIP: There might be a small cover installed on the USB port and/or the fax port located at the back of the printer. If installed, remove these covers now.


1. Remove one screw (callout 1).

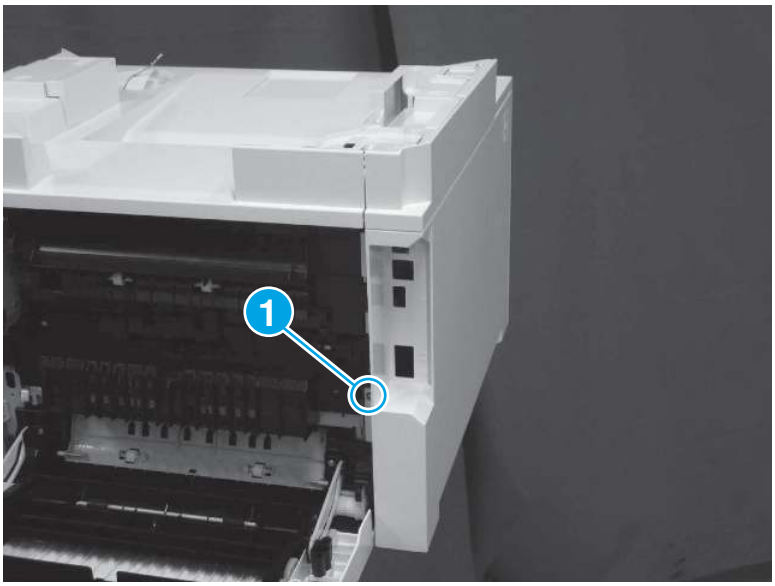Figure 4-729 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

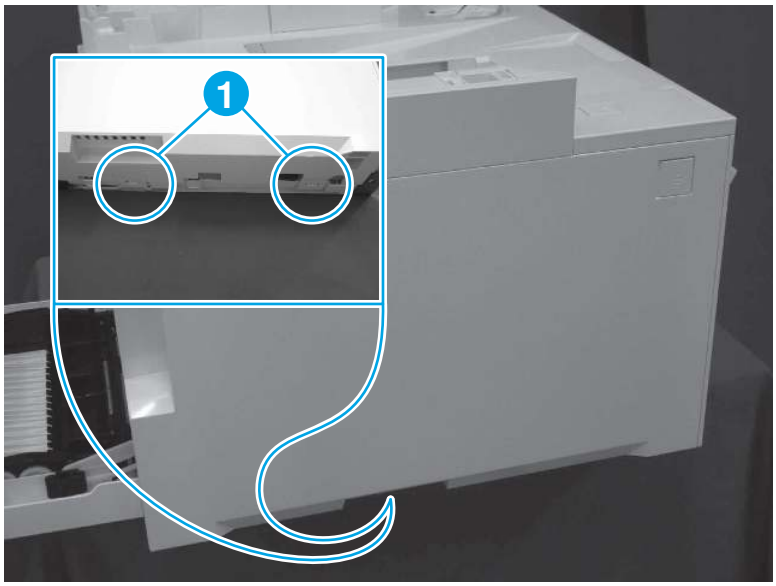Figure 4-730 Release two tabs




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

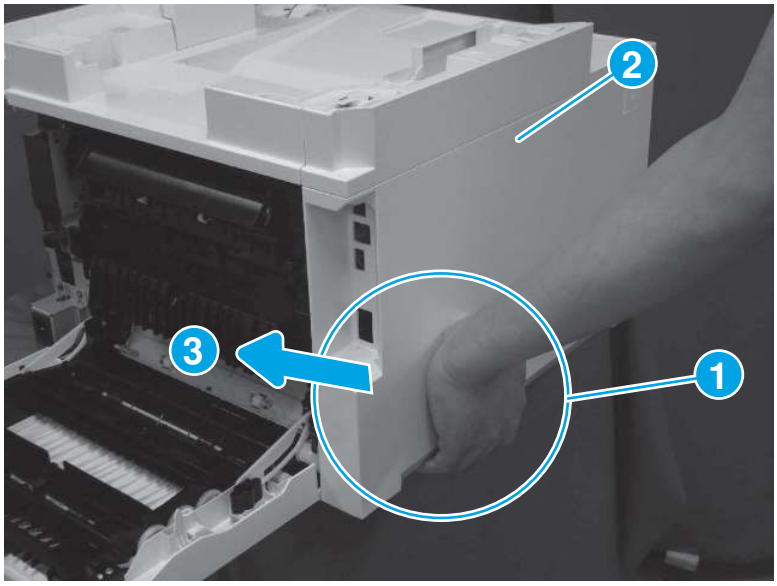Figure 4-731 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

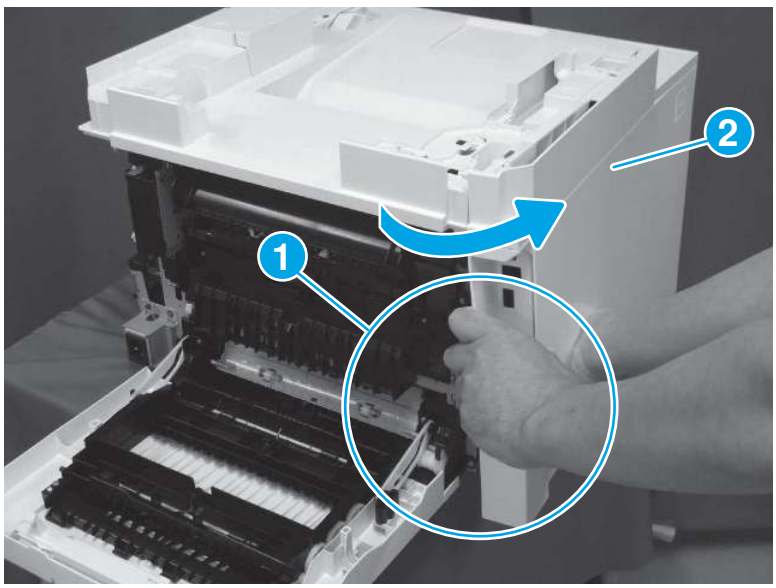Figure 4-732 Disengage the cover corner



5. Remove the left cover (callout 1).

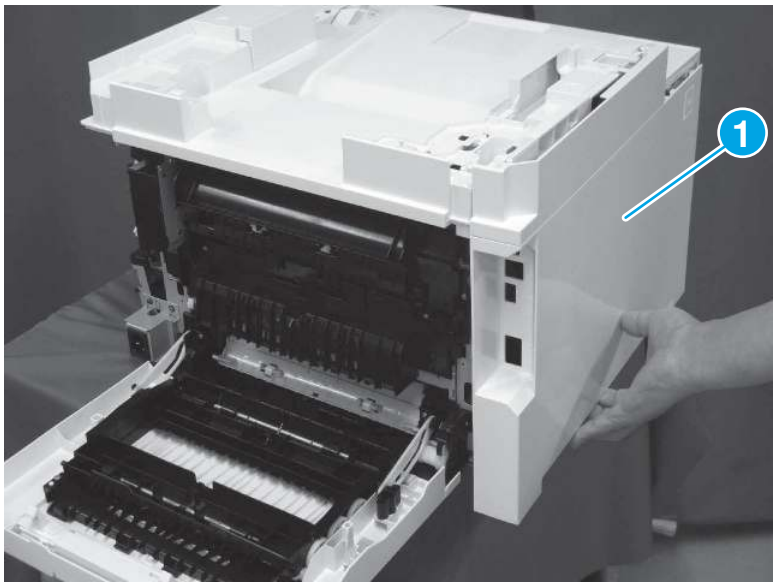Figure 4-733 **Remove the cover**



3. Remove the ISA (MFP)

Follow the procedure below to remove and replace the ISA.


1. Open the ISA, and then remove the ISA FFC cover (callout 1).

Figure 4-734 **Remove the FFC cover**



2. Disconnect three FFCs, and then remove one screw to release the ground cable.

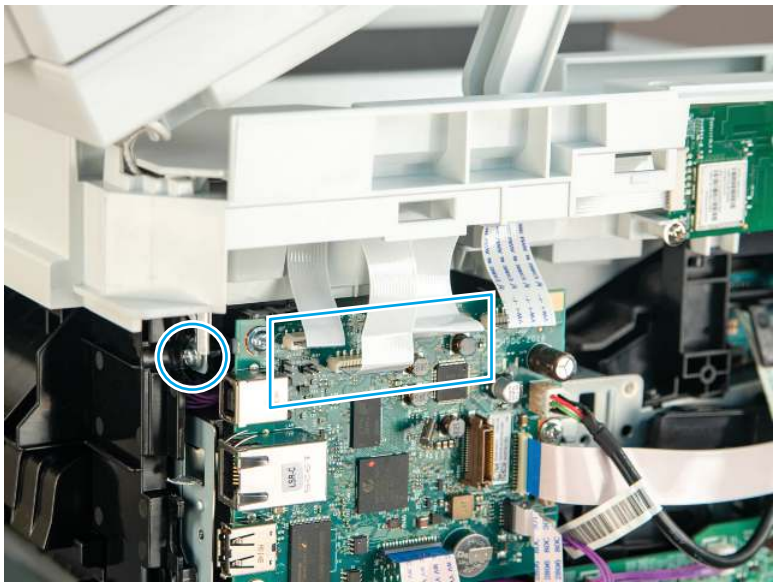Figure 4-735 Disconnect FFCs and remove screw



3. Release one tab (callout 1), and then rotate the ISA slider pin (callout 2) towards the front of the printer to release it. Remove the slider pin.


⚠ CAUTION: When the slider pin is removed, the ISA is not captive and can suddenly detach from the printer.

Figure 4-736 Remove the slider pin




4. Support the ISA, release the FFCs from the retainers, and then carefully pass the FFCs and the ground wire up through the slots in the top cover.

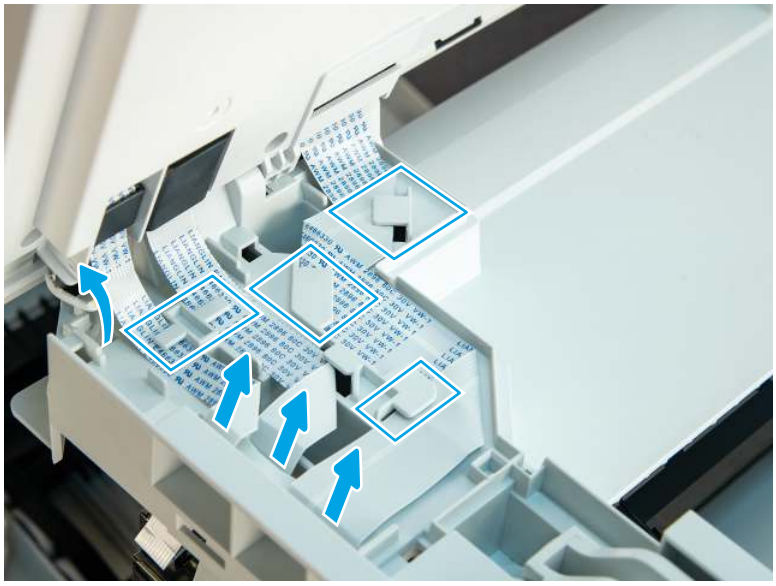Figure 4-737 Release the FFCs and ground wire



5. Slide ISA as shown below to release it.

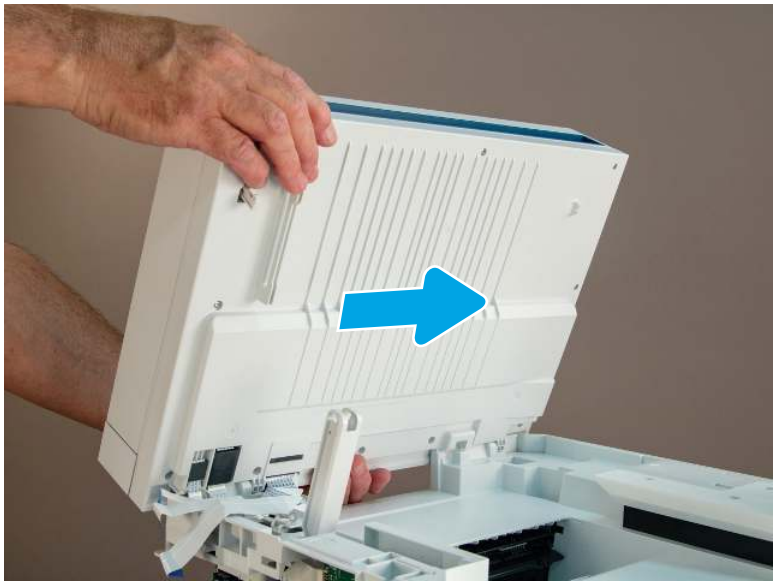Figure 4-738 Release the ISA



6. Remove the ISA.

Figure 4-739 **Remove the ISA**




4. Remove the engine controller PCA

Follow the procedure below to remove and replace the engine controller PCA (ECU).

⚠ CAUTION: ESD sensitive part.

1. Before proceeding, take note that there is an environmental sensor mounted on the engine controller PCA. **Do not** apply pressure to this sensor to avoid damaging it.

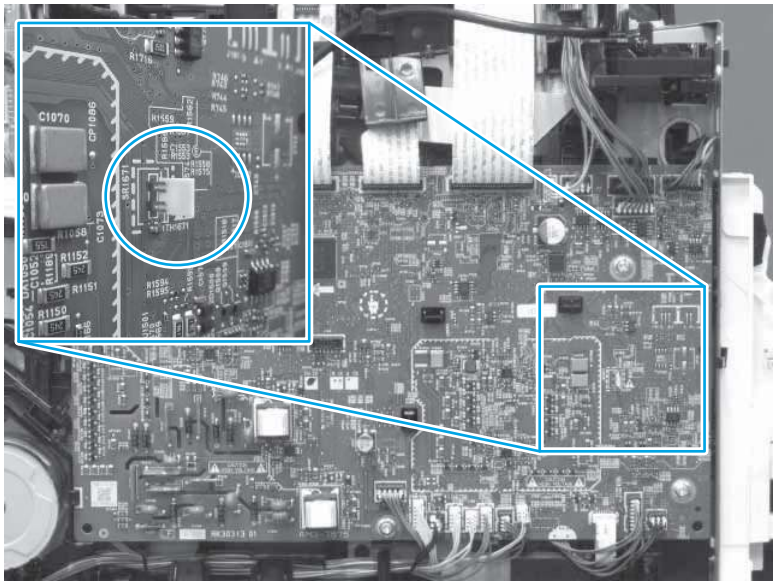Figure 4-740 **Engine controller environmental sensor location**




2. Disconnect all of the connectors on the engine controller PCA, and then remove four screws (callout 1).

⚠ **CAUTION:** Before proceeding take note of the media width sensors connectors and wire harnesses at ECU PCA locations J163 (media width sensor 2; yellow wire harness) and J165 (media width sensor 1; red wire harness). These connectors and wire harness are interchangeable. The PCA is embossed with **YELLOW** (connector J163) and **RED** (connector J165).

Make sure that the correct wire harness is plugged into the appropriate connector to avoid unexpected printer operation.

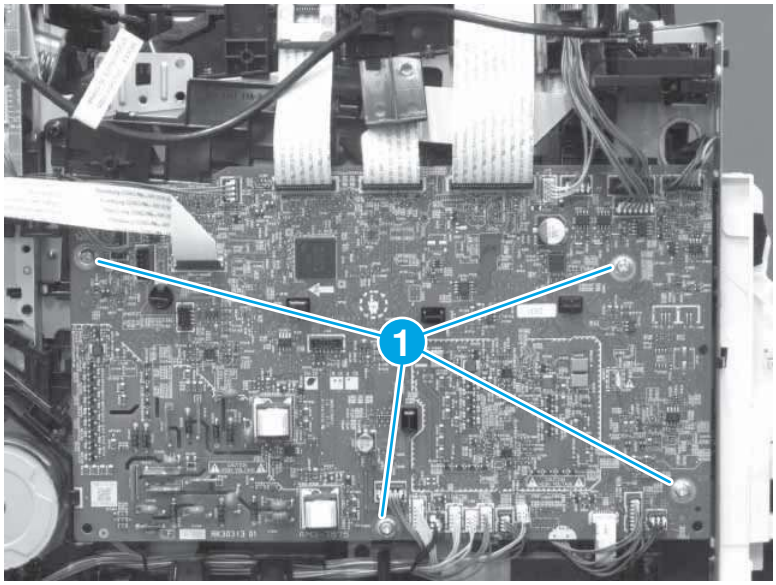Figure 4-741 **Disconnect connectors and remove screws**




3. Release four tabs (callout 1), and then remove the engine controller PCA (callout 2).

⚠ **CAUTION:** There are three clear plastic light guides installed in the PCB holder behind the PCA that are not captive. Do not lose these parts when the PCA is removed.

Reinstallation tip: If a replacement formatter is being installed, **make sure** to read and follow the special installation instructions in the topic (located immediately after the unpack and recycle step).

The ECU/DCC must be paired with the formatter to be functional.

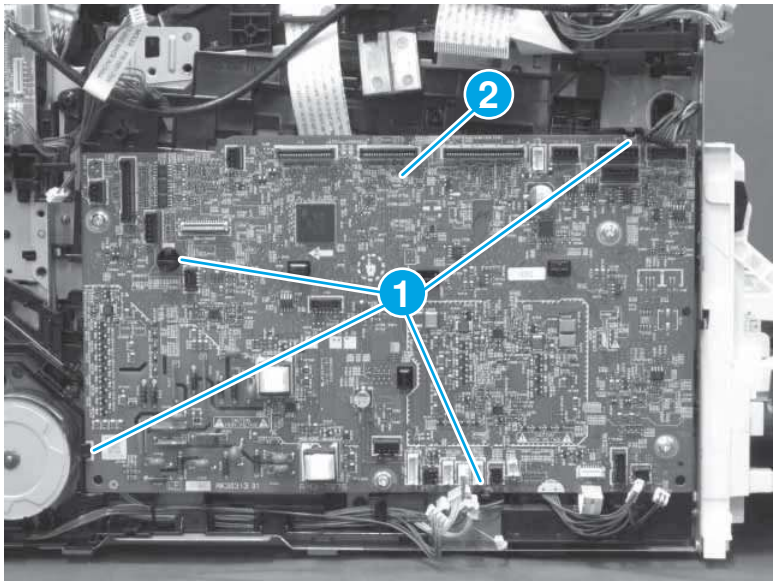Figure 4-742 Remove the engine controller PCA




5. Remove the right cover (SFP)

Follow the procedure below to remove and replace the right cover (SFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.


1. Remove one screw (callout 1).

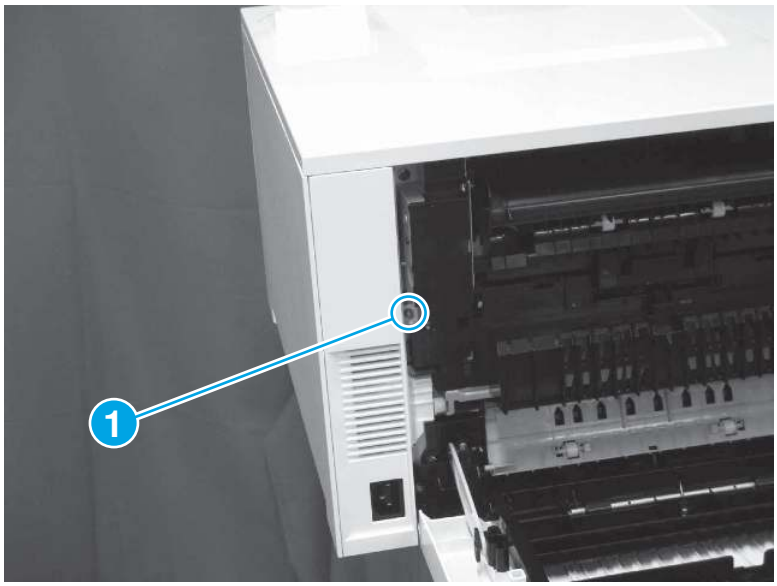Figure 4-743 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to three tabs (callout 1). Release three tabs.

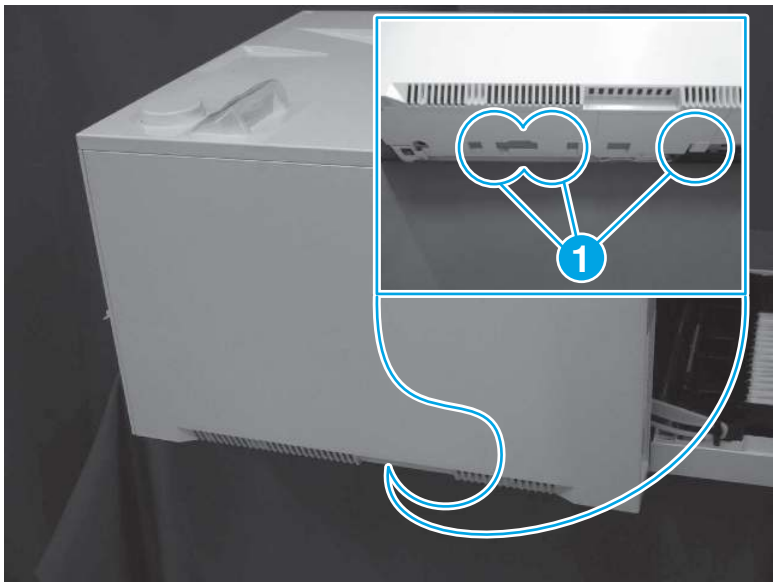Figure 4-744 Release three tabs




3. Press in on the side (callout 1) of the right cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

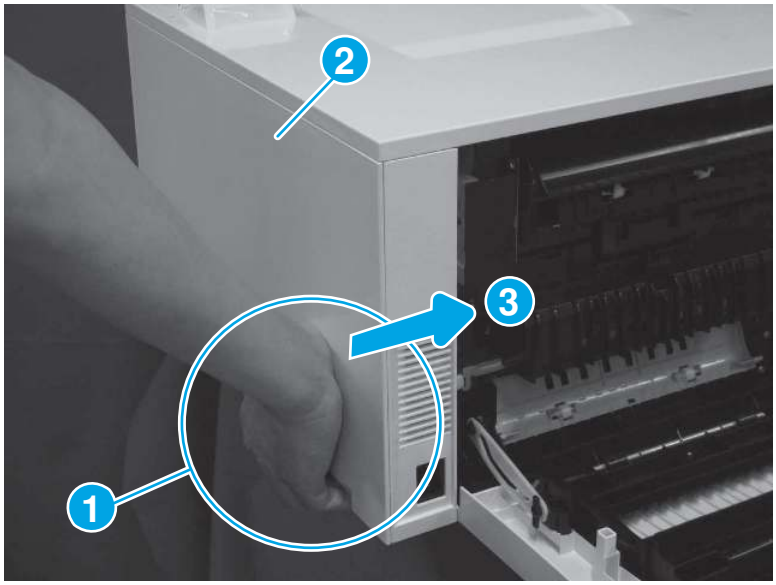Figure 4-745 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

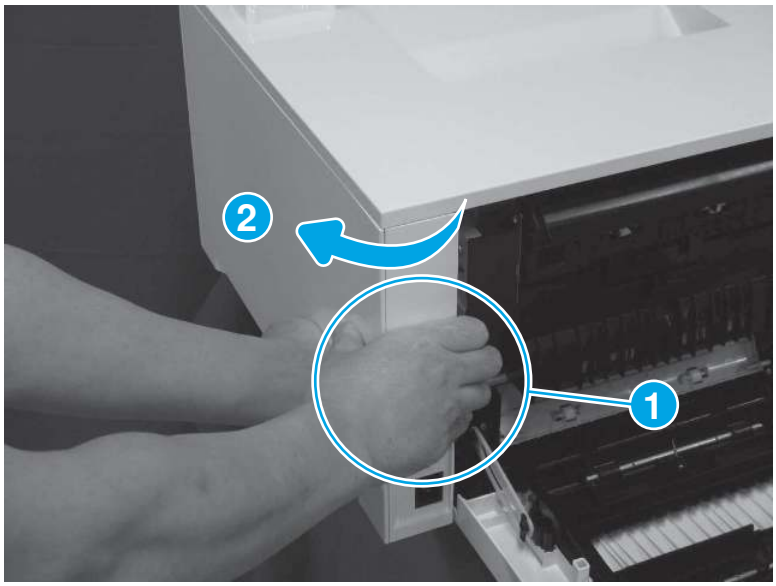Figure 4-746 Disengage the cover corner



5. Remove the right cover (callout 1).

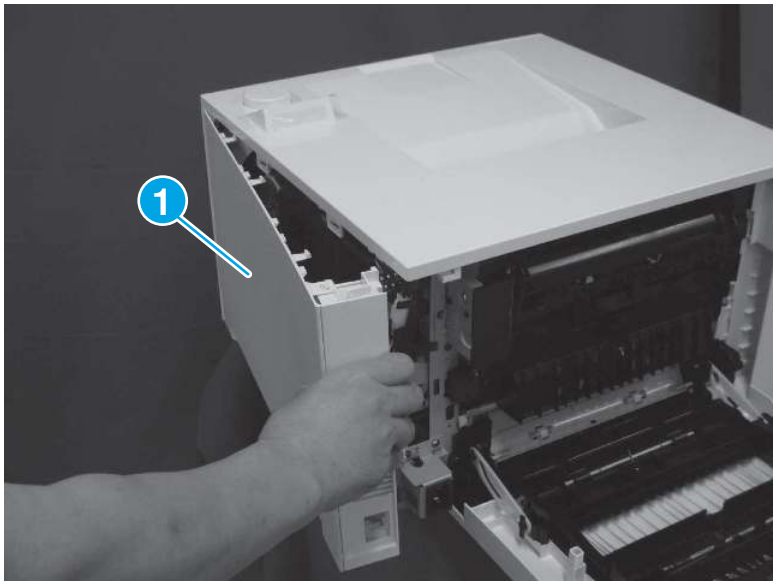Figure 4-747 Remove the cover




6. Remove the right cover (MFP)

Follow the procedure below to remove and replace the right cover (MFP).

NOTE: The following procedure is for an MFP printer only. If this assembly is being removed to gain access to dependency parts for a SFP printer, skip this step.


1. Remove one screw (callout 1).

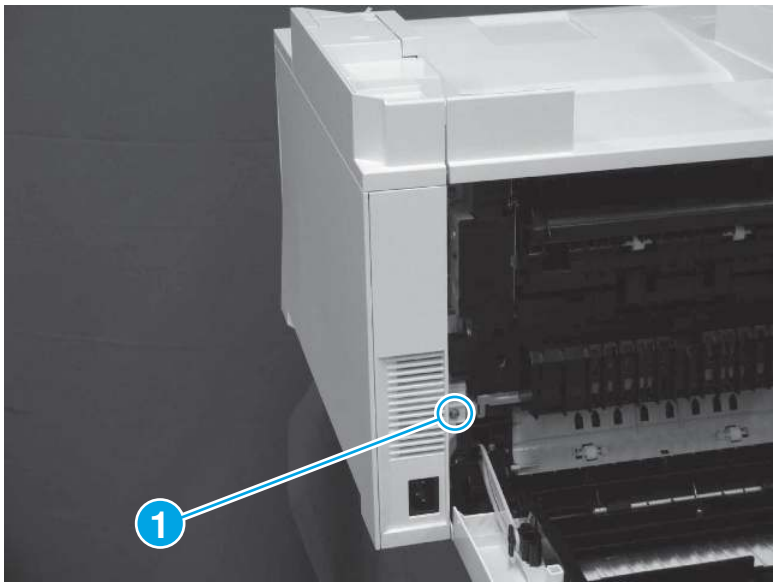Figure 4-748 **Remove one screw**




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to three tabs (callout 1). Release three tabs.

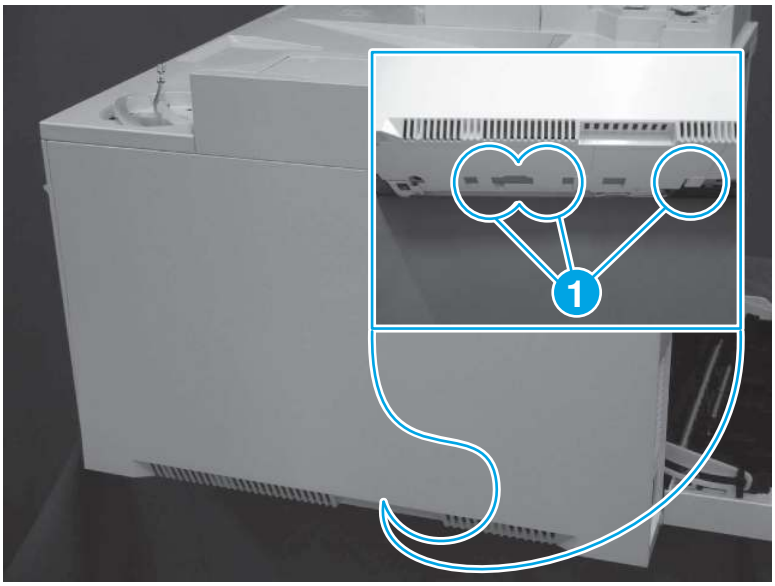Figure 4-749 **Release three tabs**




3. Press in on the side (callout 1) of the right cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

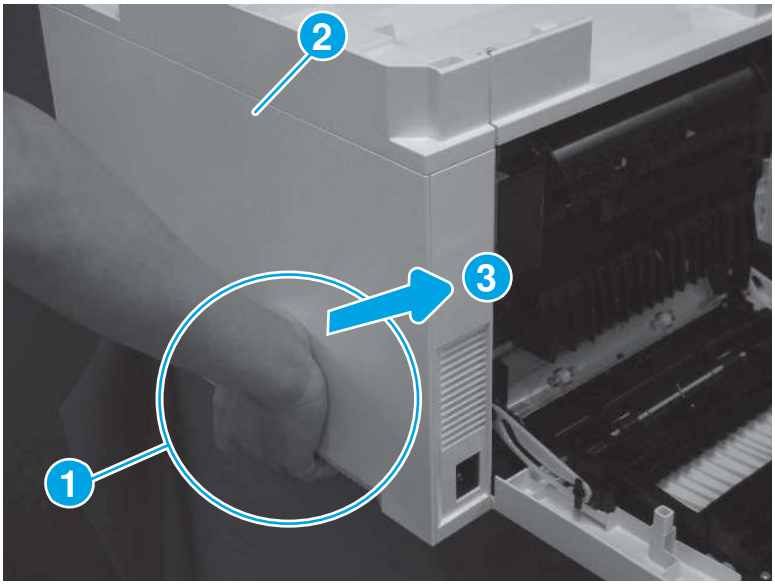Figure 4-750 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

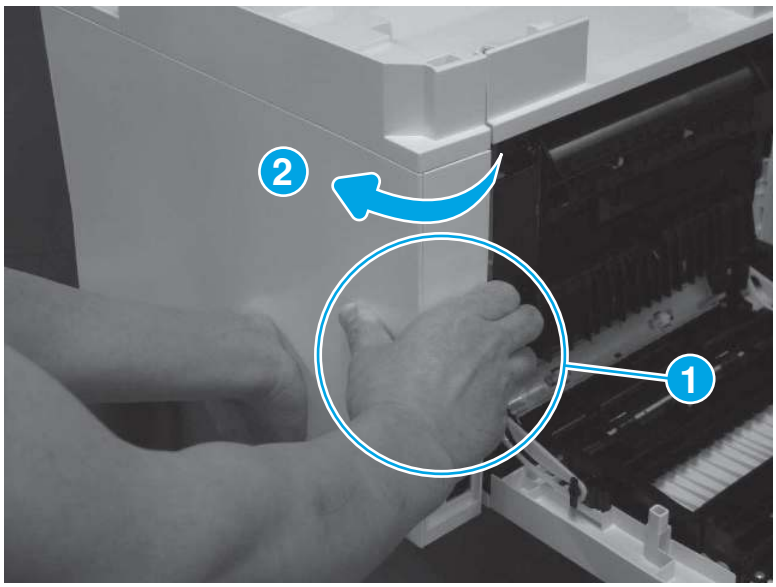Figure 4-751 Disengage the cover corner



5. Remove the right cover (callout 1).

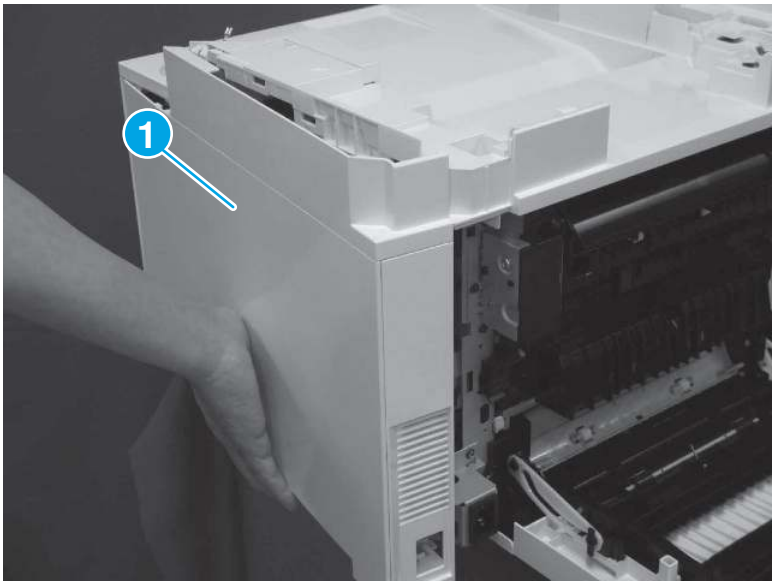Figure 4-752 **Remove the cover**



7. Remove the front cover


Follow the procedure below to remove and replace the front cover.

NOTE: Front cover removal is **identical** for both SFP and MFP models.

Reinstallation tip: Make sure to follow the special installation instructions for this part or step (located after the unpack and recycle or cleaning section).

1. Remove three screws (callout 1).

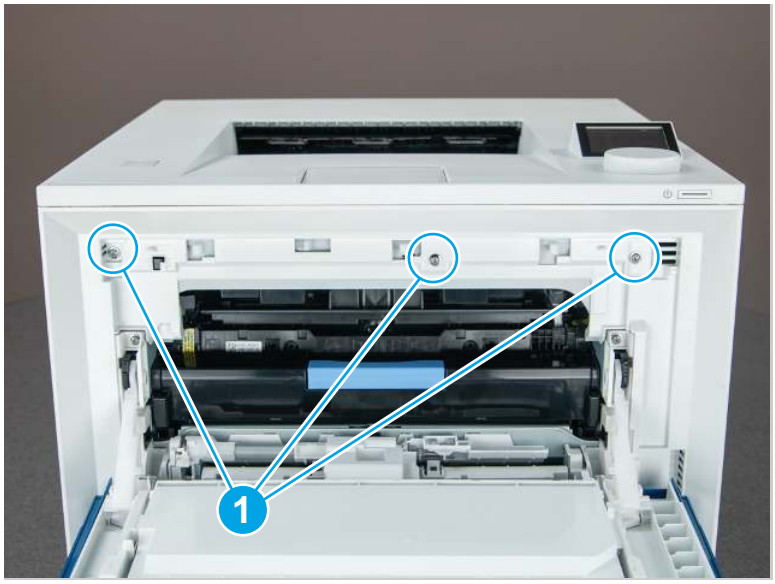
Figure 4-753 **Remove three screws**



2. Before proceeding, take note of the door release arm (callout 1). This arm can be easily dislodged when the cover is removed.


⚠ **CAUTION:** Do not lose the spring (callout 2) when removing the front cover.

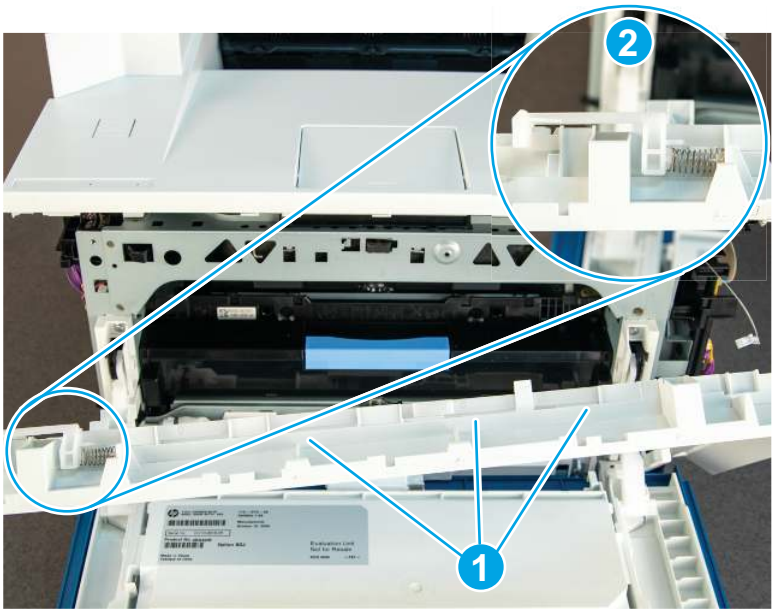Figure 4-754 Door release arm



3. Release four tabs (callout 1), and then remove the front cover (callout 2).

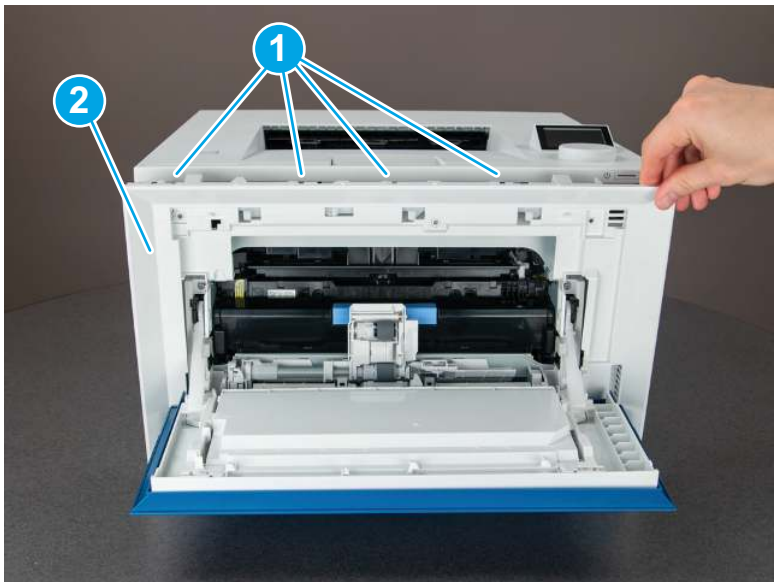Figure 4-755 Remove the cover



8. Remove the top cover (SFP)

Follow the procedure below to remove and replace the top cover (SFP).


NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.

1. **Wireless model only:** Raise and support the left side of the printer, remove one screw, and then separate the wireless PCA from the cover.

CAUTION: Do not attempt to completely remove the wireless PCA. Instead, gently move it out of the way.


TIP: To remove the screw without raising the printer, use a short-barrel screwdriver.

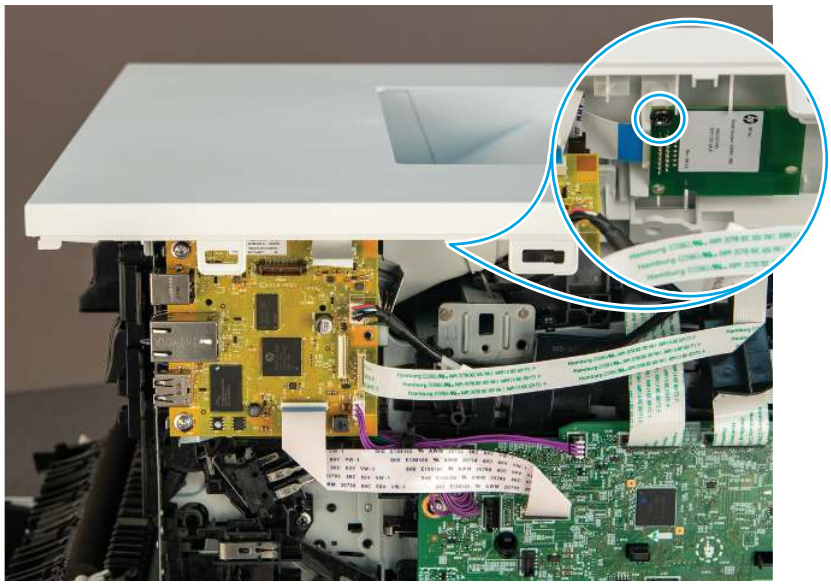Figure 4-756 **Remove one screw**



2. Disconnect one flat-flexible cable (FFC).

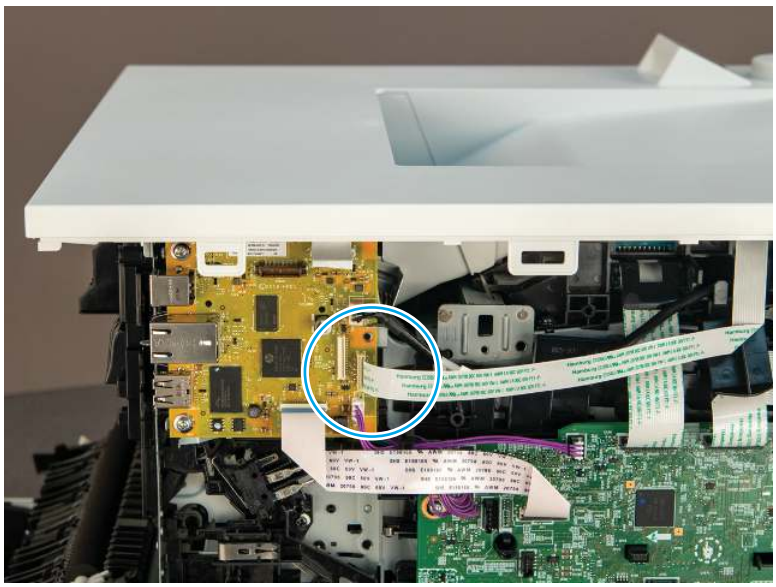Figure 4-757 **Disconnect one FFC**



3. Disconnect one FFC, and then remove one screw to release the ground wire.


NOTE: The front cover is shown installed in the figure below. However, this step is correct for removing the top cover.

Figure 4-758 Disconnect one FFC and remove one screw



4. Sliding the cover from the back of the printer towards the front to remove it.

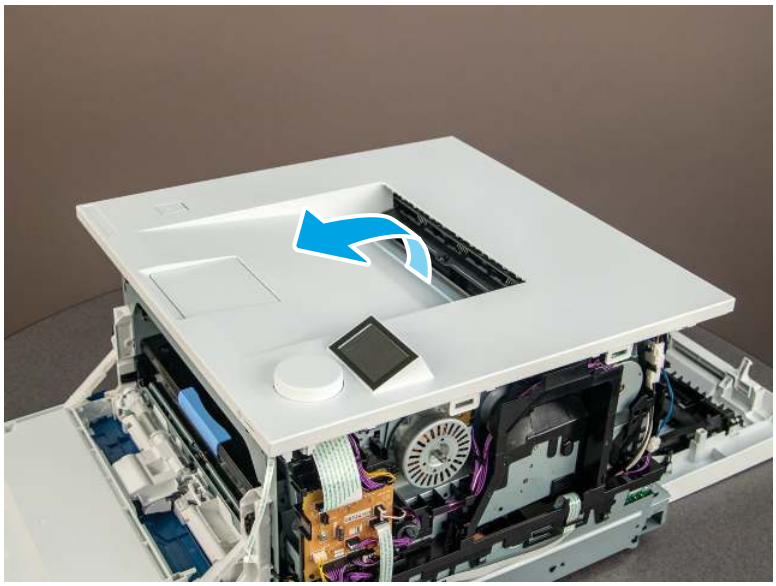Figure 4-759 Remove the cover




9. Remove the top cover (MFP)

Follow the procedure below to remove and replace the top cover (MFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.

1. Close the ISA lift arm.

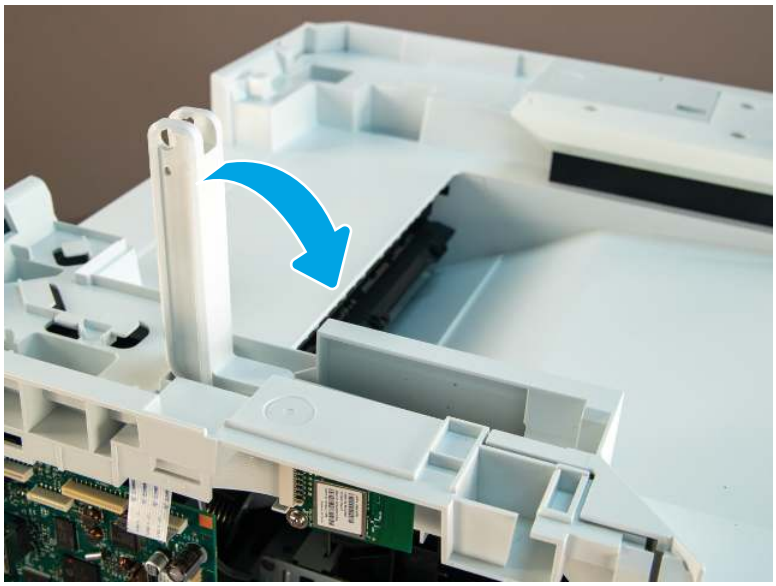
Figure 4-760 Close the ISA lift arm



2. Remove one screw.


⚠ CAUTION: The support arm is spring loaded and can unexpectedly spring into the open position. To avoid injury, do not place a finger in the screw well when the support arm is in the closed position.

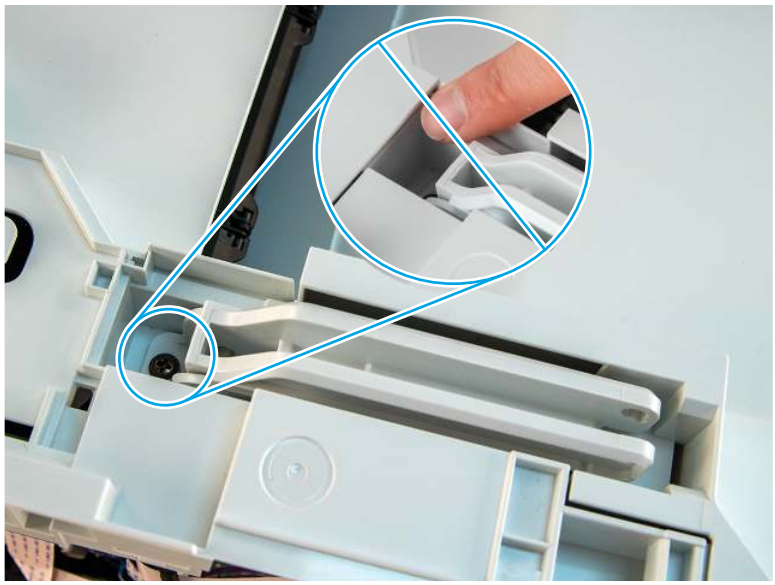Figure 4-761 Remove one screw



3. Rotate one end of the lift arm up (callout 1), and then slide the lift arm as shown below (callout 2) to release it. Remove the lift arm.

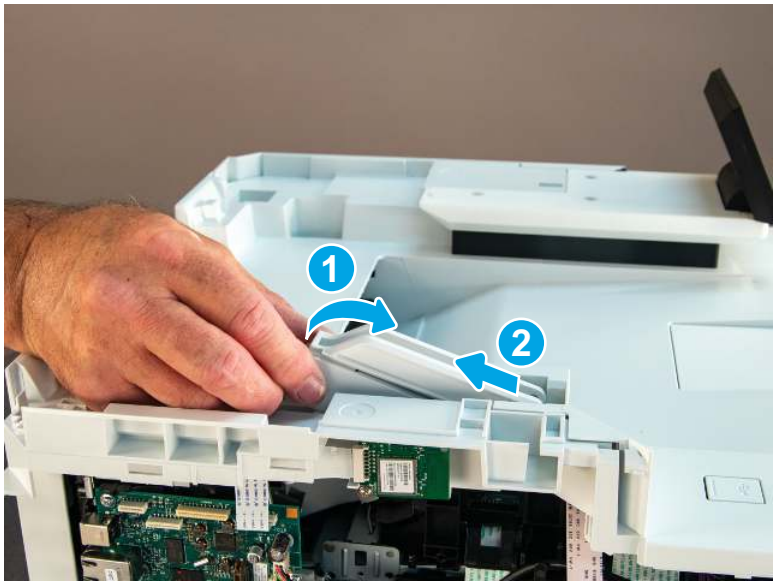Figure 4-762 **Remove the lift arm**




4. Do the following:

   a. Disconnect one FFC (control panel; callout 1).

   b. Remove one screw (callout 2), and then separate the wireless PCA from the top cover.


> NOTE: The wireless PCA does not need to be completely removed. Instead, release the FFC from the retainer (callout 3), and then gently move it out of the way.

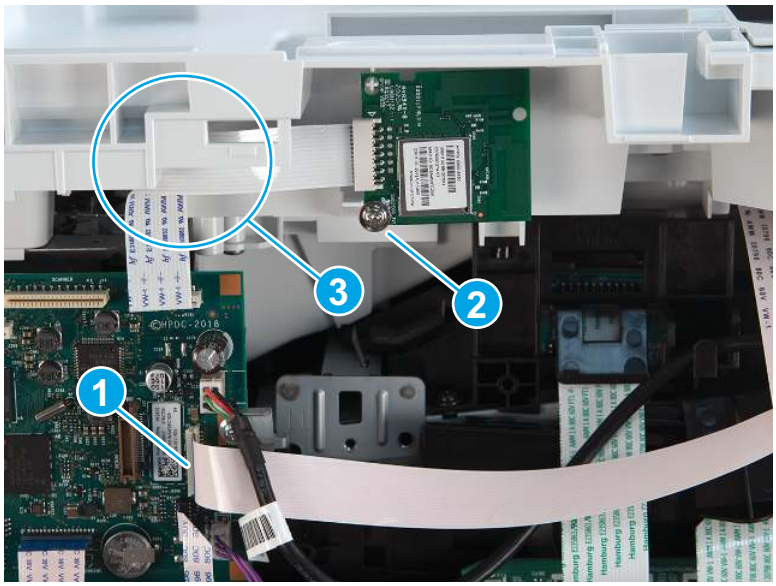Figure 4-763 **Disconnect FFC and move the wireless PCA**




5. Disconnect one FFC (power button), and then remove one screw (grounding sheet-metal plate).

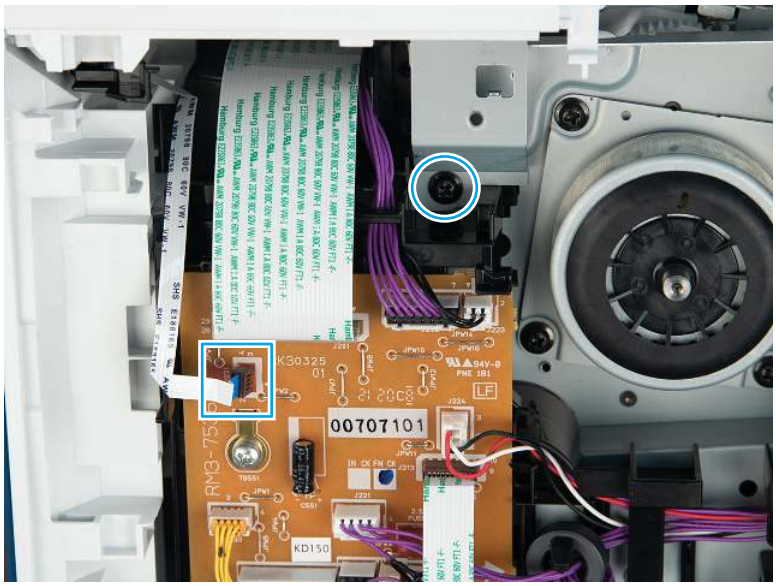Figure 4-764 Disconnect one FFC and remove one screw




6. Remove three screws.

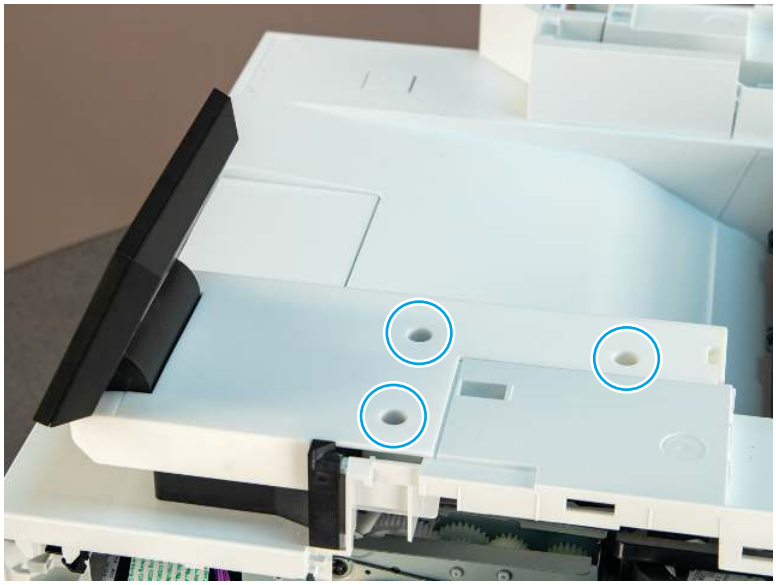Figure 4-765 Remove three screws



7. Release one tab and rotate one end of the base cover up (callout 1), and then slide the cover as shown (callout 2) to remove it.

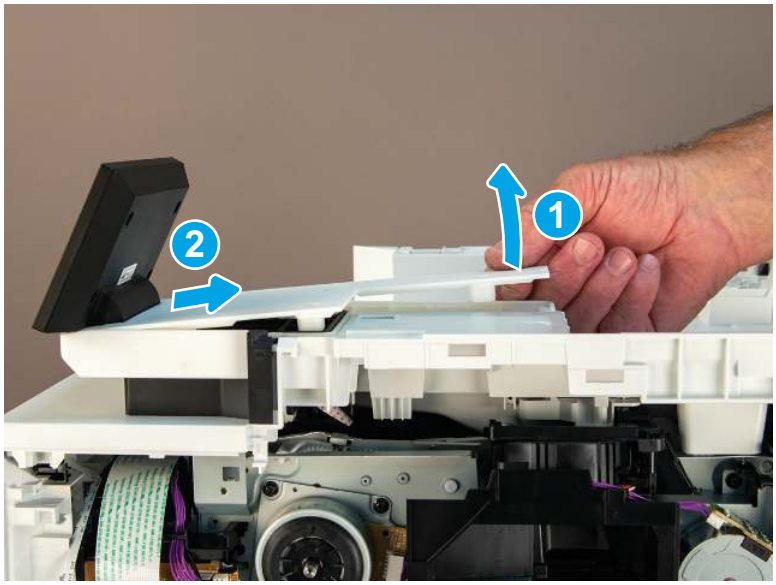Figure 4-766 Remove the cover



8. Disconnect two FFCs.

NOTE: Theses are zero-insertion force (ZIF) connectors. To remove the FFCs, first release the locking clip on the connector, and then pull the cable straight out of the connector.

TIP: For reinstallation, make sure that the line of the FFC is parallel with the body.

Figure 4-767 Disconnect two FFCs



9. Remove four screws.

NOTE: Two of the screws are self-tapping threads (black), and two of the screws are machine thread (silver).


Figure 4-768 Remove four screws



10. Lift the control panel and base straight up and off of the printer to remove them together.


NOTE: When handling the assembly, do not lose the ferrite (callout 1).

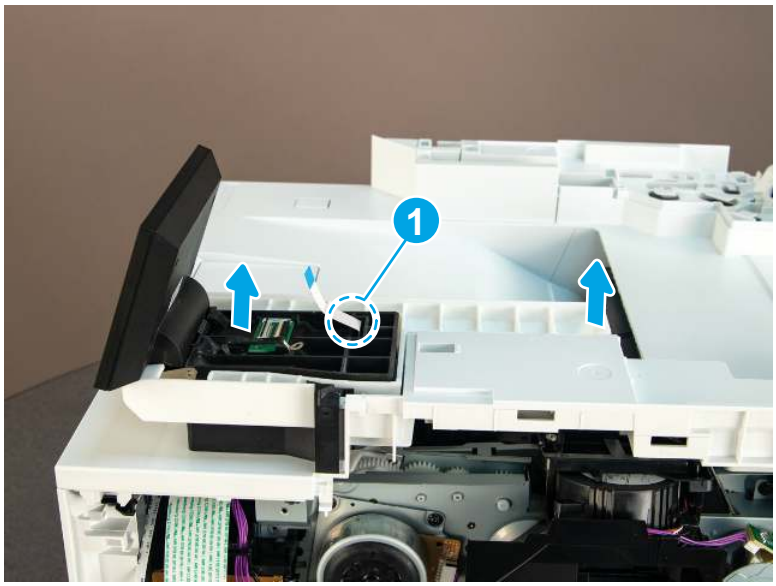Figure 4-769 Remove control panel and base



11. Remove three screws.

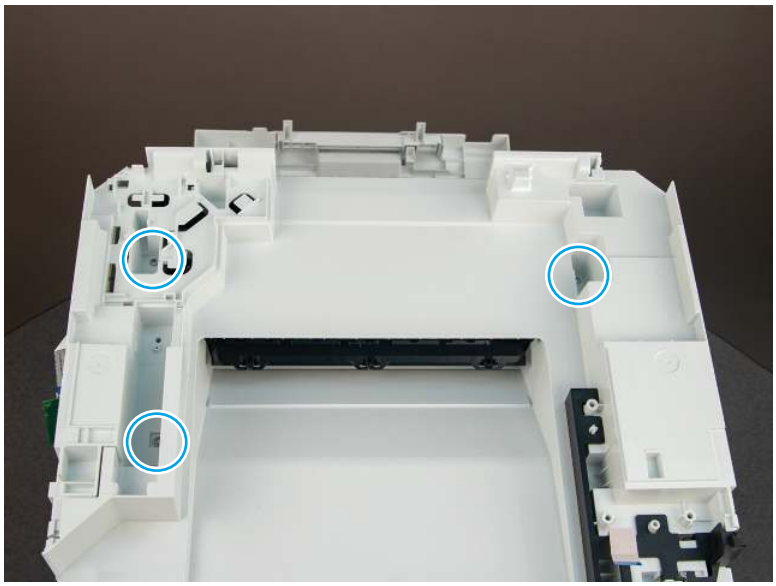
Figure 4-770 Remove three screws



12. Sliding the cover from the back of the printer to the front to remove it.

TIP: Slightly move the control-panel ground bracket (circled) back and forth to help release the top cover.

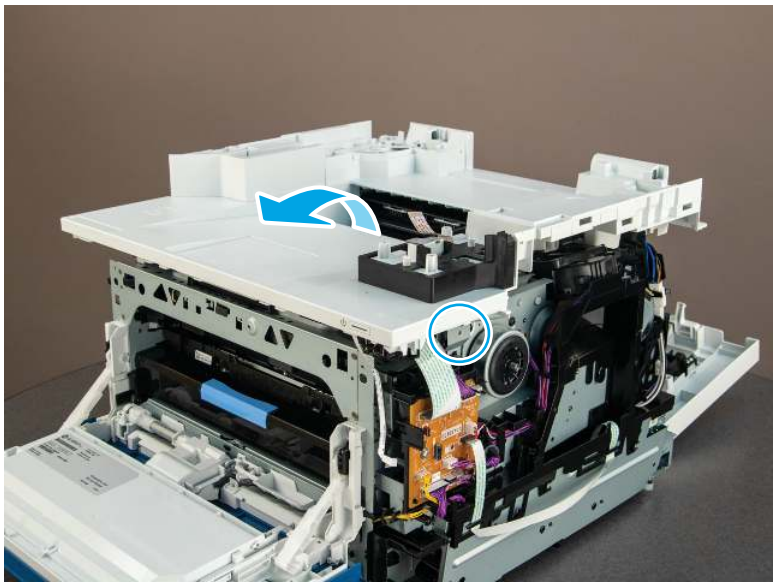Figure 4-771 Remove the cover



13. **When the cover is reinstalled**: Make sure that the front USB assembly is correctly positioned under the cover.

Figure 4-772 **Front USB assembly**



10. Remove the formatter PCA

Follow the procedure below to remove and replace the formatter PCA.

⚠ **CAUTION:** ESD sensitive part.

1. Disconnect all of the connectors on the formatter PCA.

Figure 4-773 **Disconnect all of the connectors (SFP/MFP)**




2. Remove three screws, and then remove the formatter PCA.

Reinstallation tip: If a replacement formatter is being installed, make sure to read and follow the special installation instructions in the topic (located immediately after the unpack and recycle step).

The formatter must be paired with the ECU/DCC to be functional.

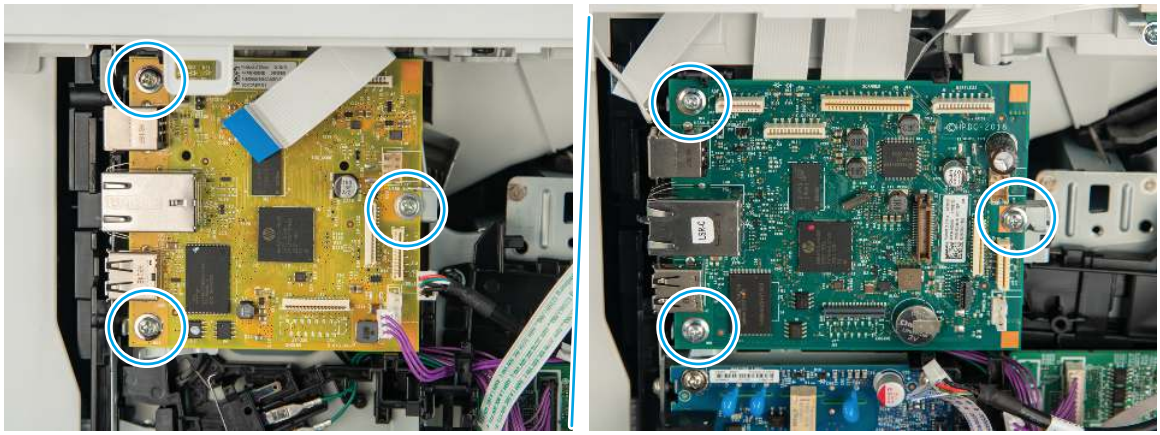Figure 4-774 Remove the formatter PCA (SFP/MFP)




11. Remove the interlock holder assembly

Follow the procedure below to remove and replace the interlock holder assembly.

1. Remove three screws (callout 1, and then remove the plate (callout 2).

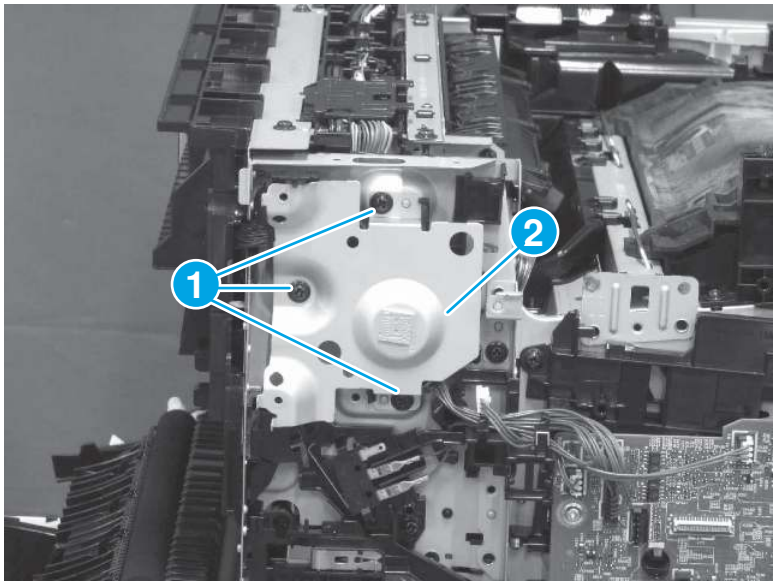
Figure 4-775 Remove the plate



2. Release the cable (callout 1) from the guides (callout 2), release two tabs (callout 3), and then separate the interlock switch (callout 4) from the holder.


⚠ CAUTION: Do not attempt to completely remove the interlock switch. It is still connected to the wire cables.

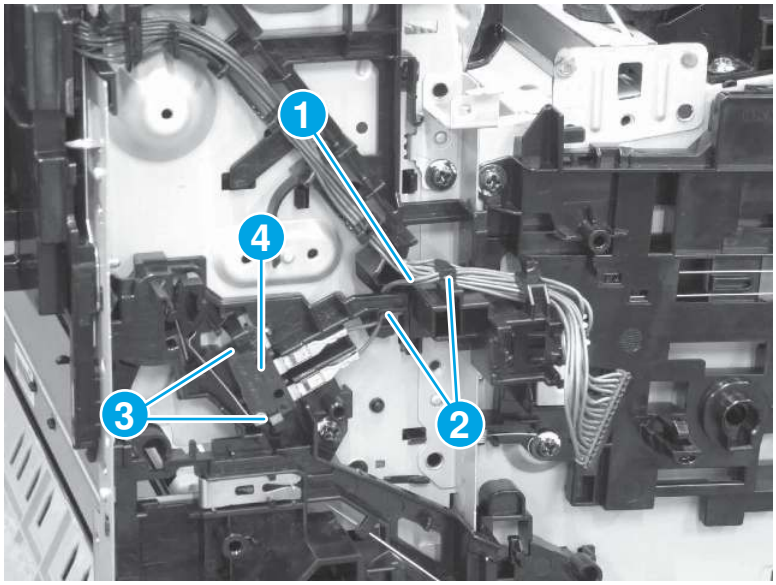Figure 4-776 Separate the interlock switch from the holder



3. Remove one screw (callout 1), release four tabs (callout 2), and then remove the interlock holder assembly (callout 3).

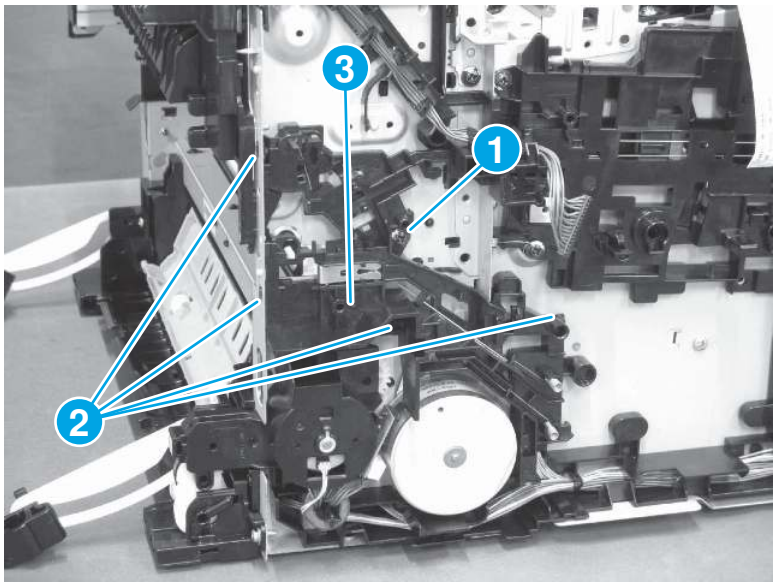Figure 4-777 Remove the interlock holder assembly




12. Remove the PCA holder assembly

Follow the procedure below to remove and replace the PCA holder assembly.


1. Remove two screws (callout 1), and then remove the guide (callout 2).

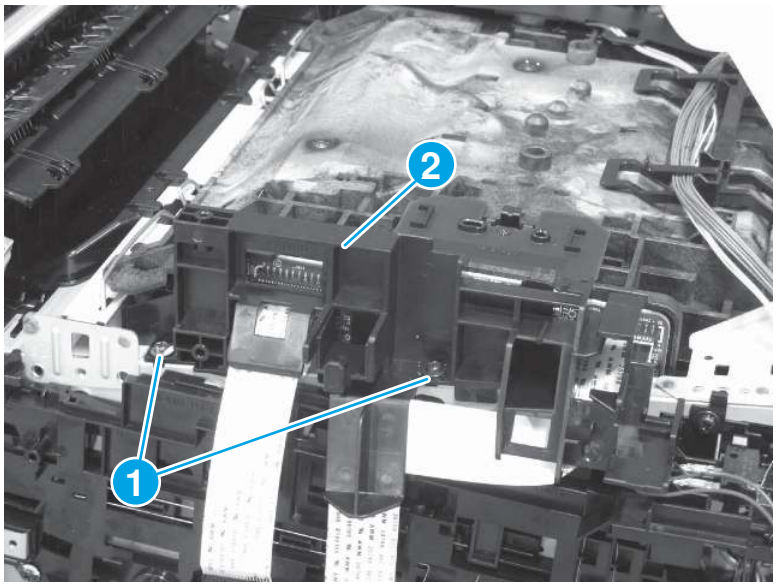Figure 4-778 **Remove the guide**




2. Remove four light guides (callout 1).

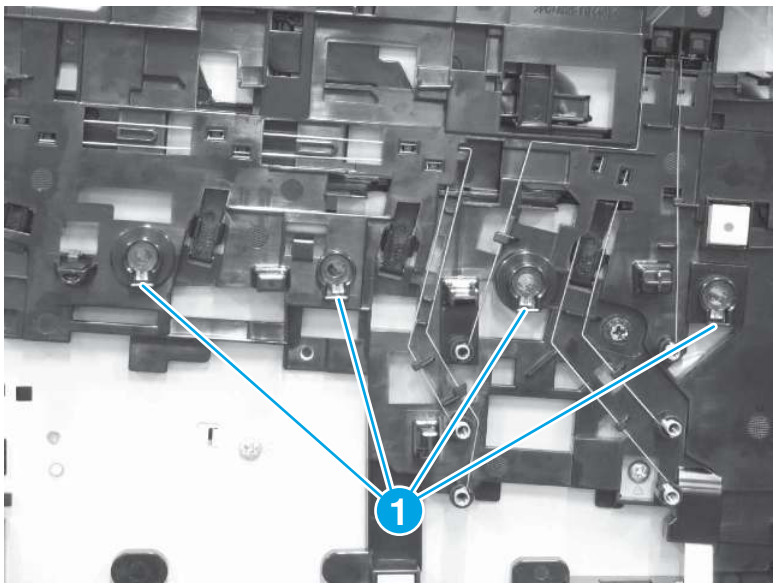Figure 4-779 **Remove four light guides**




3. Remove one screw (callout 1), and then remove the sheet-metal bracket (callout 2).

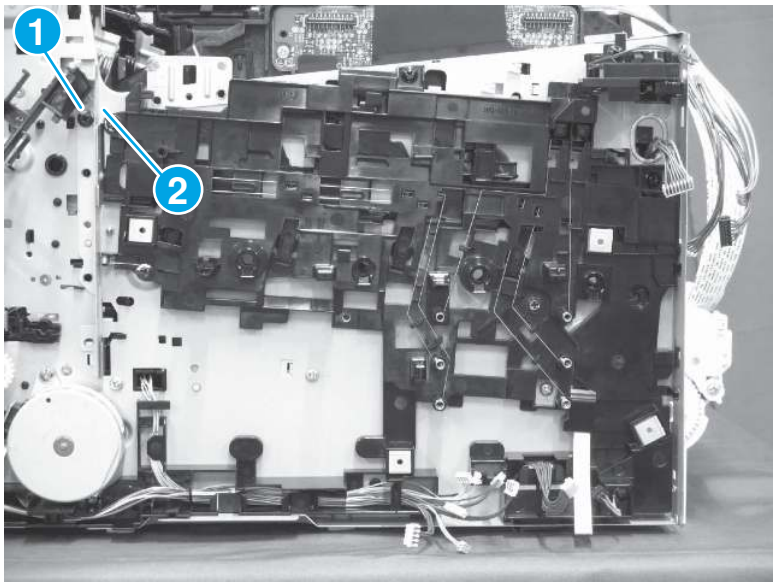Figure 4-780 **Remove the bracket**



4. Remove five screws (callout 1), release three tabs (callout 2), and then remove the PCA holder assembly (callout 3).

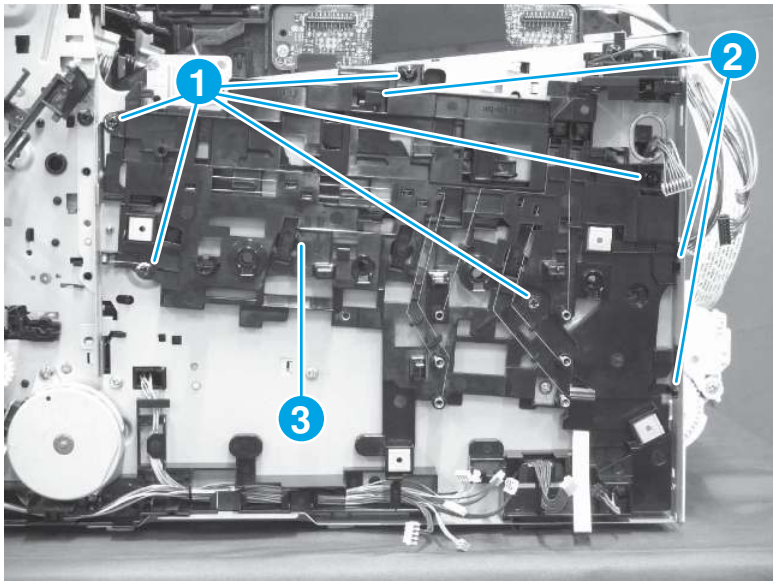
Figure 4-781 **Remove the PCA holder assembly**



5. **For a replacement PCA holder assembly only:** Remove the rail link (callout 1) from the PCA holder assembly, and then install it on the replacement PCA assembly.

NOTE: If the rail link is not on the PCA holder assembly, check the printer chassis.

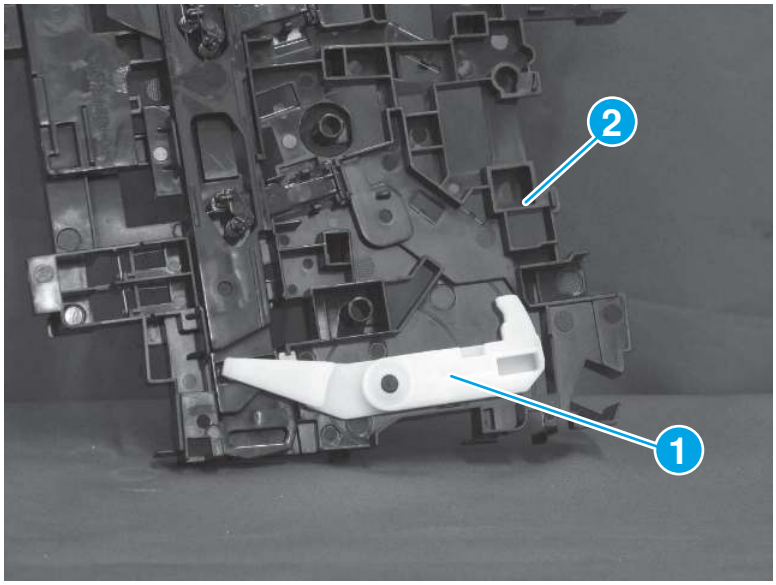Figure 4-782 Remove the rail link



13. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.


14. Special installation instructions - Front cover

Follow the special instructions below to install the front cover.

NOTE: Front cover installation is **identical** for both the SFP and MFP models.


1. If the door release arm becomes dislodged when handling the cover, install it as shown below (callout 1, 2).

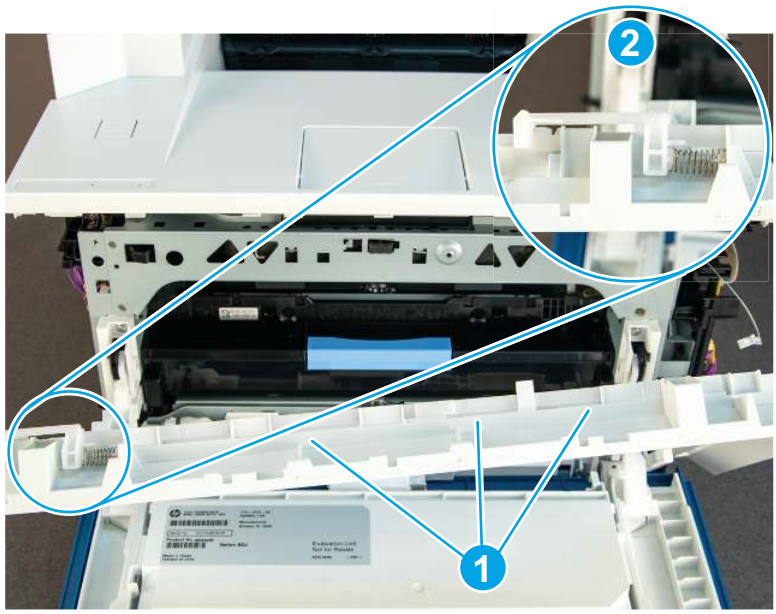Figure 4-783 Door release arm installed



2. At the right and left side of the front cover, align the holes (callout 1) in the cover with the alignment pins (callout 2) on the chassis.

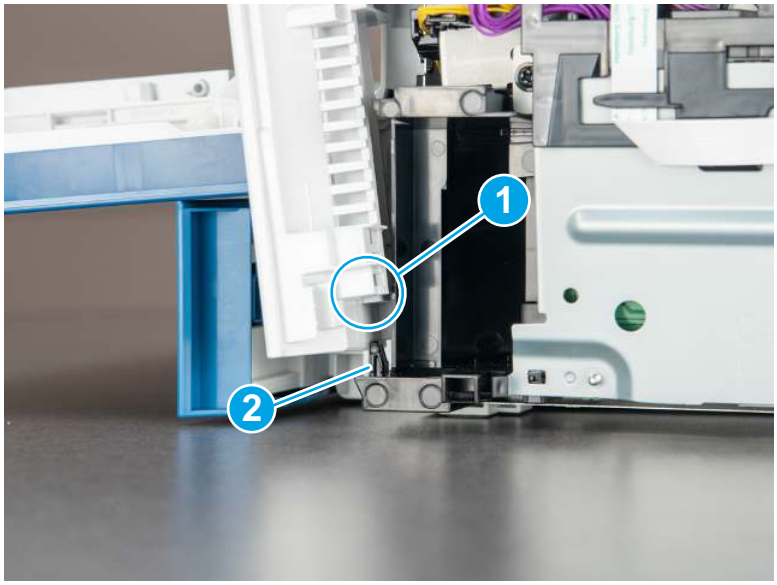
Figure 4-784 Cover alignment pins



3. Rotate the top of the cover towards the printer to install it.

IMPORTANT: Verify that the spring loaded door release button (on the left side of the cover) correctly functions.

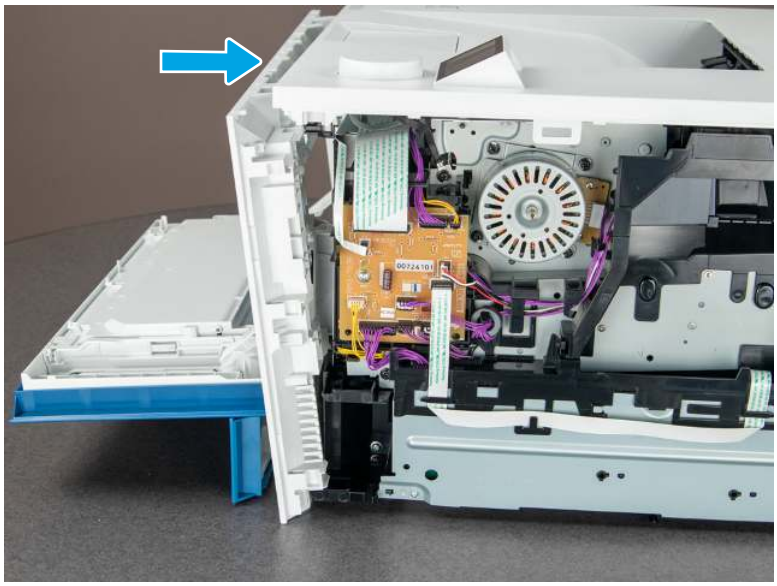Figure 4-785 Install the cover



Removal and replacement: Registration density sensor

Learn about registration density sensor removal.

View a video of removing and replacing the registration density sensor.

Mean time to repair: 90 minutes

Service level: Difficult

Before performing service

Turn the printer power off

- Disconnect the power cable.

> ⚠ **WARNING!** To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-44 Part information

Part number	Part description
RM2-2710-000CN	Density detect sensor assembly

Required tools

- #2 Phillips screwdriver with a magnetic tip and a 152 mm (6 in) shaft length
- Small flat-blade screwdriver
- Needle-nose pliers

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test

Print any pages necessary to make sure the printer is functioning correctly.


1. Remove the Tray 1 pickup roller assembly

Follow the procedure below to remove and replace the Tray 1 pickup roller assembly.

> **Reinstallation tip:** Make sure to follow the special installation instructions for this part or step (located after the unpack and recycle or cleaning section).


1. Open the cartridge door, and then depress the lever (callout 1) and slide it as shown below.

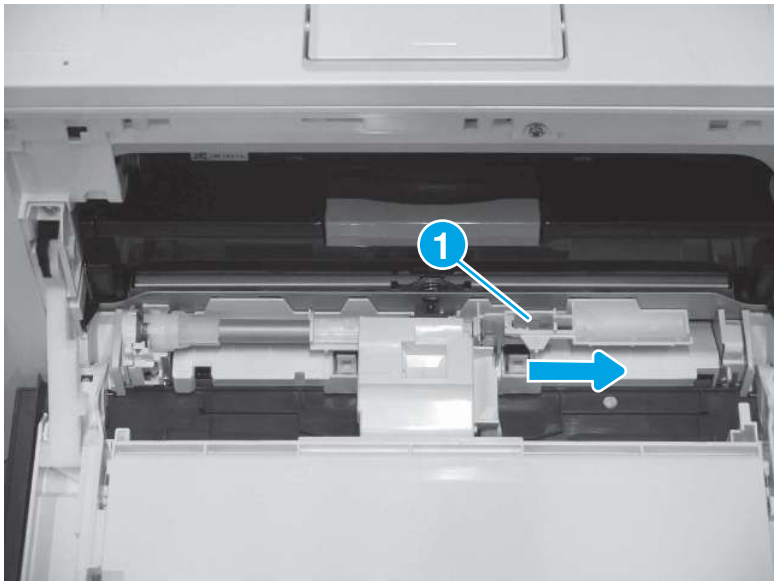Figure 4-786 Release the Tray 1 pickup roller assembly



2. Slide the pickup roller assembly (callout 1) as shown below to remove it.

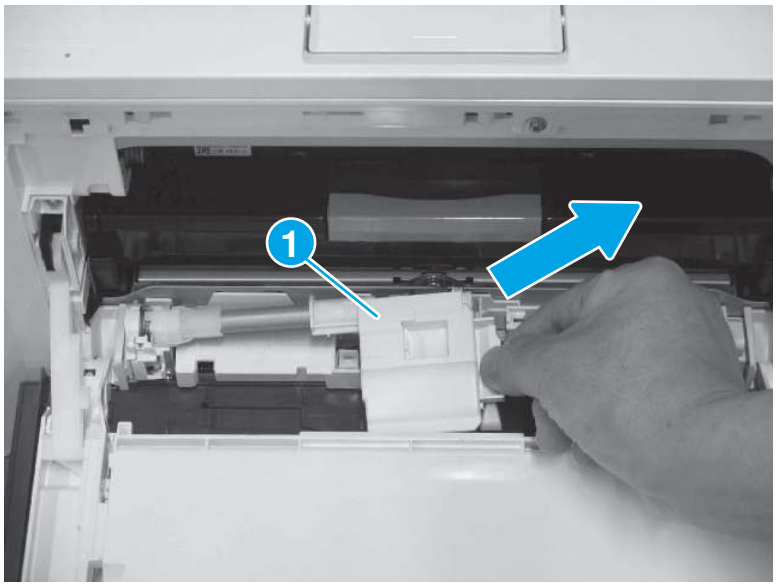Figure 4-787 Remove the Tray 1 pickup roller assembly



2. Remove the intermediate transfer belt (ITB)

Follow the procedure below to remove and replace the ITB.

IMPORTANT: *Before* ITB removal, do the following:


1. Make sure that the cartridge door and rear door are closed.
2. Turn the printer power on (initial rotation), and then turn the power off.
3. Open the cartridge door and rear door.

4. Pull the cartridge tray out of the printer until it stops.

Make sure to follow the special installation instructions for this part or step (located after the unpack and recycle or cleaning section).

1. Press the tab (callout 1) while pulling out on the coupling release lever (callout 2).

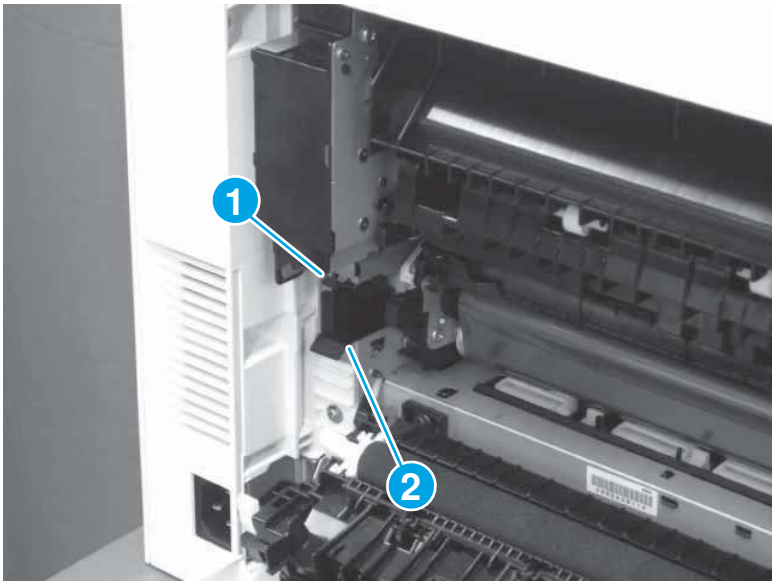Figure 4-788 **Pull the coupling release lever out**




2. Do the following:

   a. Cover the secondary transfer (T2) roller (callout 1) with a sheet of clean paper (callout 2).

   b. Grasp the left- and right-side ITB grips (callout 3), and then pull the ITB (callout 4) straight out of the printer to remove it.

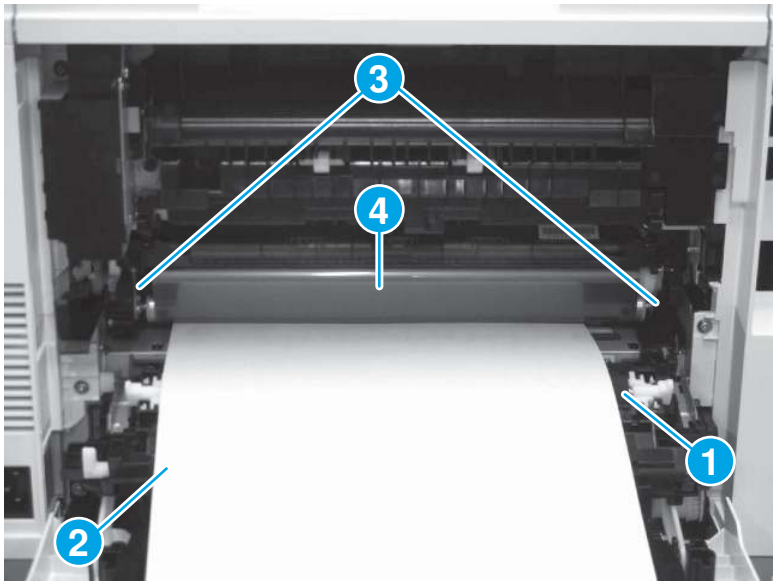Figure 4-789 **Remove the ITB**



3. Remove the left cover (SFP)


Follow the procedure below to remove and replace the left cover (SFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.

TIP: There might be a small cover installed on the USB port located at the back of the printer. If installed, remove this cover now.


1. Remove one screw (callout 1).

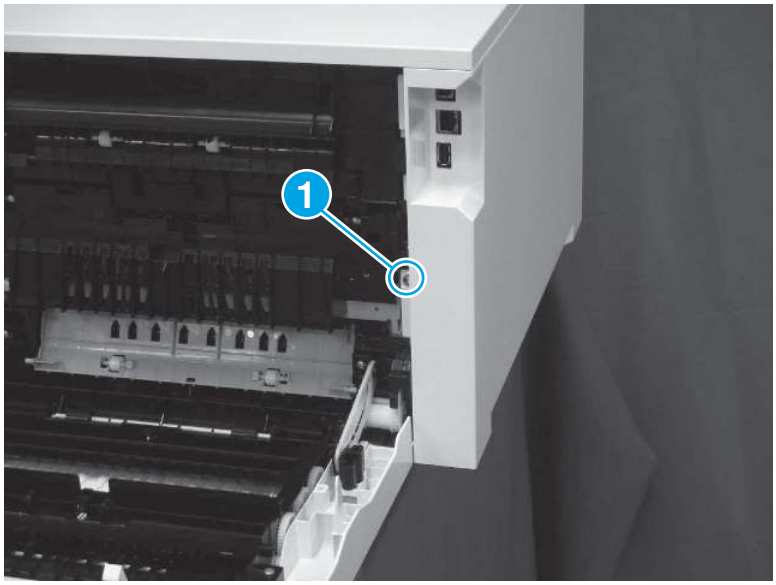Figure 4-790 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

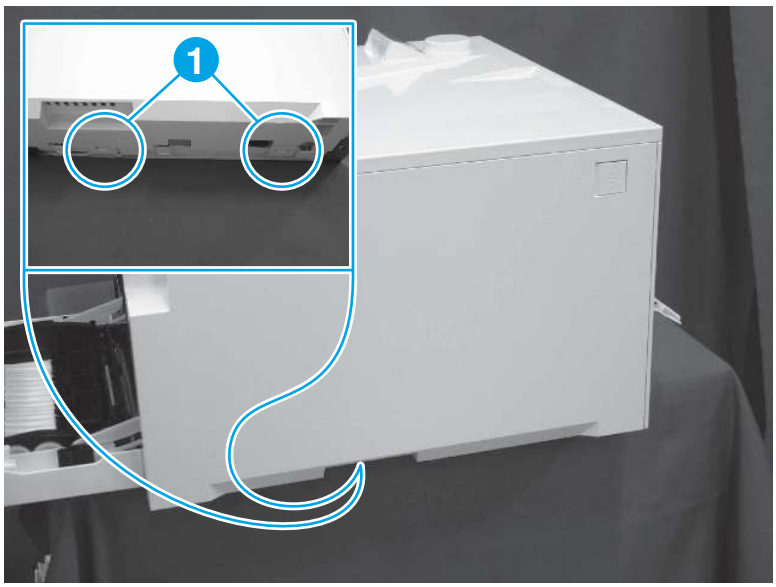Figure 4-791 Release two tabs




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

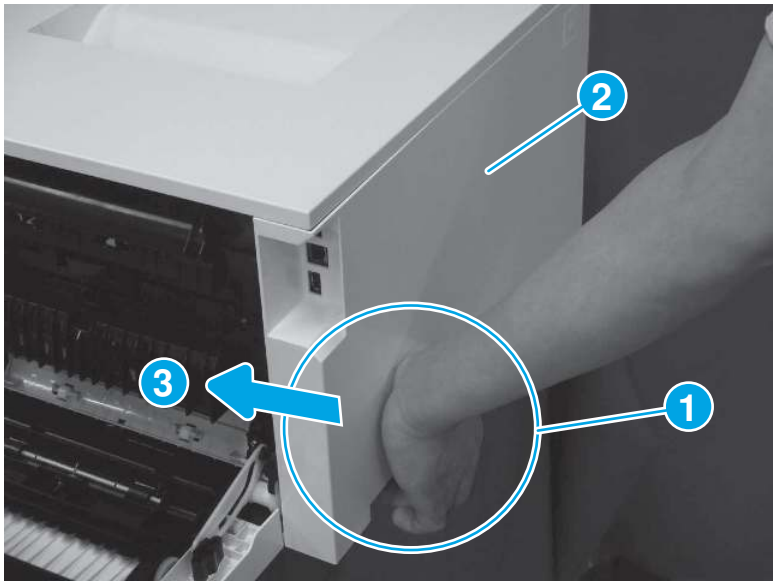Figure 4-792 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

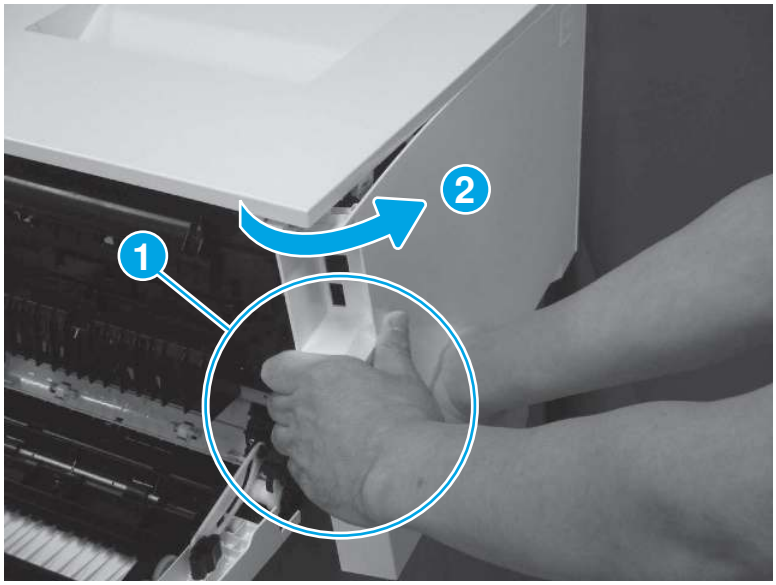Figure 4-793 Disengage the cover corner



5. Remove the left cover (callout 1).

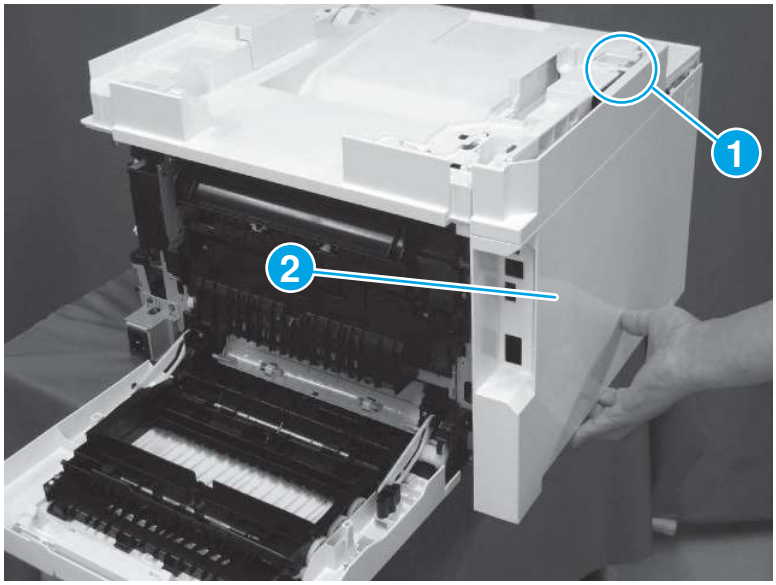Figure 4-794 Remove the cover



4. Remove the left cover (MFP)


Follow the procedure below to remove and replace the left cover (MFP).

NOTE: The following procedure is for an MFP printer only. If this assembly is being removed to gain access to dependency parts for a SFP printer, skip this step.

TIP: There might be a small cover installed on the USB port and/or the fax port located at the back of the printer. If installed, remove these covers now.


1. Remove one screw (callout 1).

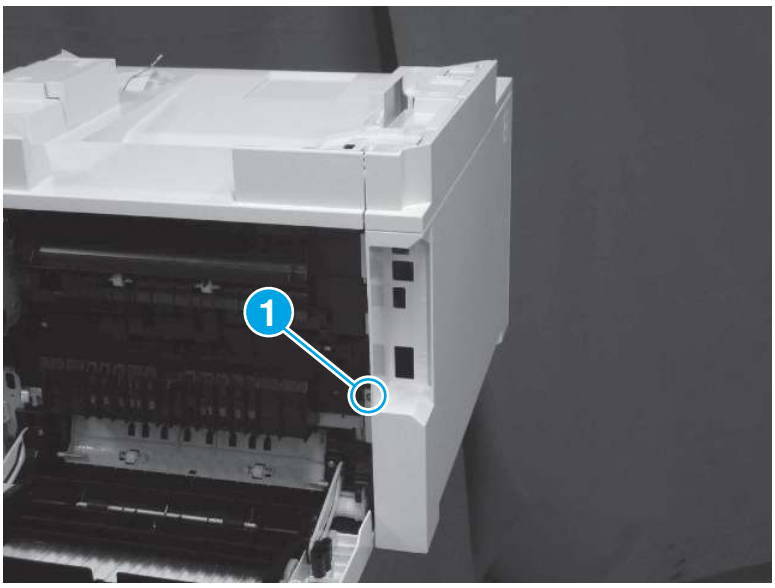Figure 4-795 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

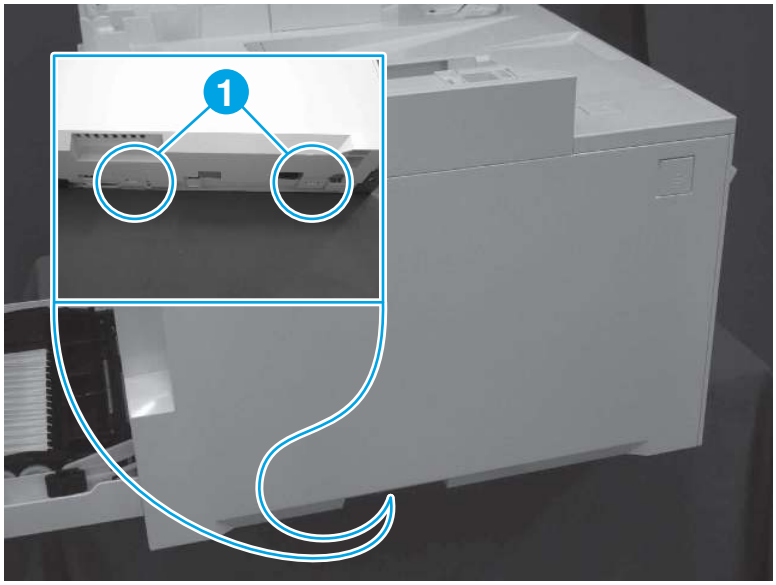Figure 4-796 Release two tabs




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

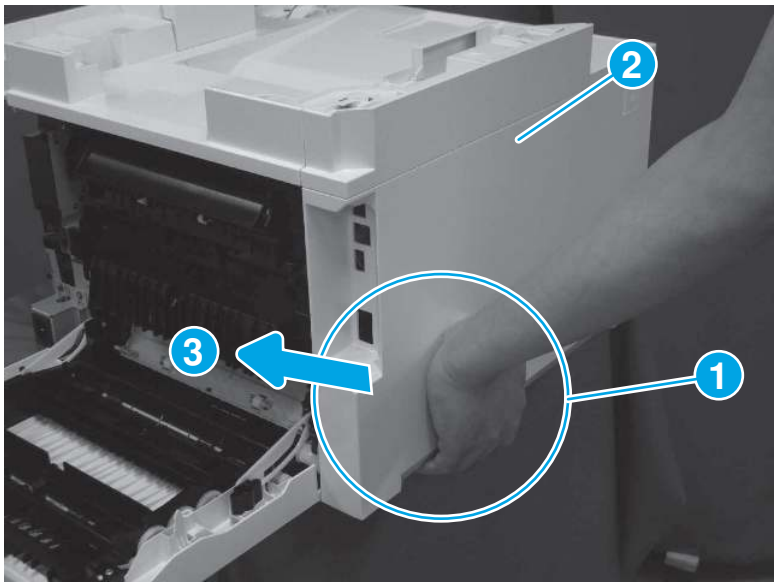Figure 4-797 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

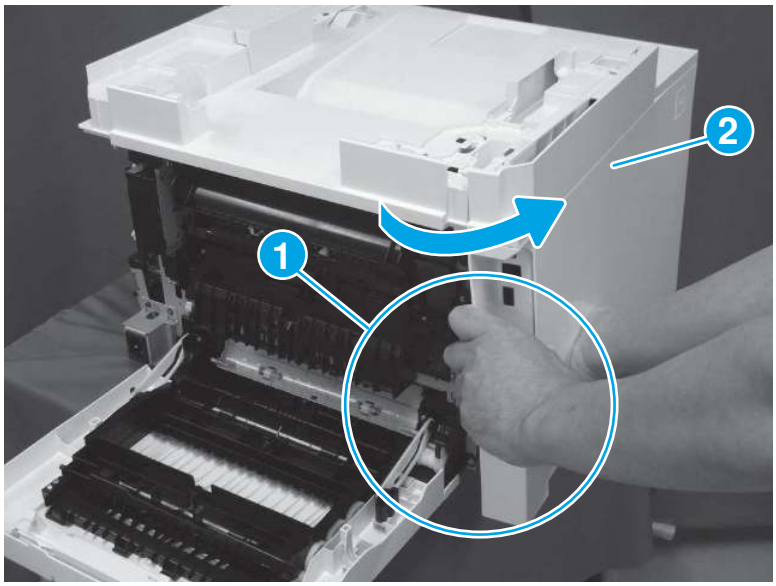Figure 4-798 Disengage the cover corner



5. Remove the left cover (callout 1).

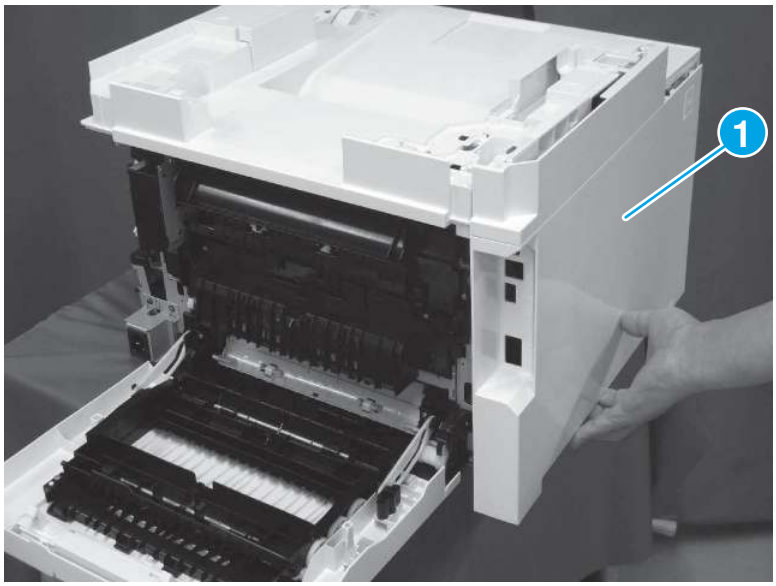Figure 4-799 Remove the cover



5. Remove the ISA (MFP)

Follow the procedure below to remove and replace the ISA.


1. Open the ISA, and then remove the ISA FFC cover (callout 1).

Figure 4-800 Remove the FFC cover



2. Disconnect three FFCs, and then remove one screw to release the ground cable.

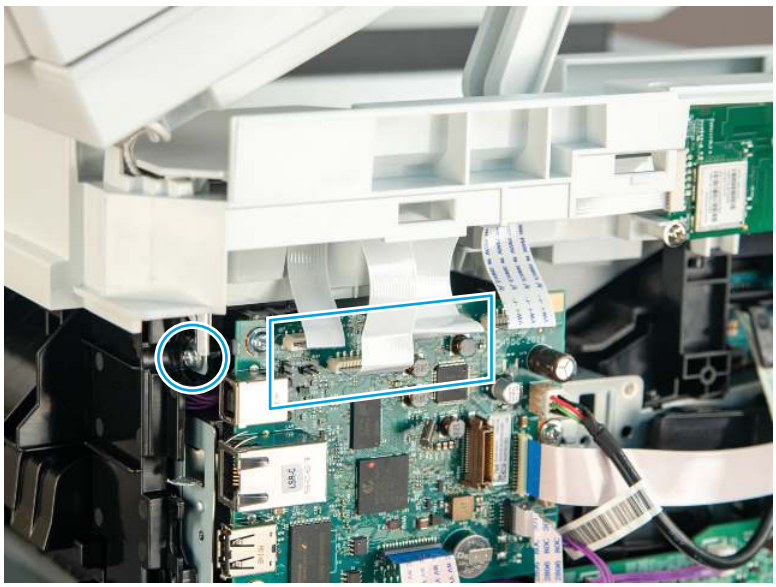Figure 4-801 Disconnect FFCs and remove screw



3. Release one tab (callout 1), and then rotate the ISA slider pin (callout 2) towards the front of the printer to release it. Remove the slider pin.


⚠ CAUTION: When the slider pin is removed, the ISA is not captive and can suddenly detach from the printer.

Figure 4-802 Remove the slider pin




4. Support the ISA, release the FFCs from the retainers, and then carefully pass the FFCs and the ground wire up through the slots in the top cover.

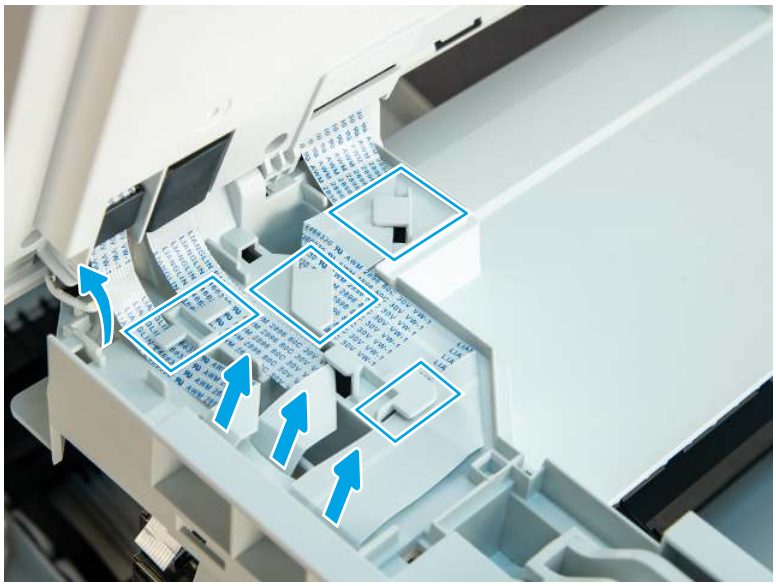Figure 4-803 Release the FFCs and ground wire



5. Slide ISA as shown below to release it.

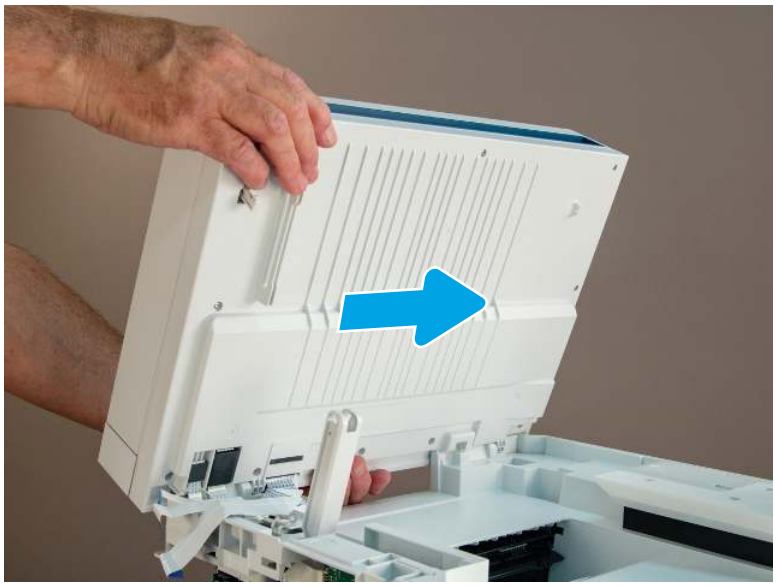Figure 4-804 Release the ISA



6. Remove the ISA.

Figure 4-805 Remove the ISA




6. Remove the engine controller PCA

Follow the procedure below to remove and replace the engine controller PCA (ECU).

⚠ CAUTION: ESD sensitive part.

1. Before proceeding, take note that there is an environmental sensor mounted on the engine controller PCA. **Do not** apply pressure to this sensor to avoid damaging it.

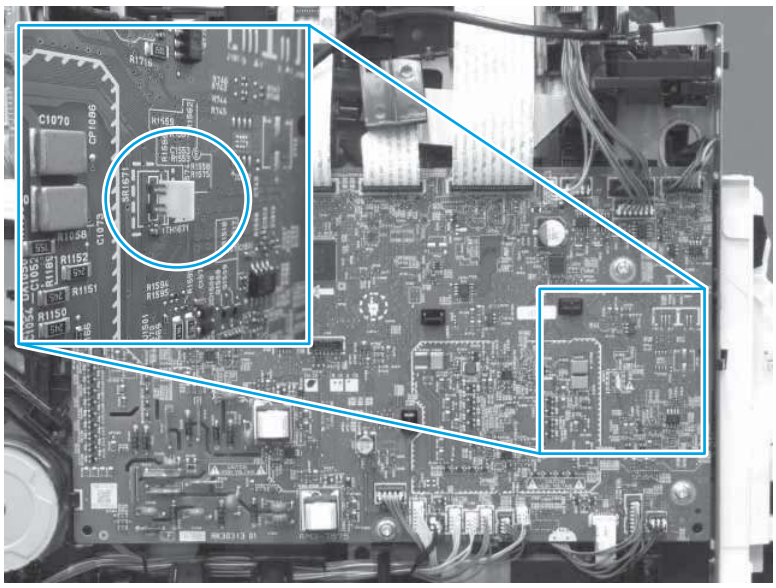Figure 4-806 **Engine controller environmental sensor location**




2. Disconnect all of the connectors on the engine controller PCA, and then remove four screws (callout 1).

⚠ **CAUTION:** Before proceeding take note of the media width sensors connectors and wire harnesses at ECU PCA locations J163 (media width sensor 2; yellow wire harness) and J165 (media width sensor 1; red wire harness). These connectors and wire harness are interchangeable. The PCA is embossed with **YELLOW** (connector J163) and **RED** (connector J165).

Make sure that the correct wire harness is plugged into the appropriate connector to avoid unexpected printer operation.

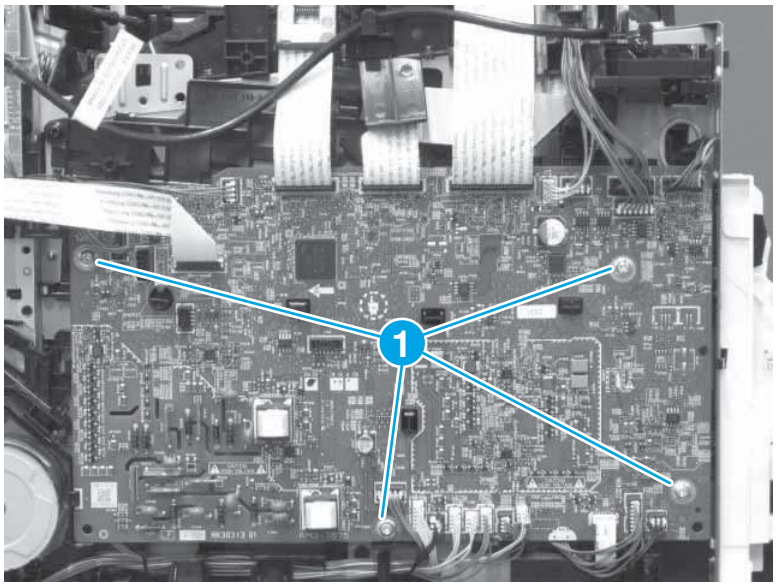Figure 4-807 **Disconnect connectors and remove screws**




3. Release four tabs (callout 1), and then remove the engine controller PCA (callout 2).

CAUTION: There are three clear plastic light guides installed in the PCB holder behind the PCA that are not captive. Do not lose these parts when the PCA is removed.

Reinstallation tip: If a replacement formatter is being installed, **make sure** to read and follow the special installation instructions in the topic (located immediately after the unpack and recycle step).

The ECU/DCC must be paired with the formatter to be functional.

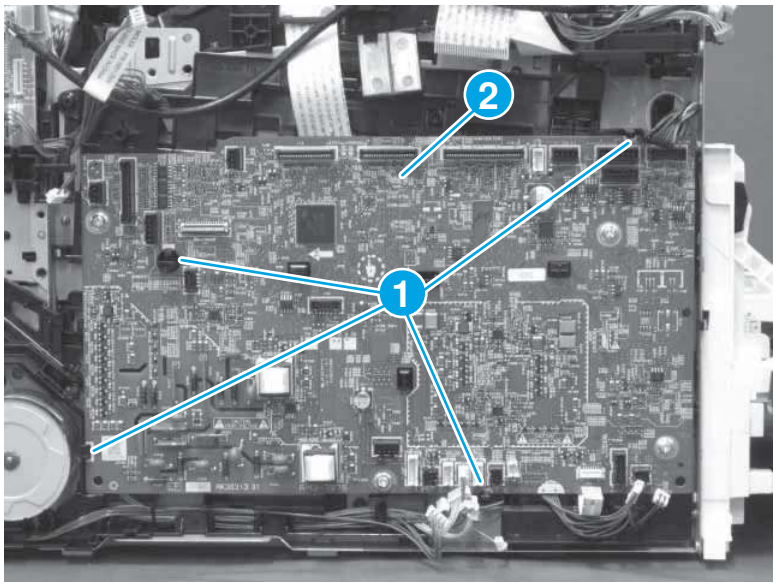Figure 4-808 **Remove the engine controller PCA**




7. Remove the right cover (SFP)

Follow the procedure below to remove and replace the right cover (SFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.


1. Remove one screw (callout 1).

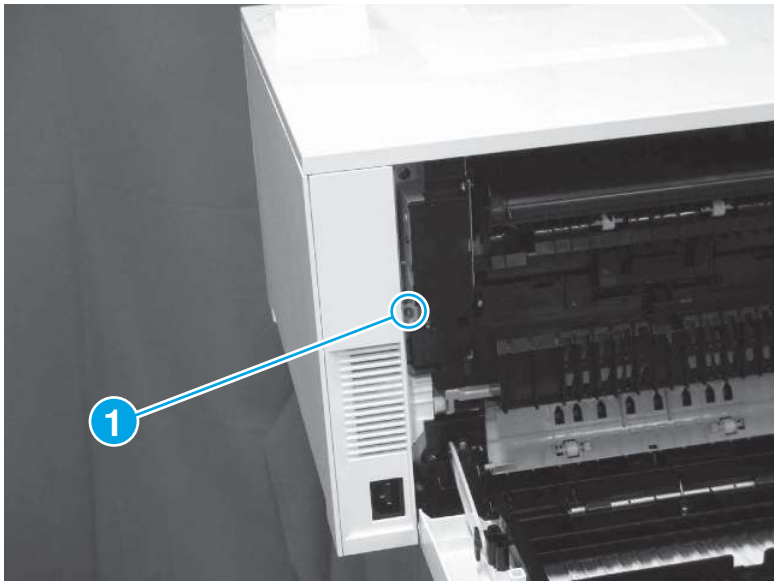Figure 4-809 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to three tabs (callout 1). Release three tabs.

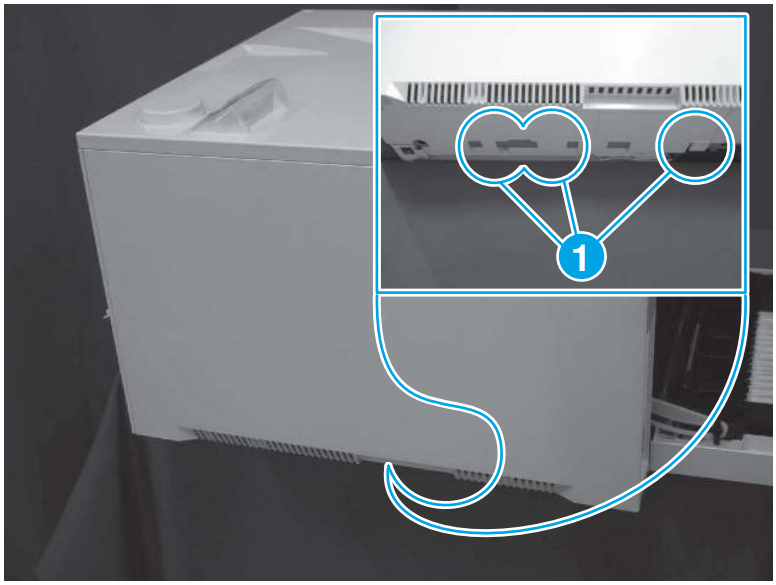Figure 4-810 Release three tabs




3. Press in on the side (callout 1) of the right cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

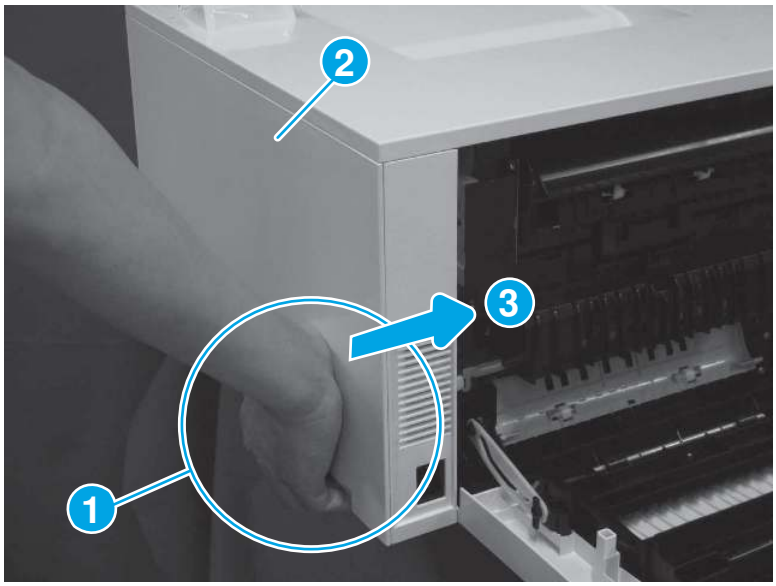Figure 4-811 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

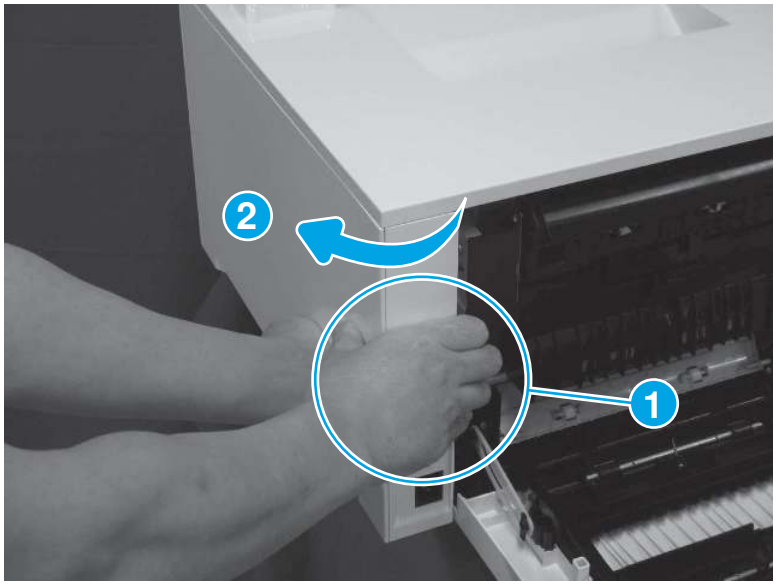Figure 4-812 Disengage the cover corner



5. Remove the right cover (callout 1).

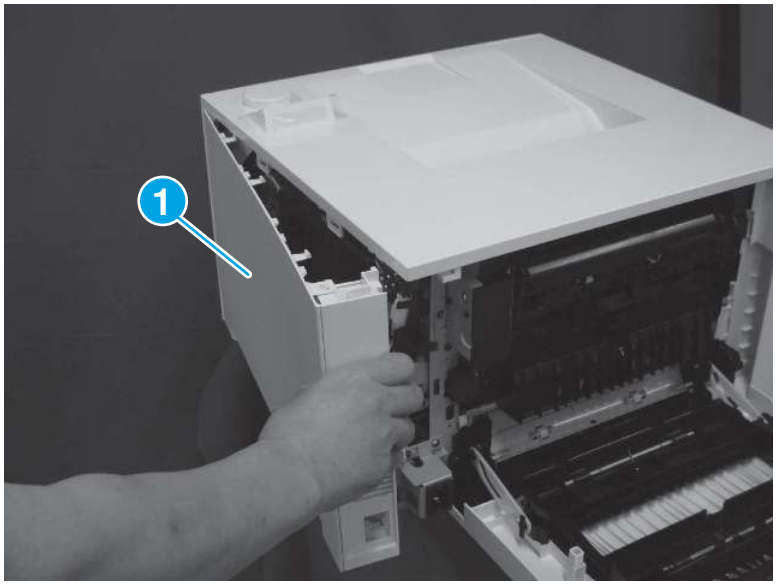Figure 4-813 **Remove the cover**




8. Remove the right cover (MFP)

Follow the procedure below to remove and replace the right cover (MFP).

NOTE: The following procedure is for an MFP printer only. If this assembly is being removed to gain access to dependency parts for a SFP printer, skip this step.


1. Remove one screw (callout 1).

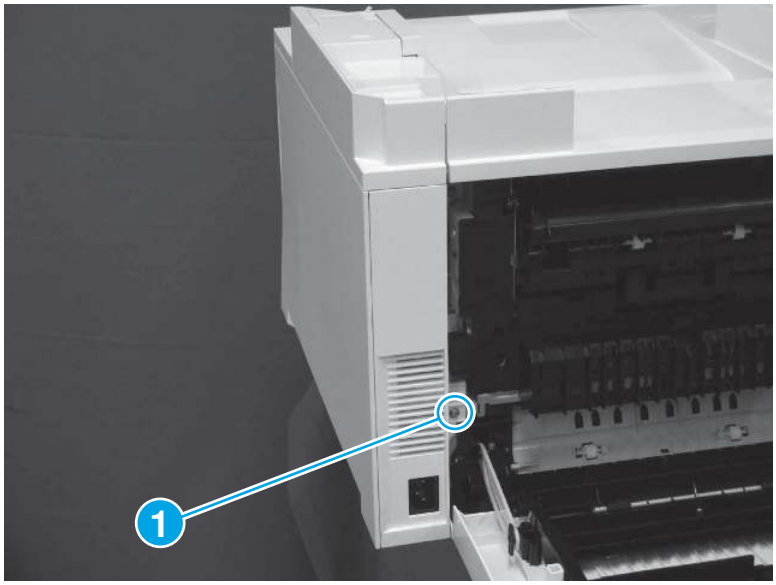Figure 4-814 **Remove one screw**




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to three tabs (callout 1). Release three tabs.

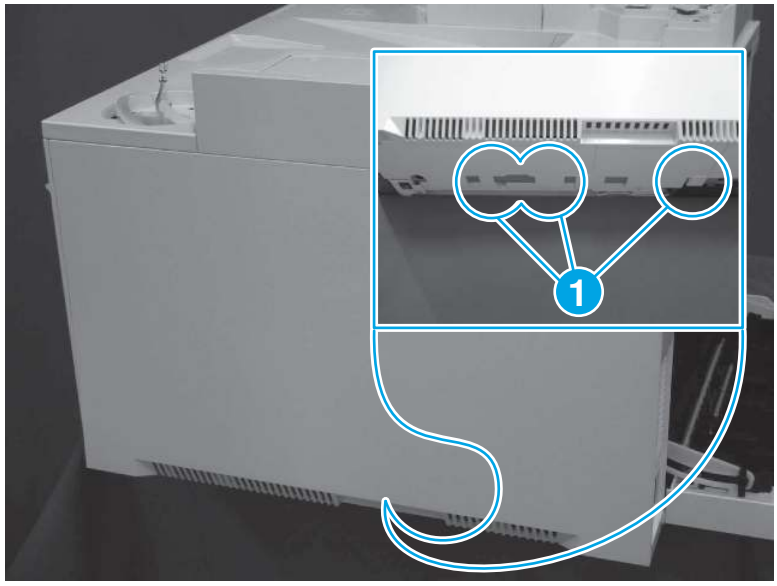Figure 4-815 Release three tabs




3. Press in on the side (callout 1) of the right cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

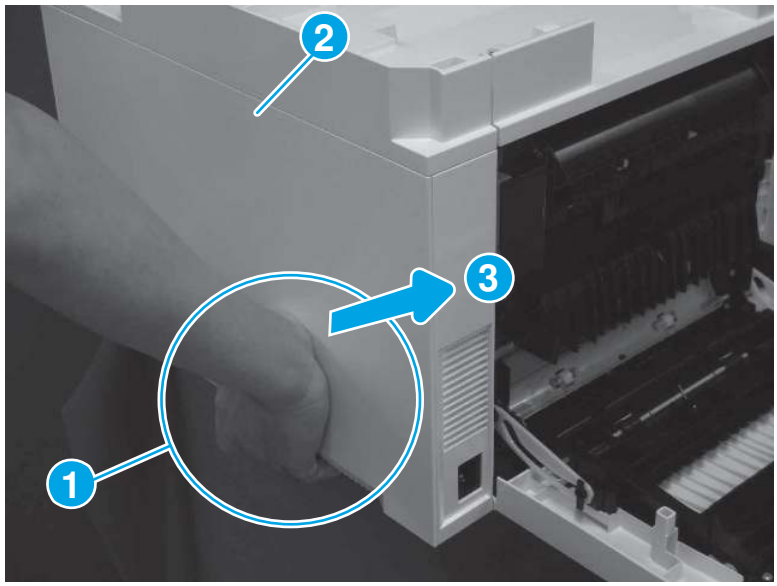Figure 4-816 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

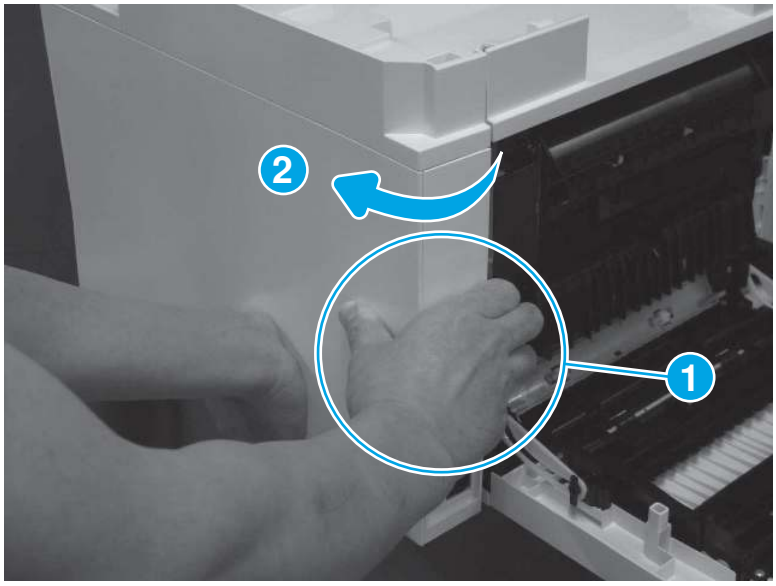Figure 4-817 Disengage the cover corner



5. Remove the right cover (callout 1).

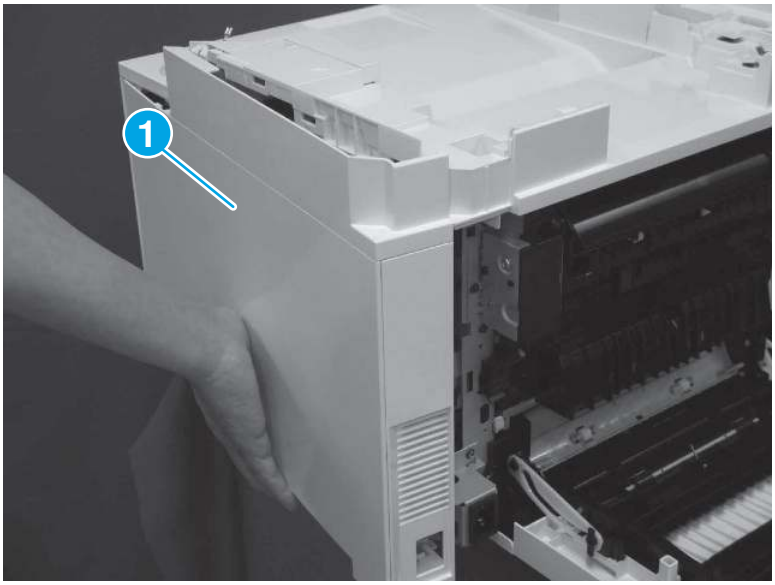Figure 4-818 Remove the cover



9. Remove the front cover


Follow the procedure below to remove and replace the front cover.

NOTE: Front cover removal is **identical** for both SFP and MFP models.

Reinstallation tip: Make sure to follow the special installation instructions for this part or step (located after the unpack and recycle or cleaning section).

1. Remove three screws (callout 1).

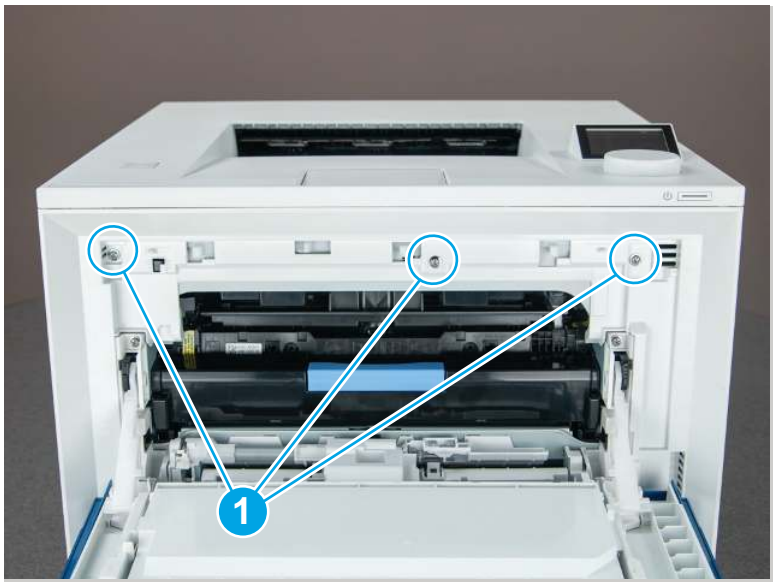
Figure 4-819 **Remove three screws**



2. Before proceeding, take note of the door release arm (callout 1). This arm can be easily dislodged when the cover is removed.


⚠ CAUTION: Do not lose the spring (callout 2) when removing the front cover.

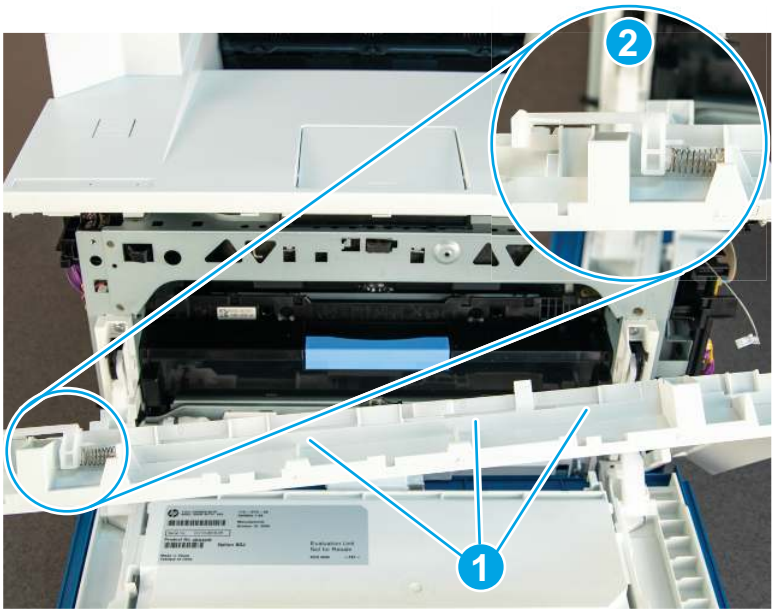Figure 4-820 **Door release arm**



3. Release four tabs (callout 1), and then remove the front cover (callout 2).

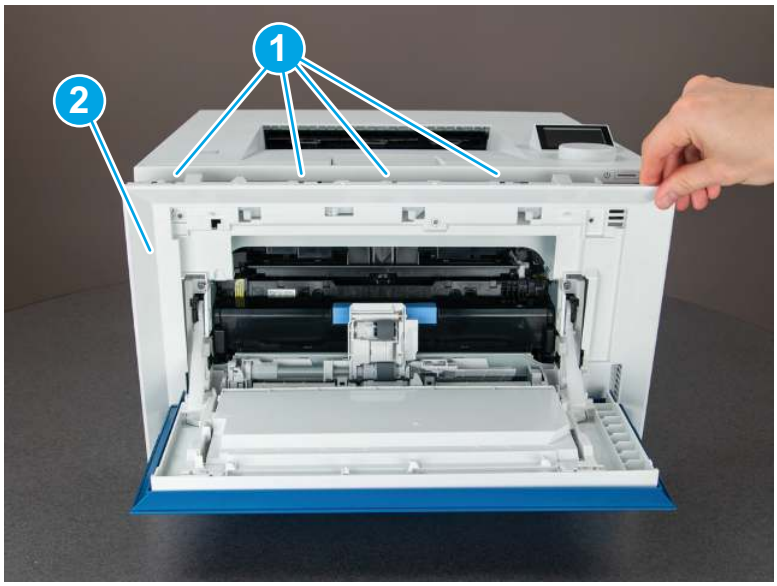Figure 4-821 **Remove the cover**




10. Remove the cartridge tray

Follow the procedure below to remove and replace the cartridge tray.

1. Release one tab (left side).

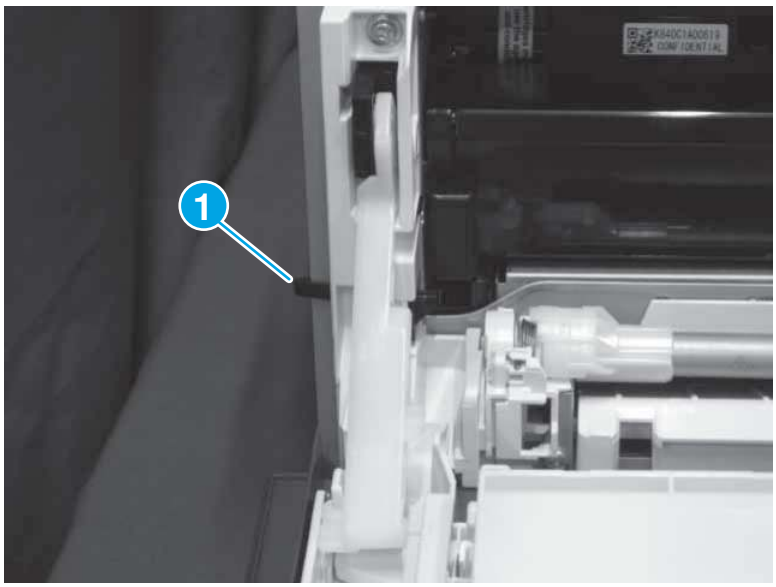Figure 4-822 **Release one tab (left side)**




2. Use a pair of needle-nose pliers to remove the stopper (callout 1) (left side).

Figure 4-823 **Remove the stopper (left side)**




3. Release one tab (right side).

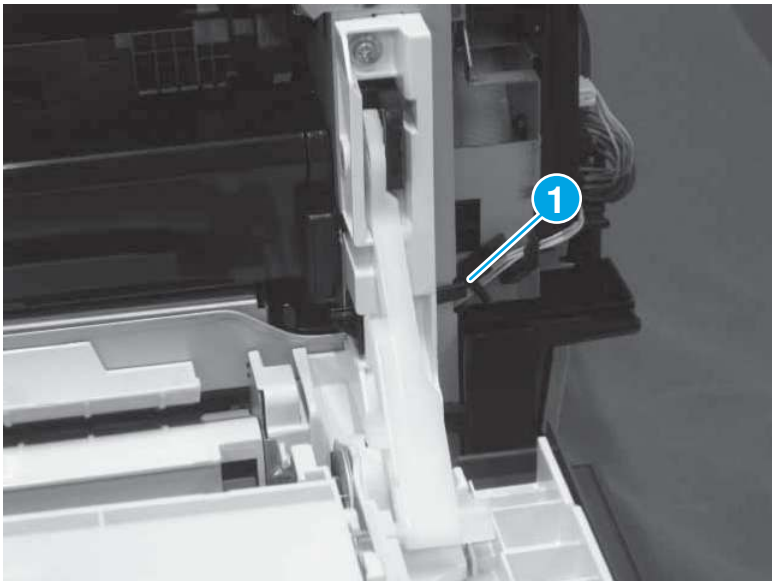Figure 4-824 **Release on tab (right side)**



4. Use a pair of needle-nose pliers to remove the stopper (callout 1) (right side).

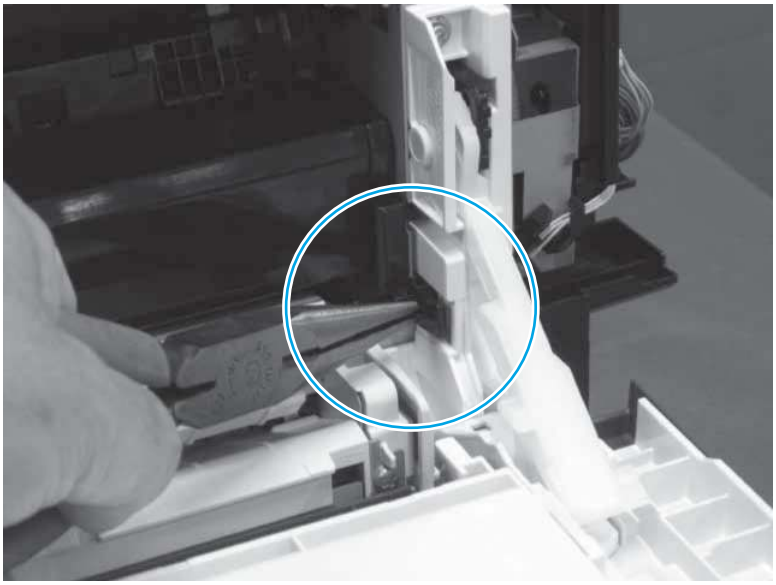
Figure 4-825 **Remove the stopper (right side)**



5. Pull the cartridge tray (callout 1) out of the printer to remove it.

NOTE: Slightly lift up on the front of the tray while removing it.

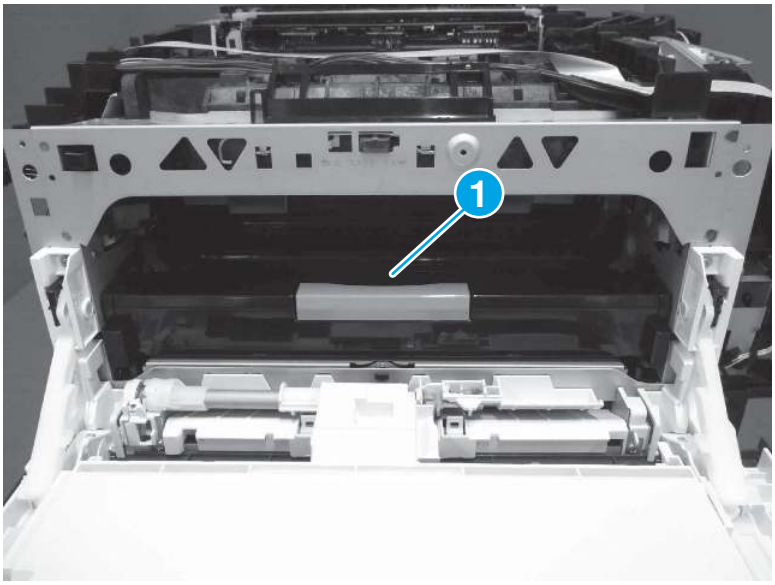Figure 4-826 **Remove the cartridge tray**



11. Remove the top cover (SFP)

Follow the procedure below to remove and replace the top cover (SFP).


NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.

1. **Wireless model only:** Raise and support the left side of the printer, remove one screw, and then separate the wireless PCA from the cover.

CAUTION: Do not attempt to completely remove the wireless PCA. Instead, gently move it out of the way.


TIP: To remove the screw without raising the printer, use a short-barrel screwdriver.

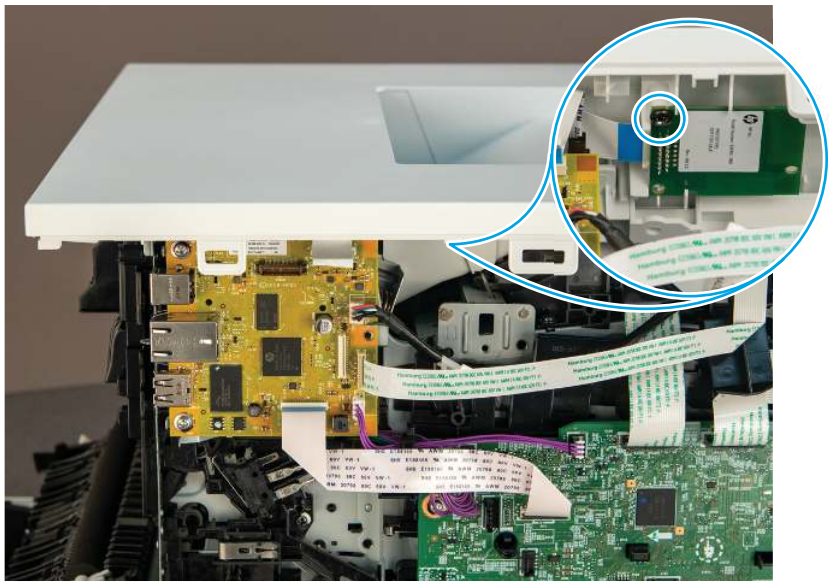Figure 4-827 **Remove one screw**



2. Disconnect one flat-flexible cable (FFC).

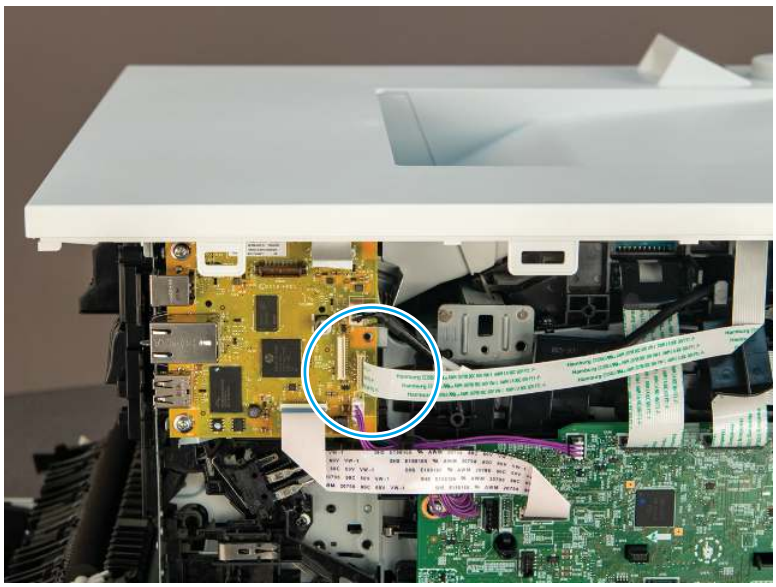Figure 4-828 **Disconnect one FFC**



3. Disconnect one FFC, and then remove one screw to release the ground wire.


NOTE: The front cover is shown installed in the figure below. However, this step is correct for removing the top cover.

Figure 4-829 Disconnect one FFC and remove one screw



4. Sliding the cover from the back of the printer towards the front to remove it.

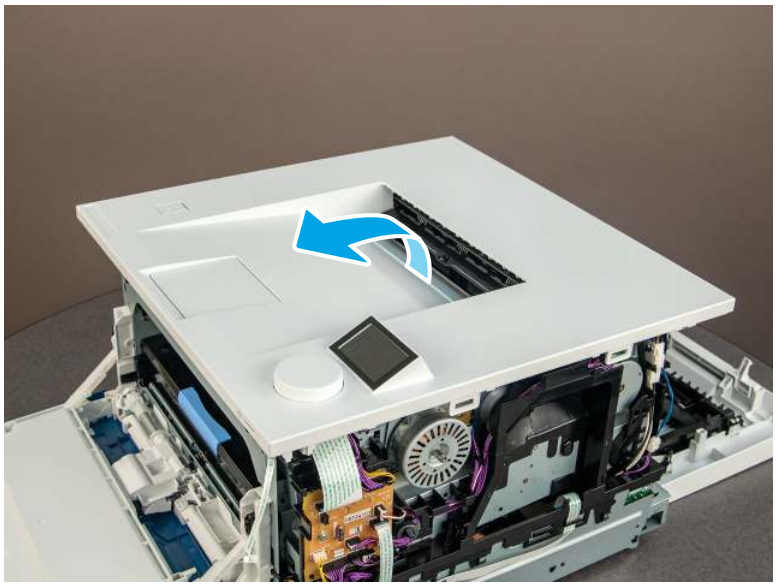Figure 4-830 Remove the cover




12. Remove the top cover (MFP)

Follow the procedure below to remove and replace the top cover (MFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.

1. Close the ISA lift arm.

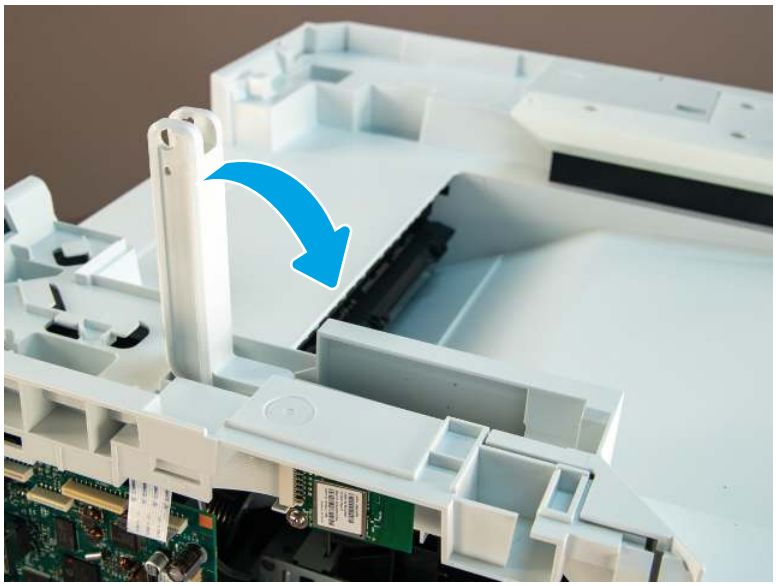
Figure 4-831 Close the ISA lift arm



2. Remove one screw.


⚠ CAUTION: The support arm is spring loaded and can unexpectedly spring into the open position. To avoid injury, do not place a finger in the screw well when the support arm is in the closed position.

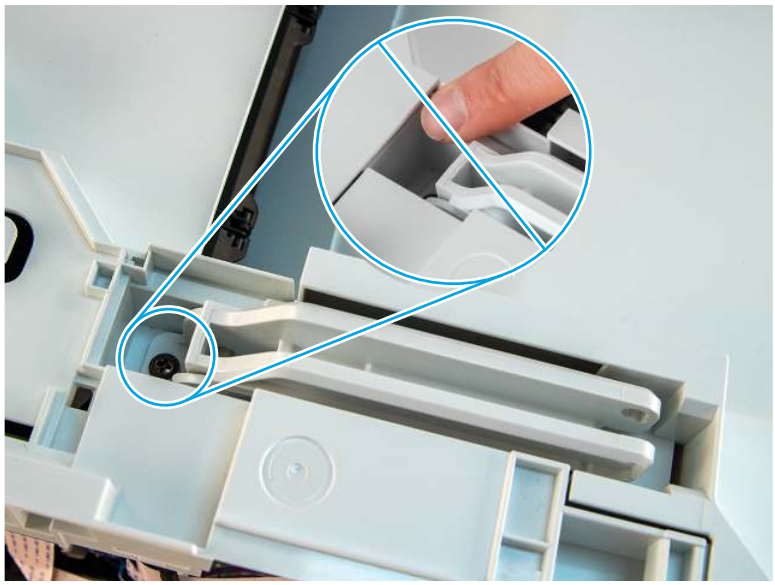Figure 4-832 Remove one screw



3. Rotate one end of the lift arm up (callout 1), and then slide the lift arm as shown below (callout 2) to release it. Remove the lift arm.

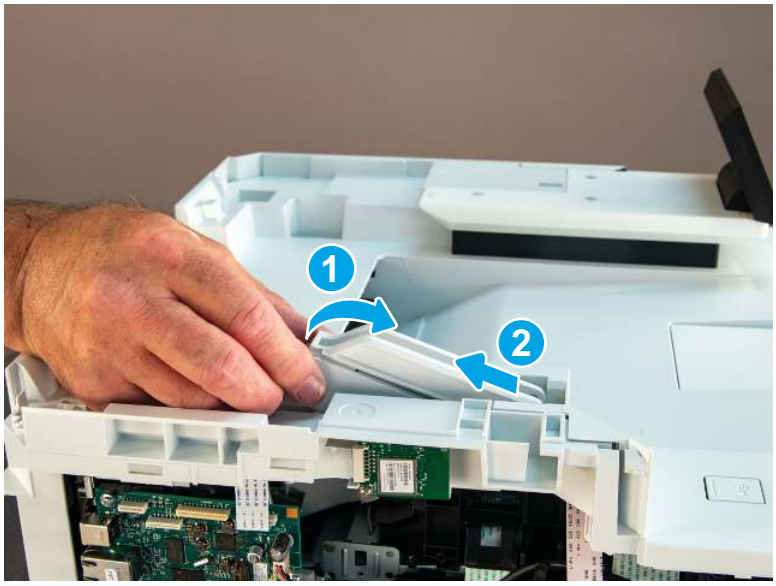Figure 4-833 Remove the lift arm




4. Do the following:

   a. Disconnect one FFC (control panel; callout 1).

   b. Remove one screw (callout 2), and then separate the wireless PCA from the top cover.


NOTE: The wireless PCA does not need to be completely removed. Instead, release the FFC from the retainer (callout 3), and then gently move it out of the way.

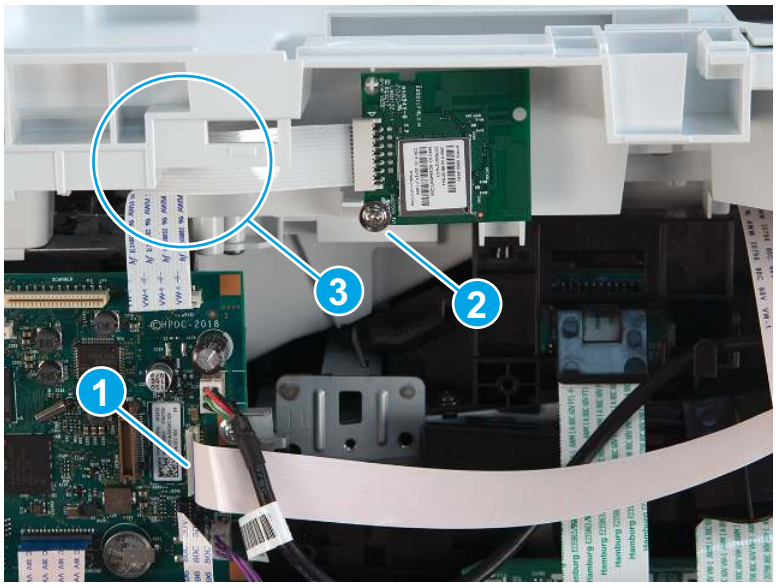Figure 4-834 Disconnect FFC and move the wireless PCA




5. Disconnect one FFC (power button), and then remove one screw (grounding sheet-metal plate).

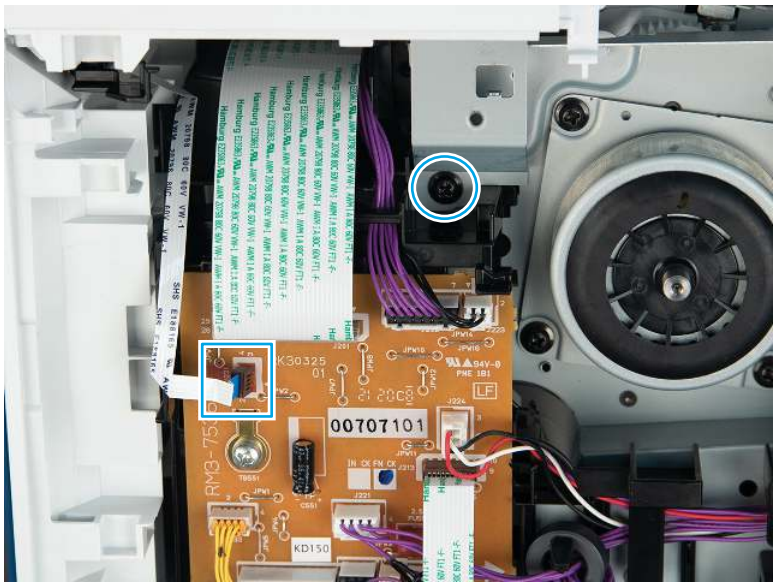Figure 4-835 Disconnect one FFC and remove one screw




6. Remove three screws.

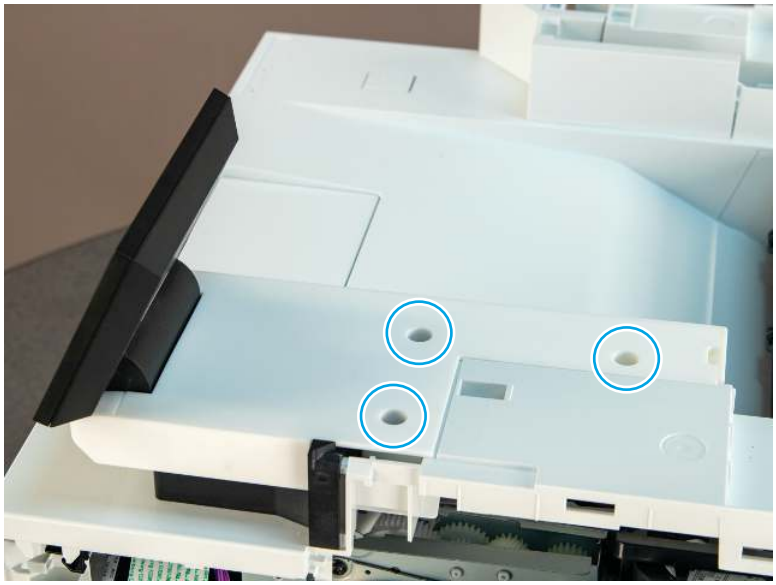Figure 4-836 Remove three screws



7. Release one tab and rotate one end of the base cover up (callout 1), and then slide the cover as shown (callout 2) to remove it.

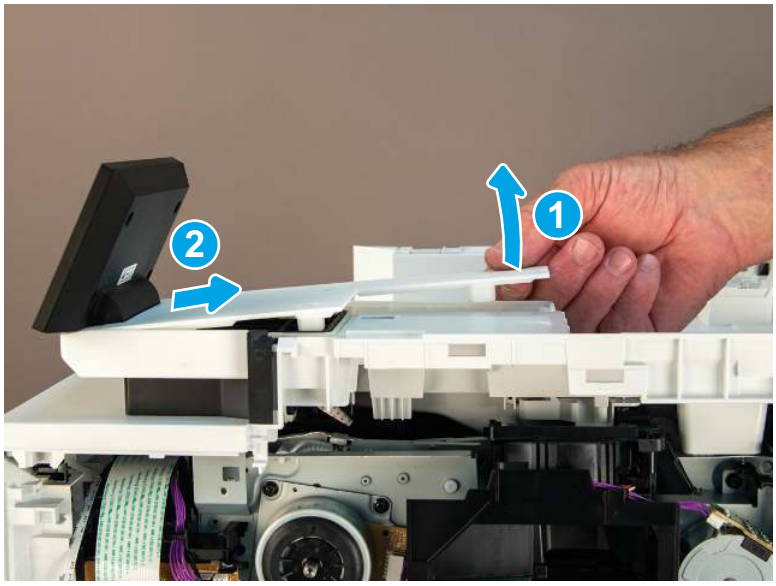Figure 4-837 Remove the cover



8. Disconnect two FFCs.

NOTE: Theses are zero-insertion force (ZIF) connectors. To remove the FFCs, first release the locking clip on the connector, and then pull the cable straight out of the connector.

TIP: For reinstallation, make sure that the line of the FFC is parallel with the body.

Figure 4-838 Disconnect two FFCs



9. Remove four screws.

NOTE: Two of the screws are self-tapping threads (black), and two of the screws are machine thread (silver).


Figure 4-839 Remove four screws



10. Lift the control panel and base straight up and off of the printer to remove them together.


NOTE: When handling the assembly, do not lose the ferrite (callout 1).

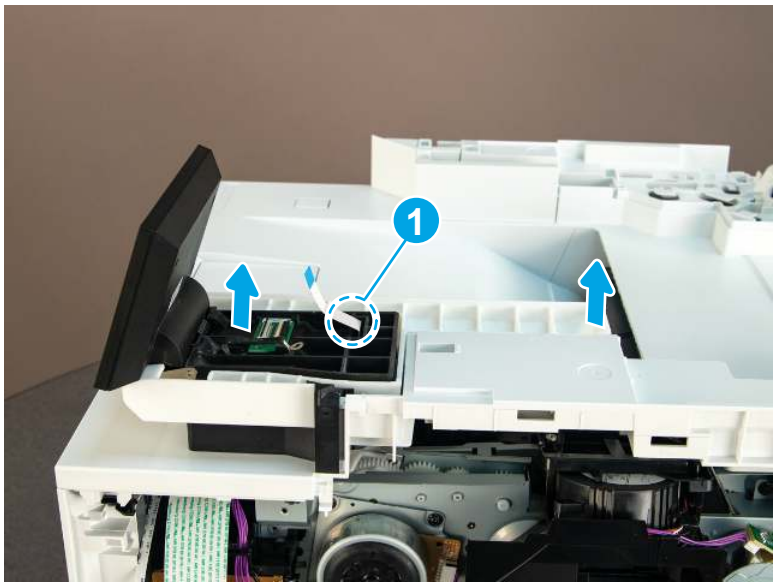Figure 4-840 Remove control panel and base



11. Remove three screws.

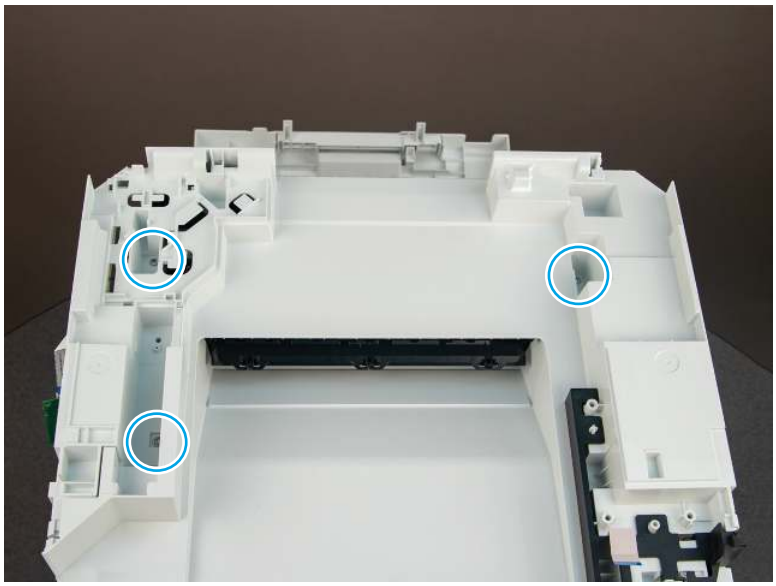
Figure 4-841 Remove three screws



12. Sliding the cover from the back of the printer to the front to remove it.

TIP: Slightly move the control-panel ground bracket (circled) back and forth to help release the top cover.

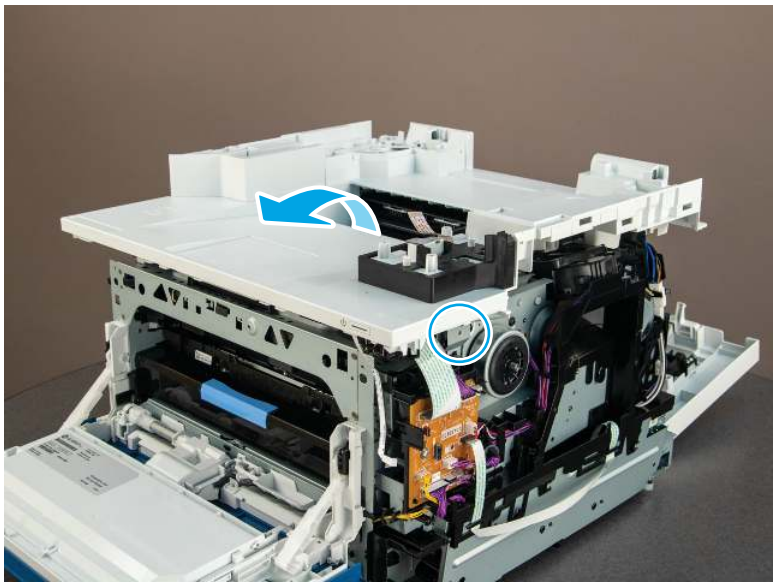Figure 4-842 Remove the cover



13. **When the cover is reinstalled**: Make sure that the front USB assembly is correctly positioned under the cover.

Figure 4-843 **Front USB assembly**



13. Remove the formatter PCA

Follow the procedure below to remove and replace the formatter PCA.

⚠ CAUTION: ESD sensitive part.

1. Disconnect all of the connectors on the formatter PCA.

Figure 4-844 **Disconnect all of the connectors (SFP/MFP)**




2. Remove three screws, and then remove the formatter PCA.

Reinstallation tip: If a replacement formatter is being installed, make sure to read and follow the special installation instructions in the topic (located immediately after the unpack and recycle step).

The formatter must be paired with the ECU/DCC to be functional.

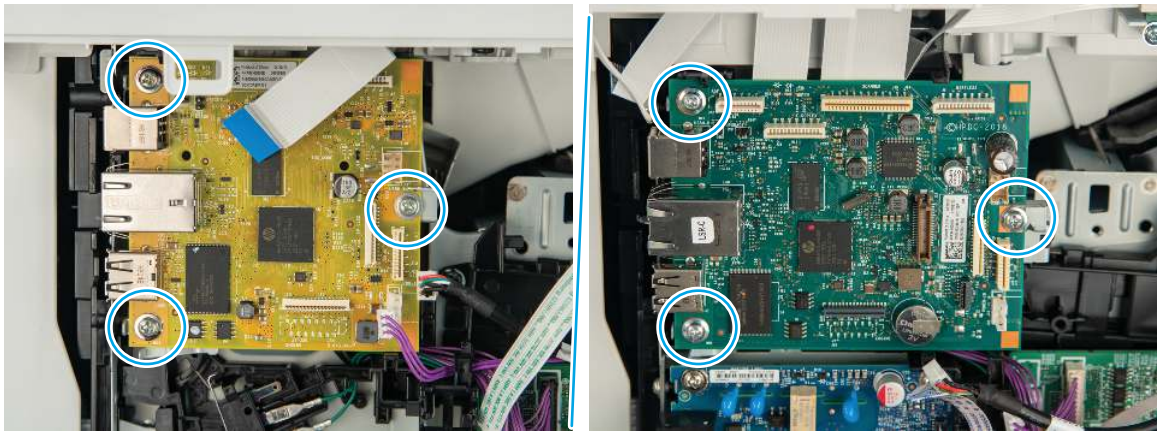Figure 4-845 Remove the formatter PCA (SFP/MFP)




14. Remove the interlock holder assembly

Follow the procedure below to remove and replace the interlock holder assembly.

1. Remove three screws (callout 1, and then remove the plate (callout 2).

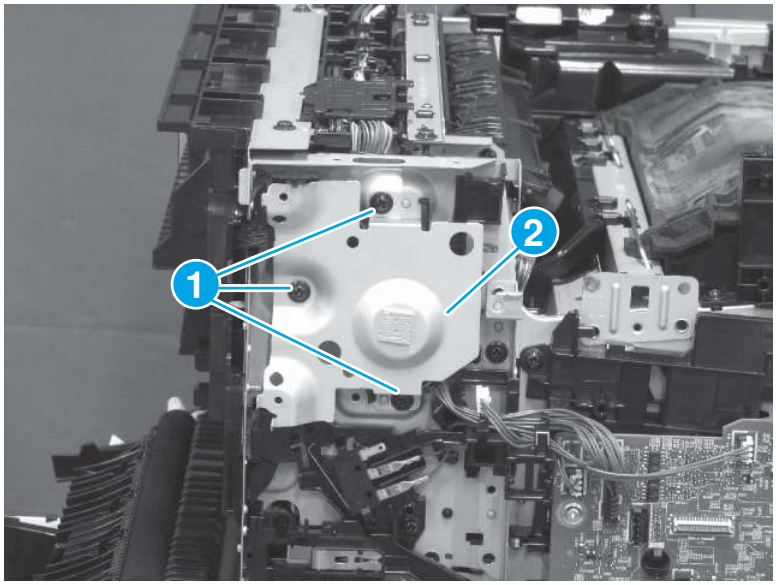
Figure 4-846 Remove the plate



2. Release the cable (callout 1) from the guides (callout 2), release two tabs (callout 3), and then separate the interlock switch (callout 4) from the holder.


⚠ CAUTION: Do not attempt to completely remove the interlock switch. It is still connected to the wire cables.

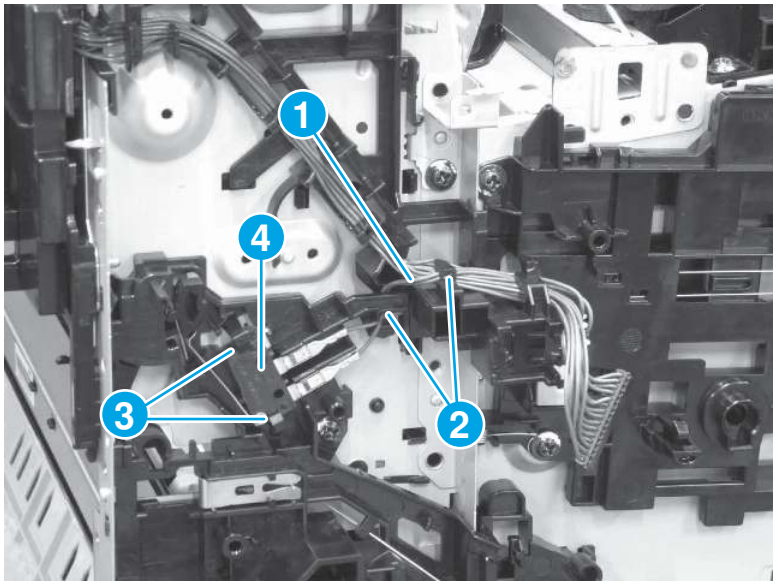Figure 4-847 Separate the interlock switch from the holder



3. Remove one screw (callout 1), release four tabs (callout 2), and then remove the interlock holder assembly (callout 3).

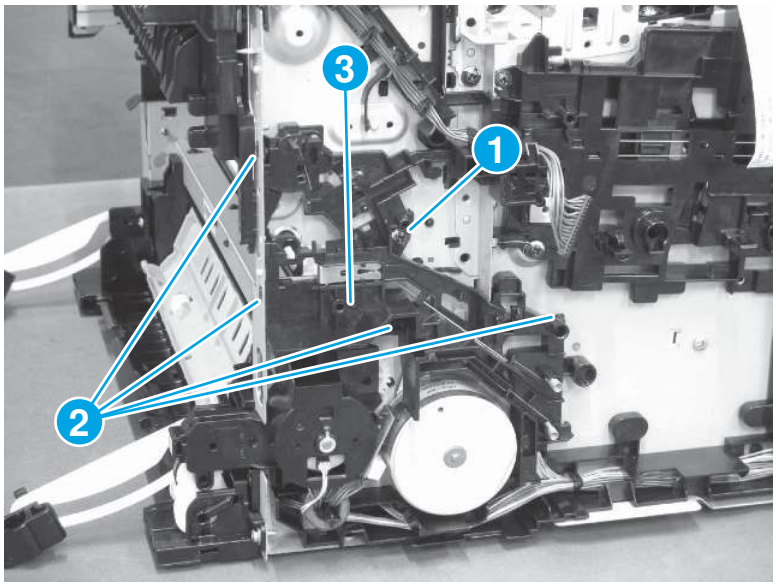Figure 4-848 Remove the interlock holder assembly




15. Remove the PCA holder assembly

Follow the procedure below to remove and replace the PCA holder assembly.


1. Remove two screws (callout 1), and then remove the guide (callout 2).

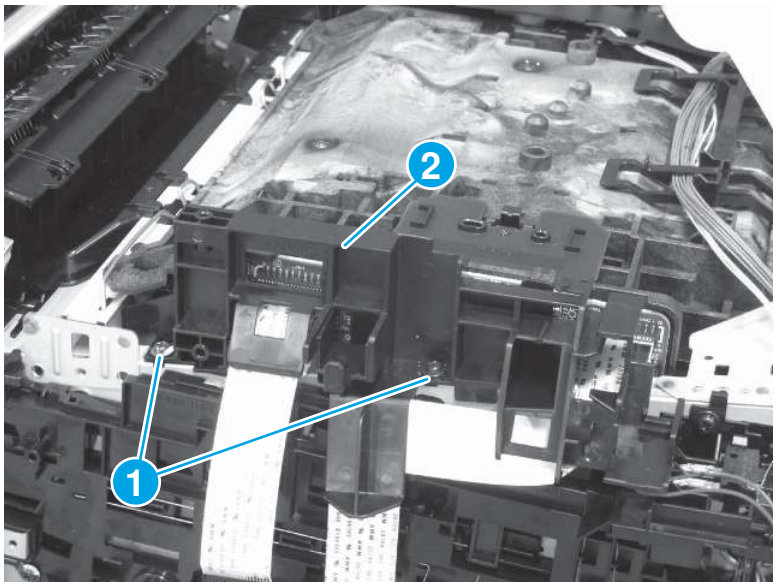Figure 4-849 Remove the guide




2. Remove four light guides (callout 1).

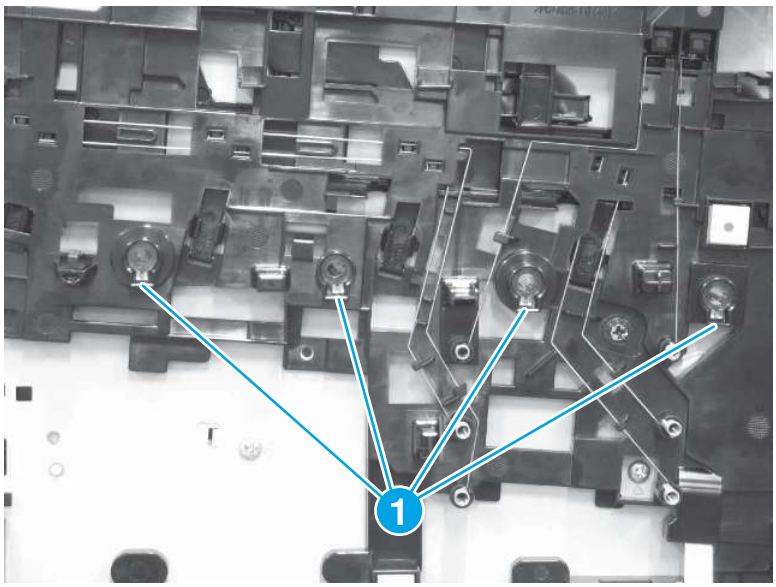Figure 4-850 Remove four light guides




3. Remove one screw (callout 1), and then remove the sheet-metal bracket (callout 2).

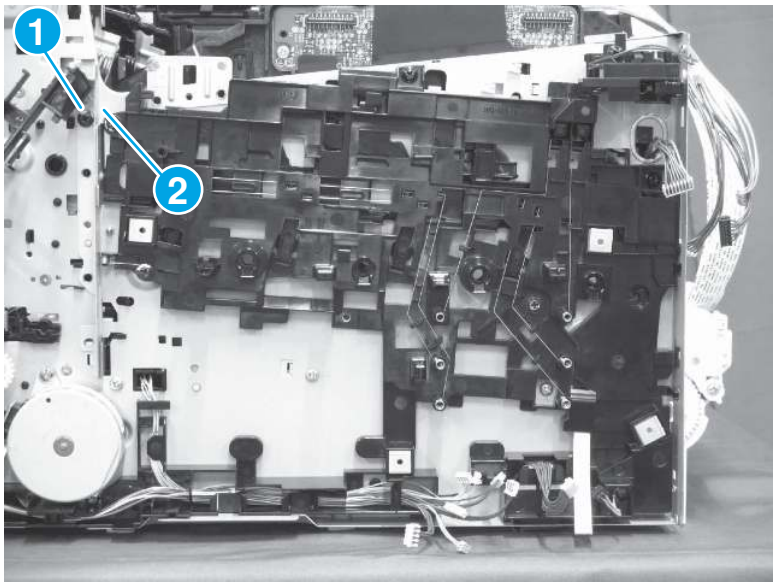Figure 4-851 **Remove the bracket**



4. Remove five screws (callout 1), release three tabs (callout 2), and then remove the PCA holder assembly (callout 3).

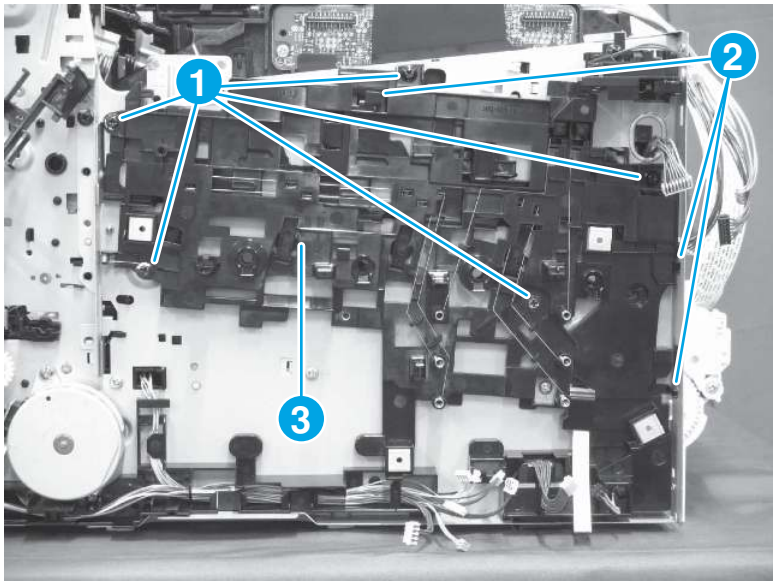
Figure 4-852 **Remove the PCA holder assembly**



5. **For a replacement PCA holder assembly only:** Remove the rail link (callout 1) from the PCA holder assembly, and then install it on the replacement PCA assembly.

NOTE: If the rail link is not on the PCA holder assembly, check the printer chassis.

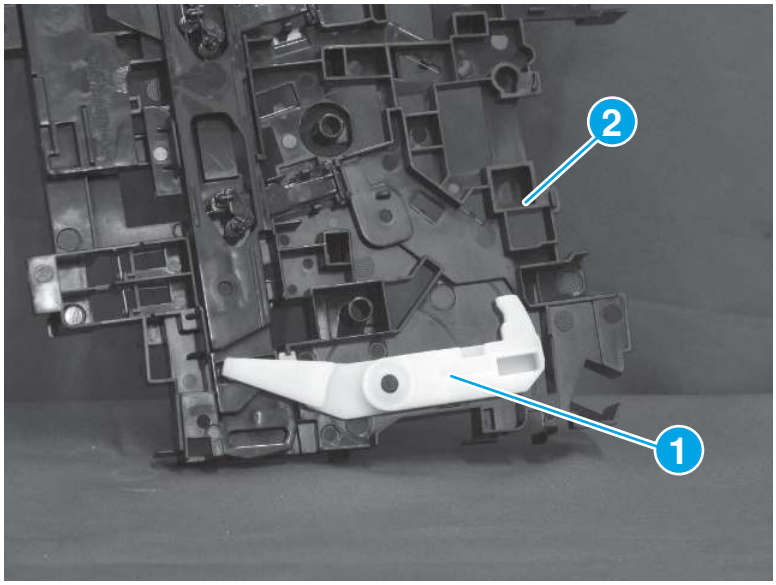Figure 4-853 Remove the rail link




16. Remove the registration density sensor

Follow the procedure below to remove and replace the registration density sensor.


1. Release one tab, and then slide the cable guide (callout 2) as shown below to release it.

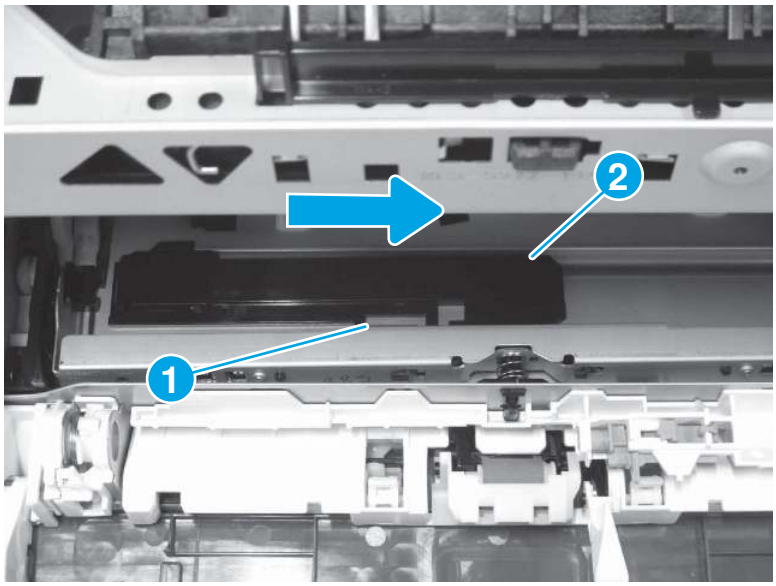Figure 4-854 Release the cable guide




2. Remove the cable guide (callout 1) and the flat-flexible cable (FFC; callout 2) together out of the way.

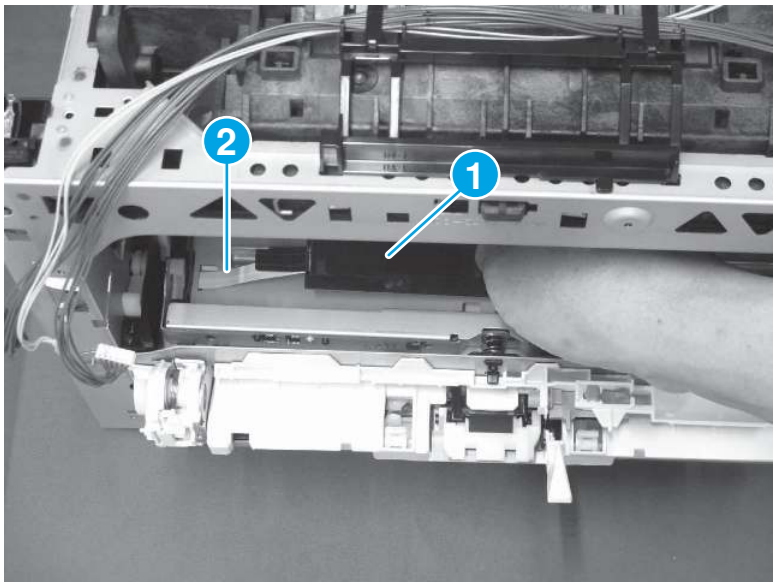Figure 4-855 Remove the guide and FFC



3. Release two tabs (callout 1), and then remove the registration density sensor (callout 2).

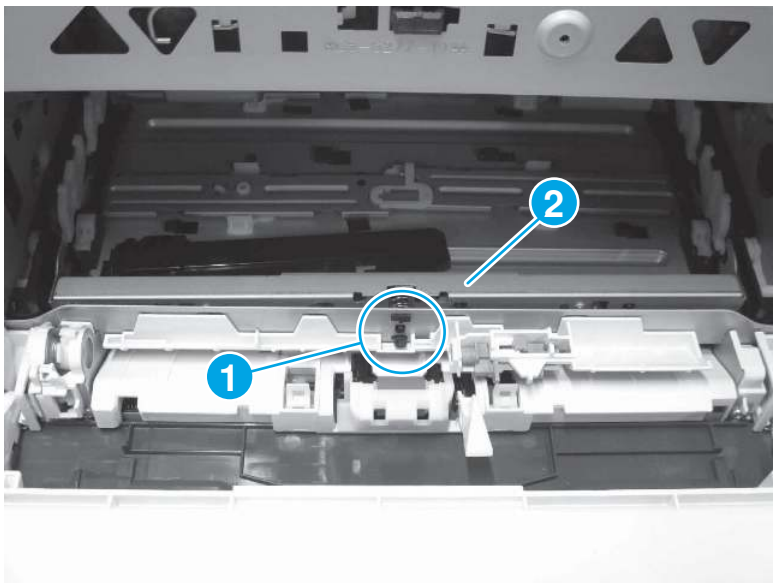Figure 4-856 Remove the registration density sensor



17. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: 

Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.


18. Special installation instructions - Front cover

Follow the special instructions below to install the front cover.

NOTE: Front cover installation is **identical** for both the SFP and MFP models.


1. If the door release arm becomes dislodged when handling the cover, install it as shown below (callout 1, 2).

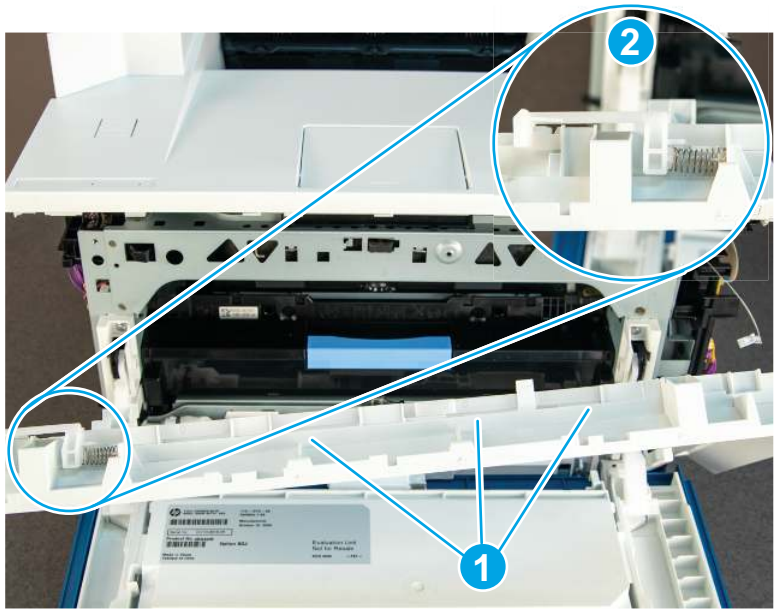Figure 4-857 Door release arm installed



2. At the right and left side of the front cover, align the holes (callout 1) in the cover with the alignment pins (callout 2) on the chassis.

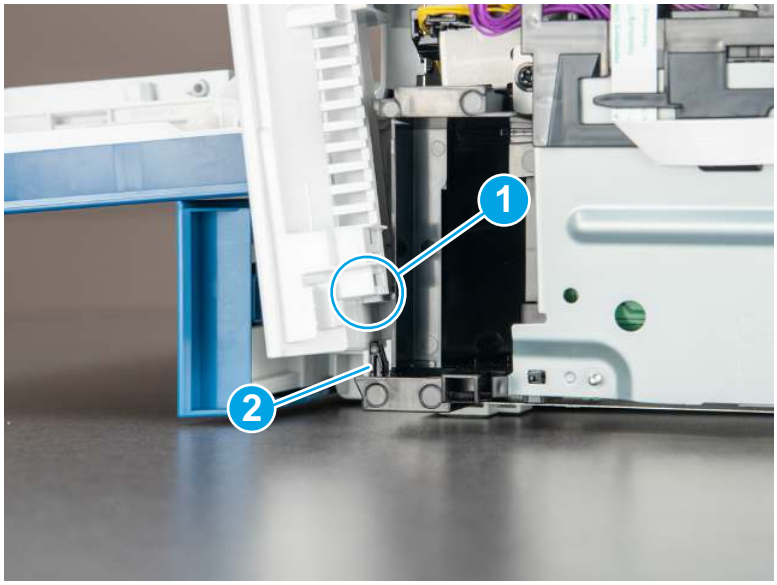
Figure 4-858 Cover alignment pins



3. Rotate the top of the cover towards the printer to install it.

IMPORTANT: Verify that the spring loaded door release button (on the left side of the cover) correctly functions.

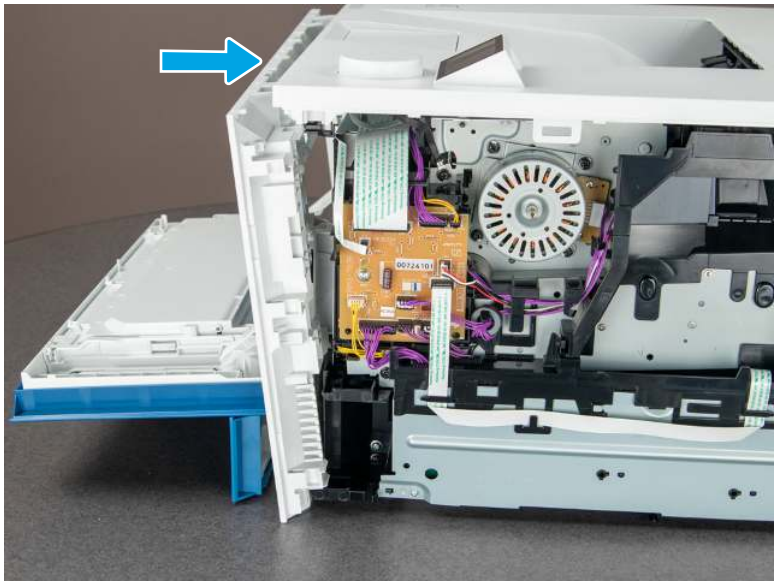Figure 4-859 **Install the cover**



19. Special installation instructions - ITB

Follow the special instructions below to install the ITB.

Before installing the ITB, use the steps below do the following:

- Make sure that the drive gear on the ITB and the gear inside the printer are correctly aligned (in phase) with each other (see step 1).
- For a replacement ITB, use the control-panel menus to reset the firmware counter (see step 2).


1. **Check the gear alignment.**

   a. Make sure that the gear (callout 1) inside the printer is positioned with the gear rib (callout 2) away from the rear door opening.

   NOTE: If the gear is not positioned correctly, do the following:


   1. Make sure that the cartridge door and rear door are closed.
   2. Turn the printer power on (initial rotation), and then turn the power off.

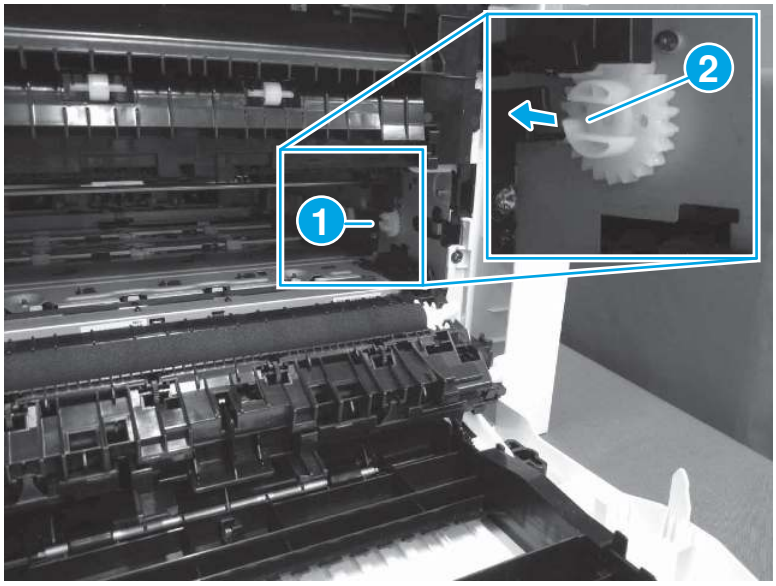   Image to check the ITB printer gear



b. Make sure that the gear (callout 1) on the ITB is positioned with the gear rib (callout 2) towards the handle grip end of the ITB.

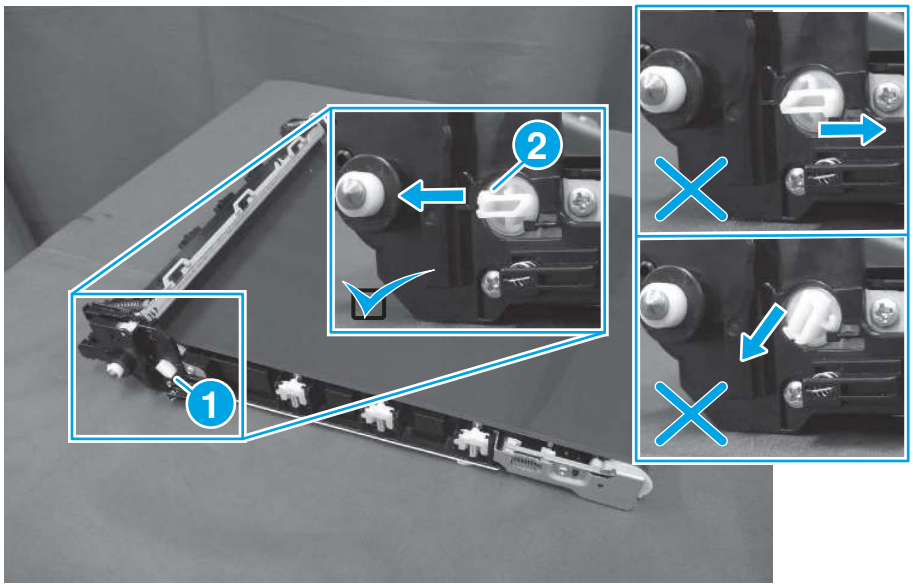NOTE: If the gear is not positioned correctly, rotate the gear to the correct position.:



2. **Reset the firmware counter (replacement ITB only).**

NOTE: If the ITB was removed to gain access to other assemblies, skip this step.

If a **replacement** ITB was installed, perform the steps below to reset the firmware counter.

a. From the control panel Home screen, open the Menu item, and then navigate to and select the Tools menu.

b. Navigate to and select the Service menu.

c. Type in the Service menu personal identification number (PIN).

NOTE: The default PIN (for access to the Service menu and the printer EWS page) for this printer is located on a on a sticker adhered to the front of the toner cartridge tray. Use this PIN to open the Service menu (or EWS) when prompted.

If the default PIN has been changed, contact the printer administrator to obtain it.

Image indicating the printer default PIN location.



d. Navigate to and select the Service Resets menu.

e. Navigate to and select the Transfer Kit Resets item, and then select Resets to initiate the process.


20. Special installation instructions - Tray 1 pickup roller assembly

Follow the special instructions below to install the Tray 1 pickup roller assembly.

- When the Tray 1 pickup roller assembly (callout 1) is installed, make sure that the alignment tab (callout 2) is in the slot (callout 3) on the assembly shaft.

TIP: When correctly installed, the tab fits completely into the slot (callout 4).

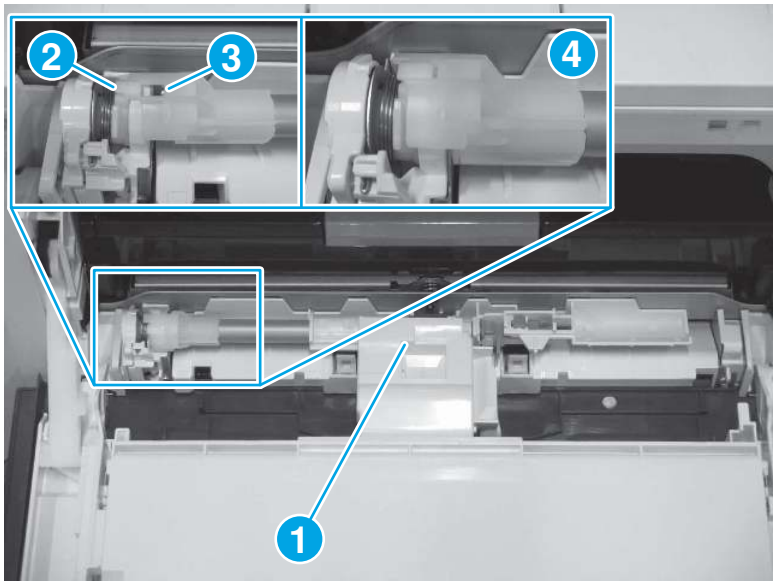Figure 4-860 Install the Tray 1 pickup roller assembly



Removal and replacement: Duplex upper guide

Learn about duplex upper guide removal.

Mean time to repair: 5 minutes

Service level: Easy

Before performing service

Turn the printer power off

- Disconnect the power cable.

> ⚠ **WARNING!** To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-45 Part information

Part number	Part description
RM2-2716-000CN	Duplexing guide assembly, upper

Required tools

- Small flat-blade screwdriver

After performing service

Turn the printer power on

- Connect the power cable.

- Use the power switch to turn the power on.

Post service test


Print any pages necessary to make sure the printer is functioning correctly.

1. Remove the rear door

Follow the procedure below to remove and replace the rear door.


1. Open the rear door, and then raise the secondary transfer feed assembly (callout 1) up and into the locked position.

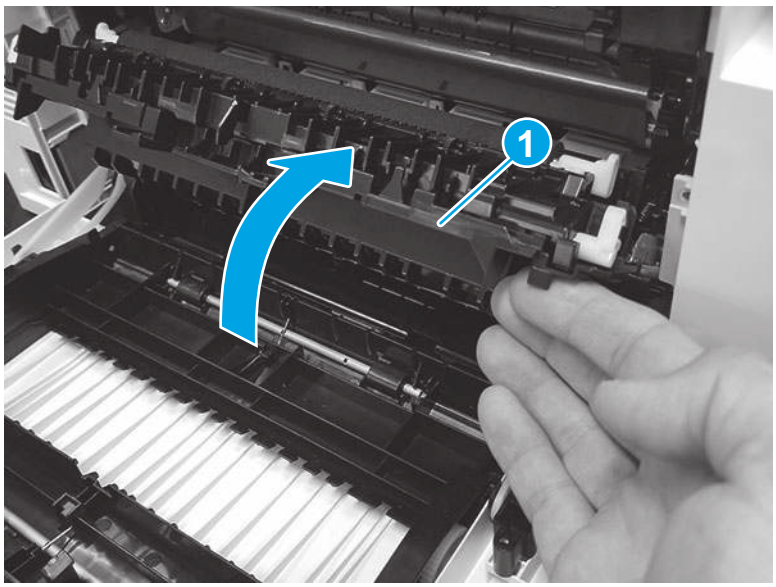Figure 4-861 Place the T2 feed assembly in the locked position




2. Remove two screws (callout 1), and then release the left- and right-side retainer arms (callout 2)

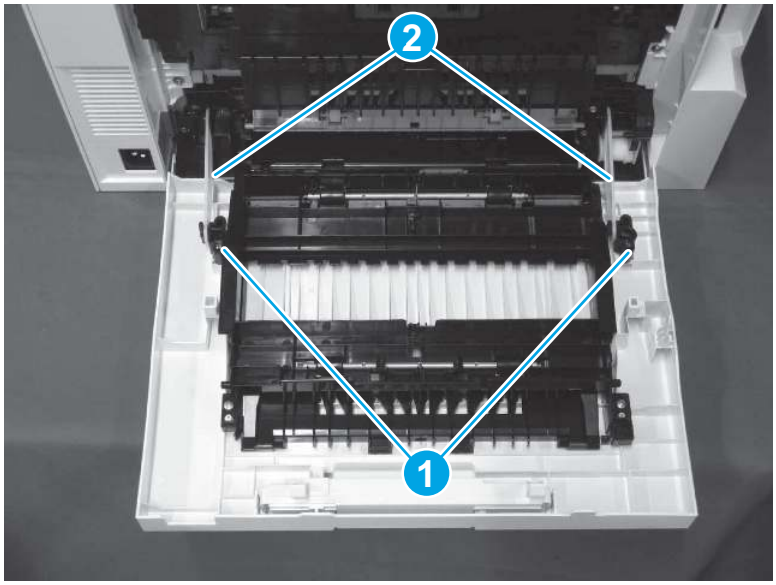Figure 4-862 Release the retainer arms



3. Carefully position the printer at the edge of the work surface and allow the rear door to open to an angle greater than 90 degrees (callout 1). Slide the door away (callout 2) from the formatter side of the printer (callout 3) to release it, and then remove the rear door.

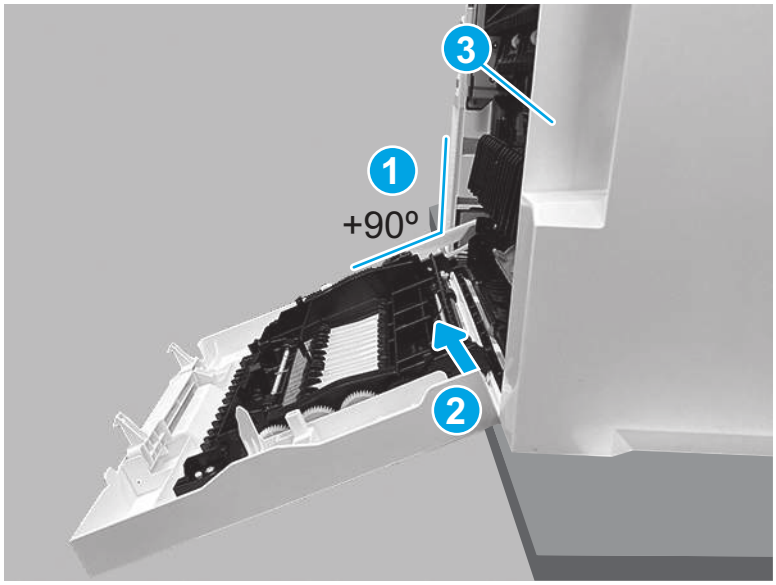Figure 4-863 Remove the door




2. Remove the duplex upper guide

Follow the procedure below to remove and replace the duplex upper guide.

- Use a small flat-blade screwdriver to release one boss at each end of the guide (callout 1), and then remove the guide (callout 2).

⚠ CAUTION: Parts of this assembly are fragile and can easily be damaged during removal.

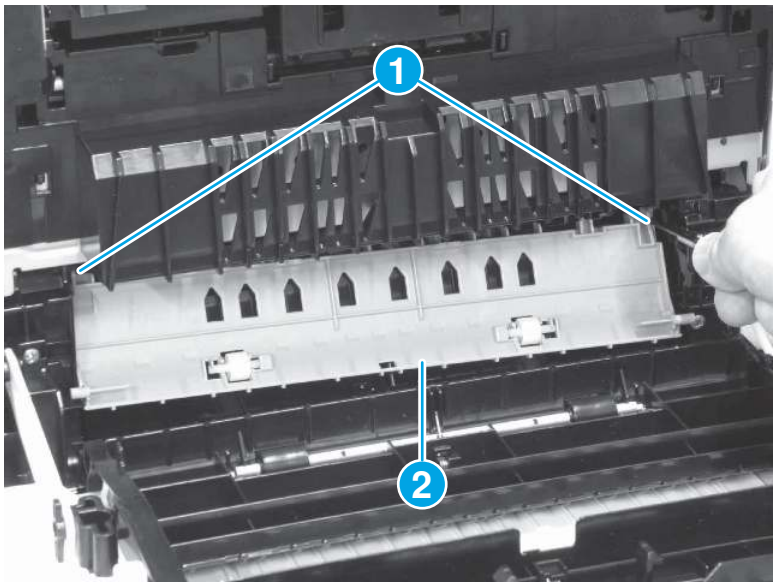Figure 4-864 Remove the duplex upper guide



3. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: 

Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.

Removal and replacement: Duplex re-pick clutch

Learn about duplex re-pick clutch removal.

Mean time to repair: 10 minutes

Service level: Medium

Before performing service

Turn the printer power off

- Disconnect the power cable.

WARNING! To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-46 Part information

Part number	Part description
RM2-2714-000CN	Duplexing clutch assembly

Required tools

- #2 Phillips screwdriver with a magnetic tip and a 152 mm (6 in) shaft length

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test

Print any pages necessary to make sure the printer is functioning correctly.

1. Remove the left cover (SFP)


Follow the procedure below to remove and replace the left cover (SFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.

TIP: There might be a small cover installed on the USB port located at the back of the printer. If installed, remove this cover now.


1. Remove one screw (callout 1).

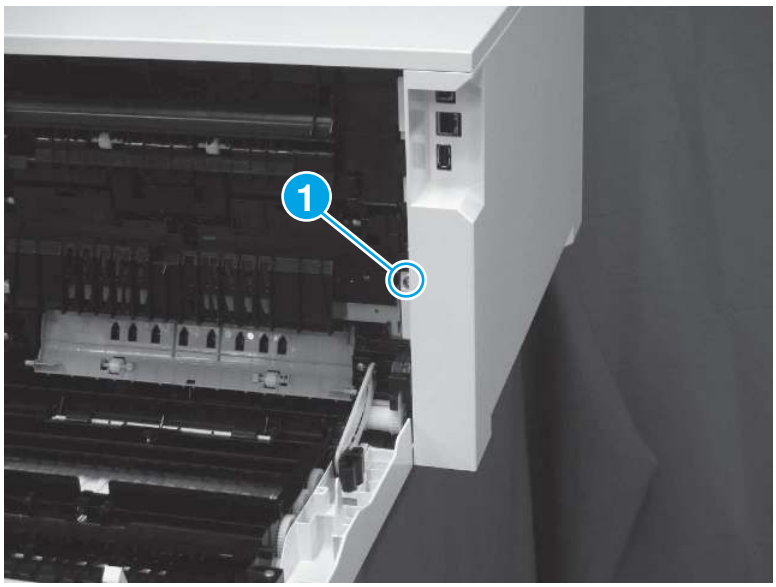Figure 4-865 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

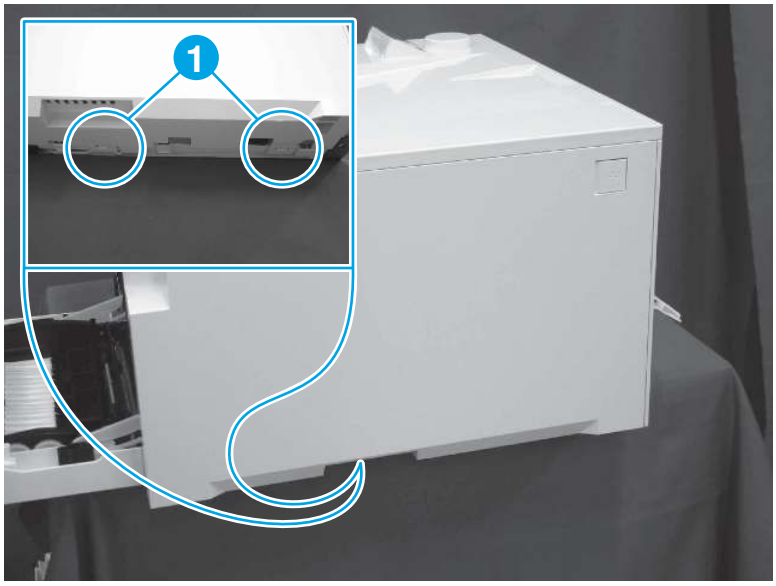Figure 4-866 Release two tabs




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

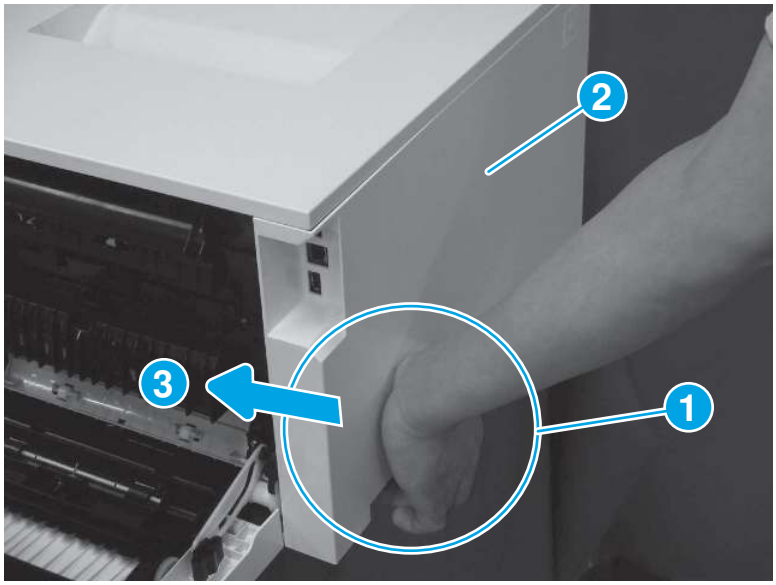Figure 4-867 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

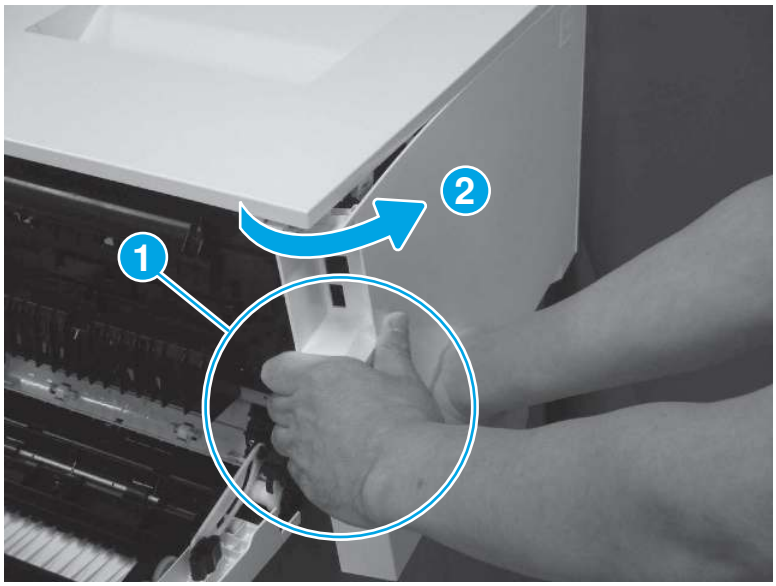Figure 4-868 Disengage the cover corner



5. Remove the left cover (callout 1).

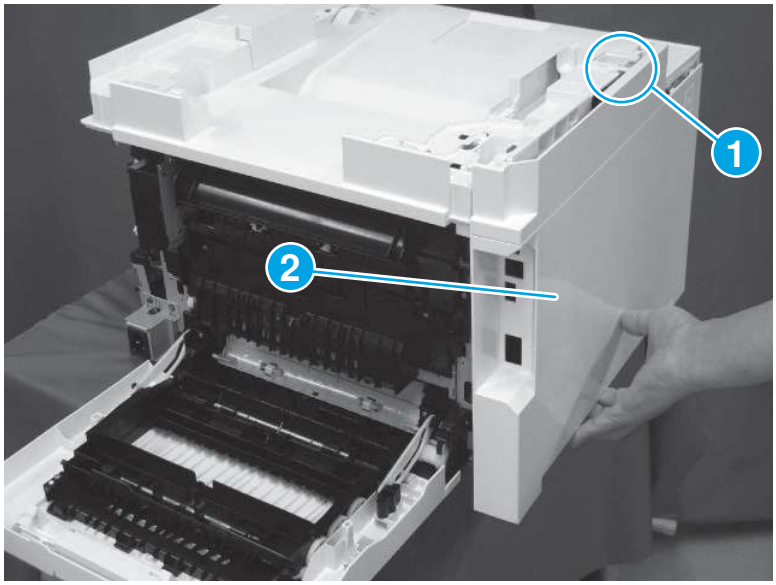Figure 4-869 Remove the cover



2. Remove the left cover (MFP)


Follow the procedure below to remove and replace the left cover (MFP).

NOTE: The following procedure is for an MFP printer only. If this assembly is being removed to gain access to dependency parts for a SFP printer, skip this step.

TIP: There might be a small cover installed on the USB port and/or the fax port located at the back of the printer. If installed, remove these covers now.


1. Remove one screw (callout 1).

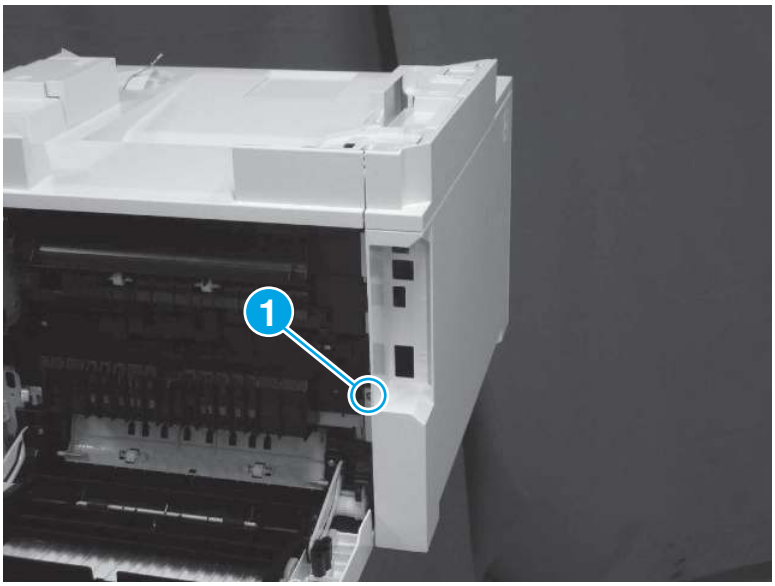Figure 4-870 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

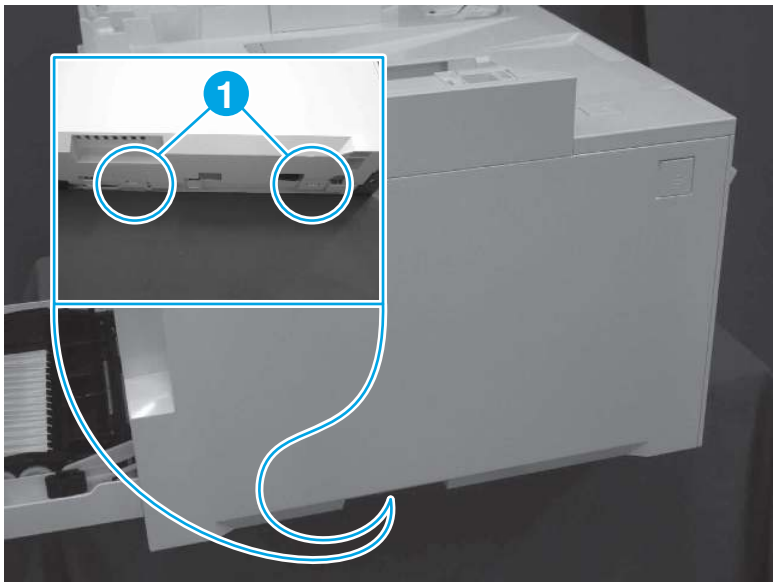Figure 4-871 Release two tabs




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

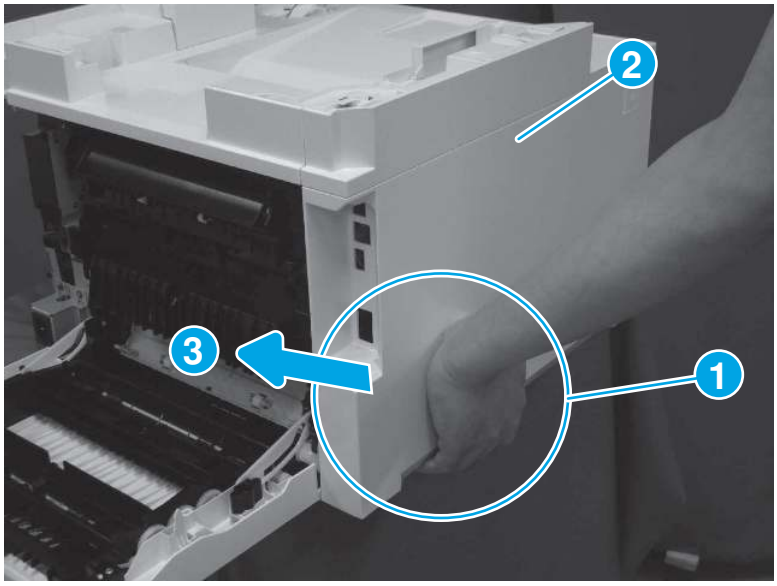Figure 4-872 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

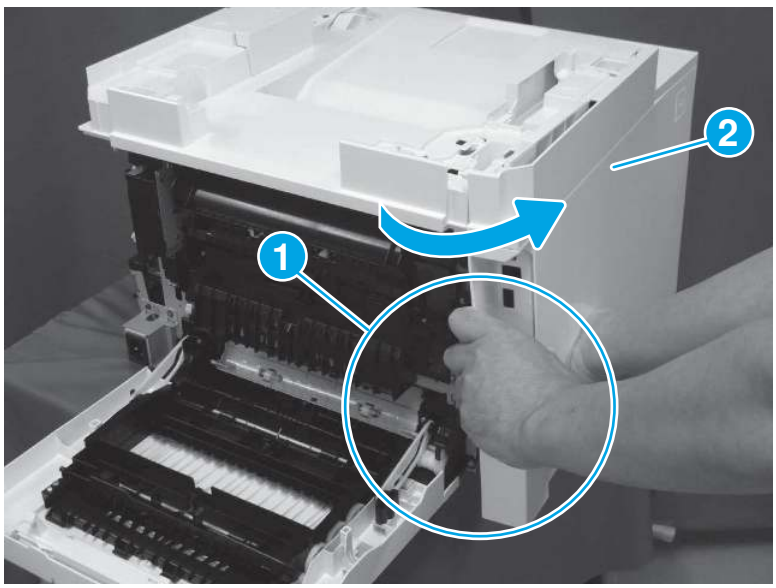Figure 4-873 Disengage the cover corner



5. Remove the left cover (callout 1).

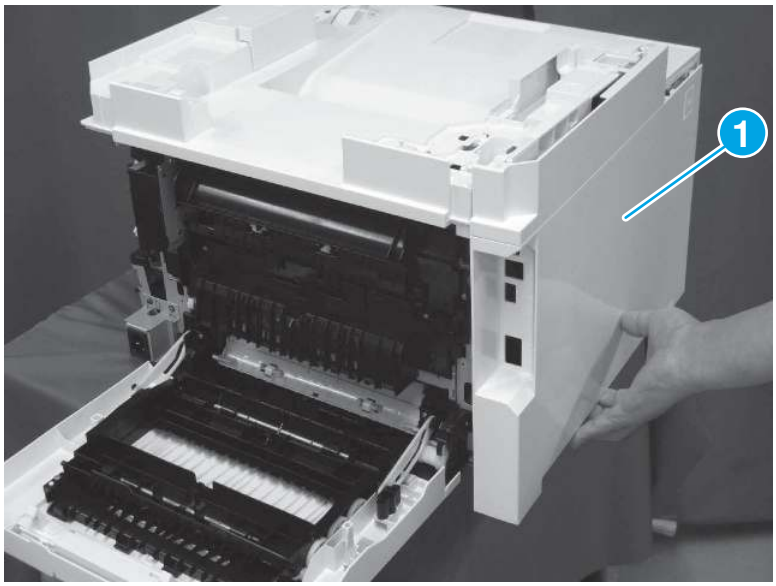Figure 4-874 Remove the cover




3. Remove the duplex re-pick clutch

Follow the procedure below to remove and replace the duplex re-pick clutch.

1. Remove one screw (callout 1), and then remove the hinge (callout 2).

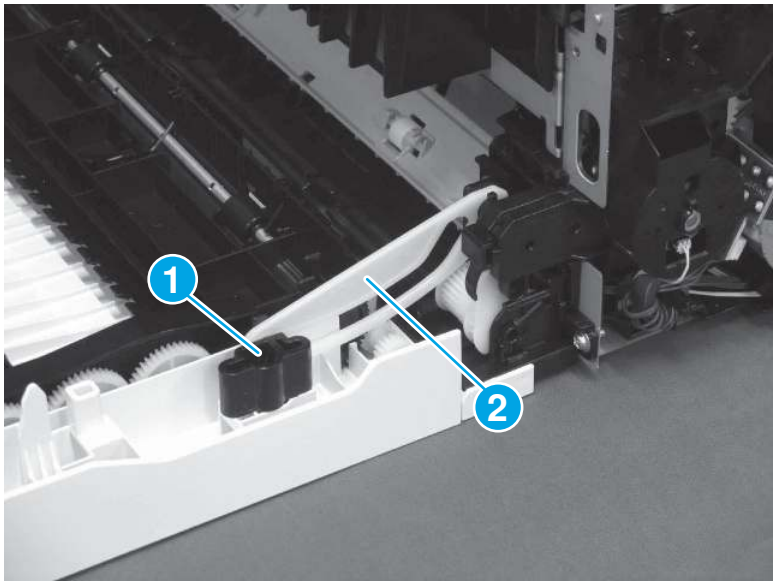
Figure 4-875 Remove the hinge



2. Release the retainer (callout 1), rotate the shaft as shown below (callout 2) to remove it, and then remove the gear (callout 3).

Reinstallation tip: Take note of how the gear is installed before removing it. The shaft cannot be reinstalled if the gear is incorrectly installed.

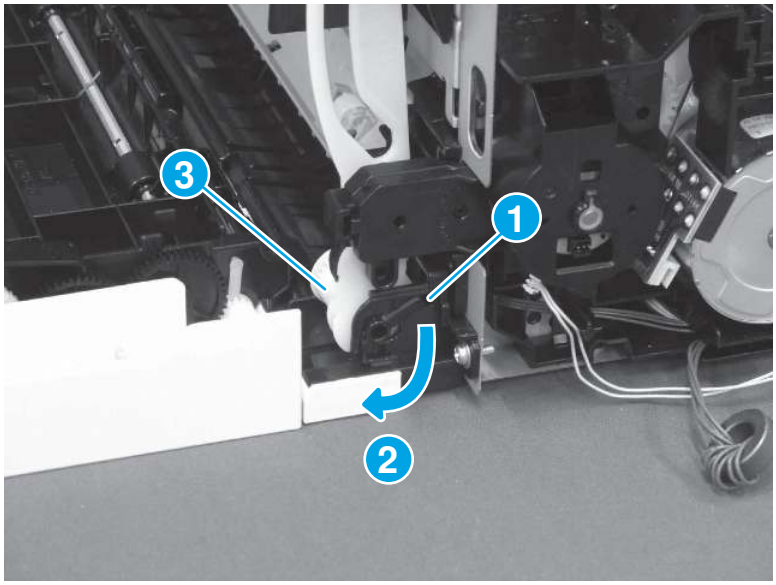
Figure 4-876 Remove the gear



3. Disconnect one connector (callout 1), remove one screw (callout 2), and then release one tab (callout 3).

NOTE: The connector (callout 1) has a tab that must be released to disconnect it. It can be difficult to disconnect when the duplex re-pick clutch is installed. It might be easier to remove the duplex re-pick clutch (see the following step), and then disconnect the connector.

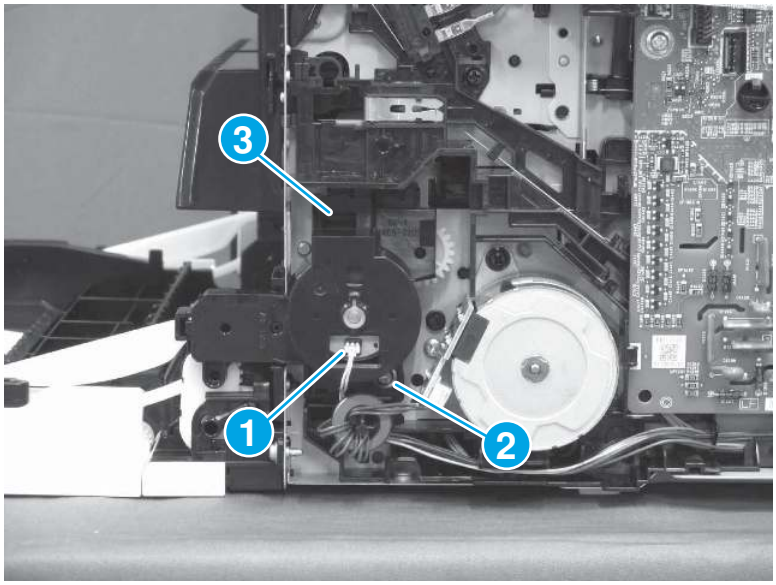Figure 4-877 Disconnect one connector, remove one screw, and release one tab




4. Remove the duplex re-pick clutch (callout 1).

CAUTION: When handling the assembly, do not lose the spring that is inside the left gear holder (callout 2).

Reinstallation tip: **For a replacement duplex re-pick clutch only**: Remove the spring from the assembly (callout 2), and then install it on the replacement duplex re-pick clutch.

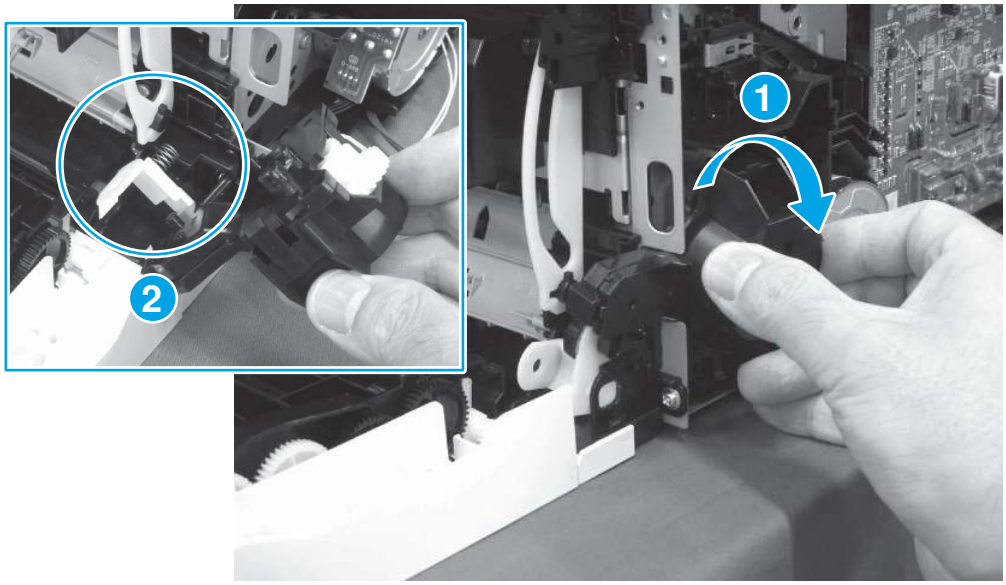Figure 4-878 Remove the duplex re-pick clutch



4. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.

Removal and replacement: Duplex guide assembly

Learn about duplex guide assembly removal.

Mean time to repair: 18 minutes

Service level: Medium

Before performing service

Turn the printer power off

- Disconnect the power cable.

WARNING! To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-47 Part information

Part number	Part description
RM2-2760-000CN	Duplexing guide assembly

Required tools

- #2 Phillips screwdriver with a magnetic tip and a 152 mm (6 in) shaft length
- Needle-nose pliers

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test

Print any pages necessary to make sure the printer is functioning correctly.

1. Remove the left cover (SFP)


Follow the procedure below to remove and replace the left cover (SFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.

TIP: There might be a small cover installed on the USB port located at the back of the printer. If installed, remove this cover now.


1. Remove one screw (callout 1).

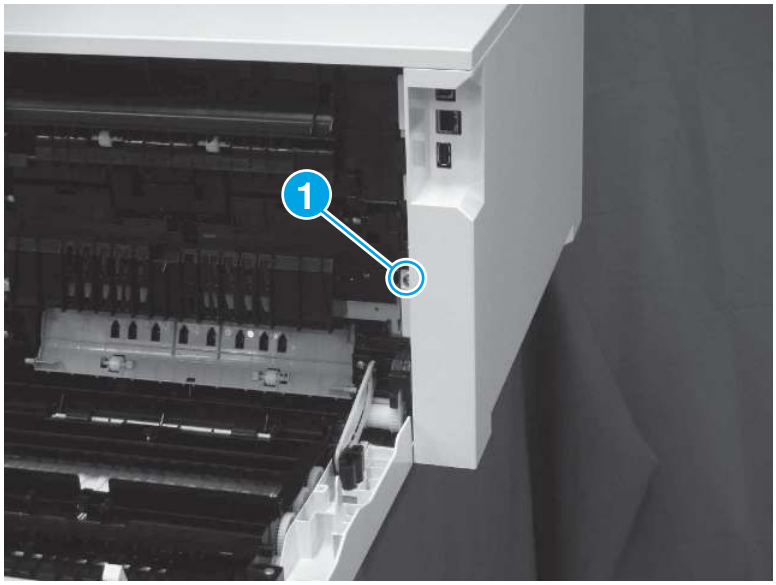Figure 4-879 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

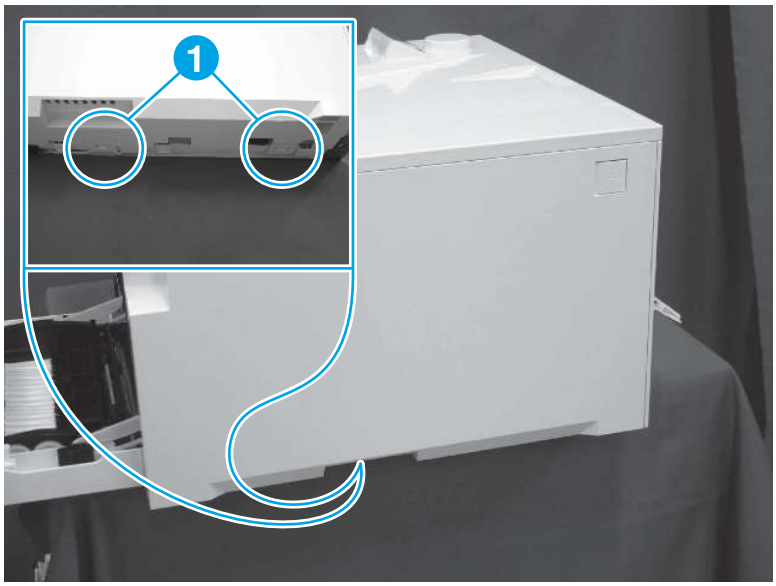Figure 4-880 Release two tabs




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

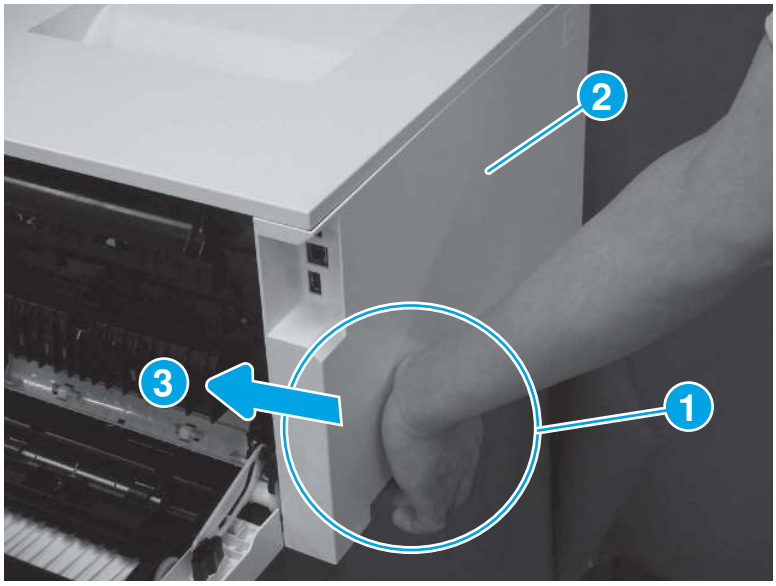Figure 4-881 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

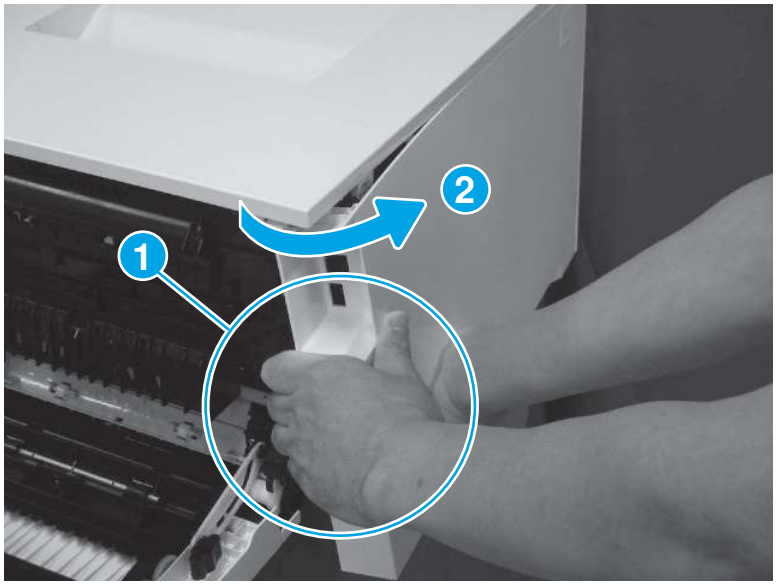Figure 4-882 Disengage the cover corner



5. Remove the left cover (callout 1).

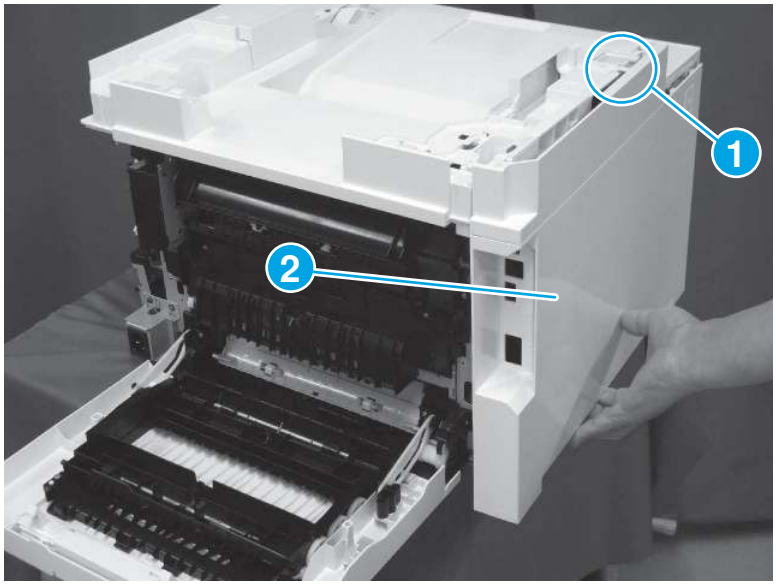Figure 4-883 Remove the cover



2. Remove the left cover (MFP)


Follow the procedure below to remove and replace the left cover (MFP).

NOTE: The following procedure is for an MFP printer only. If this assembly is being removed to gain access to dependency parts for a SFP printer, skip this step.

TIP: There might be a small cover installed on the USB port and/or the fax port located at the back of the printer. If installed, remove these covers now.


1. Remove one screw (callout 1).

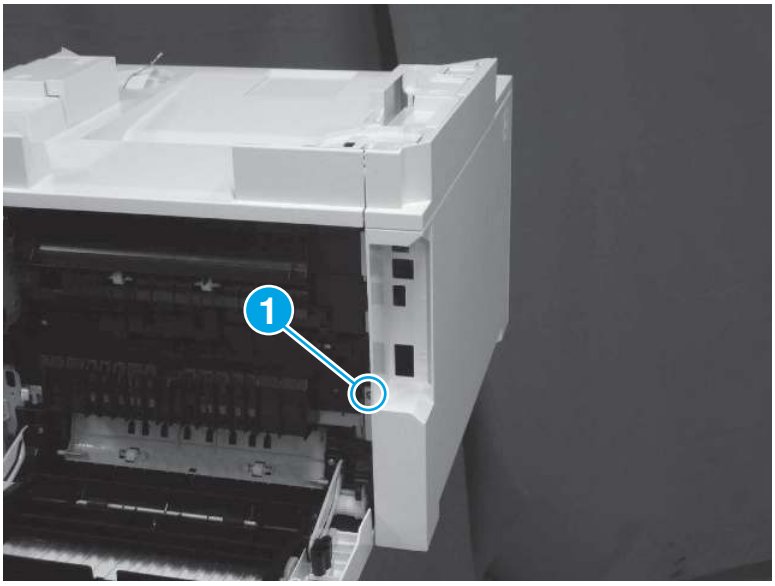Figure 4-884 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

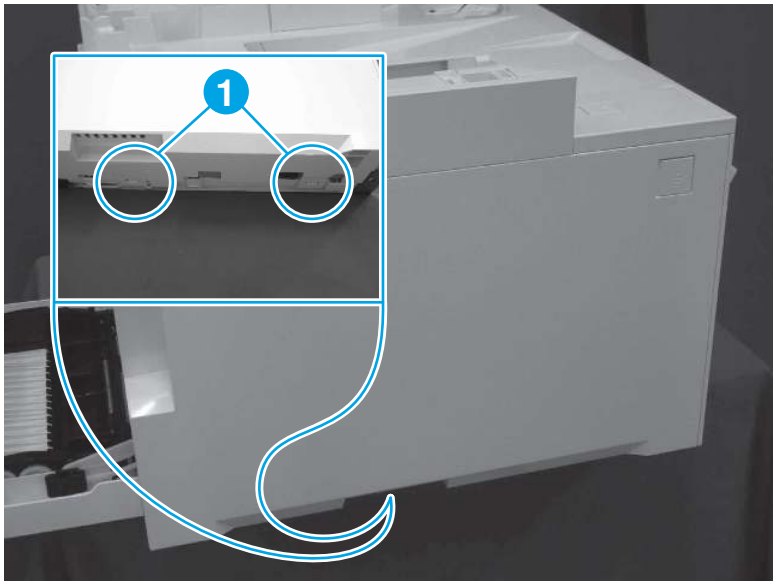Figure 4-885 Release two tabs




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

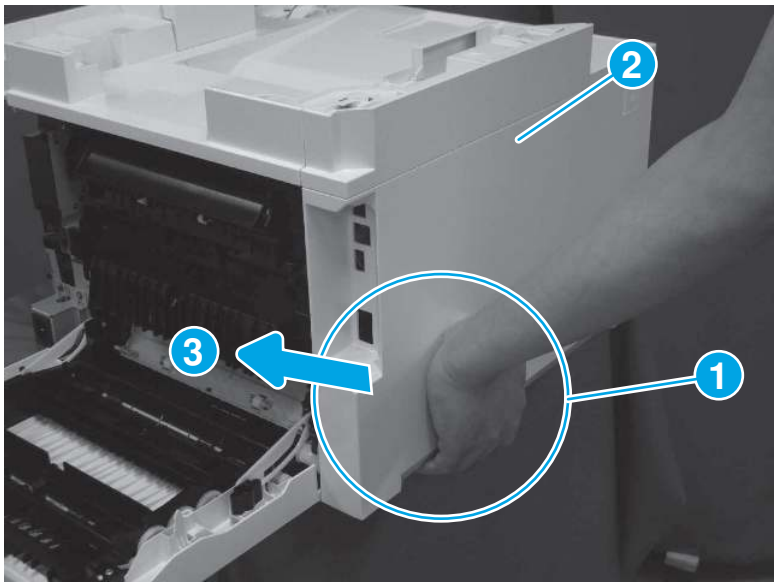Figure 4-886 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

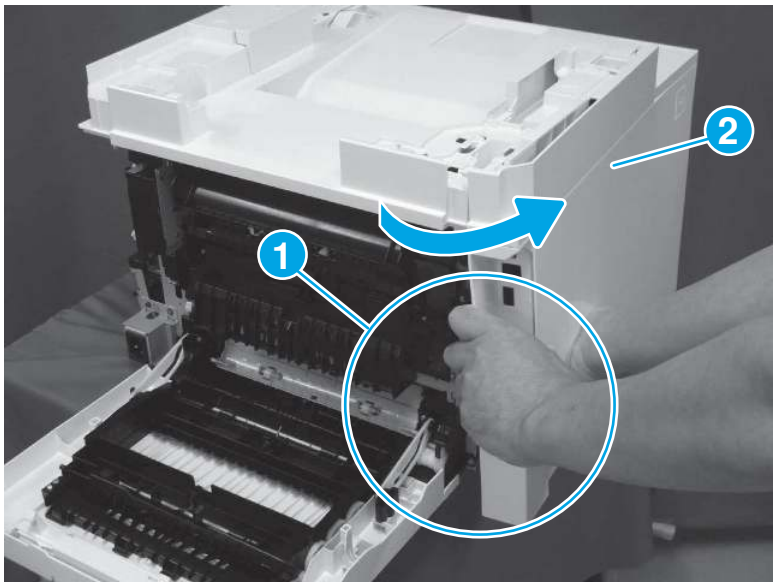Figure 4-887 Disengage the cover corner



5. Remove the left cover (callout 1).

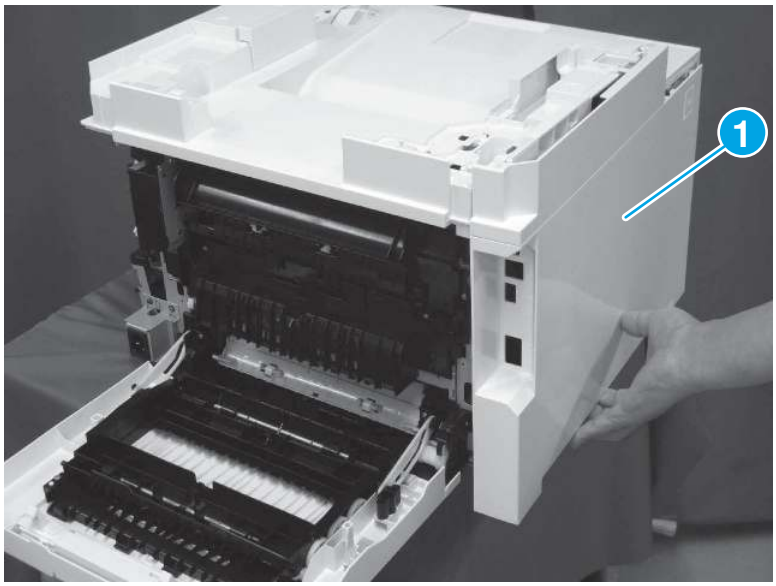Figure 4-888 Remove the cover




3. Remove the duplex re-pick clutch

Follow the procedure below to remove and replace the duplex re-pick clutch.

1. Remove one screw (callout 1), and then remove the hinge (callout 2).

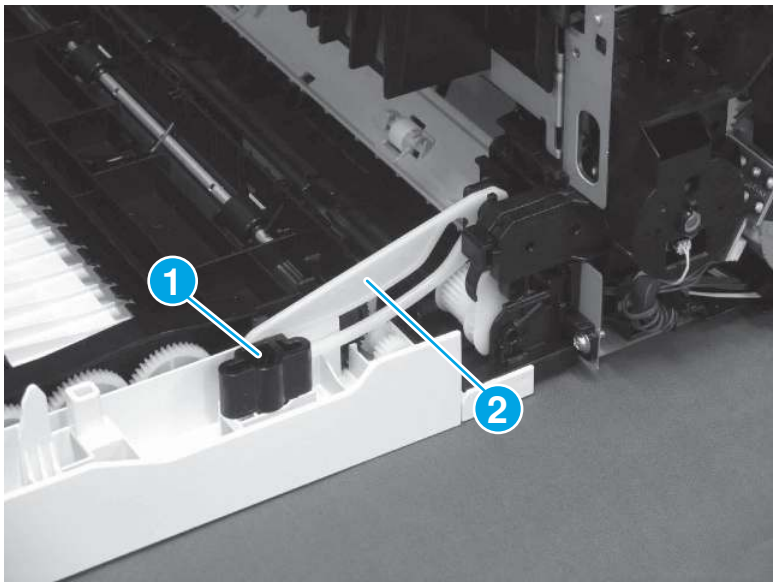
Figure 4-889 Remove the hinge



2. Release the retainer (callout 1), rotate the shaft as shown below (callout 2) to remove it, and then remove the gear (callout 3).

Reinstallation tip: Take note of how the gear is installed before removing it. The shaft cannot be reinstalled if the gear is incorrectly installed.

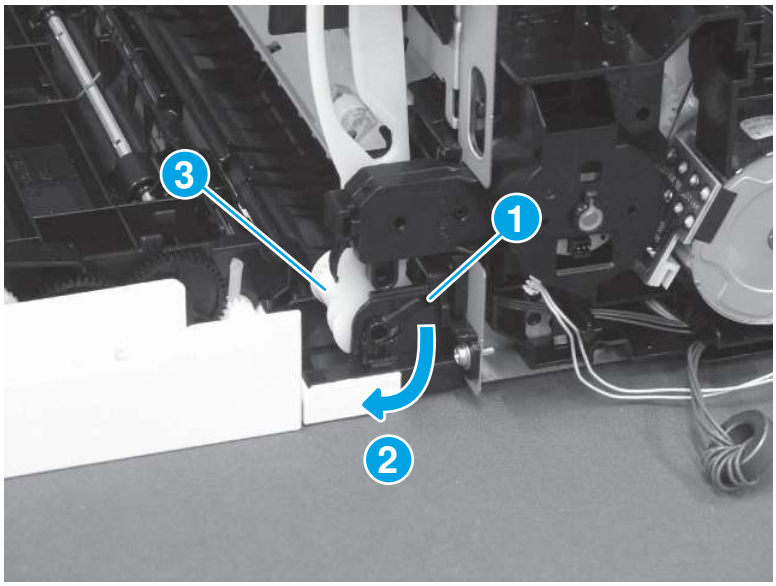
Figure 4-890 Remove the gear



3. Disconnect one connector (callout 1), remove one screw (callout 2), and then release one tab (callout 3).

NOTE: The connector (callout 1) has a tab that must be released to disconnect it. It can be difficult to disconnect when the duplex re-pick clutch is installed. It might be easier to remove the duplex re-pick clutch (see the following step), and then disconnect the connector.

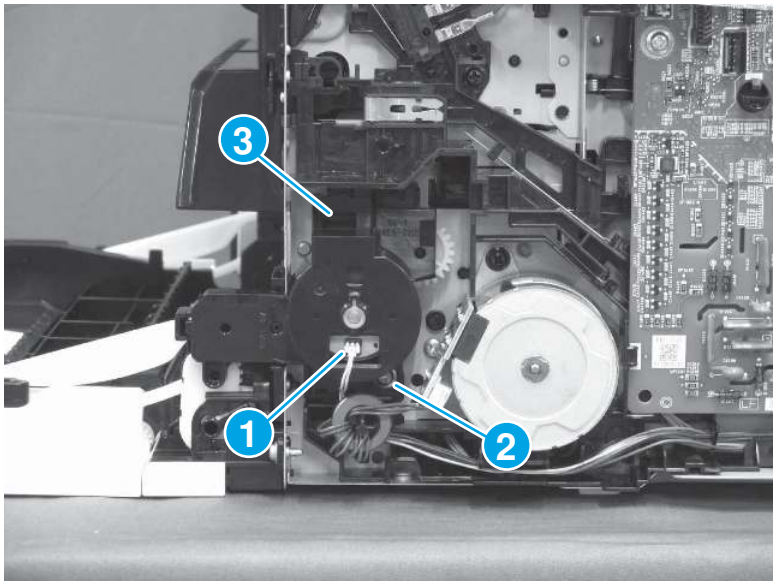Figure 4-891 Disconnect one connector, remove one screw, and release one tab




4. Remove the duplex re-pick clutch (callout 1).

CAUTION: When handling the assembly, do not lose the spring that is inside the left gear holder (callout 2).

Reinstallation tip: **For a replacement duplex re-pick clutch only:** Remove the spring from the assembly (callout 2), and then install it on the replacement duplex re-pick clutch.

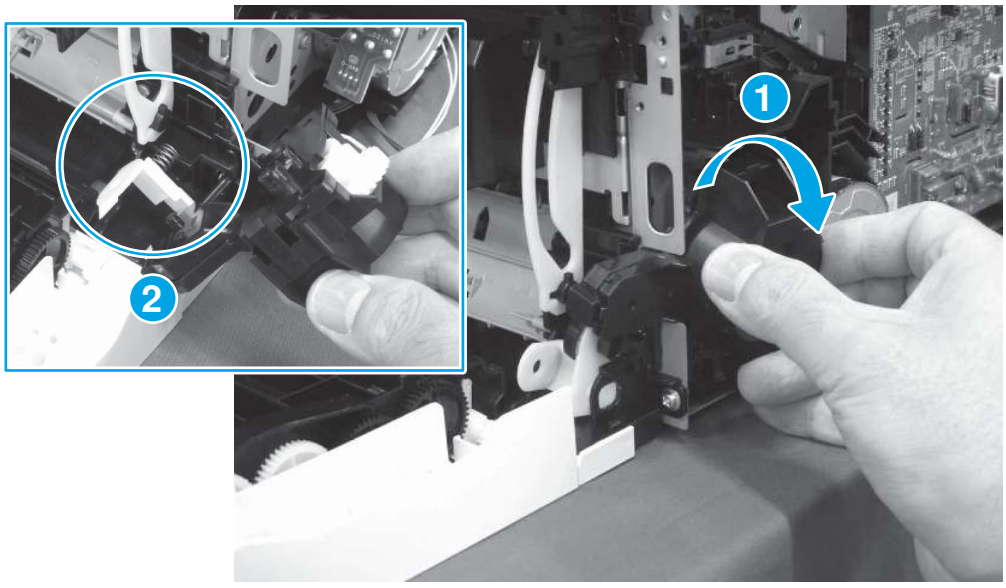Figure 4-892 Remove the duplex re-pick clutch




4. Remove the rear door

Follow the procedure below to remove and replace the rear door.


1. Open the rear door, and then raise the secondary transfer feed assembly (callout 1) up and into the locked position.

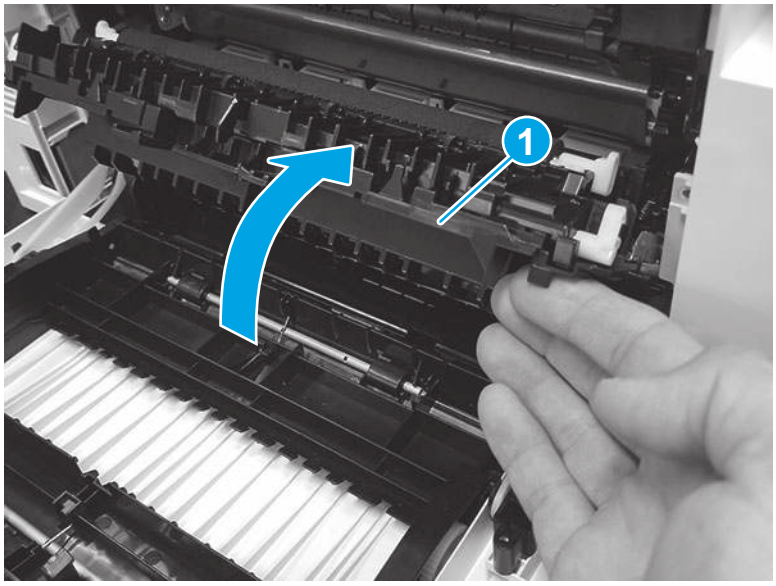Figure 4-893 Place the T2 feed assembly in the locked position




2. Remove two screws (callout 1), and then release the left- and right-side retainer arms (callout 2)

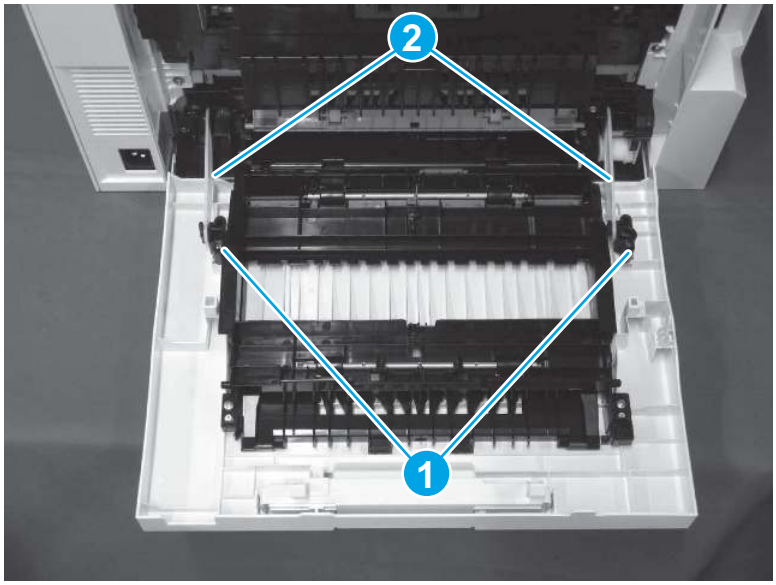Figure 4-894 Release the retainer arms



3. Carefully position the printer at the edge of the work surface and allow the rear door to open to an angle greater than 90 degrees (callout 1). Slide the door away (callout 2) from the formatter side of the printer (callout 3) to release it, and then remove the rear door.

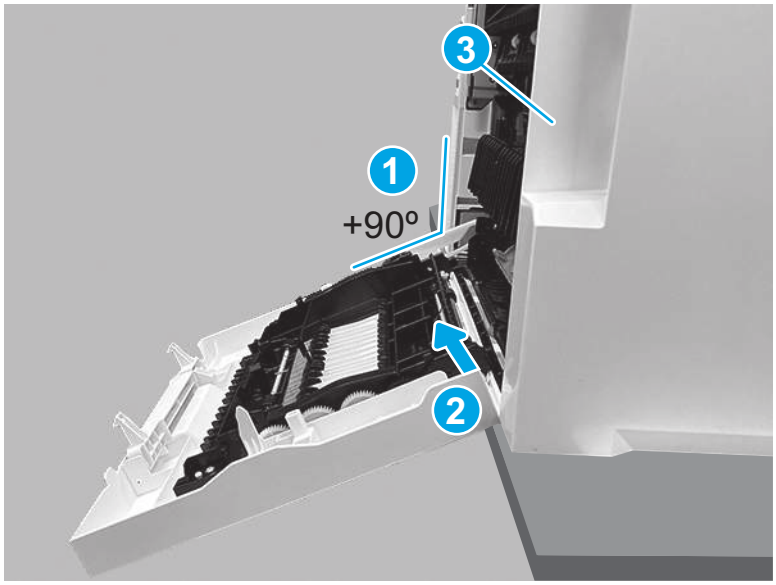Figure 4-895 **Remove the door**




5. Remove the duplexing bottom cover

Follow the procedure below to remove and replace the duplexing bottom cover.

- Release two tabs (callout 1), and then remove the duplexing bottom cover (callout 2).

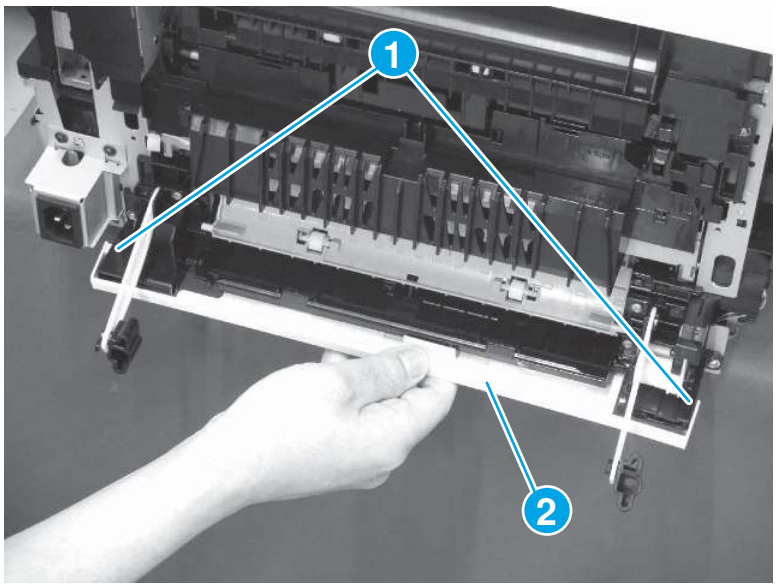Figure 4-896 **Remove the duplexing bottom cover**



6. Remove the duplex guide assembly


Follow the procedure below to remove and replace the duplex guide assembly.

1. Disconnect one connector (callout 1), and then release the wire harness from the retainer (callout 2).

NOTE: The correct cable to release is the purple three-wire harness.

Disconnect other connectors and release other wire harnesses as necessary.

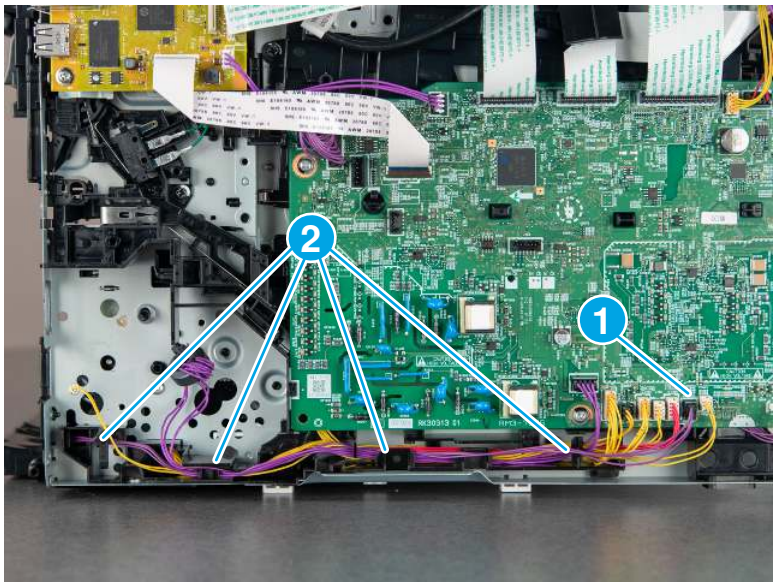Figure 4-897 Disconnect one connector




2. Do the following:

   a. Remove one (tapping) screw (callout 1).

   b. Remove one (TP) screw (callout 2)

   c. Remove the holder (callout 3).

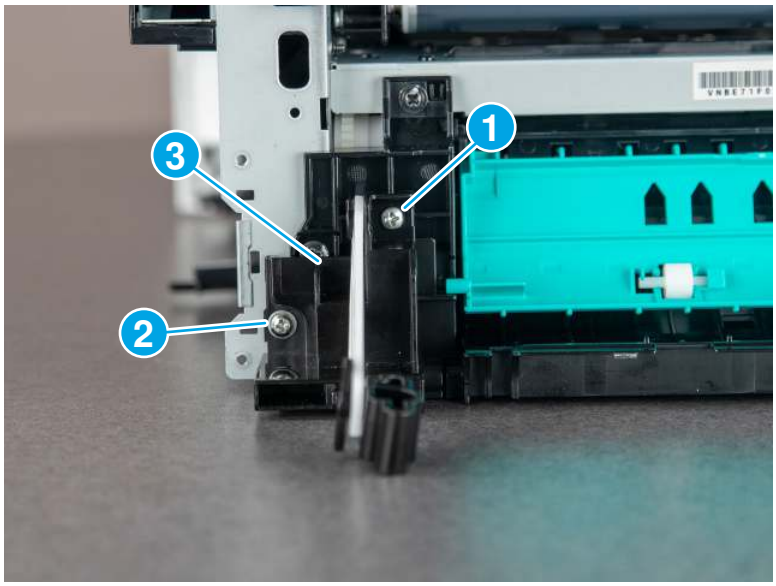Figure 4-898 Remove two screws and the holder




3. Do the following:

   a. Remove two (tapping) screws (callout 1).

   b. Remove one (TP) screw (callout 2)

   c. Remove the holder (callout 3).

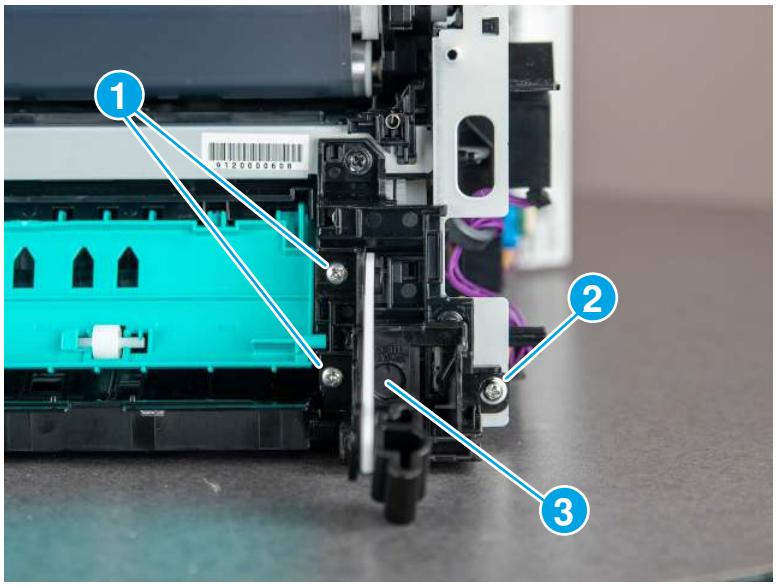
Figure 4-899 **Remove three screws and the holder**



4. Use a small flat-blade screwdriver to release one boss at each end of the duplex guide (callout 1), and then remove the guide (callout 2).

⚠ CAUTION: Parts of this assembly are fragile and can easily be damaged during removal.

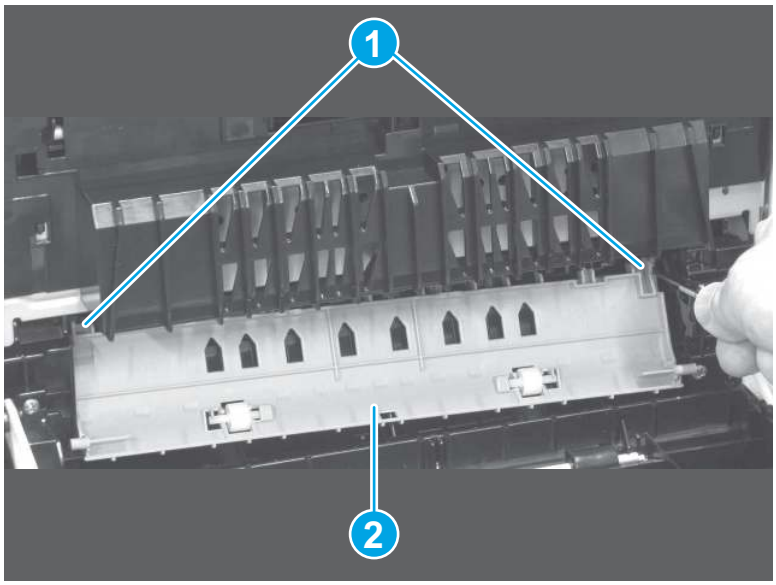
Figure 4-900 **Remove the duplex upper guide**



5. Carefully position the printer at the edge of the work surface. Slightly pull the duplex guide assembly down to release it, and then remove the assembly.

NOTE: Pass the wire harness through the opening in the chassis as the assembly is removed (callout 1).

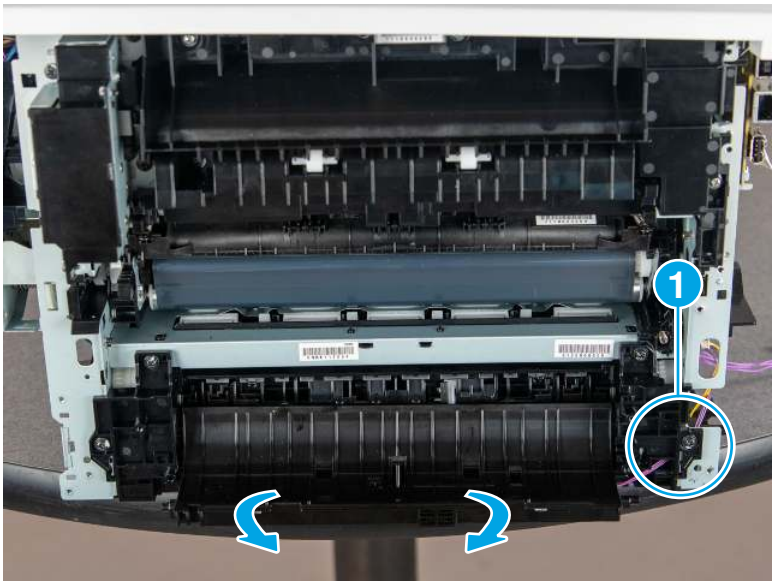Figure 4-901 Remove the duplex guide assembly



7. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using

disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.

Removal and replacement: Feed lower guide assembly

Learn about feed lower guide assembly removal.

Mean time to repair: 40 minutes

Service level: Difficult

Before performing service

Turn the printer power off

- Disconnect the power cable.

WARNING! To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-48 Part information

Part number	Part description
RM2-2736-000CN	Paper feed guide assembly, lower

Required tools

- Small flat-blade screwdriver
- Small flat-blade screwdriver
- Needle-nose pliers

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test

Print any pages necessary to make sure the printer is functioning correctly.

1. Remove the left cover (SFP)


Follow the procedure below to remove and replace the left cover (SFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.

TIP: There might be a small cover installed on the USB port located at the back of the printer. If installed, remove this cover now.


1. Remove one screw (callout 1).

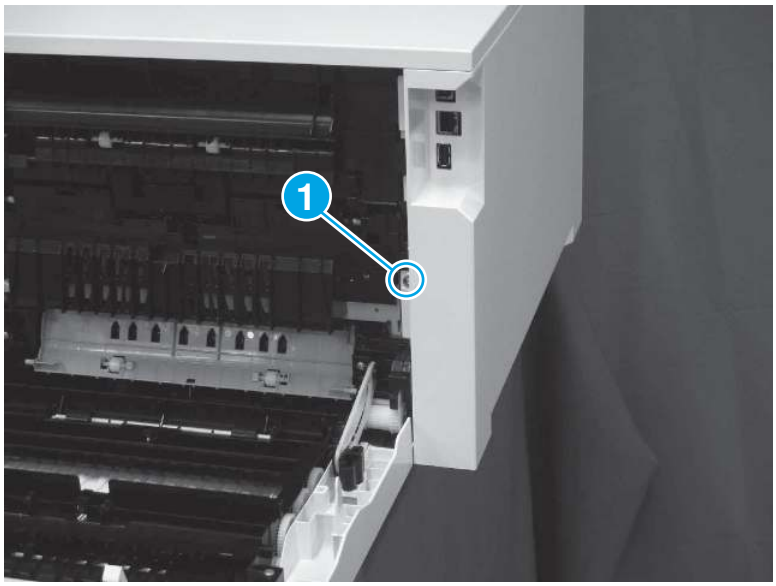Figure 4-902 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

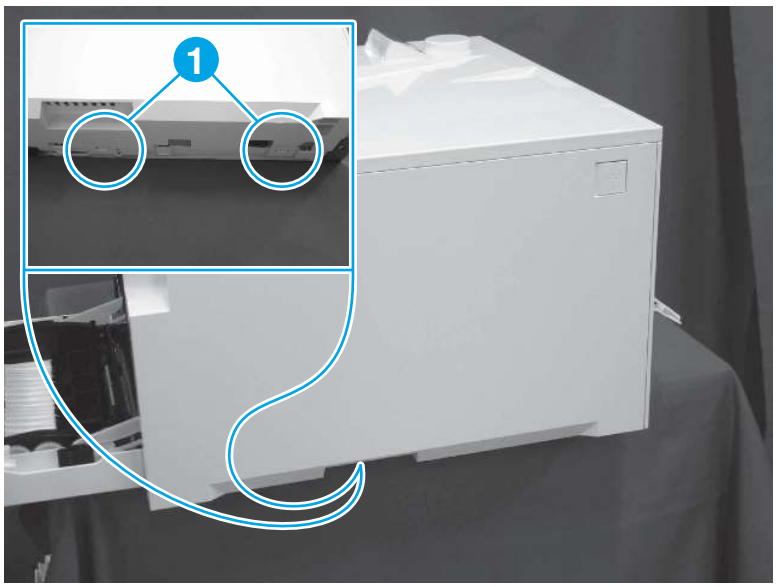Figure 4-903 Release two tabs




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

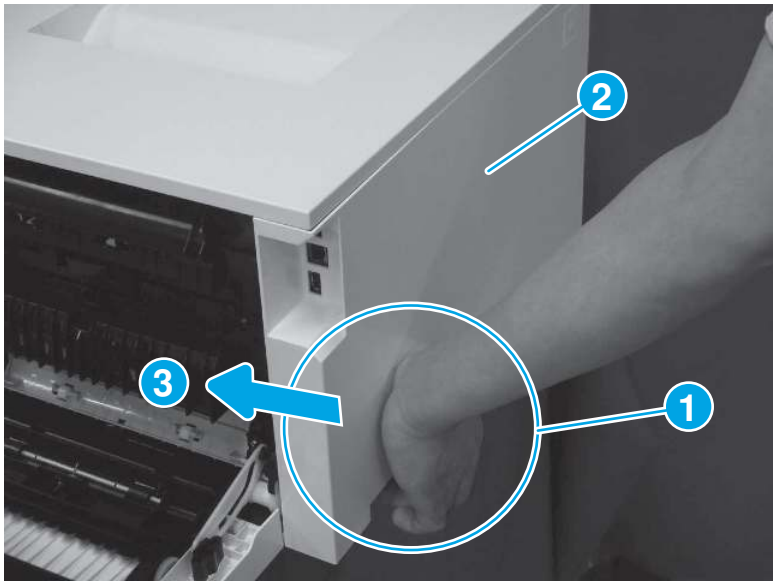Figure 4-904 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

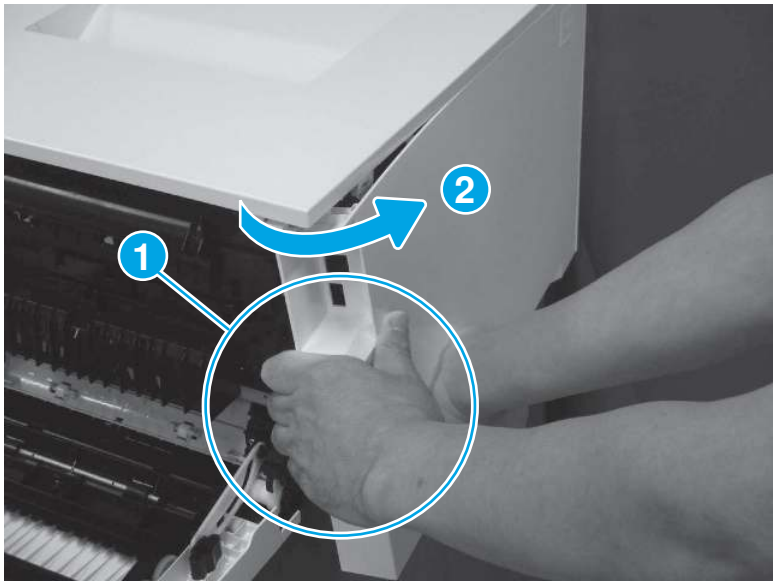Figure 4-905 Disengage the cover corner



5. Remove the left cover (callout 1).

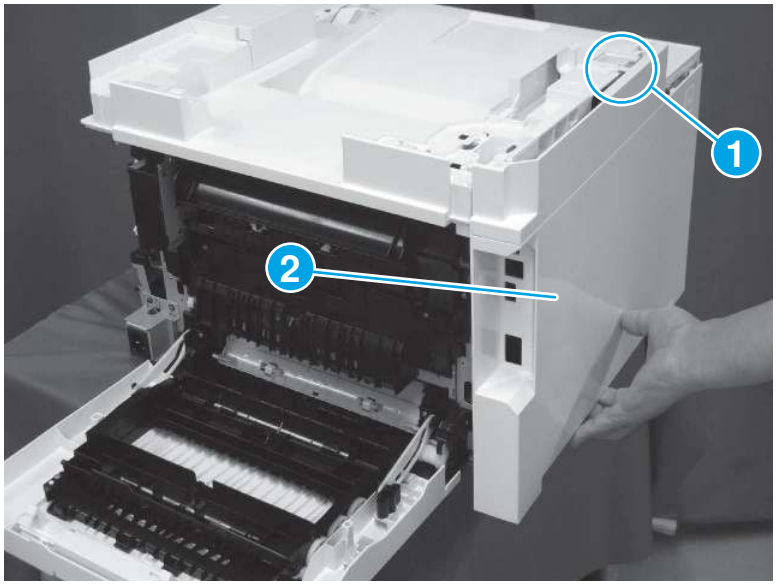Figure 4-906 **Remove the cover**



2. Remove the left cover (MFP)


Follow the procedure below to remove and replace the left cover (MFP).

NOTE: The following procedure is for an MFP printer only. If this assembly is being removed to gain access to dependency parts for a SFP printer, skip this step.

TIP: There might be a small cover installed on the USB port and/or the fax port located at the back of the printer. If installed, remove these covers now.


1. Remove one screw (callout 1).

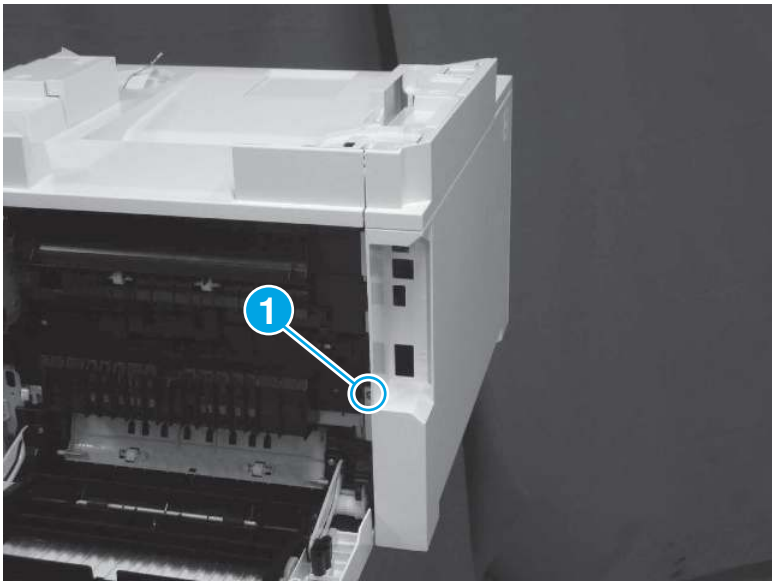Figure 4-907 **Remove one screw**




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

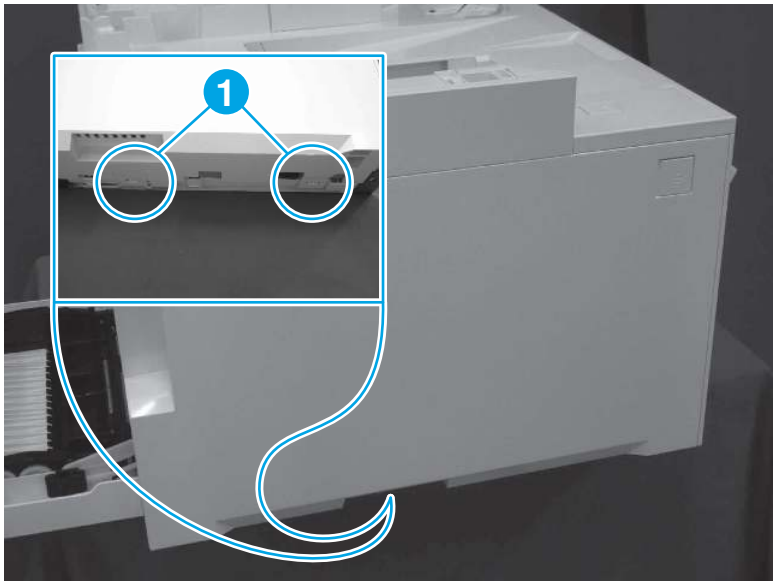Figure 4-908 Release two tabs




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

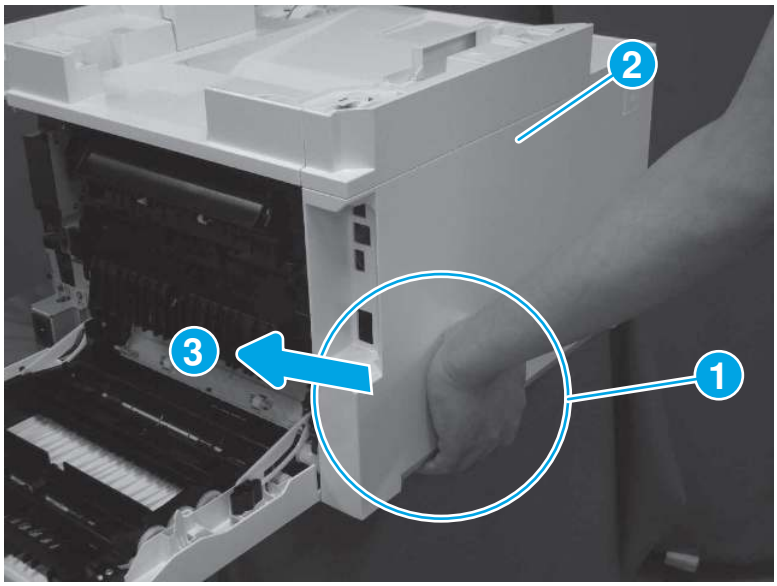Figure 4-909 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

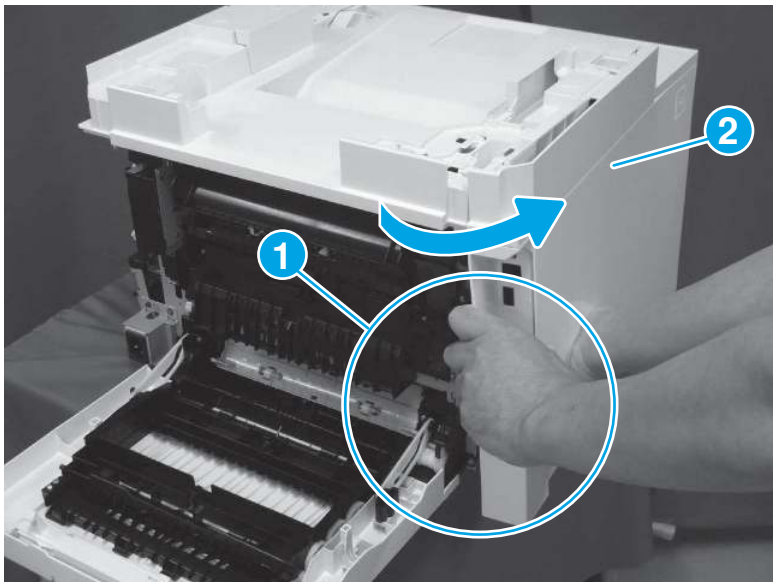Figure 4-910 Disengage the cover corner



5. Remove the left cover (callout 1).

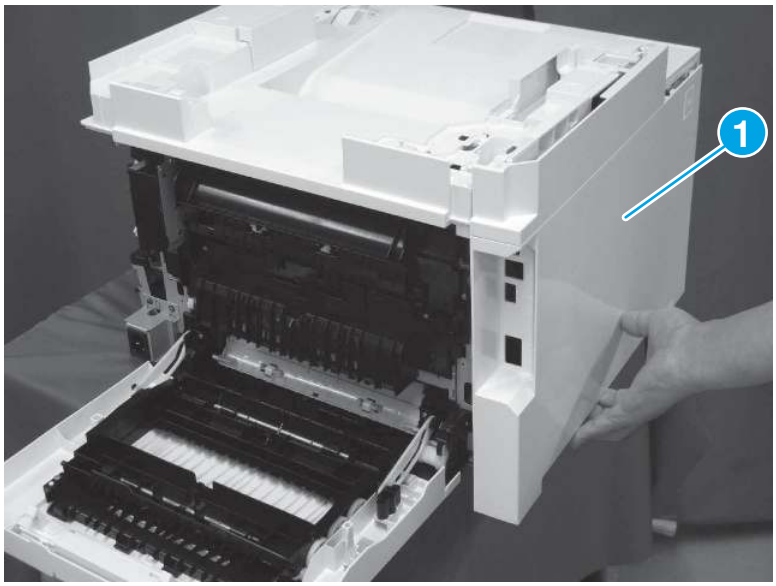Figure 4-911 Remove the cover




3. Remove the duplex re-pick clutch

Follow the procedure below to remove and replace the duplex re-pick clutch.

1. Remove one screw (callout 1), and then remove the hinge (callout 2).

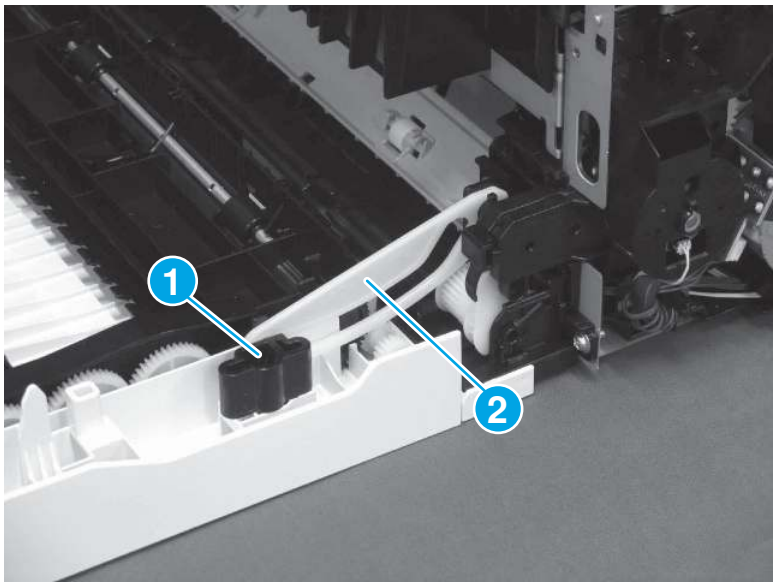
Figure 4-912 Remove the hinge



2. Release the retainer (callout 1), rotate the shaft as shown below (callout 2) to remove it, and then remove the gear (callout 3).

Reinstallation tip: Take note of how the gear is installed before removing it. The shaft cannot be reinstalled if the gear is incorrectly installed.

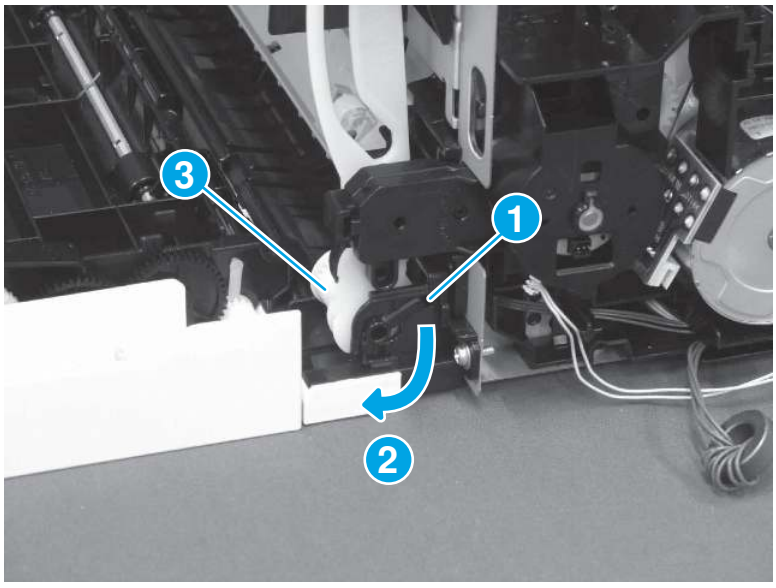
Figure 4-913 Remove the gear



3. Disconnect one connector (callout 1), remove one screw (callout 2), and then release one tab (callout 3).

NOTE: The connector (callout 1) has a tab that must be released to disconnect it. It can be difficult to disconnect when the duplex re-pick clutch is installed. It might be easier to remove the duplex re-pick clutch (see the following step), and then disconnect the connector.

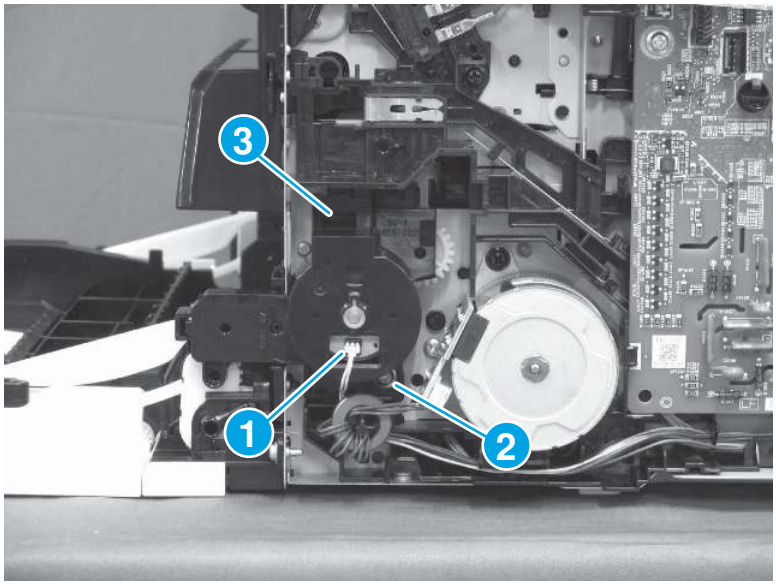Figure 4-914 Disconnect one connector, remove one screw, and release one tab




4. Remove the duplex re-pick clutch (callout 1).

⚠ CAUTION: When handling the assembly, do not lose the spring that is inside the left gear holder (callout 2).

Reinstallation tip: **For a replacement duplex re-pick clutch only**: Remove the spring from the assembly (callout 2), and then install it on the replacement duplex re-pick clutch.

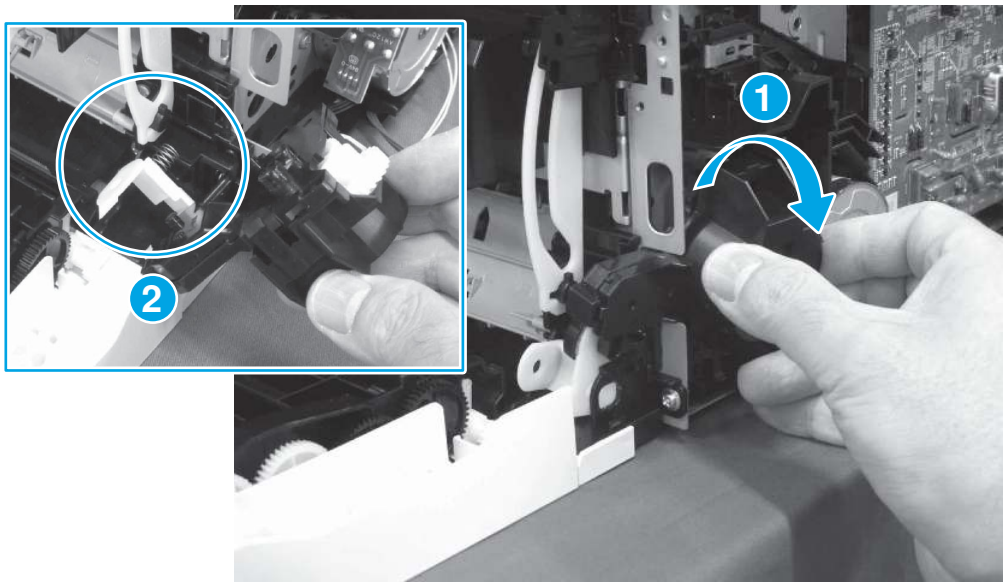Figure 4-915 Remove the duplex re-pick clutch




4. Remove the feed motor

Follow the procedure below to remove and replace the feed motor.

- Disconnect one connector (callout 1), remove two screws (callout 2), and then remove the feed motor (callout 3).

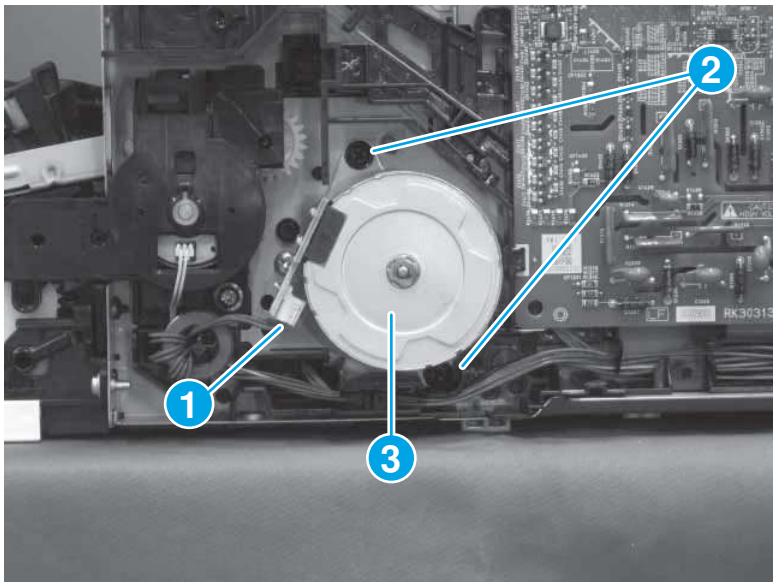Figure 4-916 **Remove the feed motor**




5. Remove the right cover (SFP)

Follow the procedure below to remove and replace the right cover (SFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.


1. Remove one screw (callout 1).

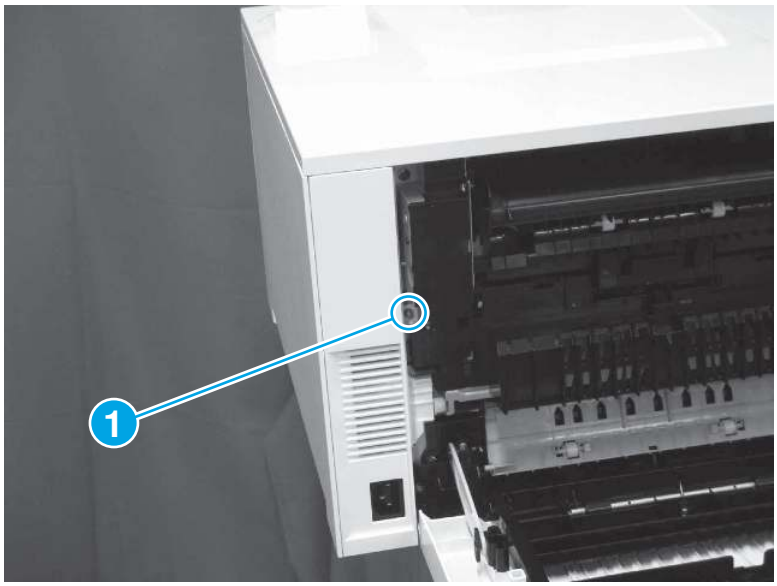Figure 4-917 **Remove one screw**




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to three tabs (callout 1). Release three tabs.

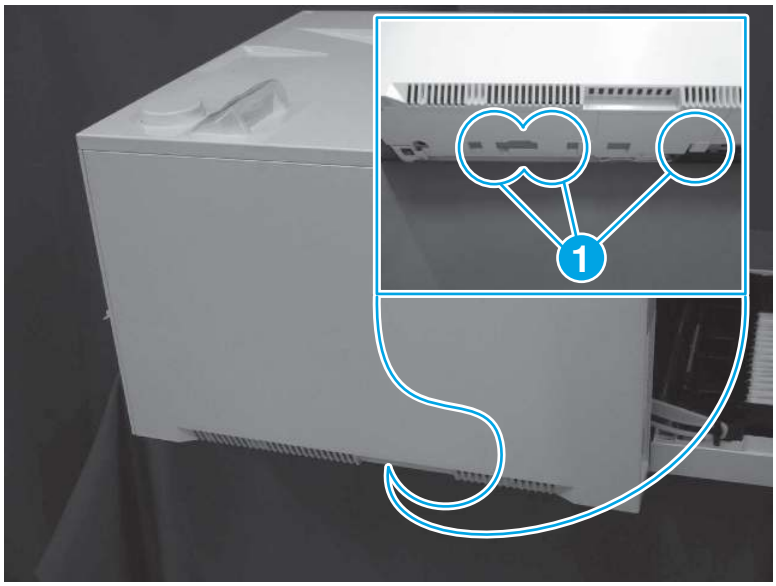Figure 4-918 Release three tabs




3. Press in on the side (callout 1) of the right cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

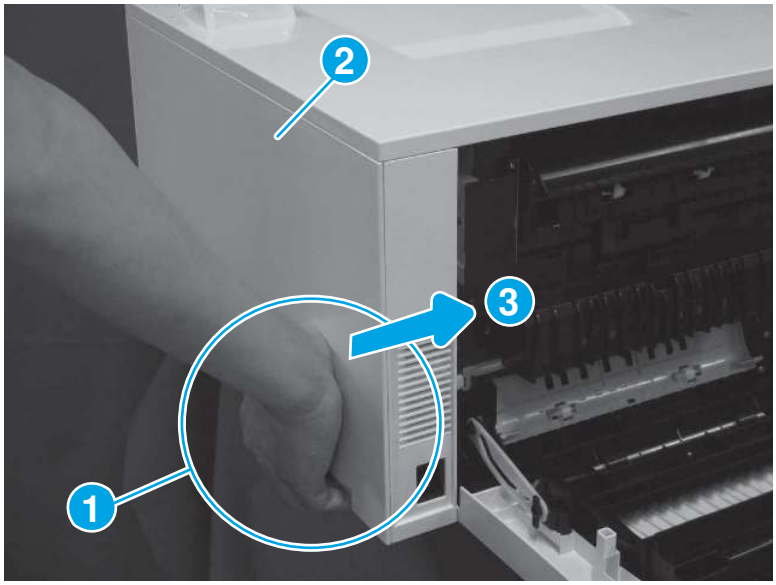Figure 4-919 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

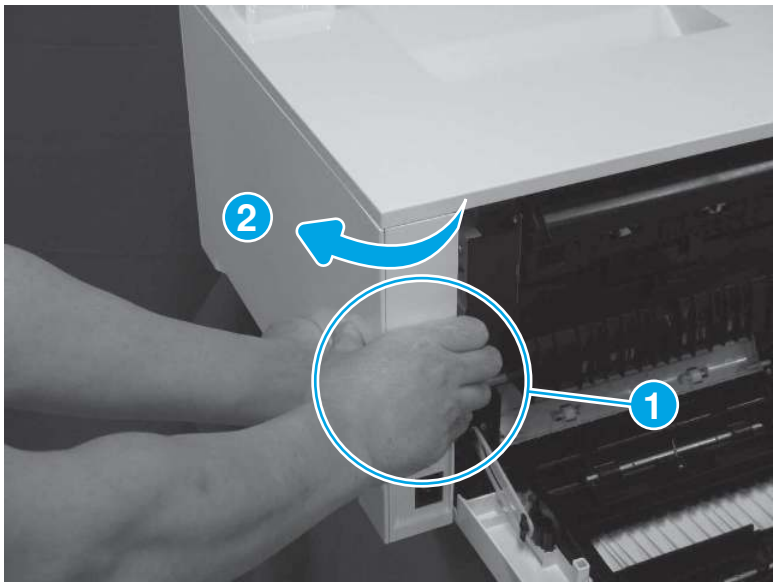Figure 4-920 Disengage the cover corner



5. Remove the right cover (callout 1).

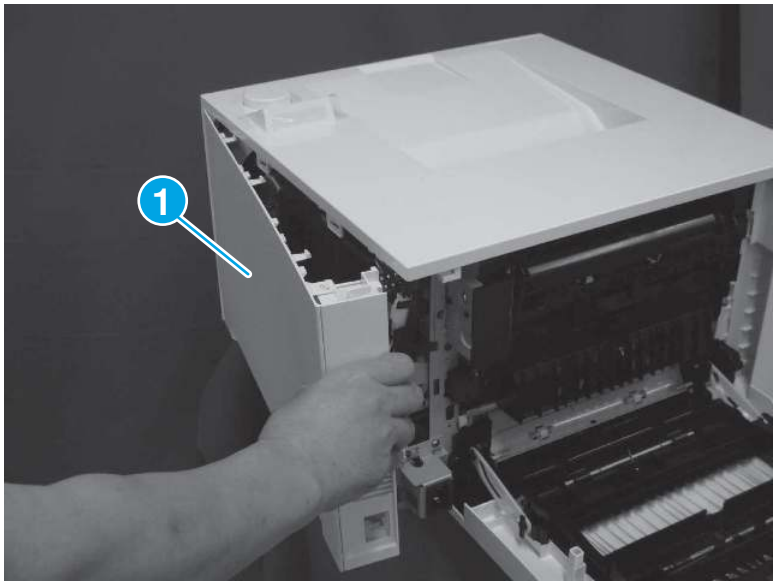Figure 4-921 Remove the cover




6. Remove the right cover (MFP)

Follow the procedure below to remove and replace the right cover (MFP).

NOTE: The following procedure is for an MFP printer only. If this assembly is being removed to gain access to dependency parts for a SFP printer, skip this step.


1. Remove one screw (callout 1).

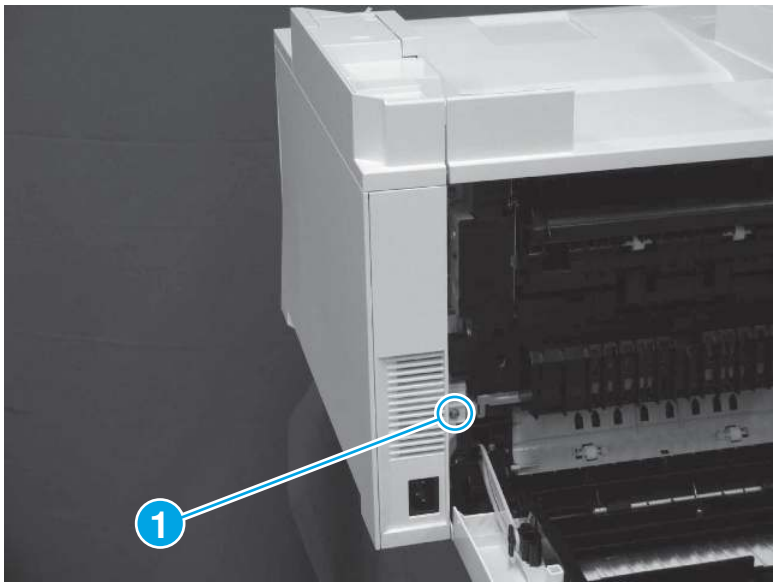Figure 4-922 **Remove one screw**




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to three tabs (callout 1). Release three tabs.

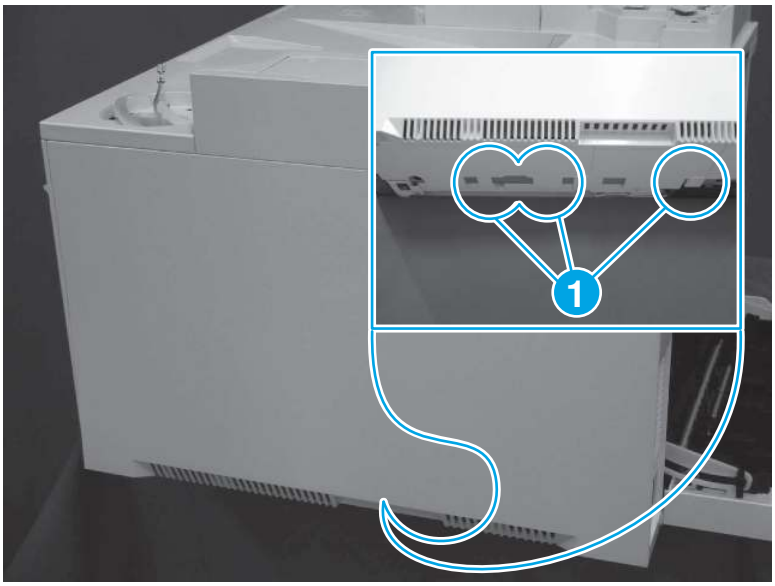Figure 4-923 **Release three tabs**




3. Press in on the side (callout 1) of the right cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

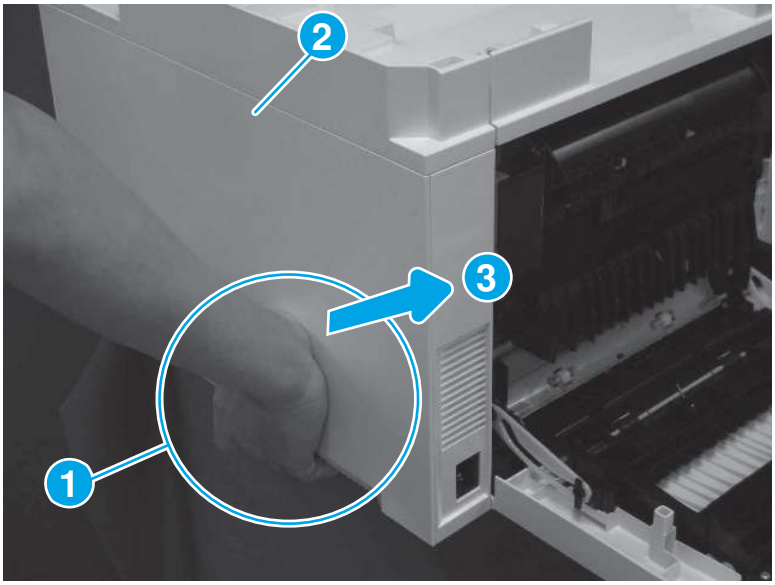Figure 4-924 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

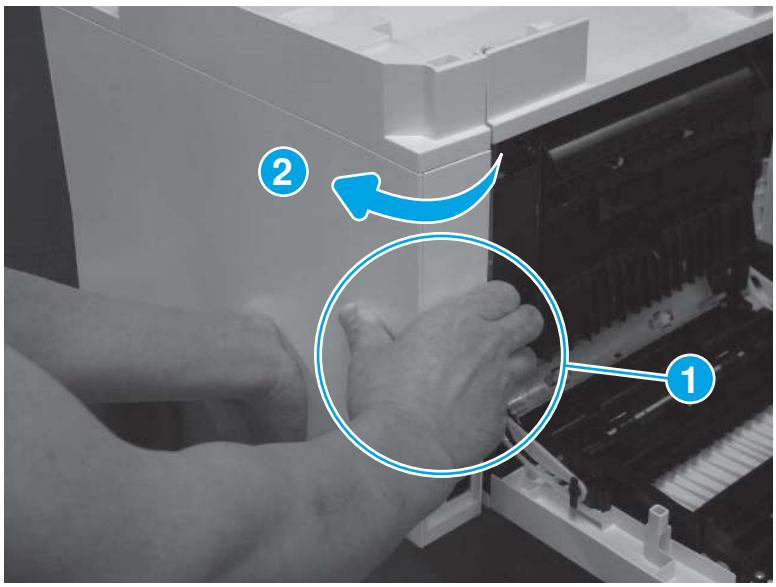Figure 4-925 Disengage the cover corner



5. Remove the right cover (callout 1).

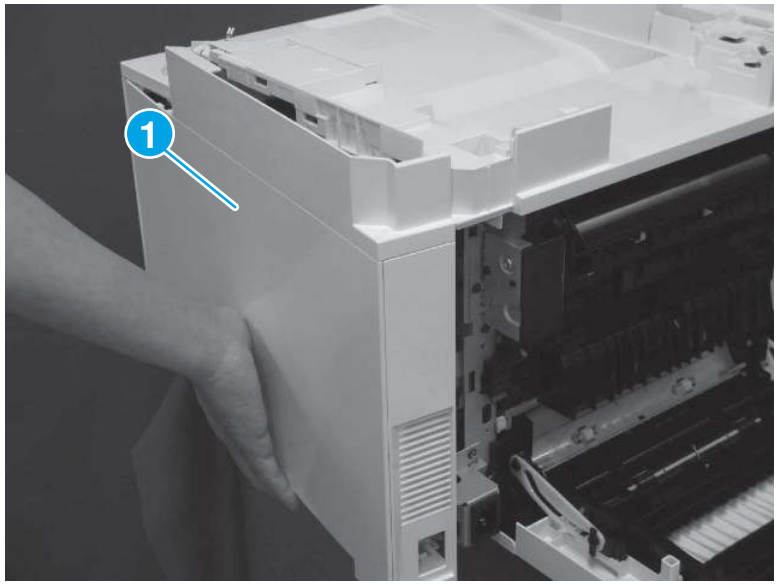Figure 4-926 **Remove the cover**




7. Remove the rear door

Follow the procedure below to remove and replace the rear door.


1. Open the rear door, and then raise the secondary transfer feed assembly (callout 1) up and into the locked position.

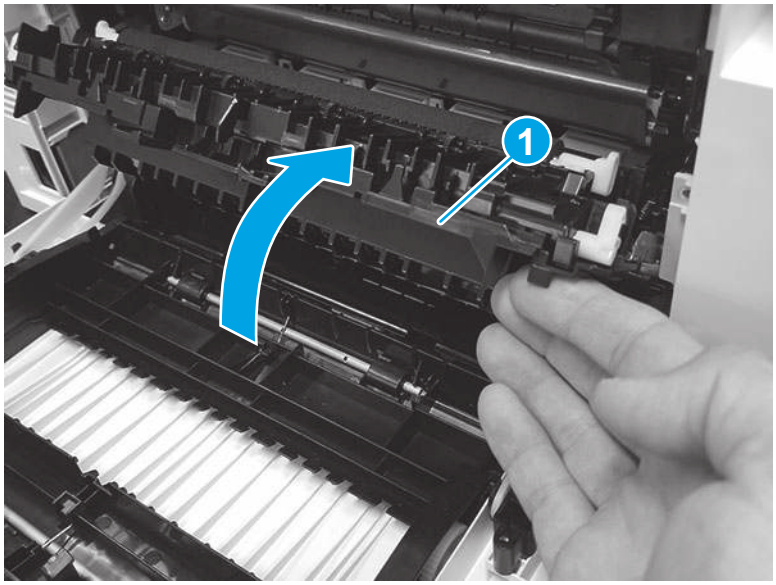Figure 4-927 **Place the T2 feed assembly in the locked position**




2. Remove two screws (callout 1), and then release the left- and right-side retainer arms (callout 2)

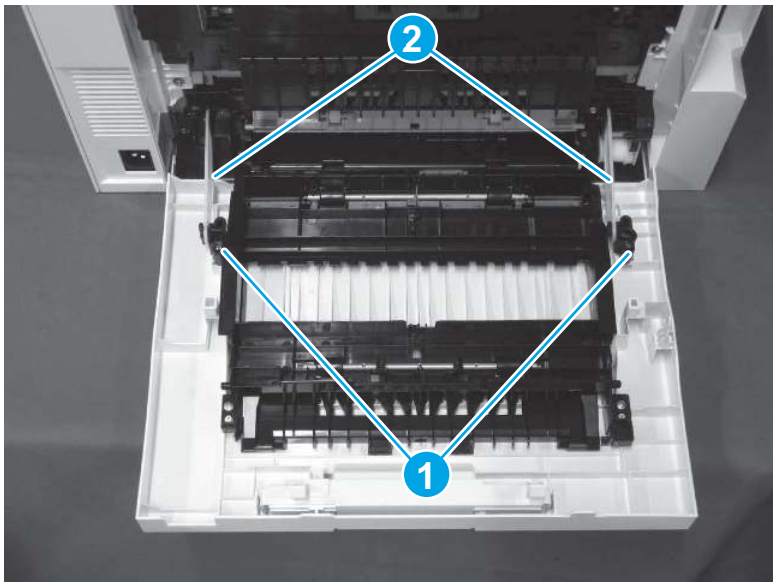Figure 4-928 Release the retainer arms



3. Carefully position the printer at the edge of the work surface and allow the rear door to open to an angle greater than 90 degrees (callout 1). Slide the door away (callout 2) from the formatter side of the printer (callout 3) to release it, and then remove the rear door.

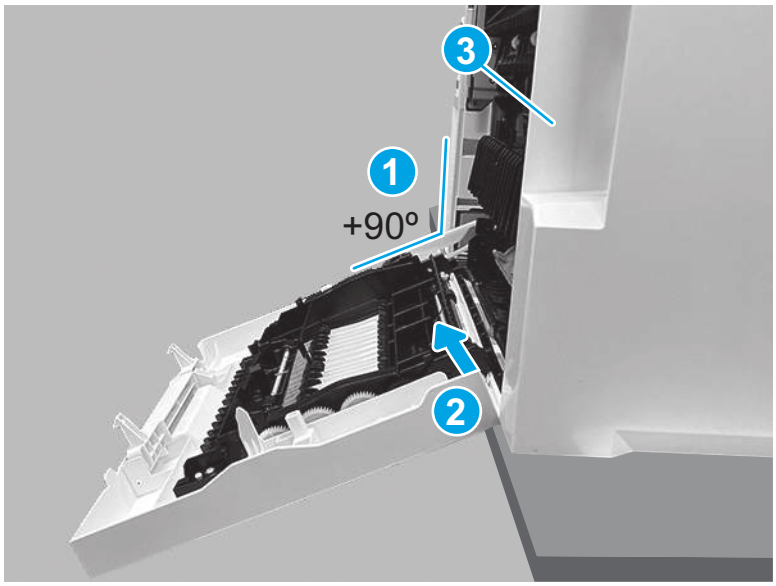Figure 4-929 Remove the door




8. Remove the duplexing bottom cover

Follow the procedure below to remove and replace the duplexing bottom cover.

- Release two tabs (callout 1), and then remove the duplexing bottom cover (callout 2).

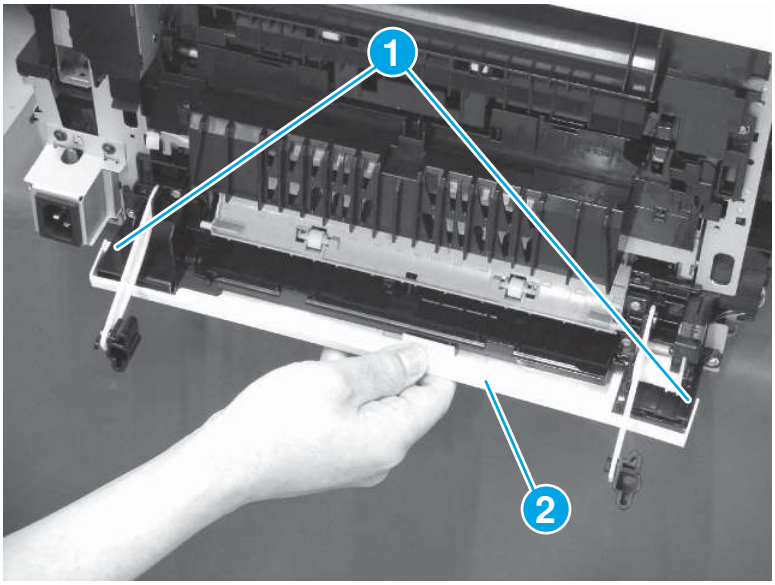Figure 4-930 **Remove the duplexing bottom cover**




9. Remove the secondary transfer roller (T2) assembly

Follow the procedure below to remove and replace the T2 roller assembly.


1. Open the rear door, and then rotate the bushing (callout 1) in the direction shown below.

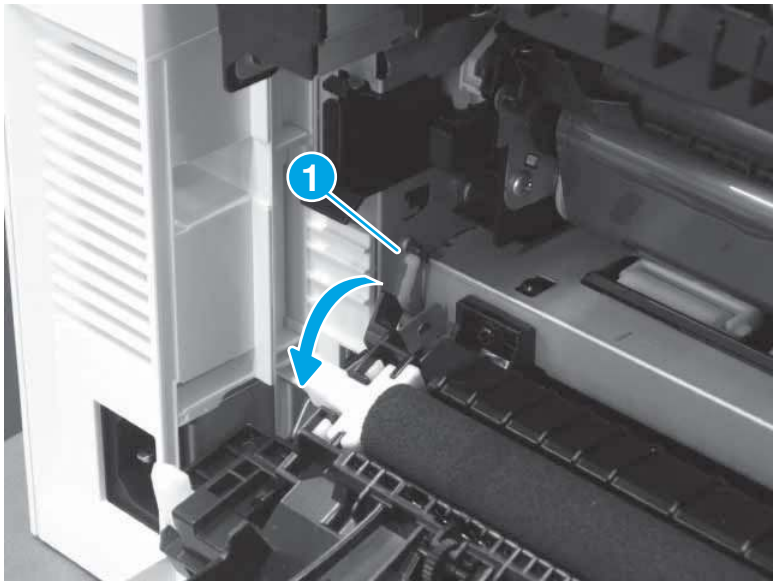Figure 4-931 **Rotate the bushing**




2. Slide the bushing in the direction shown below.

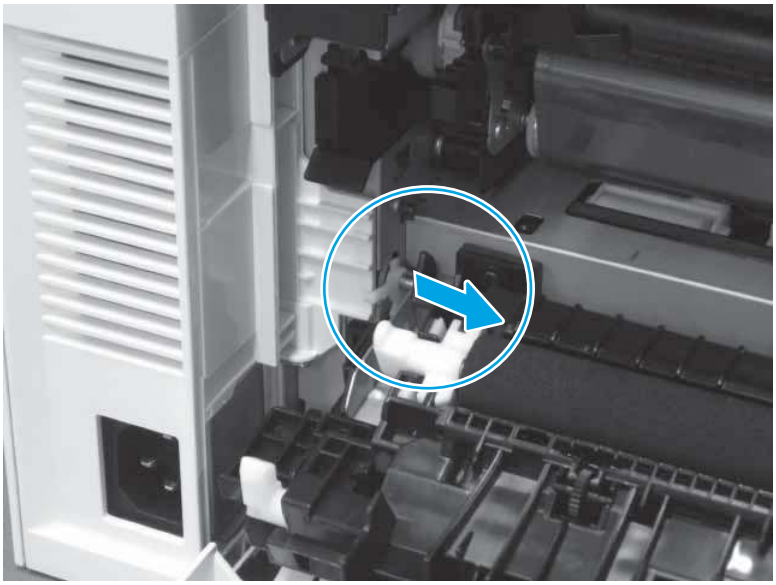Figure 4-932 **Slide the bushing**




3. Slide the T2 assembly (callout 1) in the direction shown below to remove it.

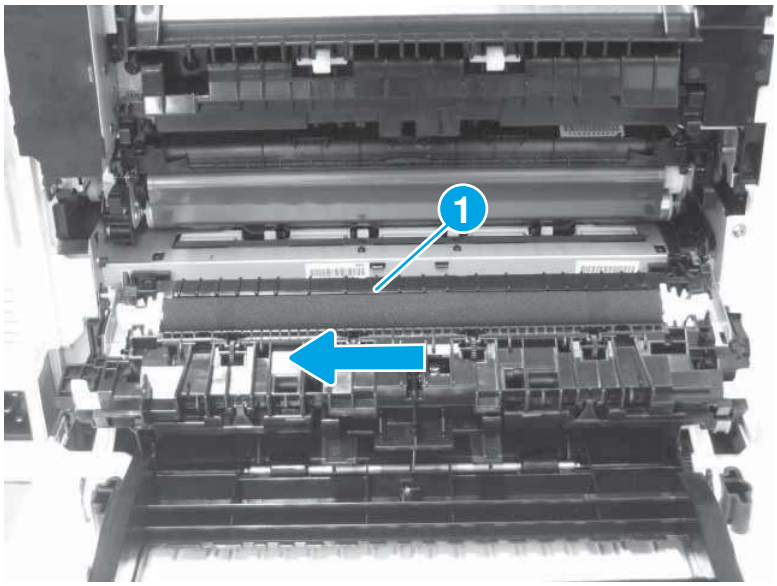Figure 4-933 **Remove the T2 assembly**



4. The bushing shown in the figure below is supplied with the replacement assembly.

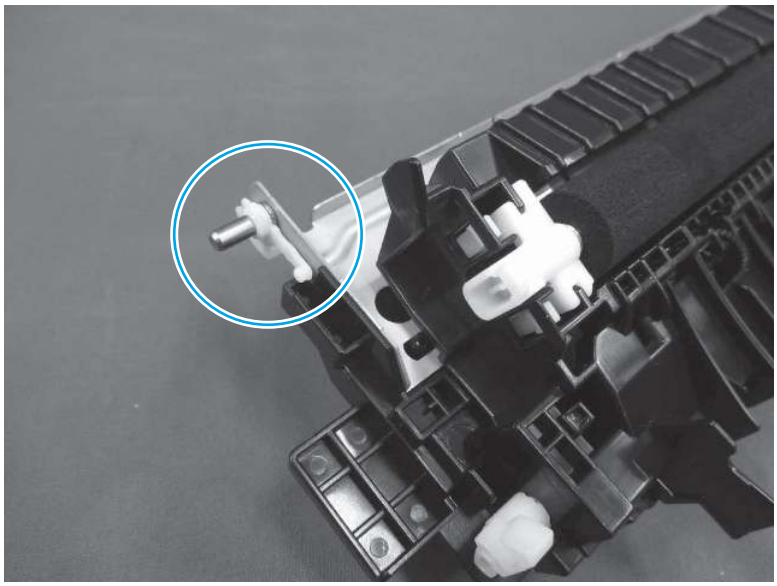Figure 4-934 T2 assembly bushing




10. Remove the low-voltage power supply (LVPS)

Follow the procedure below to remove and replace the LVPS.

⚠ CAUTION: ESD sensitive part.


1. Disconnect one flat-flexible cable (FFC; callout 1) and one connector (callout 2), and then remove one screw (callout 3).

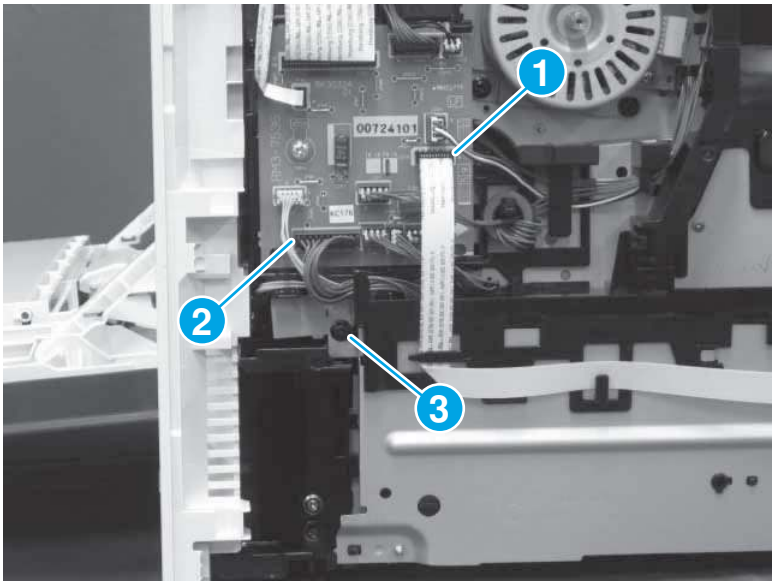Figure 4-935 Disconnect FFC, connector, and remove one screw




2. Disconnect two connectors (callout 1), and then remove two screws (callout 2).

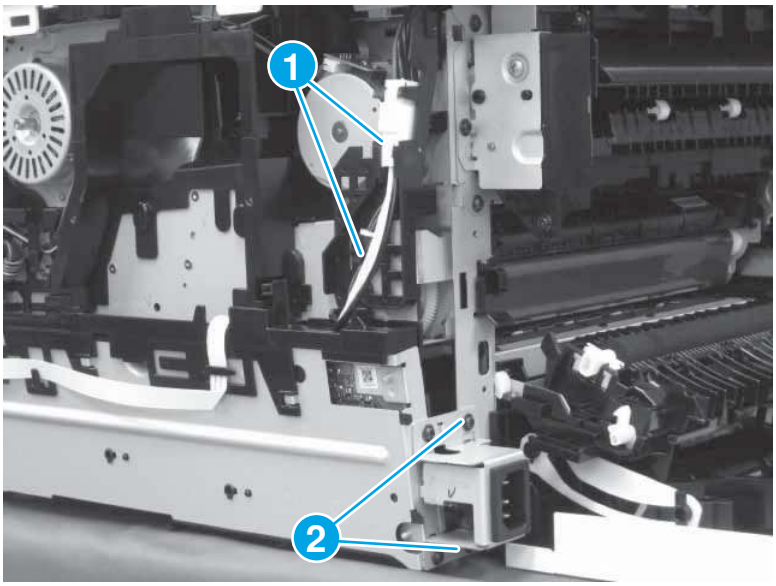Figure 4-936 Disconnect connectors and remove screws



3. Release three tabs (callout 1), and then remove the LVPS (callout 2).

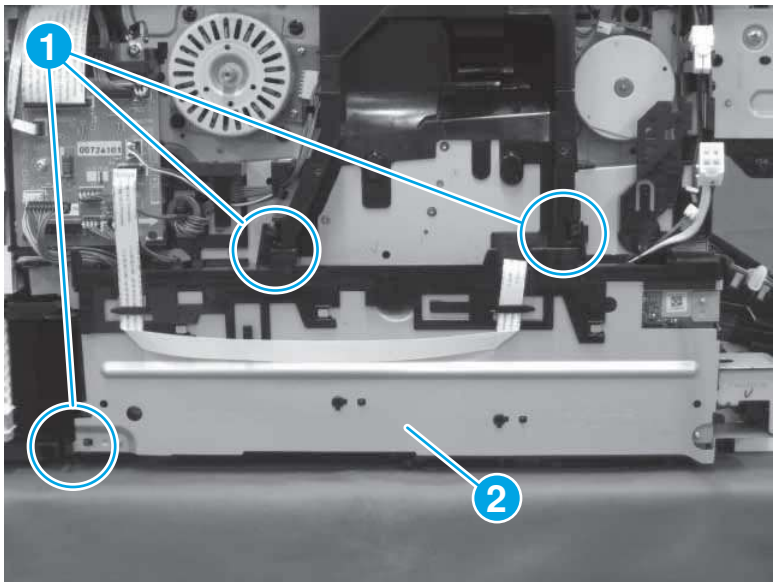Figure 4-937 Remove the LVPS



11. Remove the duplex guide assembly


Follow the procedure below to remove and replace the duplex guide assembly.

1. Disconnect one connector (callout 1), and then release the wire harness from the retainer (callout 2).

NOTE: The correct cable to release is the purple three-wire harness.


Disconnect other connectors and release other wire harnesses as necessary.

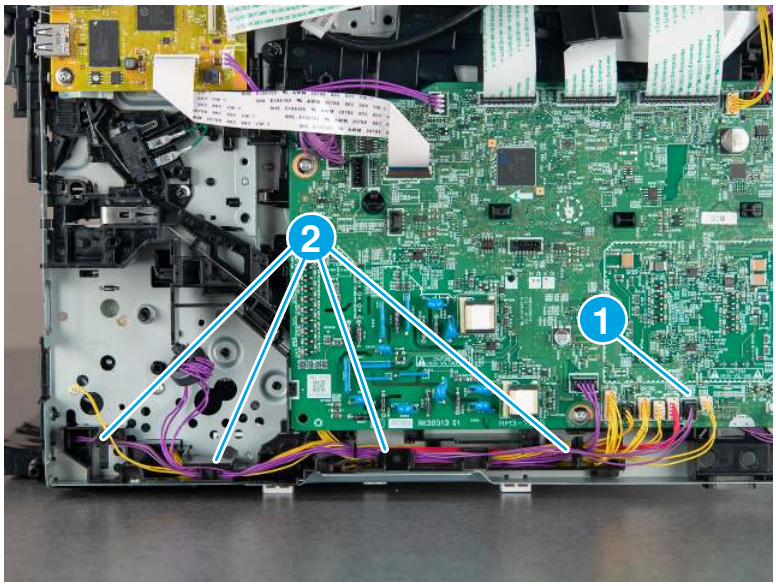Figure 4-938 Disconnect one connector




2. Do the following:
   a. Remove one (tapping) screw (callout 1).
   b. Remove one (TP) screw (callout 2)
   c. Remove the holder (callout 3).

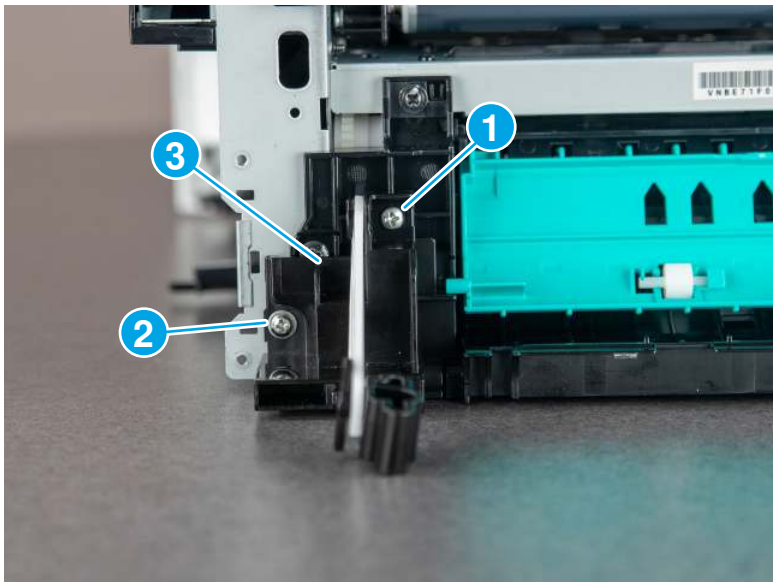Figure 4-939 Remove two screws and the holder



3. Do the following:
   a. Remove two (tapping) screws (callout 1).
   b. Remove one (TP) screw (callout 2)
   c. Remove the holder (callout 3).

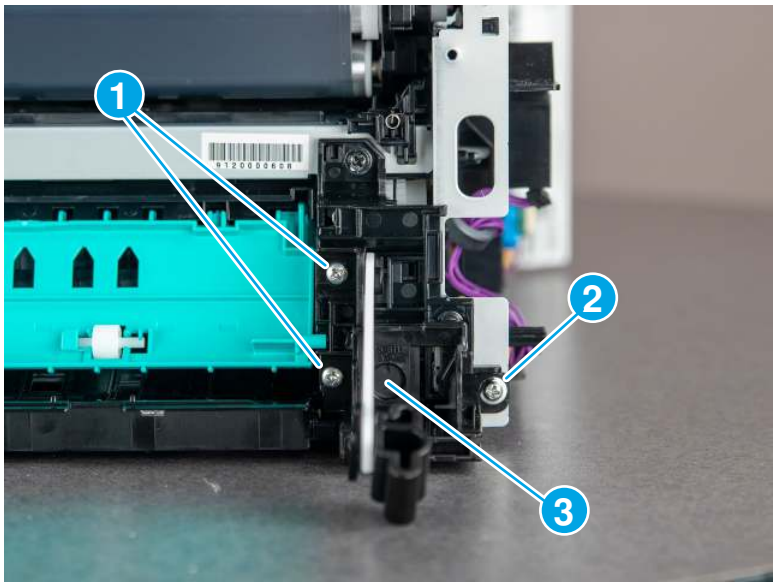
Figure 4-940 Remove three screws and the holder



4. Use a small flat-blade screwdriver to release one boss at each end of the duplex guide (callout 1), and then remove the guide (callout 2).

CAUTION: Parts of this assembly are fragile and can easily be damaged during removal.

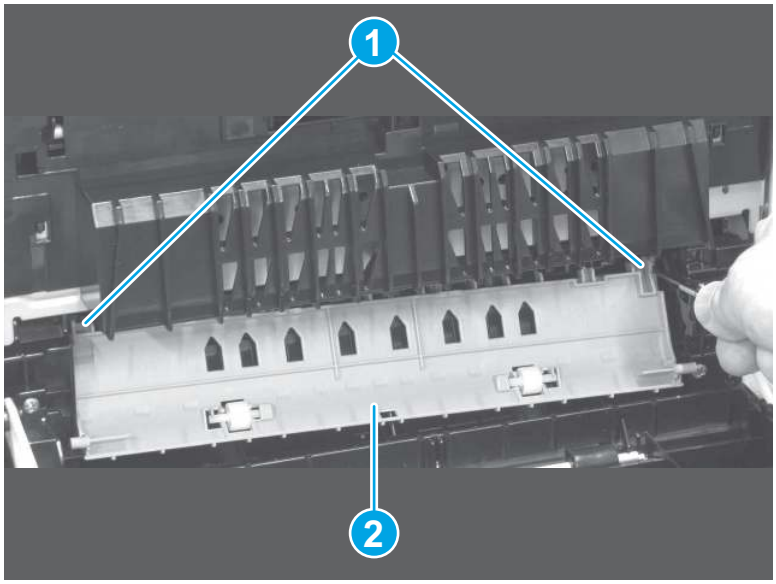
Figure 4-941 Remove the duplex upper guide



5. Carefully position the printer at the edge of the work surface. Slightly pull the duplex guide assembly down to release it, and then remove the assembly.

NOTE: Pass the wire harness through the opening in the chassis as the assembly is removed (callout 1).

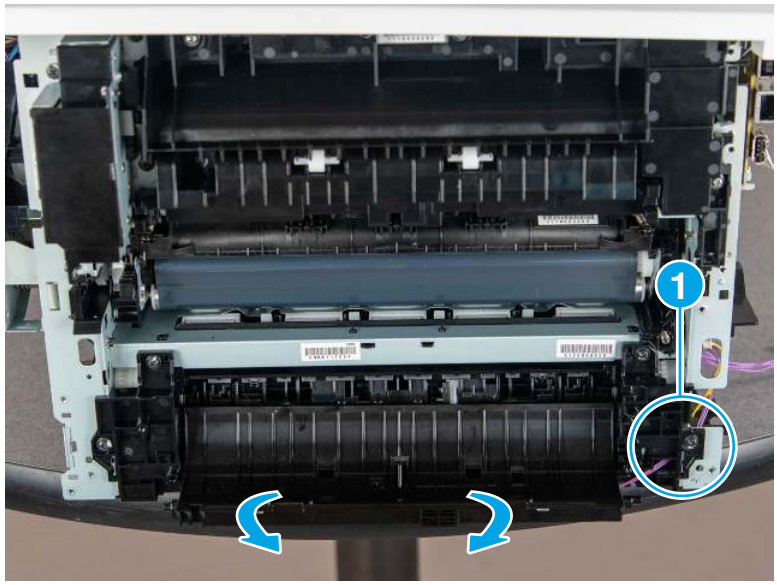Figure 4-942 Remove the duplex guide assembly




12. Remove the feed lower guide assembly

Follow the procedure below to remove and replace the feed lower guide assembly.

1. Disconnect four connectors (callout 1), and then release the wire harnesses from the guide (callout 2).

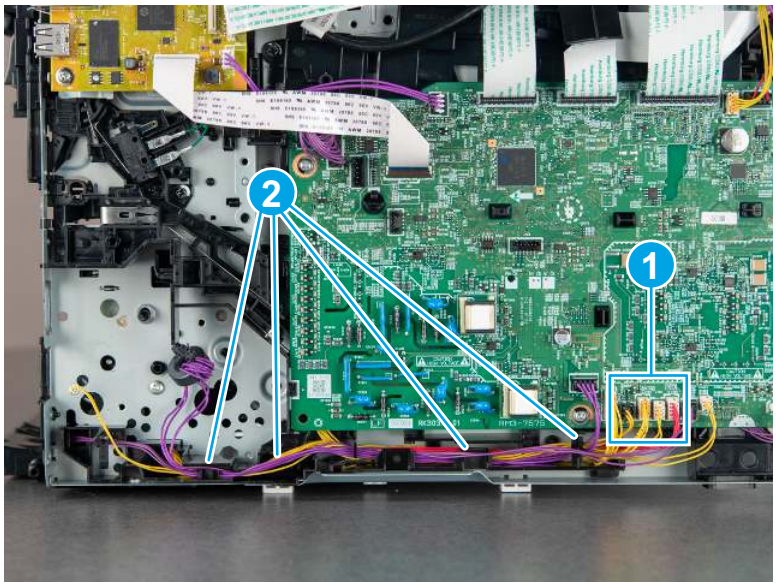
Figure 4-943 Disconnect connectors and release the wire harnesses



2. Position the printer with the front-side down, release one tab (callout 1), and then remove the rubber pad (callout 2). Repeat this step for the rubber pad on the opposite side.


⚠ CAUTION: **MFP only**: The integrated scanner assembly (ISA) can suddenly open when the printer is place in any postilion other than top-side up. Secure the ISA when repositioning the printer.

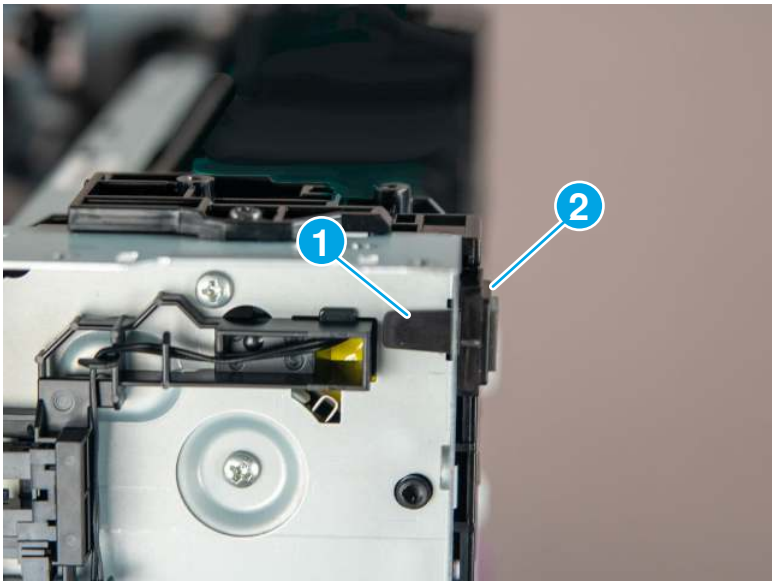Figure 4-944 Remove the pad



3. Position the printer with the top-side up (normal position), and then remove four screws.

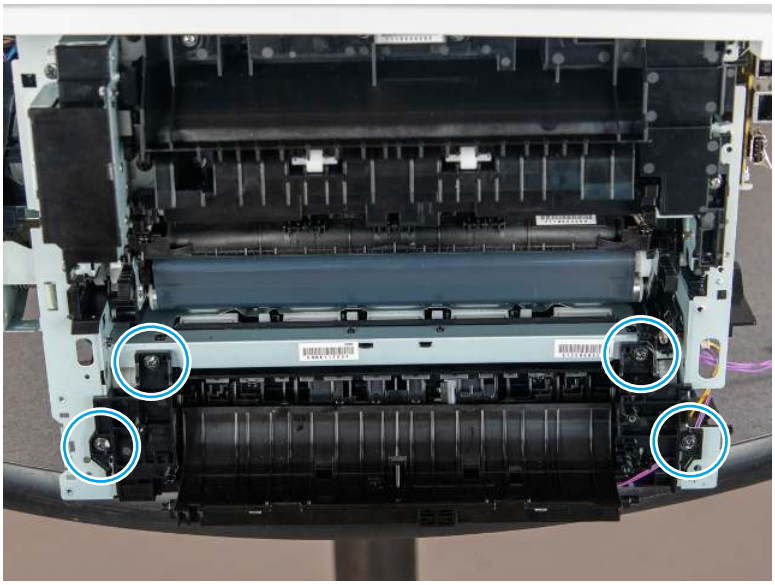Figure 4-945 Remove four screws



4. Use a small flat-blade screwdriver to release two bosses (callout 1).


Figure 4-946 Release two bosses



5. Carefully position the printer at the edge of the work surface. Slightly pull down on the assembly to release it, and then remove the feed lower guide assembly (callout 1).

NOTE: Carefully pull the wire harness through the opening in the chassis (callout 2) while removing the assembly.

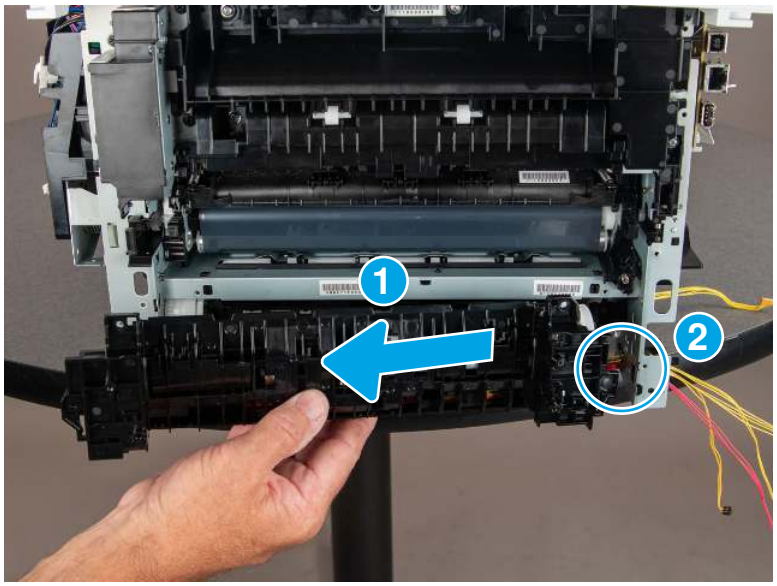Figure 4-947 Remove the feed lower guide assembly



13. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: 

Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.


14. Special installation instructions - Feed lower guide assembly

Follow the special instructions below to install the feed lower guide assembly.

NOTE: The printer is shown upside down in the figure below for clarity.

- When the assembly is installed, make sure that the link arm (callout 1) on the printer is correctly inserted in the gear (callout 2) of the feed lower guide assembly.

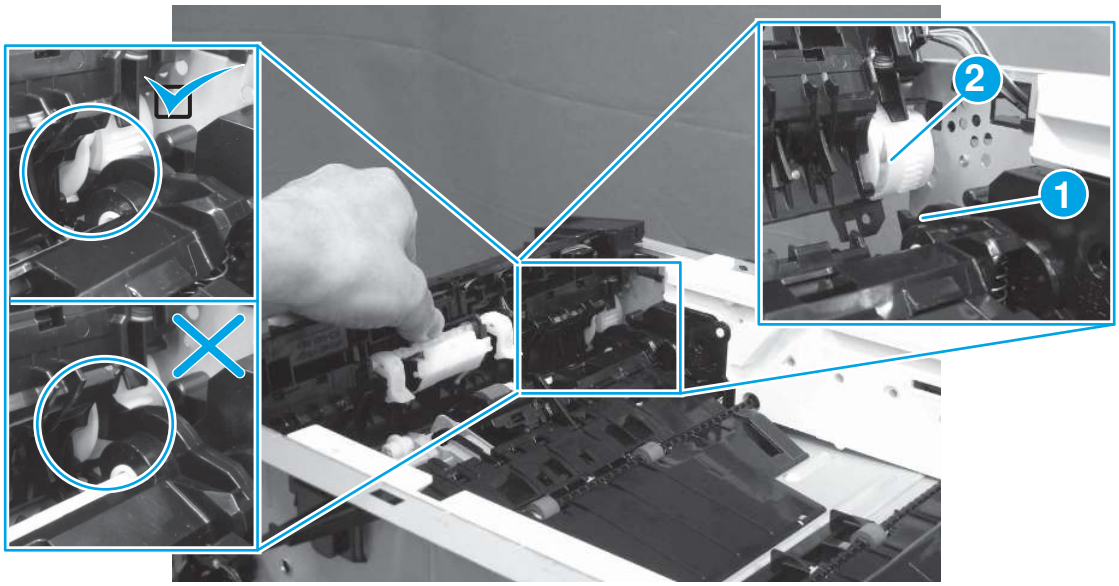Figure 4-948 **Install the feed lower guide assembly**




15. Special installation instructions - Low-voltage power supply (LVPS)

Follow the special instructions below to install a replacement LVPS.

⚠ CAUTION: ESD sensitive part.


1. When the LVPS is installed, make sure that the sheet-metal tab (callout 1) near the power receptacle is inserted in the slot (callout 2) in the chassis.

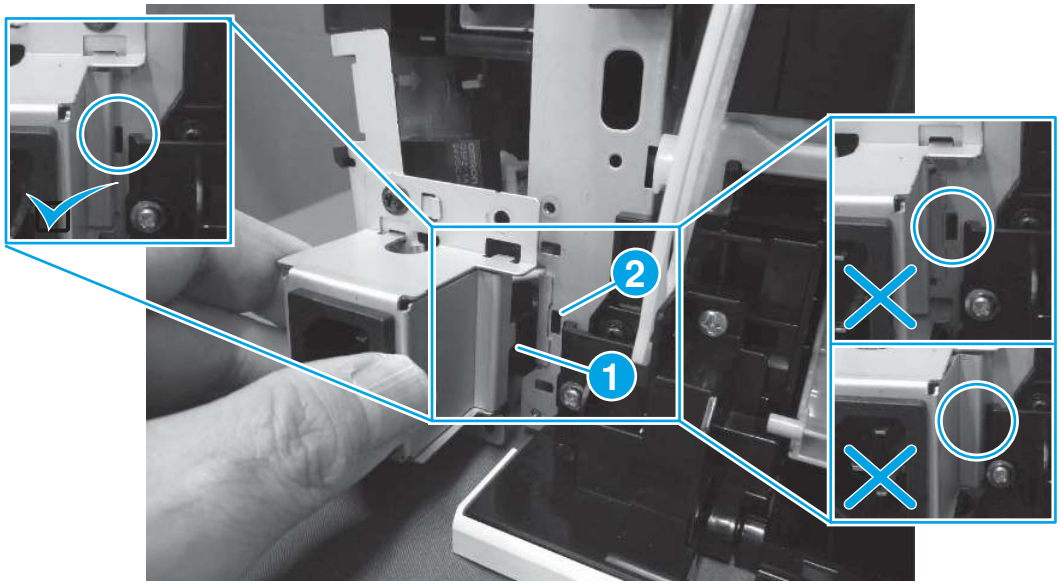Figure 4-949 **Install the LVPS tab**



2. Make sure that the fuser temperature fuse cable (callout 1) is positioned behind the thick cable (callout 2). This prevents the fuser cable from unnecessary movement.

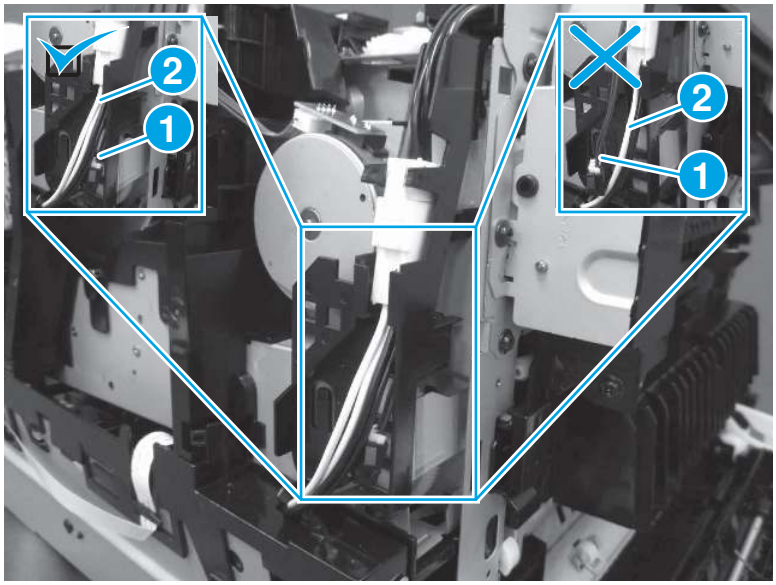Figure 4-950 **Check the fuser temperature fuse cable**



Removal and replacement: Lifter drive assembly

Learn about lifter drive assembly removal.

Mean time to repair: 45 minutes

Service level: Difficult

Before performing service

Turn the printer power off

- Disconnect the power cable.

⚠ **WARNING!** To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-49 **Part information**

Part number	Part description
RM2-2711-000CN	Lifter drive assembly

Required tools

- Small flat-blade screwdriver
- Small flat-blade screwdriver
- Needle-nose pliers

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test

Print any pages necessary to make sure the printer is functioning correctly.

1. Remove the left cover (SFP)


Follow the procedure below to remove and replace the left cover (SFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.

TIP: There might be a small cover installed on the USB port located at the back of the printer. If installed, remove this cover now.


1. Remove one screw (callout 1).

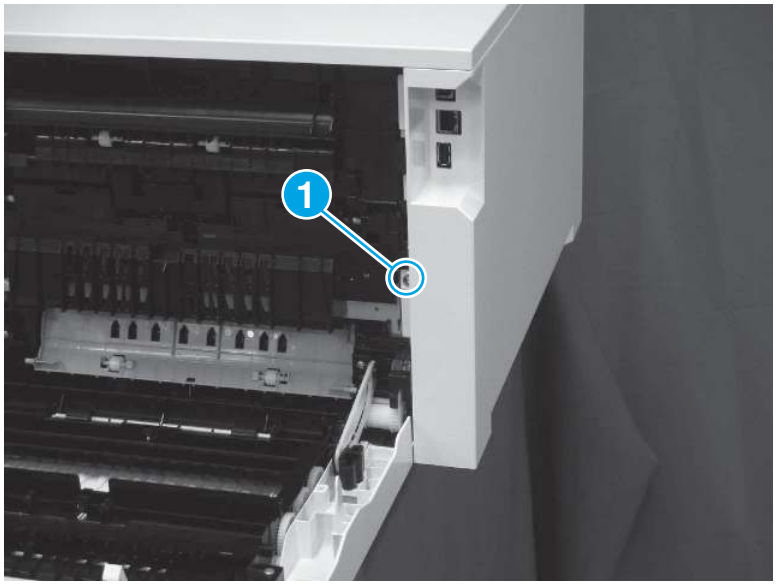Figure 4-951 **Remove one screw**




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

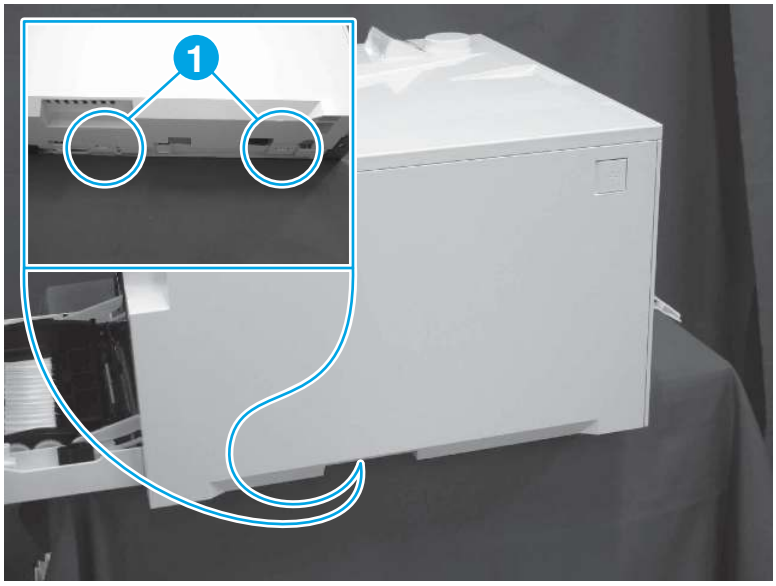Figure 4-952 Release two tabs




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

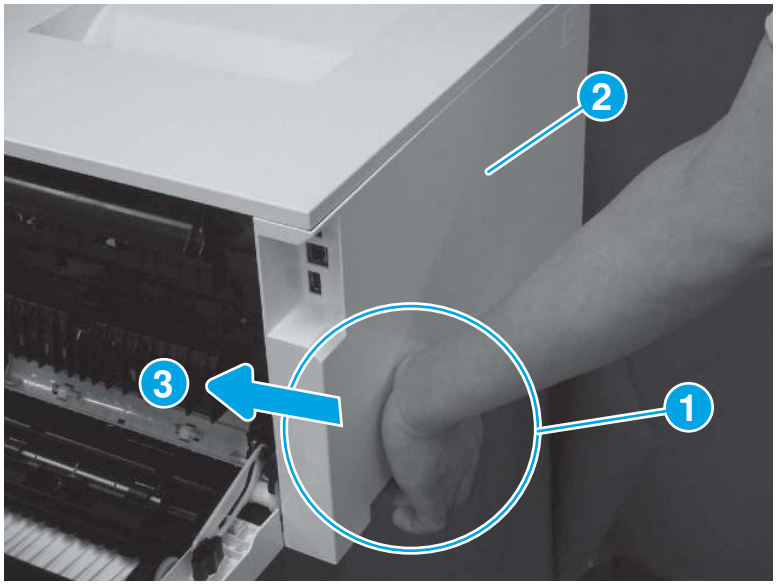Figure 4-953 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

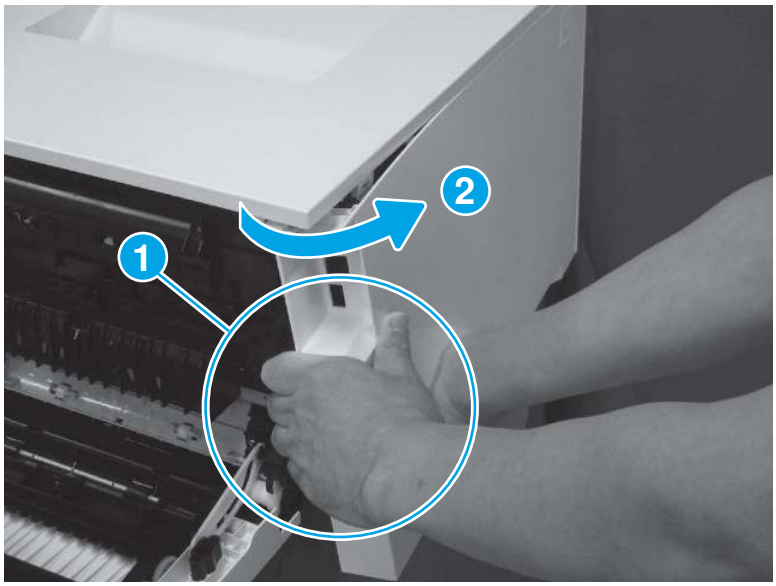Figure 4-954 Disengage the cover corner



5. Remove the left cover (callout 1).

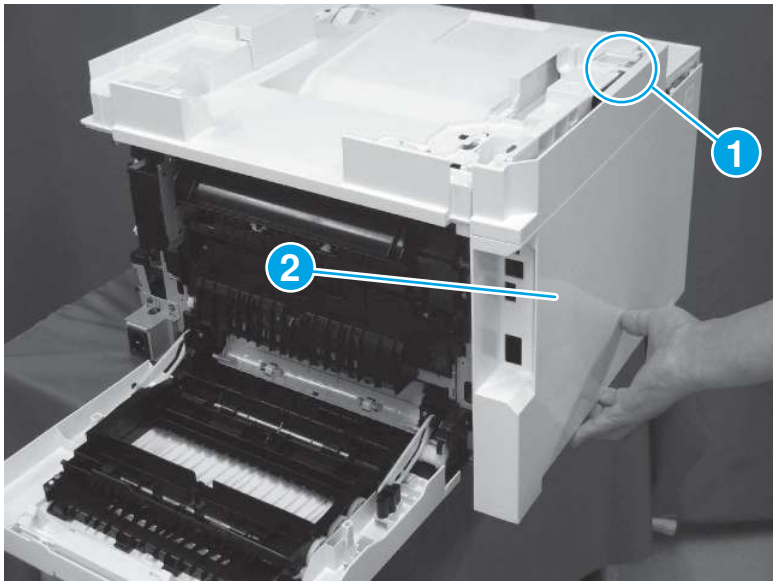Figure 4-955 Remove the cover



2. Remove the left cover (MFP)


Follow the procedure below to remove and replace the left cover (MFP).

NOTE: The following procedure is for an MFP printer only. If this assembly is being removed to gain access to dependency parts for a SFP printer, skip this step.

TIP: There might be a small cover installed on the USB port and/or the fax port located at the back of the printer. If installed, remove these covers now.


1. Remove one screw (callout 1).

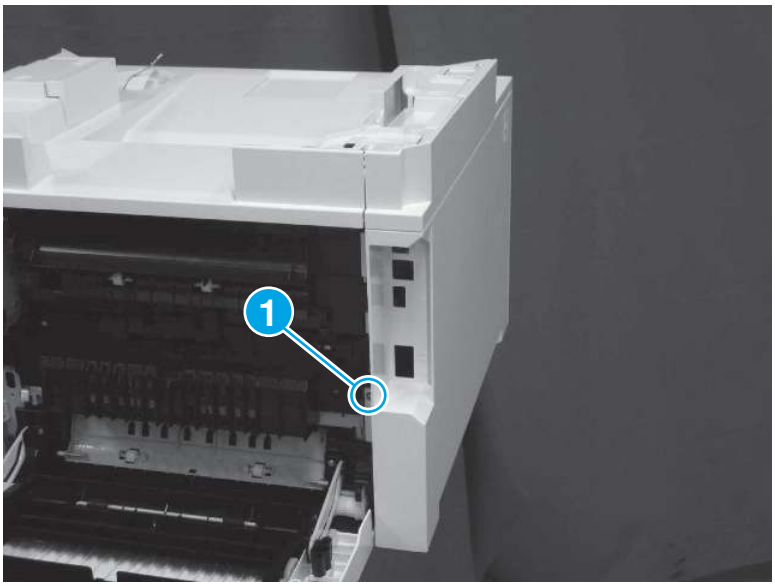Figure 4-956 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

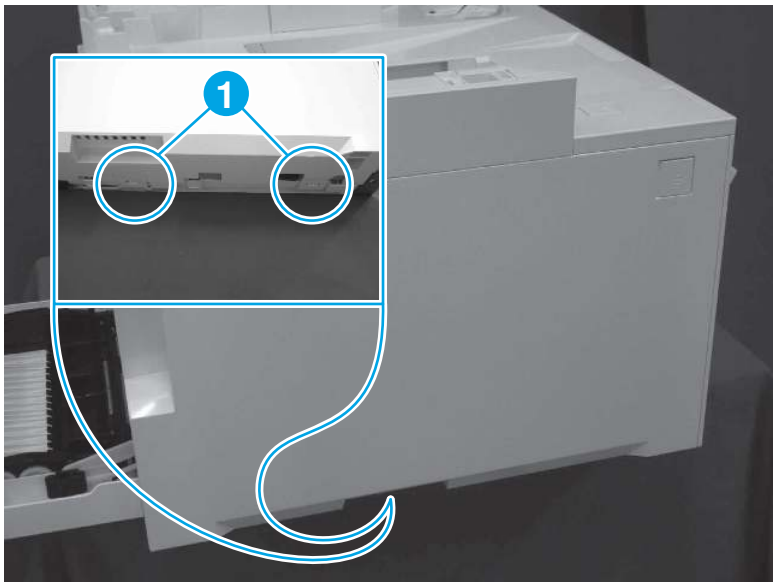Figure 4-957 Release two tabs




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

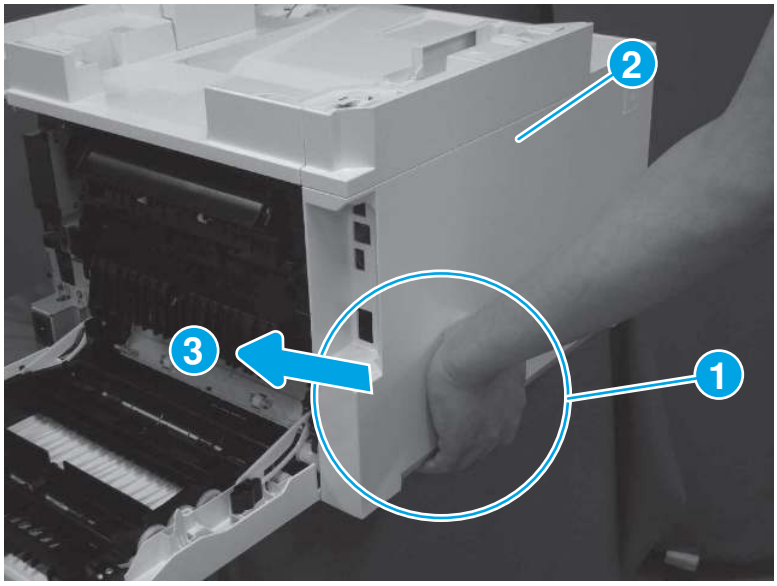Figure 4-958 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

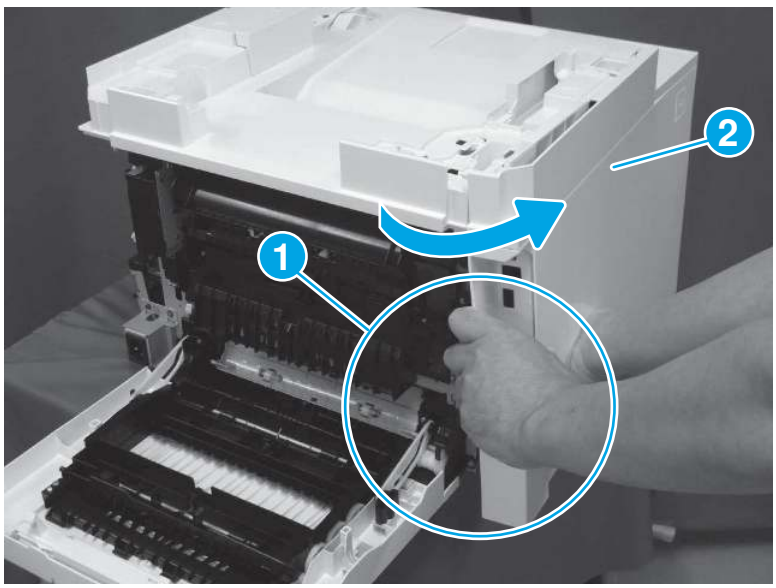Figure 4-959 Disengage the cover corner



5. Remove the left cover (callout 1).

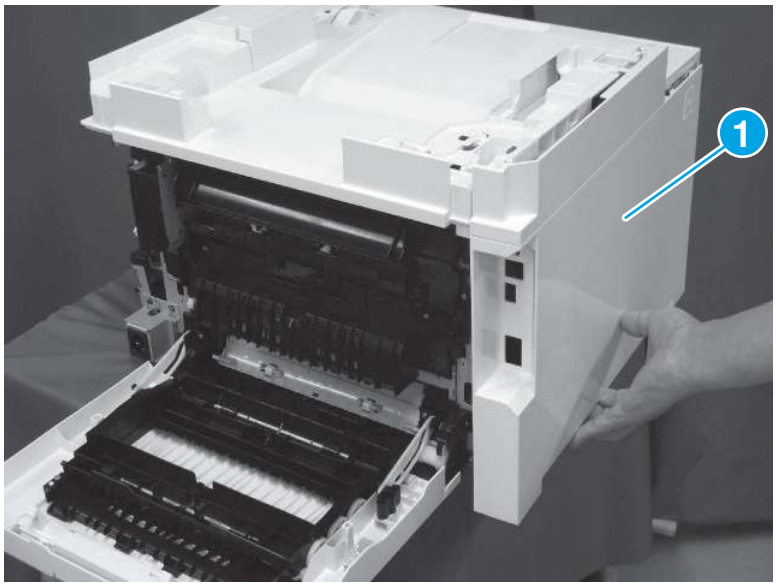Figure 4-960 Remove the cover




3. Remove the duplex re-pick clutch

Follow the procedure below to remove and replace the duplex re-pick clutch.

1. Remove one screw (callout 1), and then remove the hinge (callout 2).

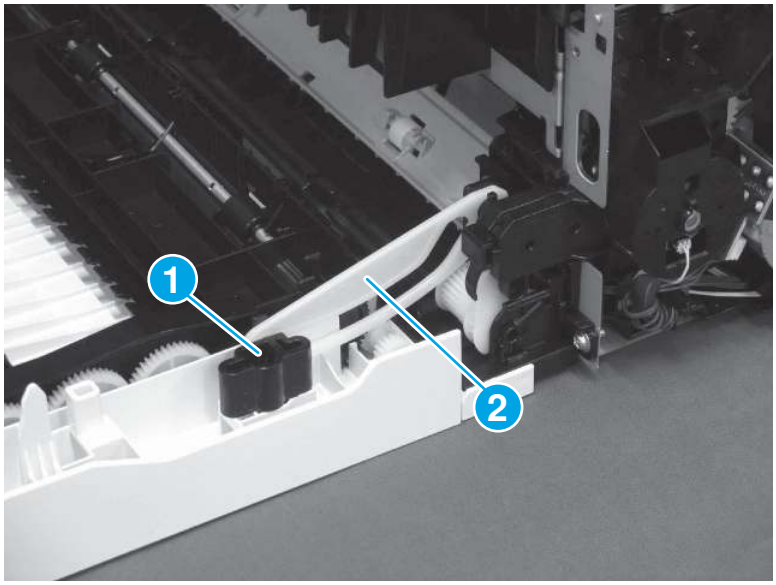
Figure 4-961 Remove the hinge



2. Release the retainer (callout 1), rotate the shaft as shown below (callout 2) to remove it, and then remove the gear (callout 3).

Reinstallation tip: Take note of how the gear is installed before removing it. The shaft cannot be reinstalled if the gear is incorrectly installed.

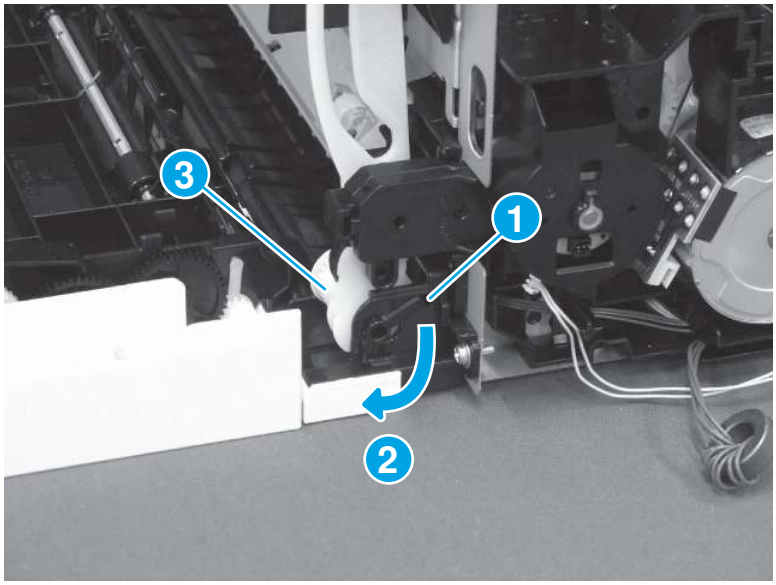
Figure 4-962 Remove the gear



3. Disconnect one connector (callout 1), remove one screw (callout 2), and then release one tab (callout 3).

NOTE: The connector (callout 1) has a tab that must be released to disconnect it. It can be difficult to disconnect when the duplex re-pick clutch is installed. It might be easier to remove the duplex re-pick clutch (see the following step), and then disconnect the connector.

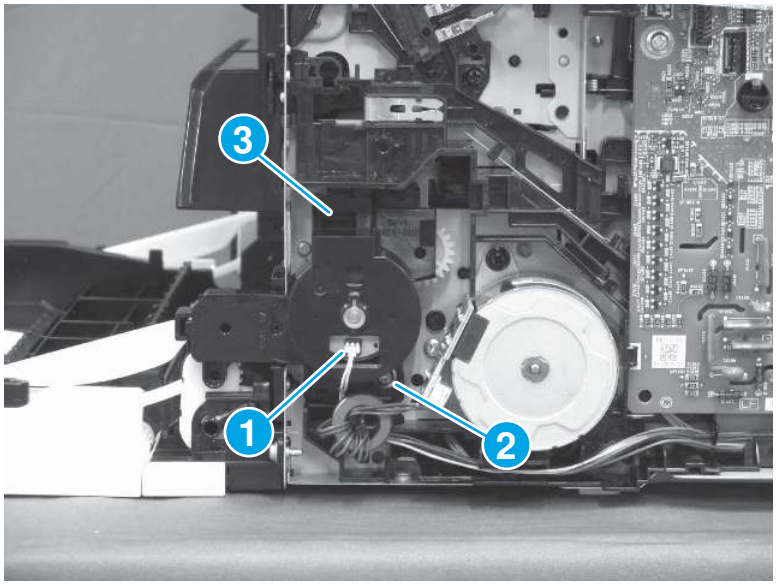Figure 4-963 Disconnect one connector, remove one screw, and release one tab




4. Remove the duplex re-pick clutch (callout 1).

CAUTION: When handling the assembly, do not lose the spring that is inside the left gear holder (callout 2).

Reinstallation tip: **For a replacement duplex re-pick clutch only**: Remove the spring from the assembly (callout 2), and then install it on the replacement duplex re-pick clutch.

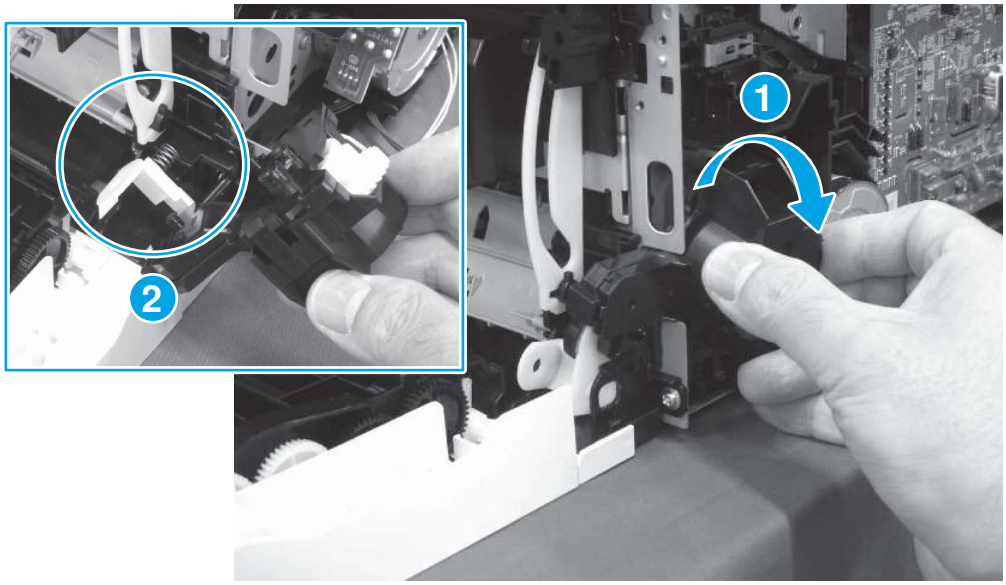Figure 4-964 Remove the duplex re-pick clutch




4. Remove the feed motor

Follow the procedure below to remove and replace the feed motor.

- Disconnect one connector (callout 1), remove two screws (callout 2), and then remove the feed motor (callout 3).

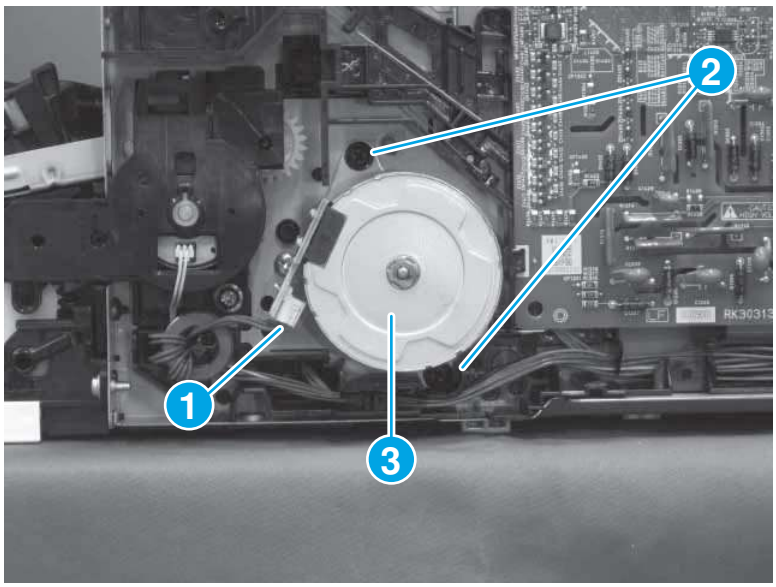Figure 4-965 Remove the feed motor




5. Remove the right cover (SFP)

Follow the procedure below to remove and replace the right cover (SFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.


1. Remove one screw (callout 1).

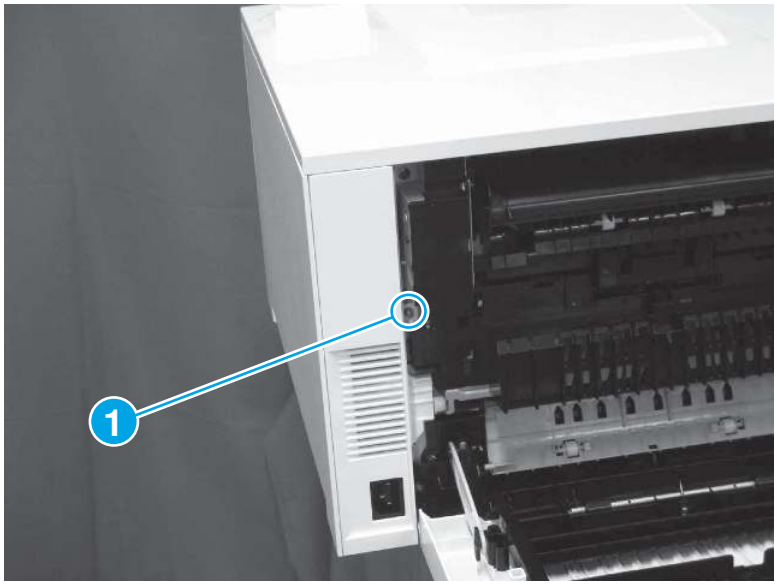Figure 4-966 **Remove one screw**




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to three tabs (callout 1). Release three tabs.

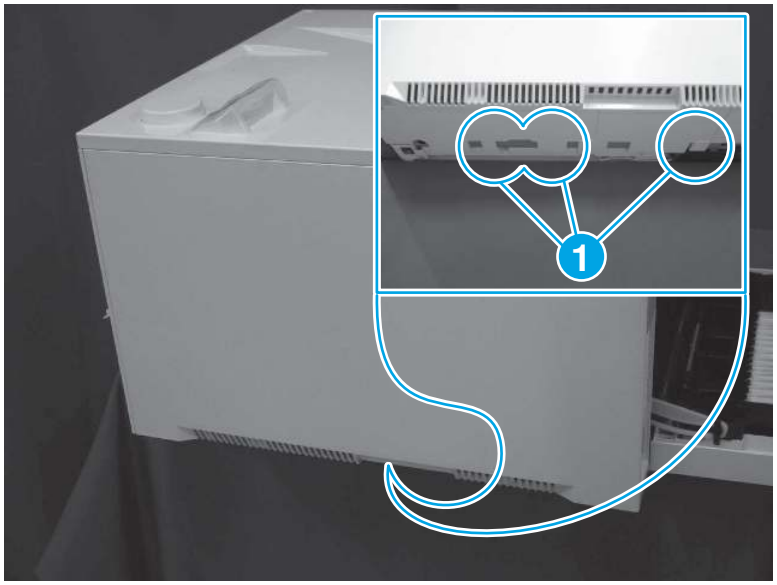Figure 4-967 **Release three tabs**




3. Press in on the side (callout 1) of the right cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

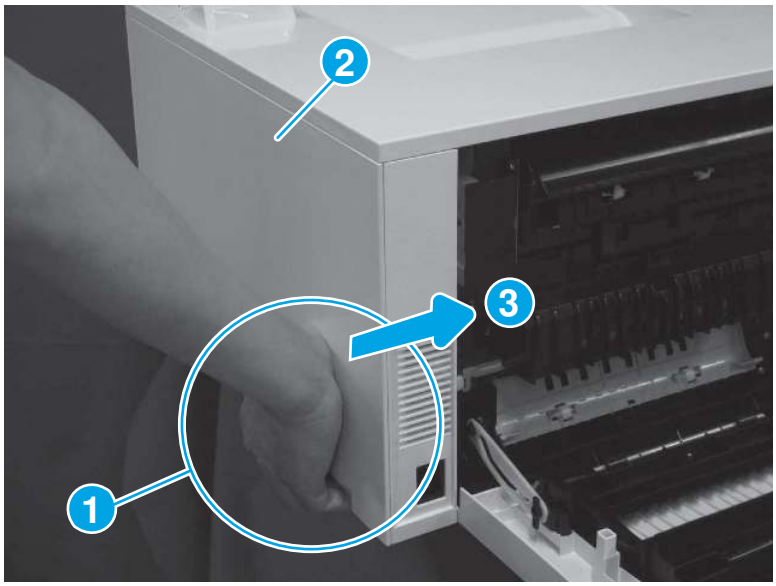Figure 4-968 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

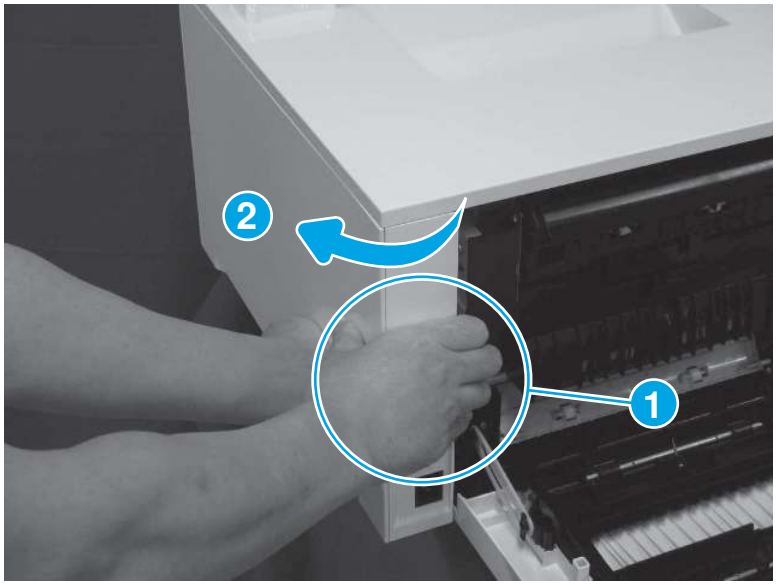Figure 4-969 Disengage the cover corner



5. Remove the right cover (callout 1).

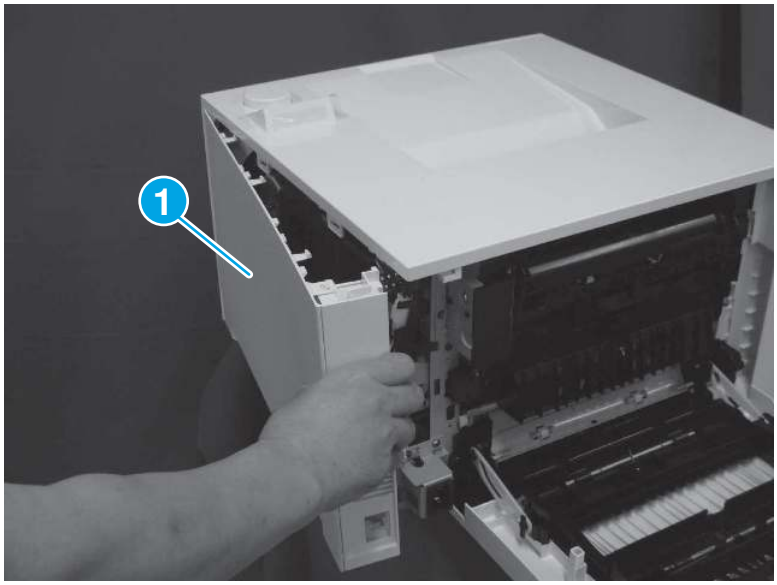Figure 4-970 Remove the cover




6. Remove the right cover (MFP)

Follow the procedure below to remove and replace the right cover (MFP).

NOTE: The following procedure is for an MFP printer only. If this assembly is being removed to gain access to dependency parts for a SFP printer, skip this step.


1. Remove one screw (callout 1).

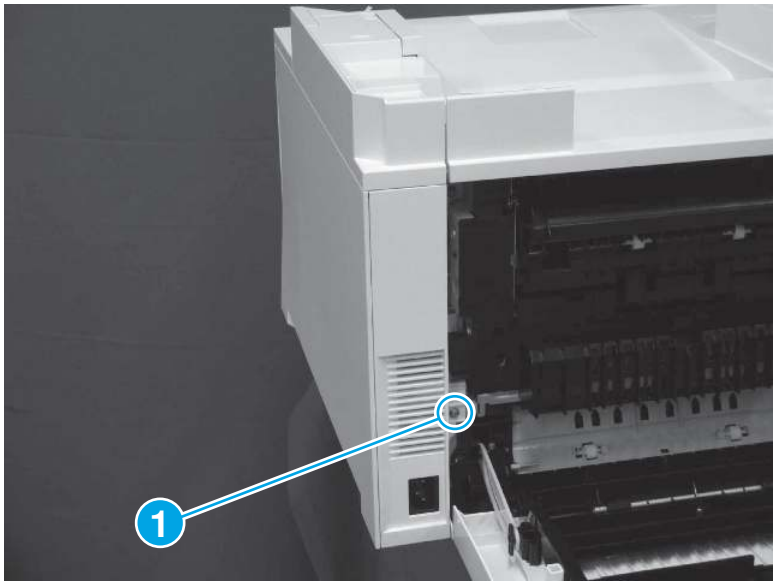Figure 4-971 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to three tabs (callout 1). Release three tabs.

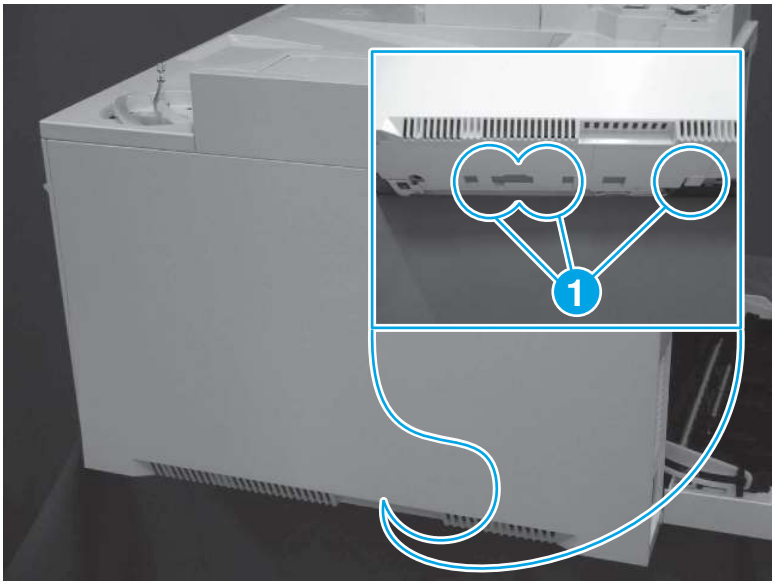Figure 4-972 **Release three tabs**




3. Press in on the side (callout 1) of the right cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

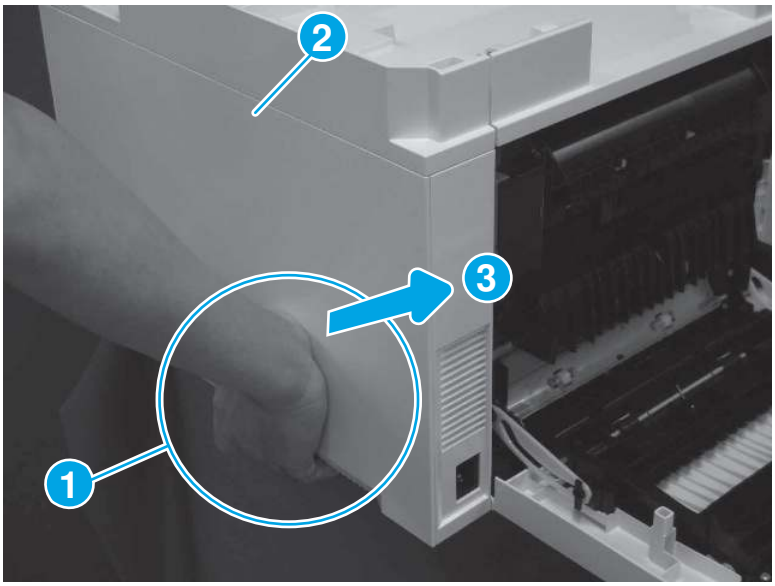Figure 4-973 **Release the rear cover corner**




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

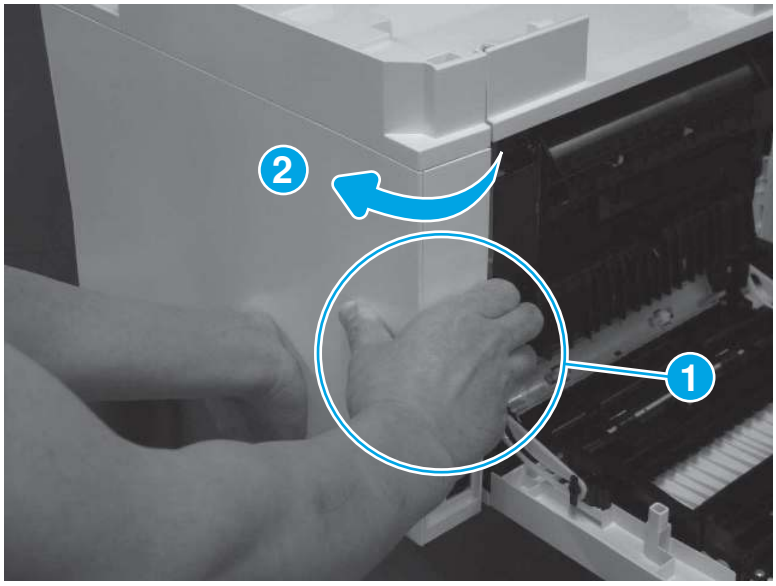Figure 4-974 Disengage the cover corner



5. Remove the right cover (callout 1).

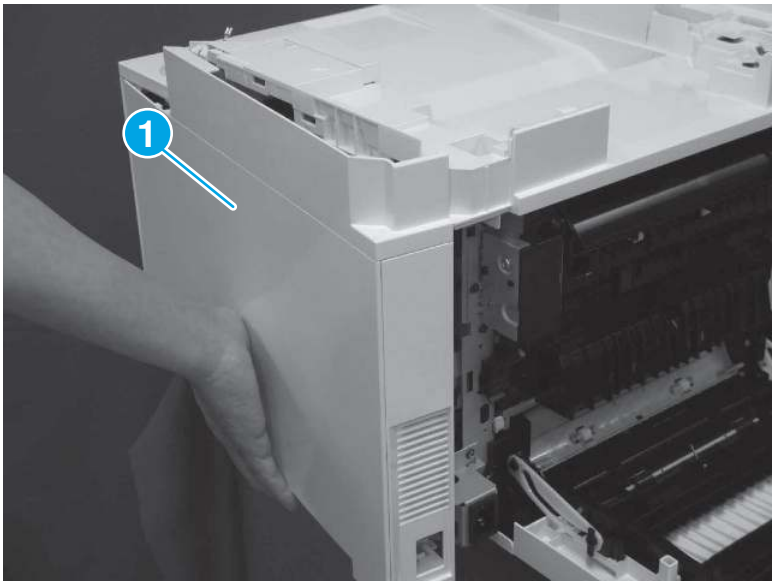Figure 4-975 Remove the cover




7. Remove the rear door

Follow the procedure below to remove and replace the rear door.


1. Open the rear door, and then raise the secondary transfer feed assembly (callout 1) up and into the locked position.

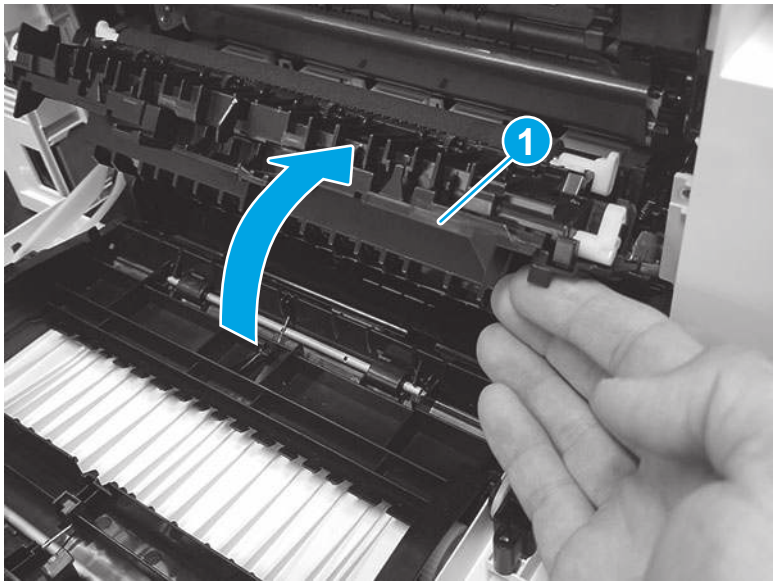Figure 4-976 Place the T2 feed assembly in the locked position




2. Remove two screws (callout 1), and then release the left- and right-side retainer arms (callout 2)

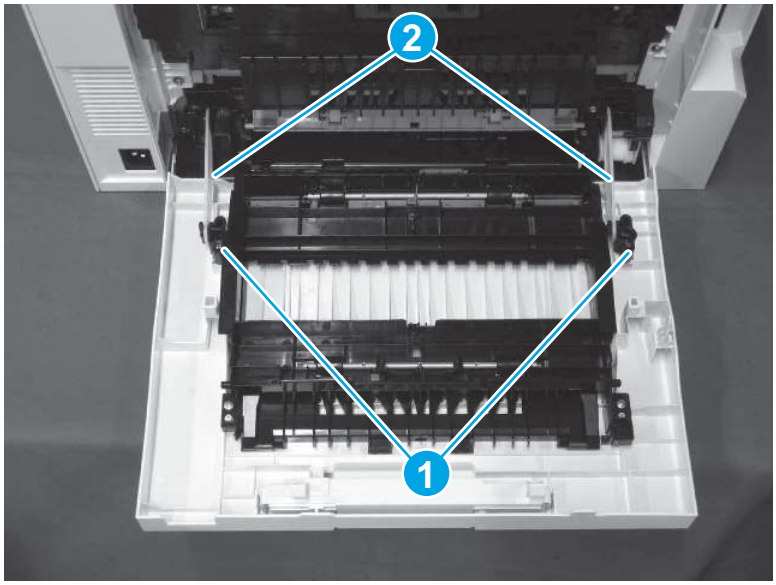Figure 4-977 Release the retainer arms



3. Carefully position the printer at the edge of the work surface and allow the rear door to open to an angle greater than 90 degrees (callout 1). Slide the door away (callout 2) from the formatter side of the printer (callout 3) to release it, and then remove the rear door.

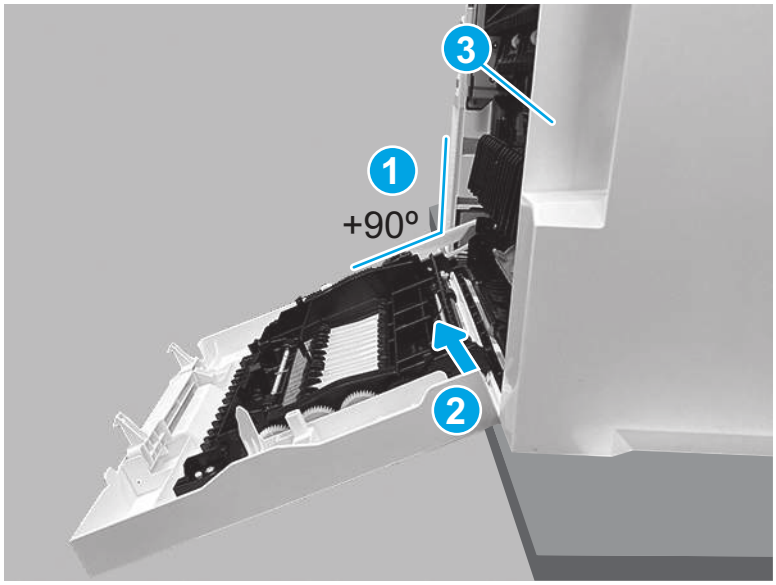Figure 4-978 **Remove the door**




8. Remove the secondary transfer roller (T2) assembly

Follow the procedure below to remove and replace the T2 roller assembly.


1. Open the rear door, and then rotate the bushing (callout 1) in the direction shown below.

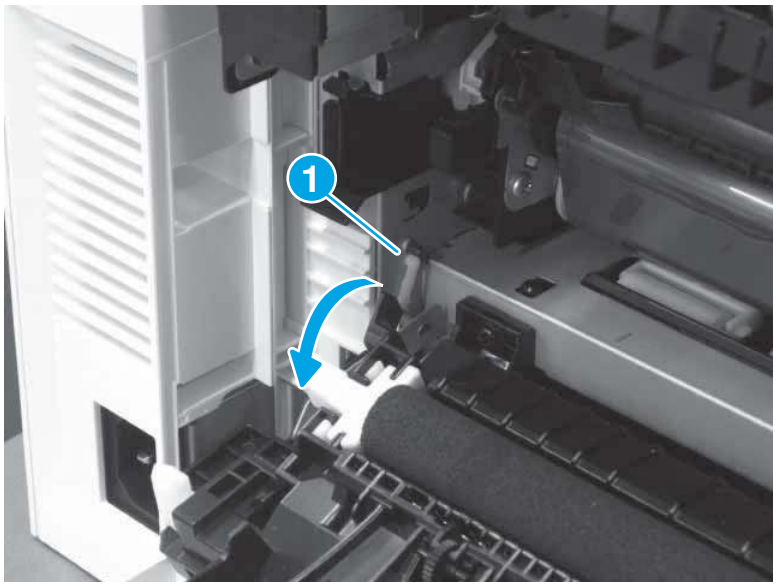Figure 4-979 **Rotate the bushing**




2. Slide the bushing in the direction shown below.

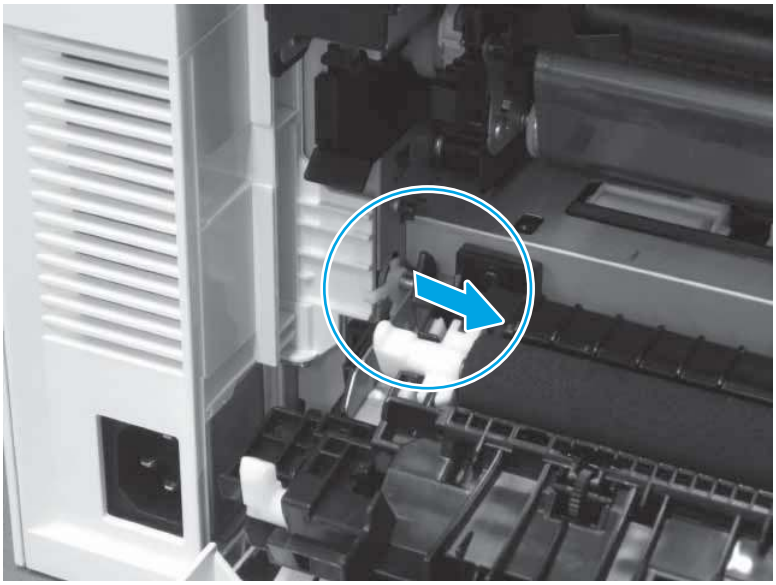Figure 4-980 Slide the bushing




3. Slide the T2 assembly (callout 1) in the direction shown below to remove it.

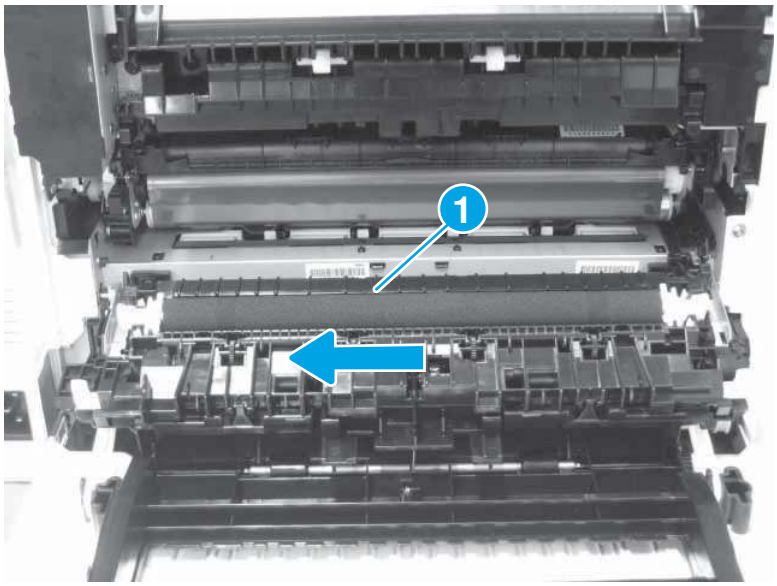Figure 4-981 Remove the T2 assembly



4. The bushing shown in the figure below is supplied with the replacement assembly.

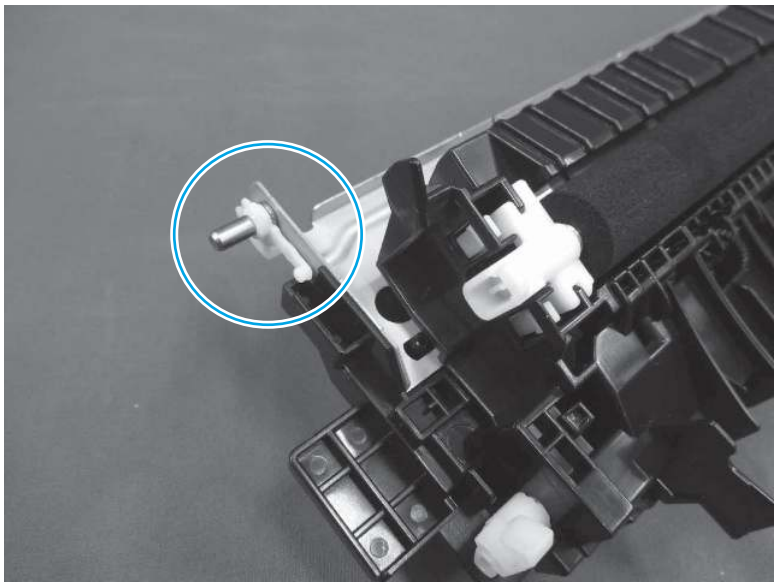Figure 4-982 T2 assembly bushing




9. Remove the duplexing bottom cover

Follow the procedure below to remove and replace the duplexing bottom cover.

- Release two tabs (callout 1), and then remove the duplexing bottom cover (callout 2).

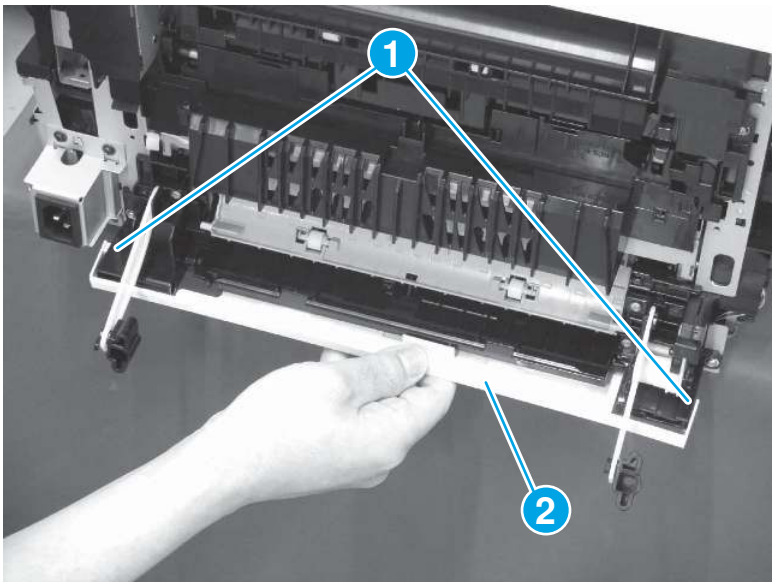Figure 4-983 Remove the duplexing bottom cover




10. Remove the MP paper feed assembly

Follow the procedure below to remove the MP paper feed assembly.


1. Position the printer with the rear-door side down.

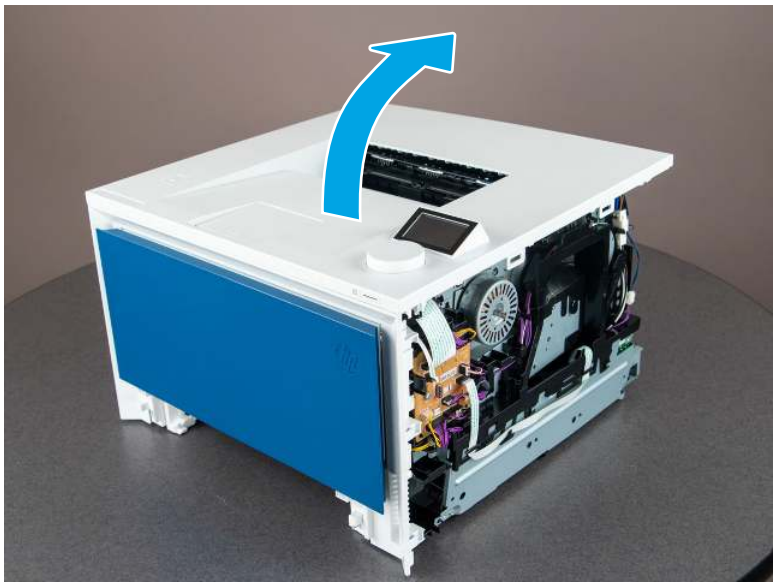Figure 4-984 **Position the printer**



2. Press the green button to release the assembly.

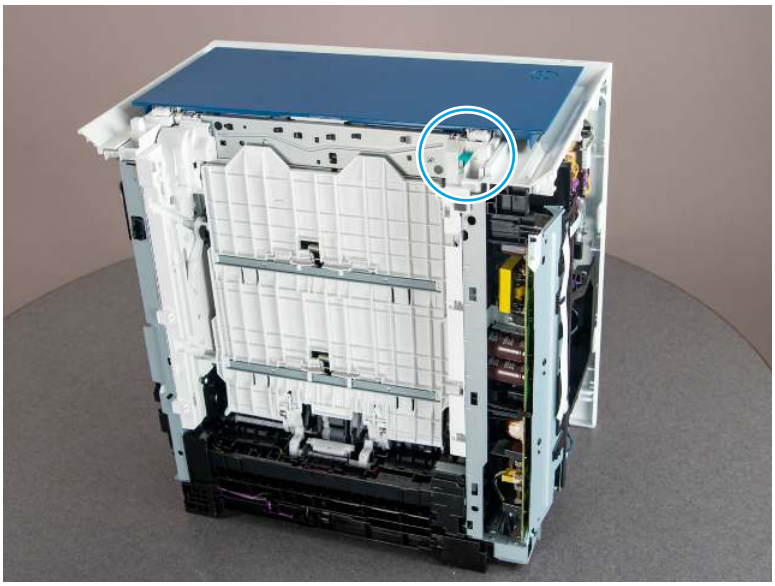
Figure 4-985 **Release the assembly**



3. Slide the assembly up (callout 1), and then toward the right-side of the printer (callout 2) to remove it.


NOTE: There is a retainer arm (callout 3) on one of the assembly legs. Carefully disengage the retainer arm and leg when removing the assembly.

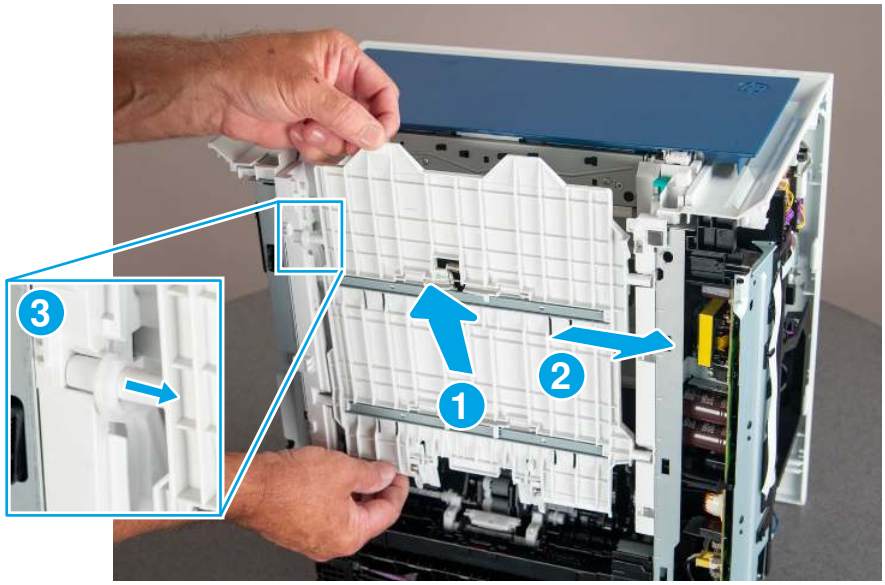Figure 4-986 Remove the assembly



4. If the retainer arm becomes dislodged, reinstall it as shown below.

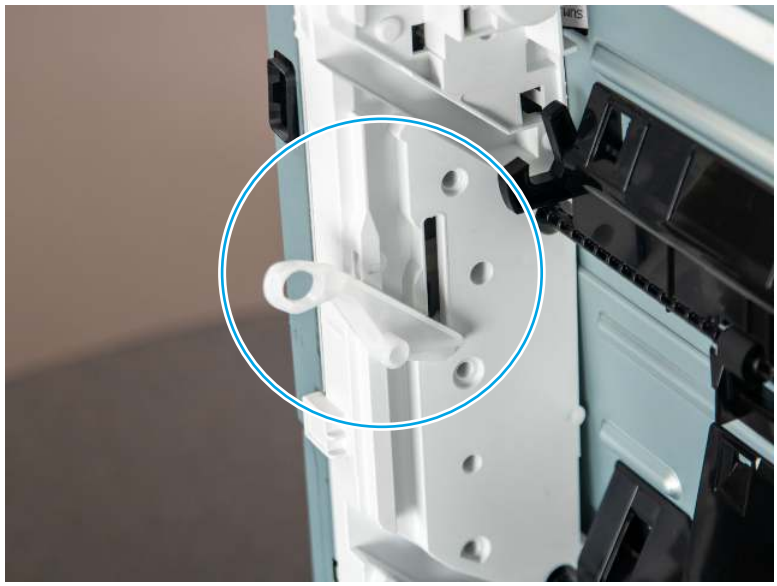Figure 4-987 Install the retainer arm




11. Remove the low-voltage power supply (LVPS)

Follow the procedure below to remove and replace the LVPS.

⚠ CAUTION: ESD sensitive part.


1. Disconnect one flat-flexible cable (FFC; callout 1) and one connector (callout 2), and then remove one screw (callout 3).

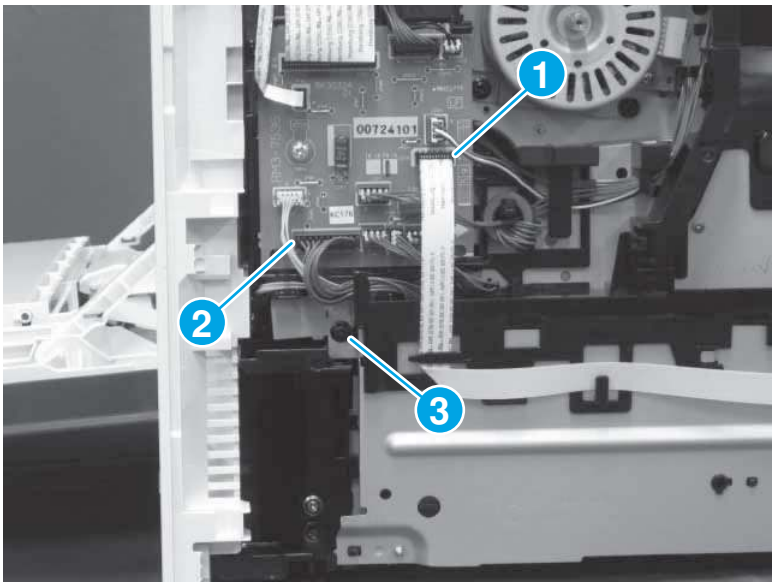Figure 4-988 Disconnect FFC, connector, and remove one screw




2. Disconnect two connectors (callout 1), and then remove two screws (callout 2).

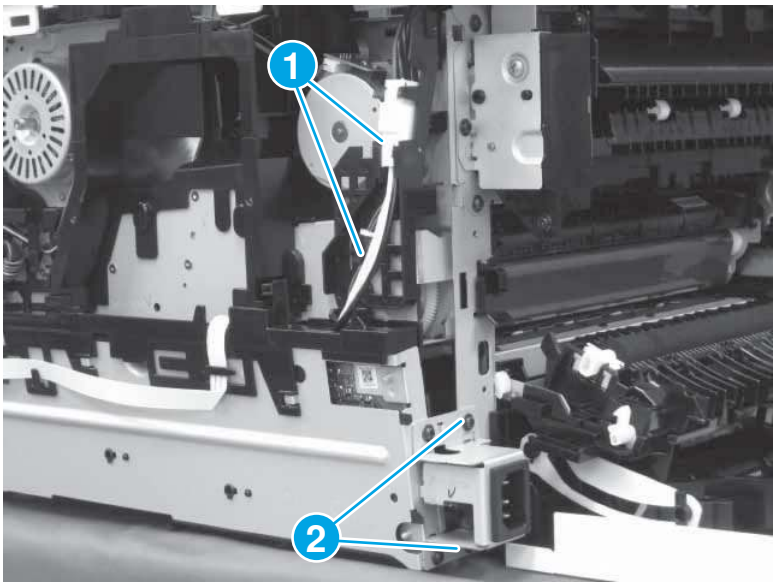Figure 4-989 Disconnect connectors and remove screws



3. Release three tabs (callout 1), and then remove the LVPS (callout 2).

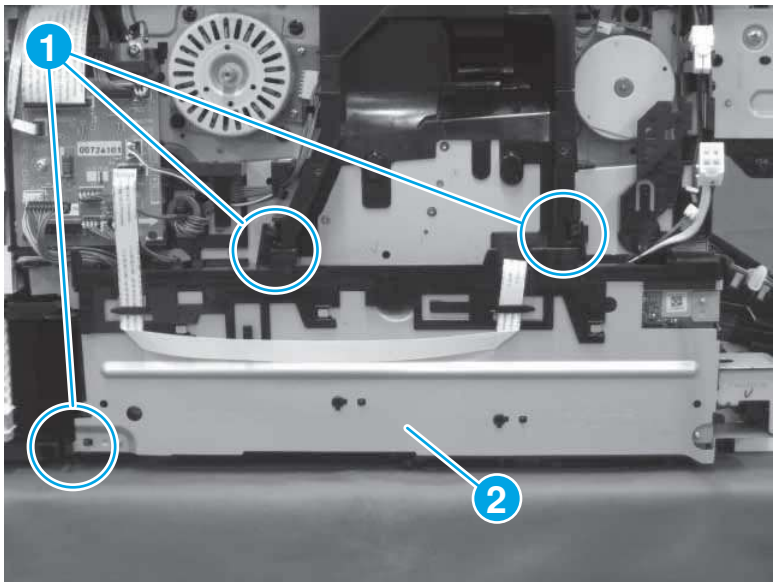Figure 4-990 Remove the LVPS



12. Remove the duplex guide assembly


Follow the procedure below to remove and replace the duplex guide assembly.

1. Disconnect one connector (callout 1), and then release the wire harness from the retainer (callout 2).

NOTE: The correct cable to release is the purple three-wire harness.

Disconnect other connectors and release other wire harnesses as necessary.

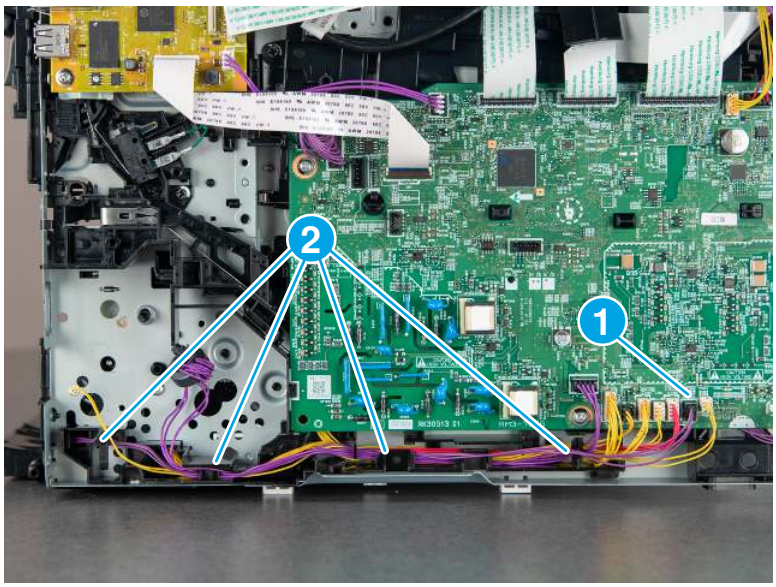Figure 4-991 Disconnect one connector




2. Do the following:

   a. Remove one (tapping) screw (callout 1).

   b. Remove one (TP) screw (callout 2)

   c. Remove the holder (callout 3).

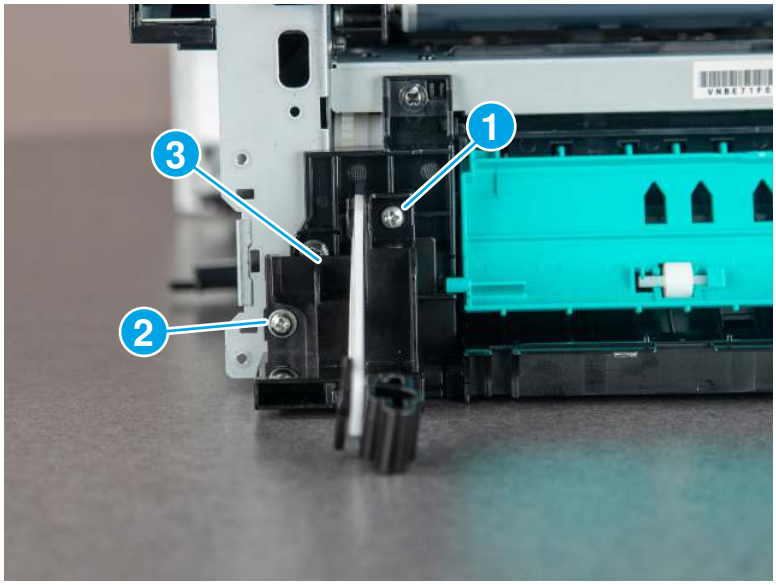Figure 4-992 **Remove two screws and the holder**




3. Do the following:

   a. Remove two (tapping) screws (callout 1).

   b. Remove one (TP) screw (callout 2)

   c. Remove the holder (callout 3).

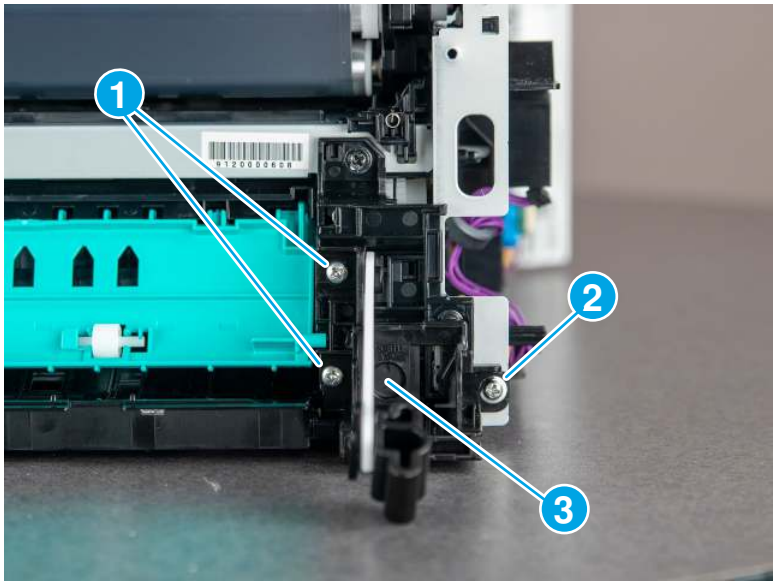
Figure 4-993 **Remove three screws and the holder**



4. Use a small flat-blade screwdriver to release one boss at each end of the duplex guide (callout 1), and then remove the guide (callout 2).

⚠ **CAUTION:** Parts of this assembly are fragile and can easily be damaged during removal.

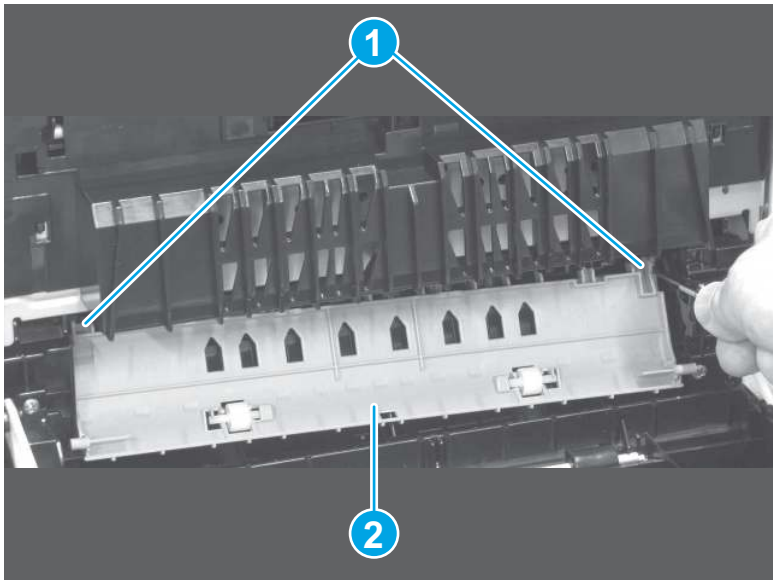
Figure 4-994 **Remove the duplex upper guide**



5. Carefully position the printer at the edge of the work surface. Slightly pull the duplex guide assembly down to release it, and then remove the assembly.

NOTE: Pass the wire harness through the opening in the chassis as the assembly is removed (callout 1).

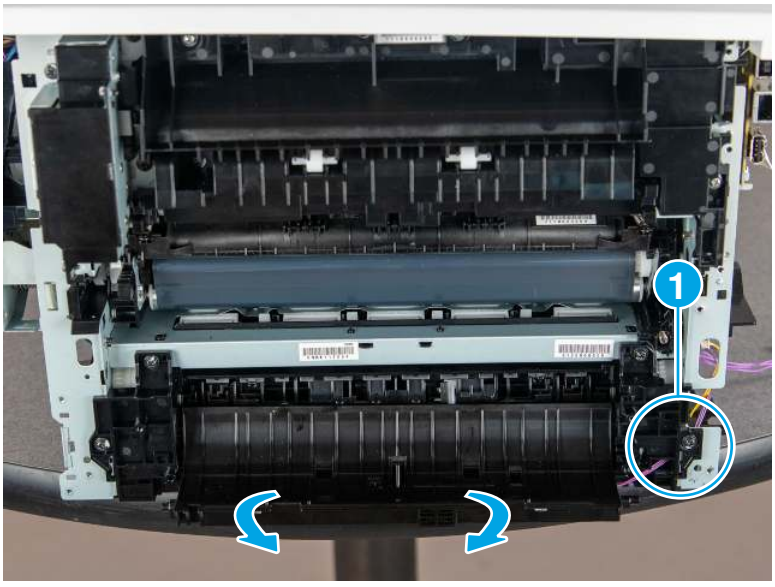Figure 4-995 **Remove the duplex guide assembly**




13. Remove the feed lower guide assembly

Follow the procedure below to remove and replace the feed lower guide assembly.

1. Disconnect four connectors (callout 1), and then release the wire harnesses from the guide (callout 2).

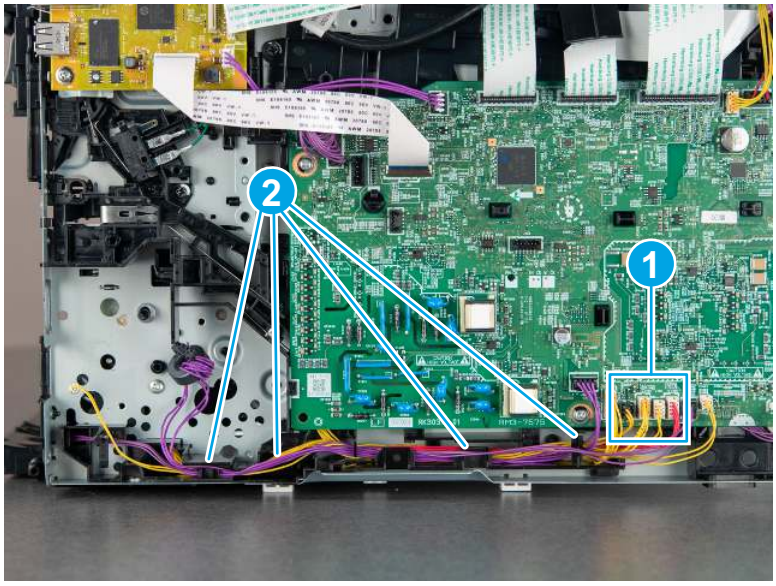
Figure 4-996 **Disconnect connectors and release the wire harnesses**



2. Position the printer with the front-side down, release one tab (callout 1), and then remove the rubber pad (callout 2). Repeat this step for the rubber pad on the opposite side.


⚠ CAUTION: **MFP only**: The integrated scanner assembly (ISA) can suddenly open when the printer is place in any postilion other than top-side up. Secure the ISA when repositioning the printer.

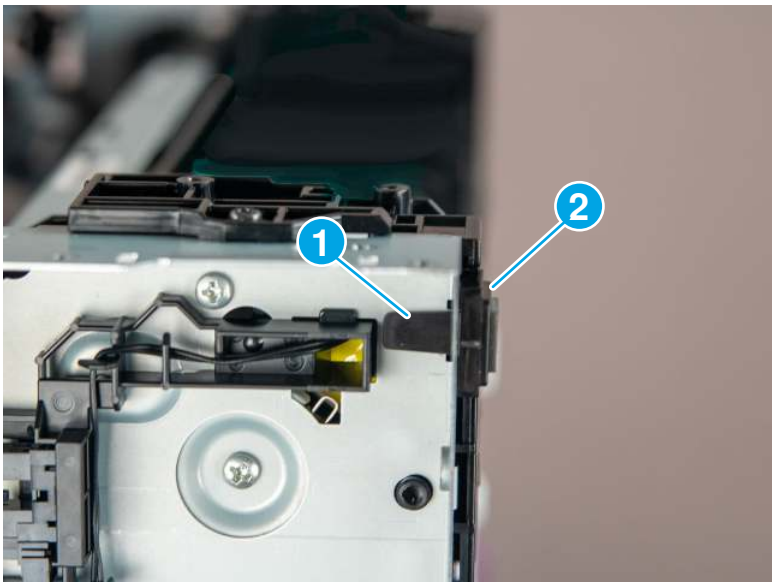Figure 4-997 **Remove the pad**



3. Position the printer with the top-side up (normal position), and then remove four screws.

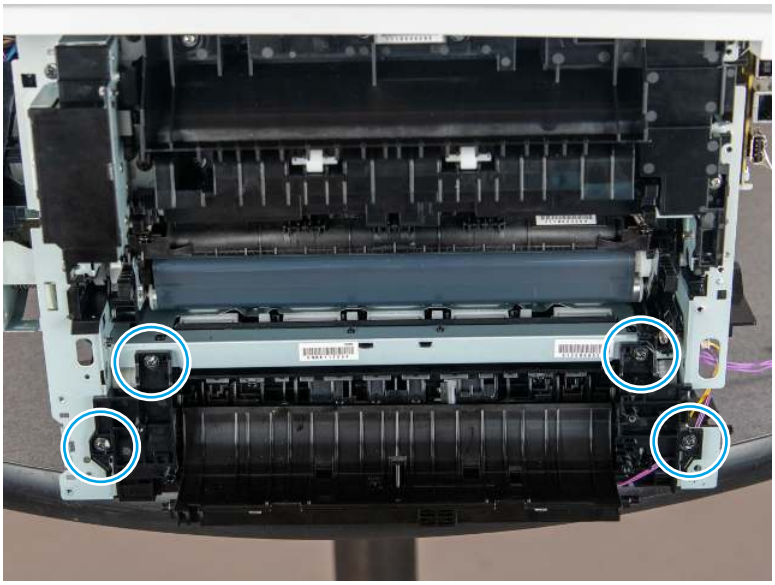Figure 4-998 Remove four screws



4. Use a small flat-blade screwdriver to release two bosses (callout 1).


Figure 4-999 Release two bosses



5. Carefully position the printer at the edge of the work surface. Slightly pull down on the assembly to release it, and then remove the feed lower guide assembly (callout 1).

NOTE: Carefully pull the wire harness through the opening in the chassis (callout 2) while removing the assembly.

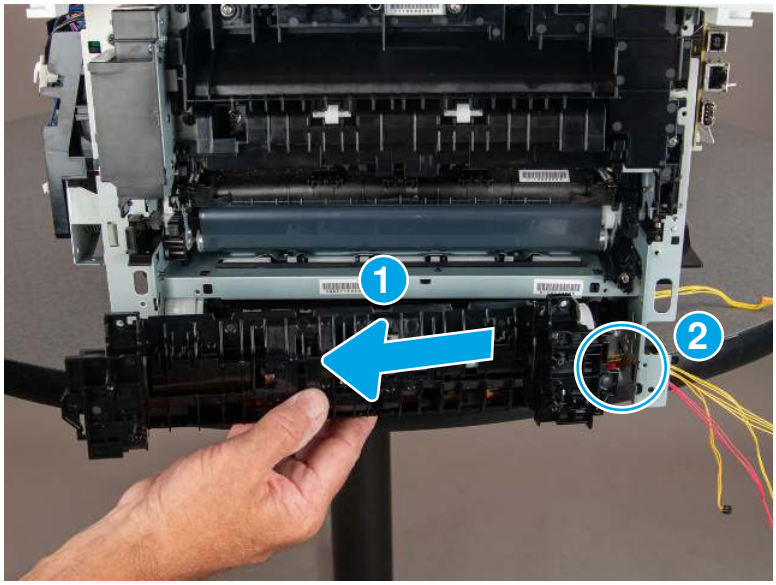Figure 4-1000 Remove the feed lower guide assembly




14. Remove the lifter drive assembly

Follow the procedure below to remove and replace the lifter drive assembly.


1. Release two tabs (callout 1), and the remove the cover (callout 2).

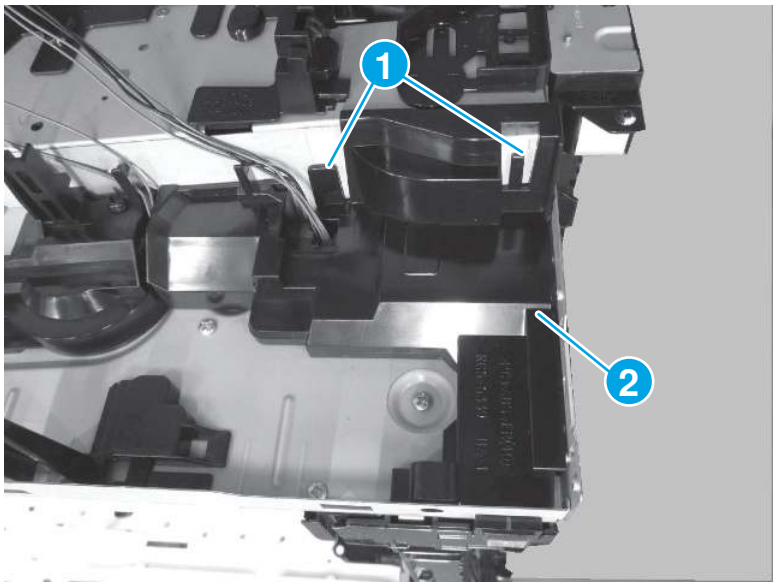Figure 4-1001 Remove the cover




2. Disconnect one connector (callout 1), and then release the wire harness from the retainers (callout 2).

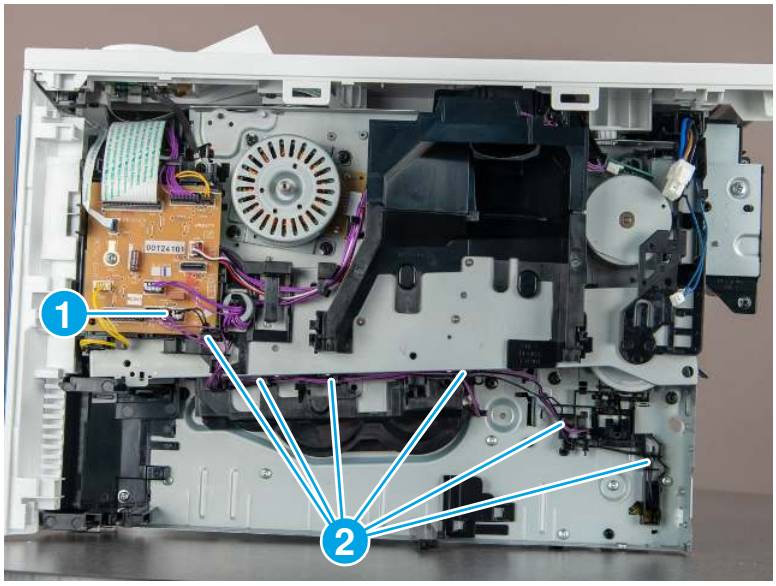Figure 4-1002 **Disconnect one connector**



3. Remove three screws.

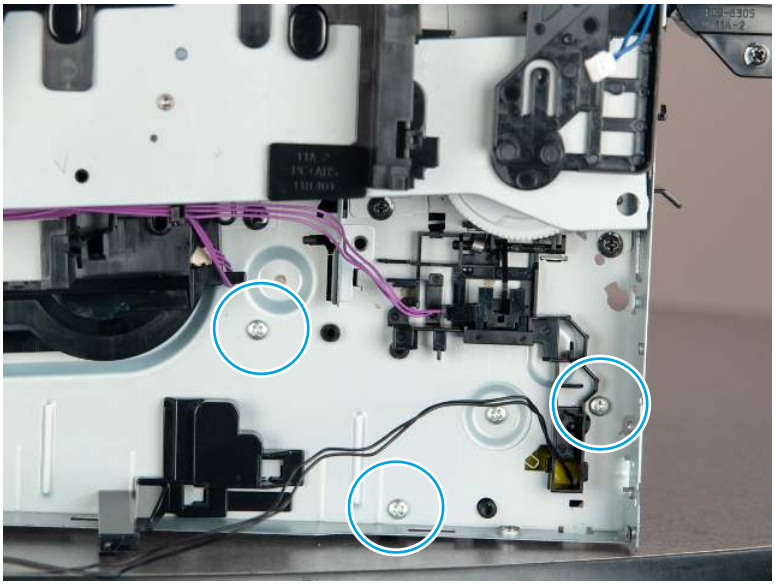
Figure 4-1003 **Remove three screws**



4. Position the printer with the front-side down, and then release one tab.

⚠ CAUTION: **MFP only**: The integrated scanner assembly (ISA) can suddenly open when the printer is place in any postilion other than top-side up. Secure the ISA when repositioning the printer.

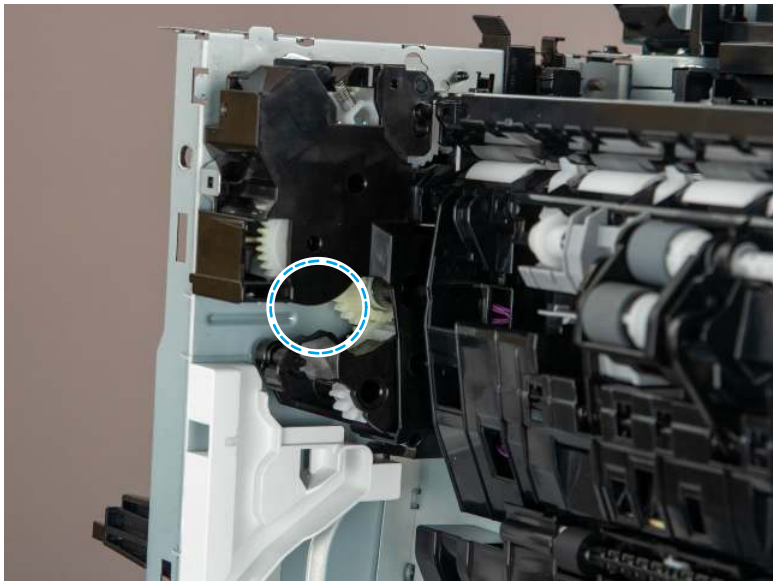
Figure 4-1004 Release one tab



5. Remove the lifter drive assembly.

NOTE: Carefully pull the wire harness through the opening in the chassis while removing the assembly.

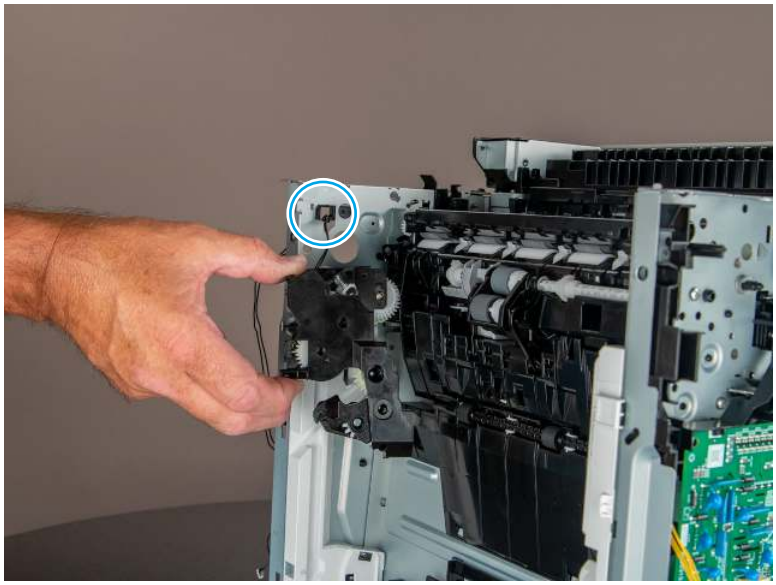Figure 4-1005 Remove the lifter drive assembly



15. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.


16. Special installation instructions - Feed lower guide assembly

Follow the special instructions below to install the feed lower guide assembly.

NOTE: The printer is shown upside down in the figure below for clarity.

- When the assembly is installed, make sure that the link arm (callout 1) on the printer is correctly inserted in the gear (callout 2) of the feed lower guide assembly.

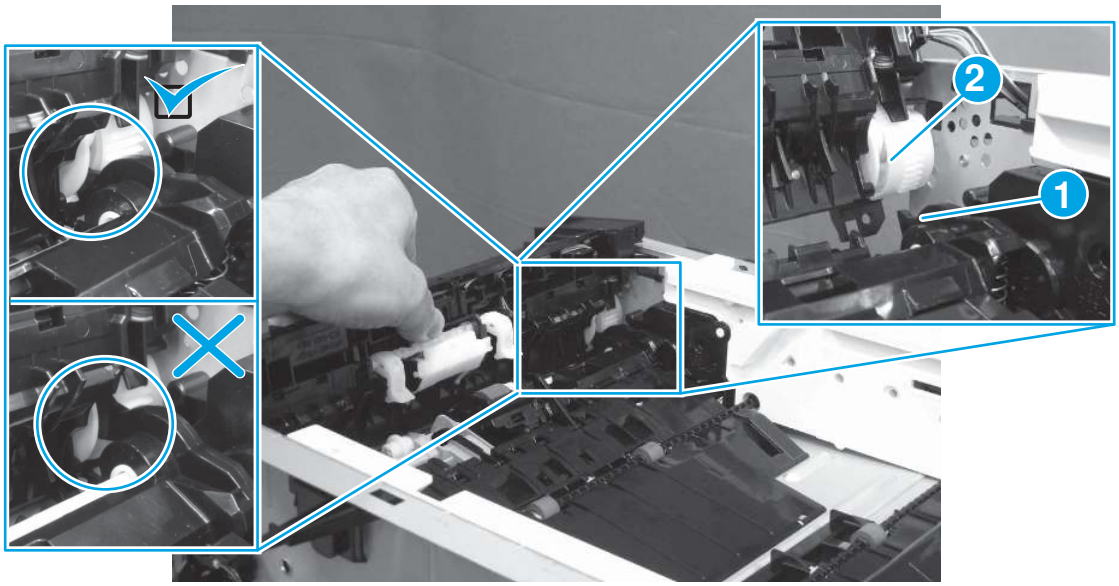Figure 4-1006 **Install the feed lower guide assembly**




17. Special installation instructions - Low-voltage power supply (LVPS)

Follow the special instructions below to install a replacement LVPS.

⚠ **CAUTION:** ESD sensitive part.


1. When the LVPS is installed, make sure that the sheet-metal tab (callout 1) near the power receptacle is inserted in the slot (callout 2) in the chassis.

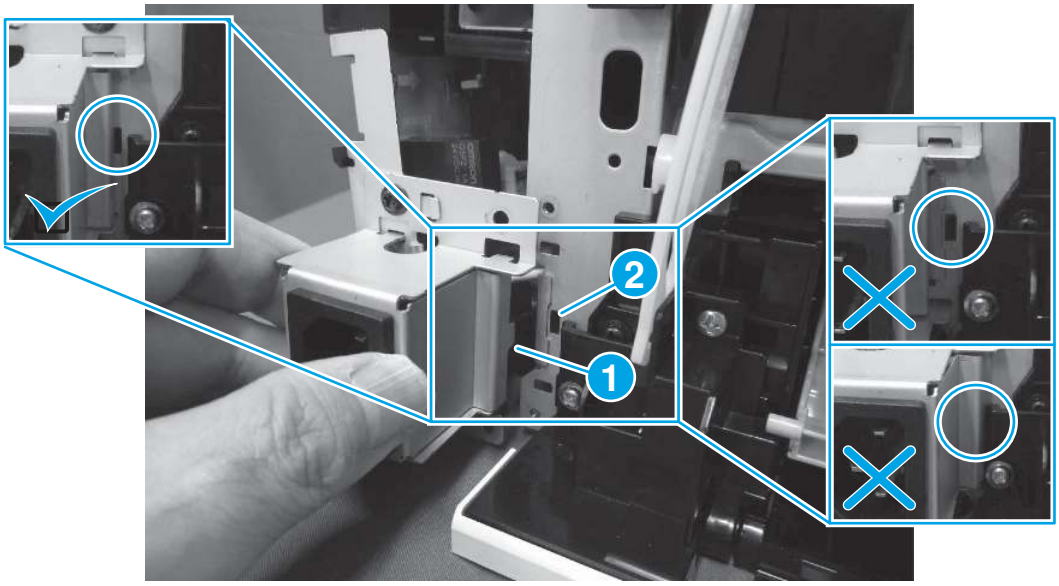Figure 4-1007 Install the LVPS tab



2. Make sure that the fuser temperature fuse cable (callout 1) is positioned behind the thick cable (callout 2). This prevents the fuser cable from unnecessary movement.

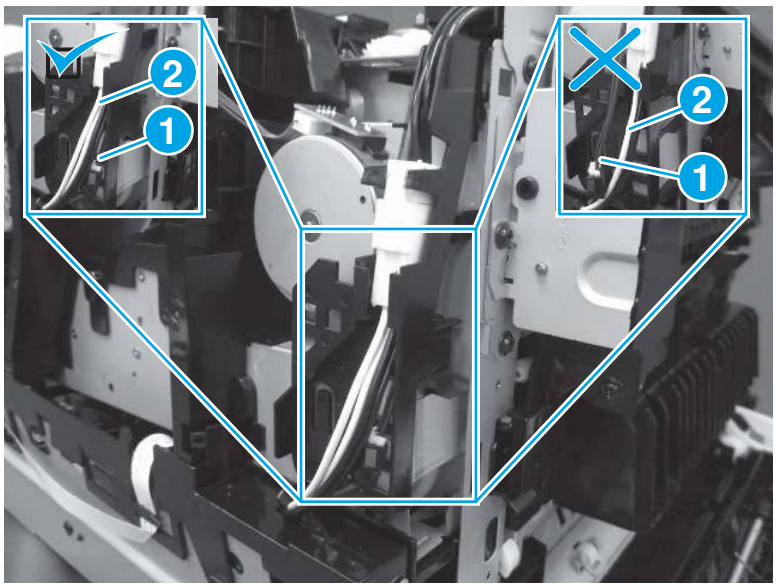Figure 4-1008 Check the fuser temperature fuse cable



Removal and replacement: Feed upper guide assembly

Learn about feed upper guide assembly removal.

Mean time to repair: 55 minutes

Service level: Difficult

Before performing service

Turn the printer power off

- Disconnect the power cable.

⚠ **WARNING!** To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-50 Part information

Part number	Part description
RM2-2747-000CN	Paper feed guide assembly, upper

Required tools

- Small flat-blade screwdriver
- Small flat-blade screwdriver
- Needle-nose pliers

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test

Print any pages necessary to make sure the printer is functioning correctly.

1. Remove the left cover (SFP)


Follow the procedure below to remove and replace the left cover (SFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.

TIP: There might be a small cover installed on the USB port located at the back of the printer. If installed, remove this cover now.


1. Remove one screw (callout 1).

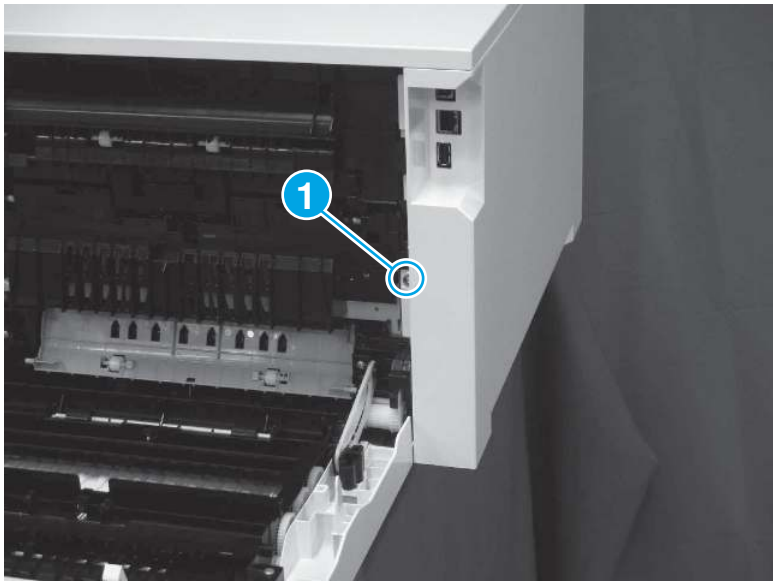Figure 4-1009 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

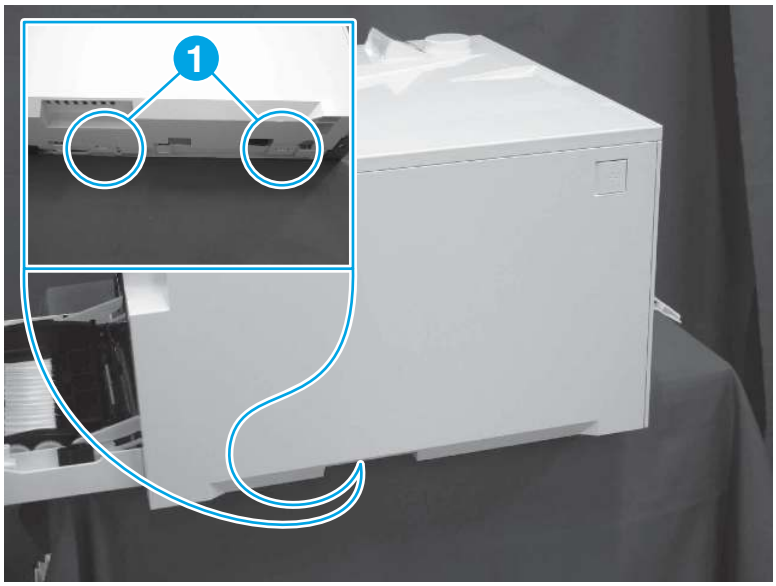Figure 4-1010 Release two tabs




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

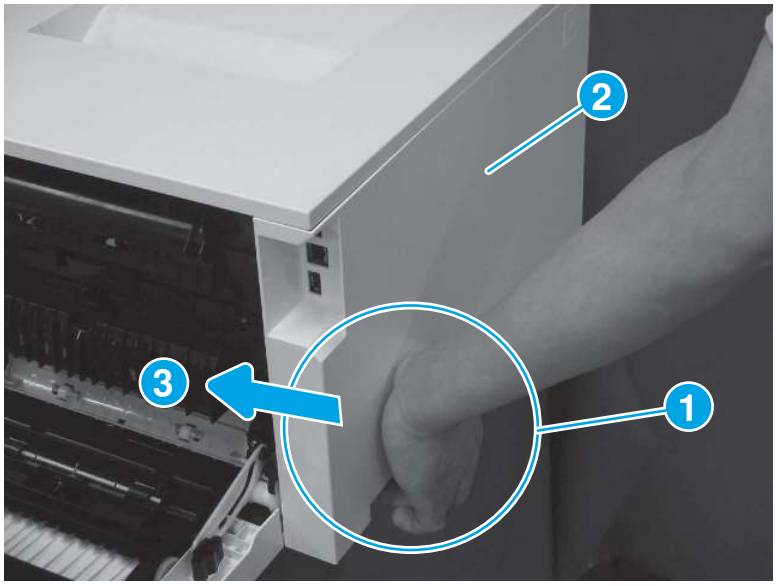Figure 4-1011 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

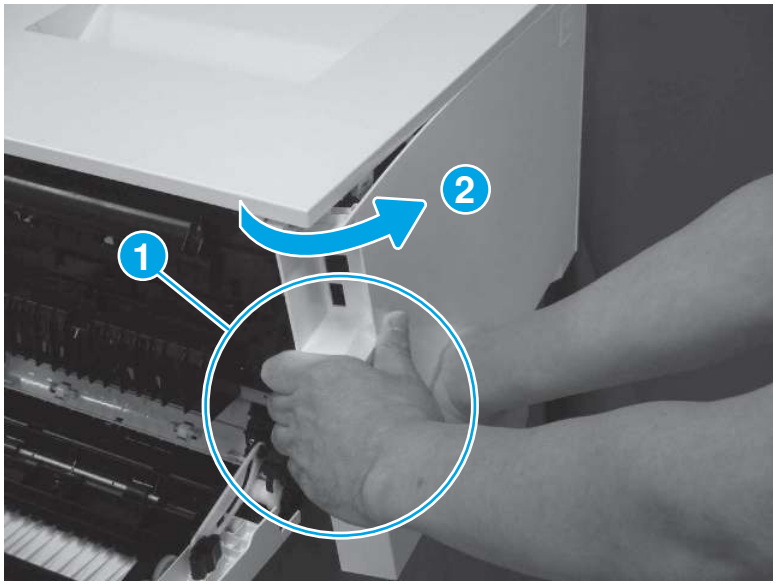Figure 4-1012 Disengage the cover corner



5. Remove the left cover (callout 1).

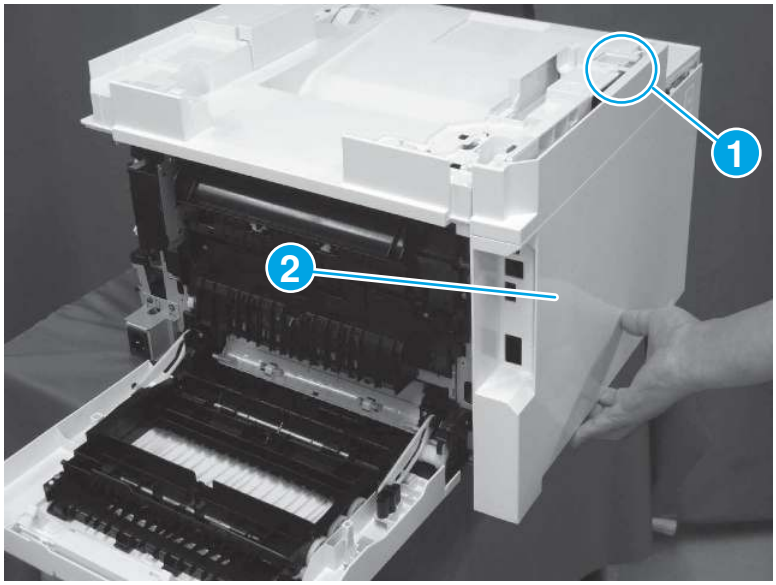Figure 4-1013 **Remove the cover**



2. Remove the left cover (MFP)


Follow the procedure below to remove and replace the left cover (MFP).

NOTE: The following procedure is for an MFP printer only. If this assembly is being removed to gain access to dependency parts for a SFP printer, skip this step.

TIP: There might be a small cover installed on the USB port and/or the fax port located at the back of the printer. If installed, remove these covers now.


1. Remove one screw (callout 1).

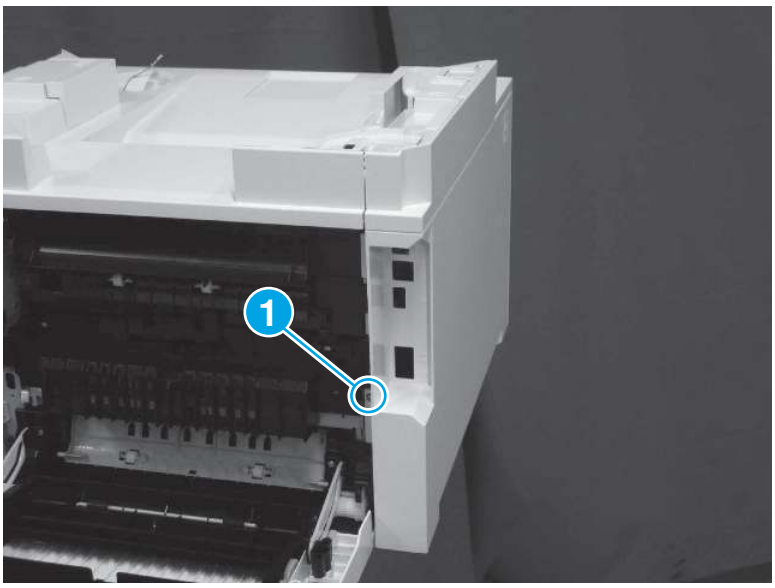Figure 4-1014 **Remove one screw**




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

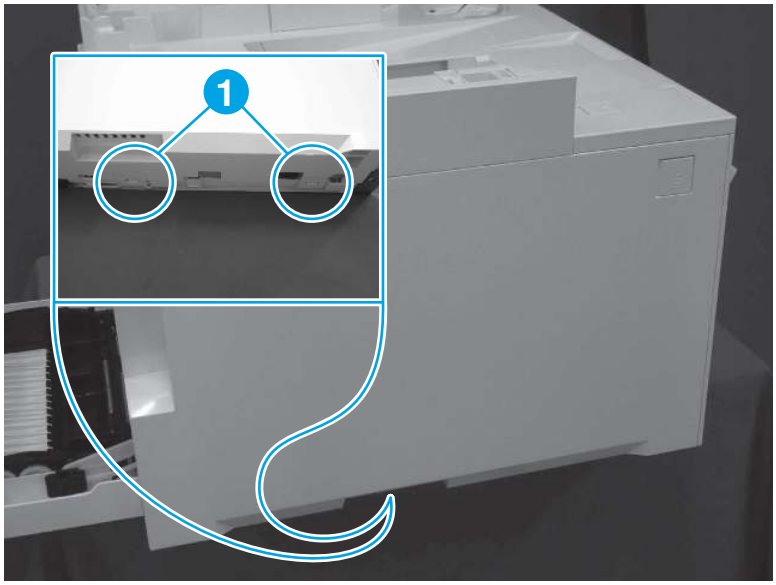Figure 4-1015 Release two tabs




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

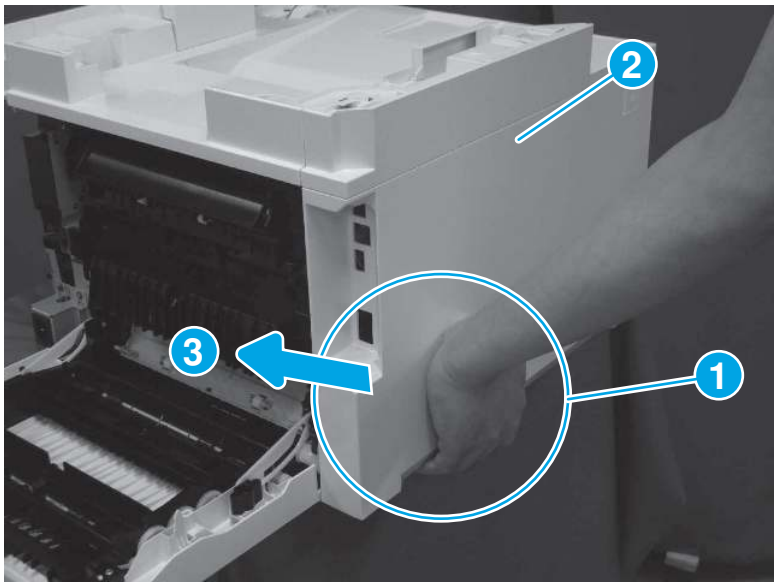Figure 4-1016 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

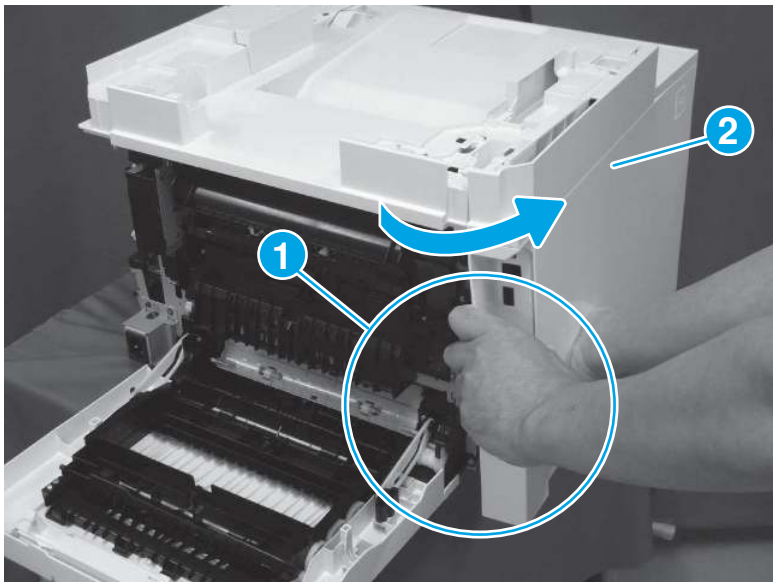Figure 4-1017 Disengage the cover corner



5. Remove the left cover (callout 1).

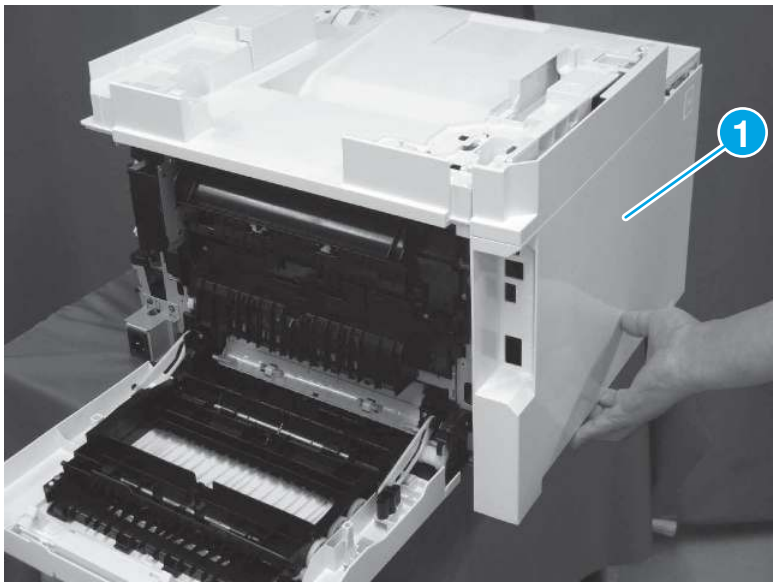Figure 4-1018 Remove the cover




3. Remove the duplex re-pick clutch

Follow the procedure below to remove and replace the duplex re-pick clutch.

1. Remove one screw (callout 1), and then remove the hinge (callout 2).

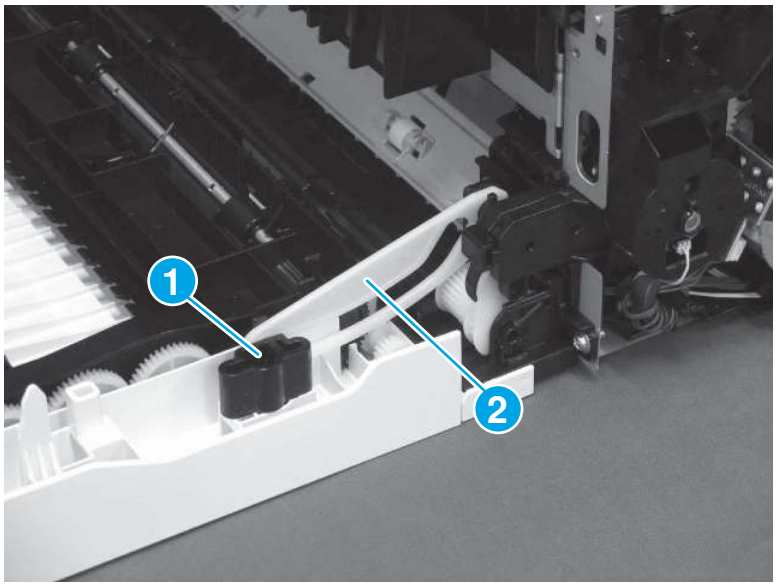
Figure 4-1019 **Remove the hinge**



2. Release the retainer (callout 1), rotate the shaft as shown below (callout 2) to remove it, and then remove the gear (callout 3).

Reinstallation tip: Take note of how the gear is installed before removing it. The shaft cannot be reinstalled if the gear is incorrectly installed.

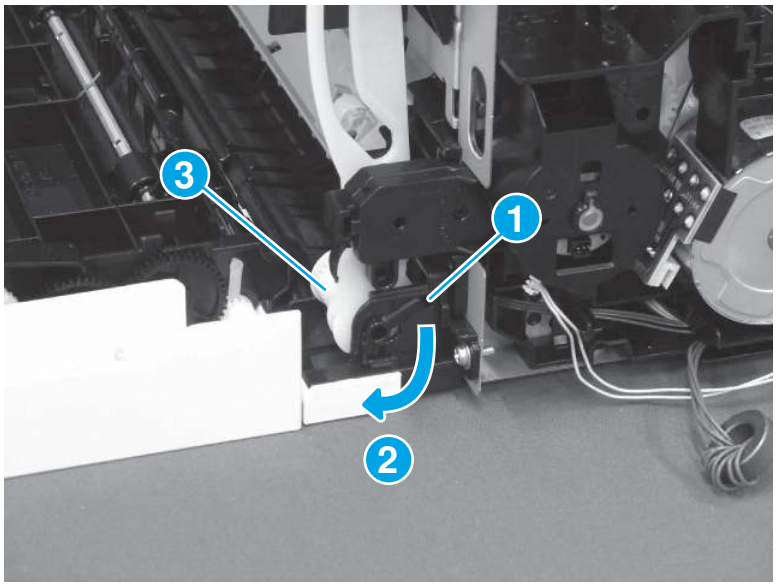
Figure 4-1020 **Remove the gear**



3. Disconnect one connector (callout 1), remove one screw (callout 2), and then release one tab (callout 3).

NOTE: The connector (callout 1) has a tab that must be released to disconnect it. It can be difficult to disconnect when the duplex re-pick clutch is installed. It might be easier to remove the duplex re-pick clutch (see the following step), and then disconnect the connector.

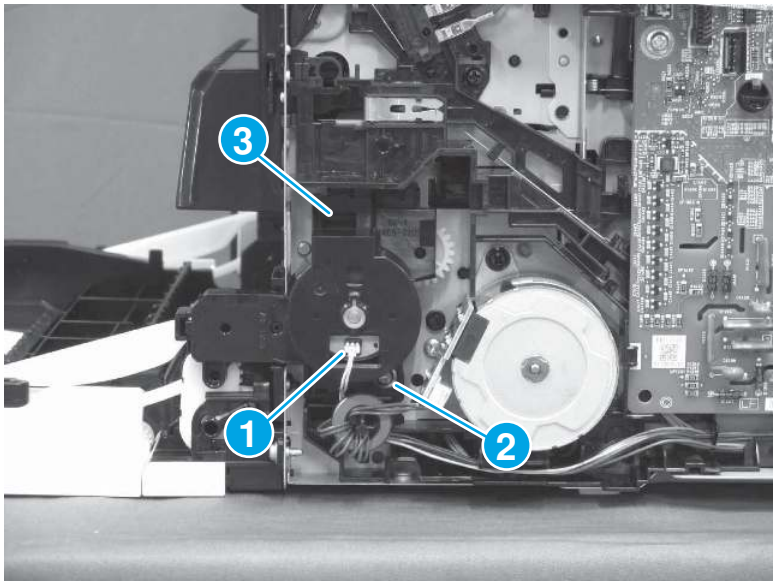Figure 4-1021 Disconnect one connector, remove one screw, and release one tab




4. Remove the duplex re-pick clutch (callout 1).

⚠ CAUTION: When handling the assembly, do not lose the spring that is inside the left gear holder (callout 2).

Reinstallation tip: **For a replacement duplex re-pick clutch only**: Remove the spring from the assembly (callout 2), and then install it on the replacement duplex re-pick clutch.

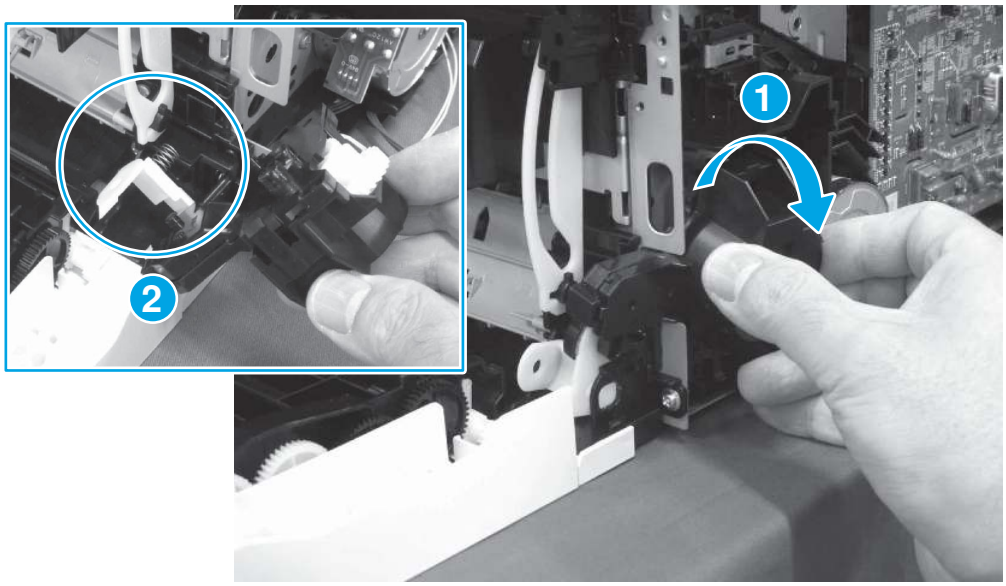Figure 4-1022 Remove the duplex re-pick clutch




4. Remove the feed motor

Follow the procedure below to remove and replace the feed motor.

- Disconnect one connector (callout 1), remove two screws (callout 2), and then remove the feed motor (callout 3).

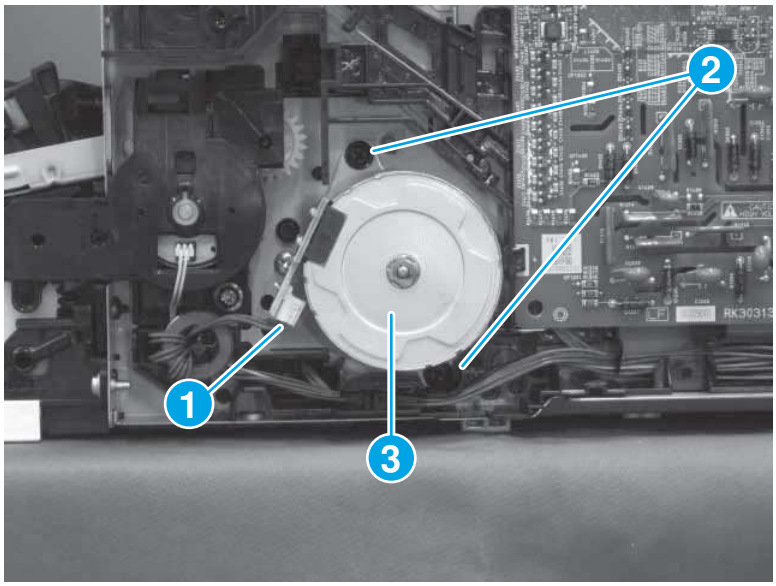Figure 4-1023 Remove the feed motor




5. Remove the right cover (SFP)

Follow the procedure below to remove and replace the right cover (SFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.


1. Remove one screw (callout 1).

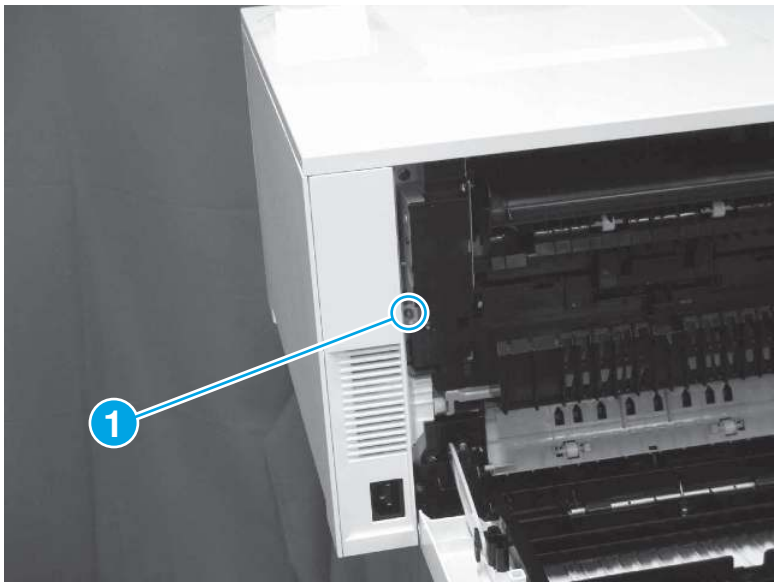Figure 4-1024 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to three tabs (callout 1). Release three tabs.

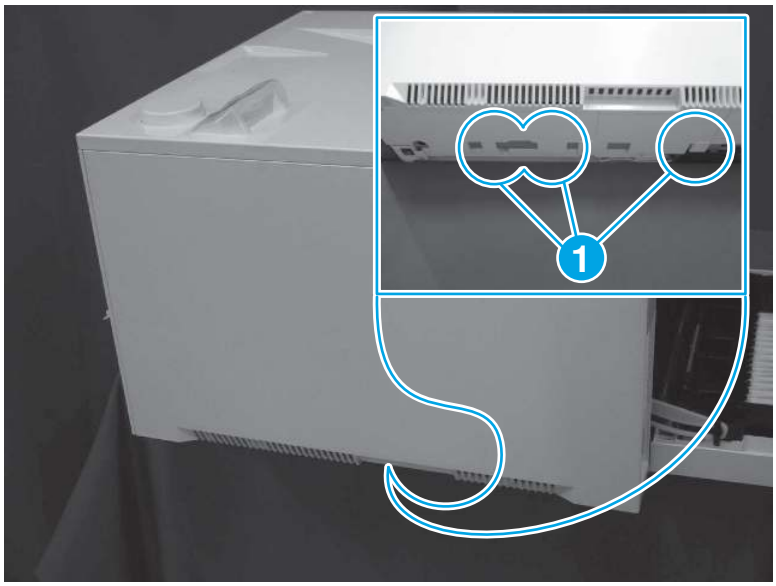Figure 4-1025 **Release three tabs**




3. Press in on the side (callout 1) of the right cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

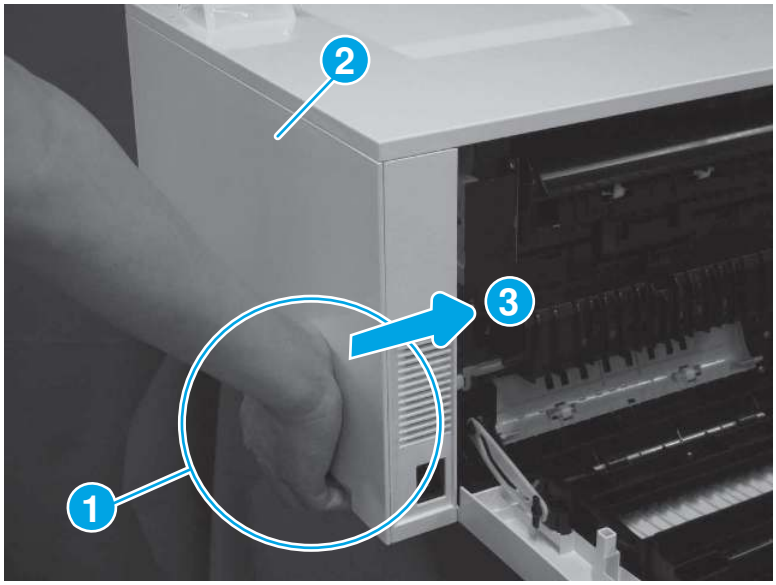Figure 4-1026 **Release the rear cover corner**




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

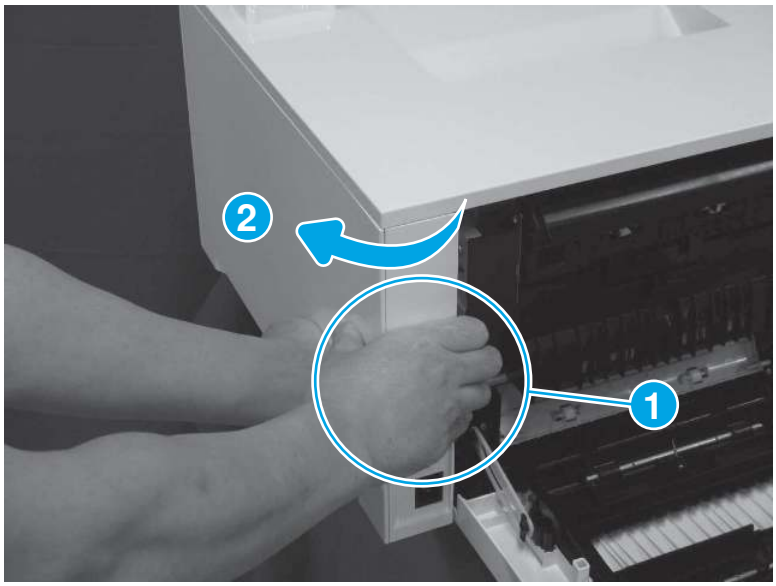Figure 4-1027 Disengage the cover corner



5. Remove the right cover (callout 1).

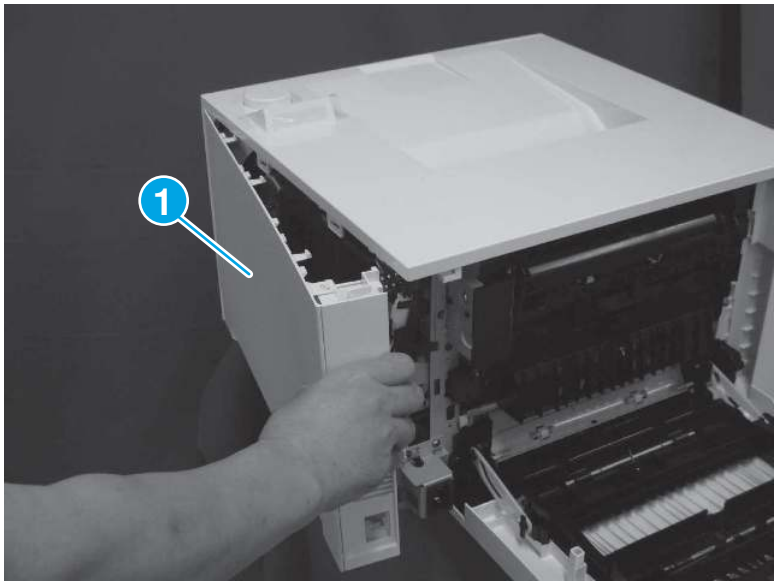Figure 4-1028 Remove the cover




6. Remove the right cover (MFP)

Follow the procedure below to remove and replace the right cover (MFP).

NOTE: The following procedure is for an MFP printer only. If this assembly is being removed to gain access to dependency parts for a SFP printer, skip this step.


1. Remove one screw (callout 1).

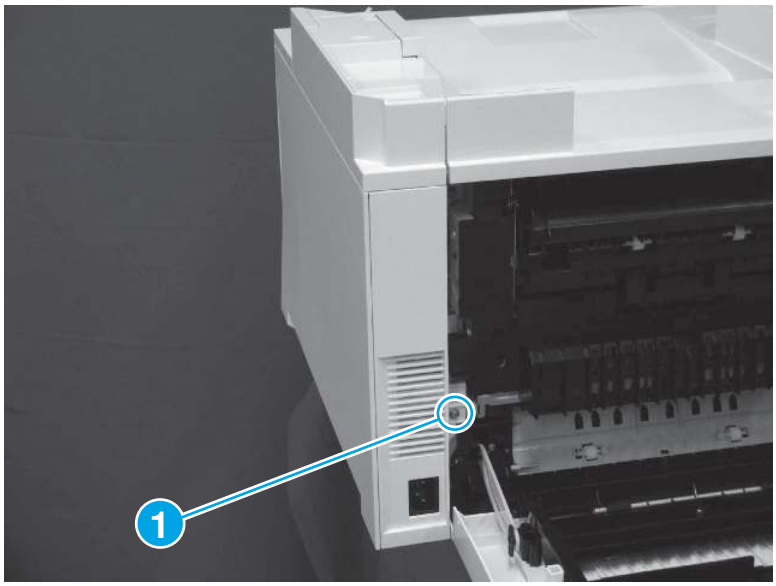Figure 4-1029 **Remove one screw**




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to three tabs (callout 1). Release three tabs.

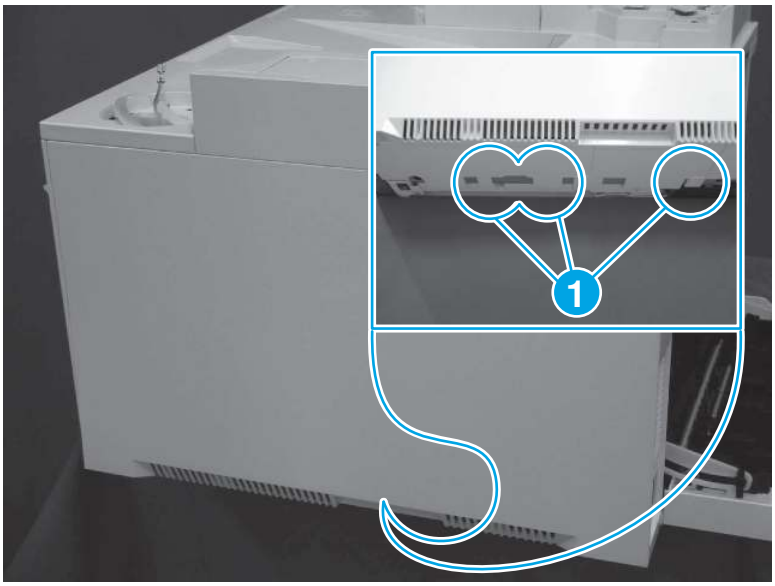Figure 4-1030 **Release three tabs**




3. Press in on the side (callout 1) of the right cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

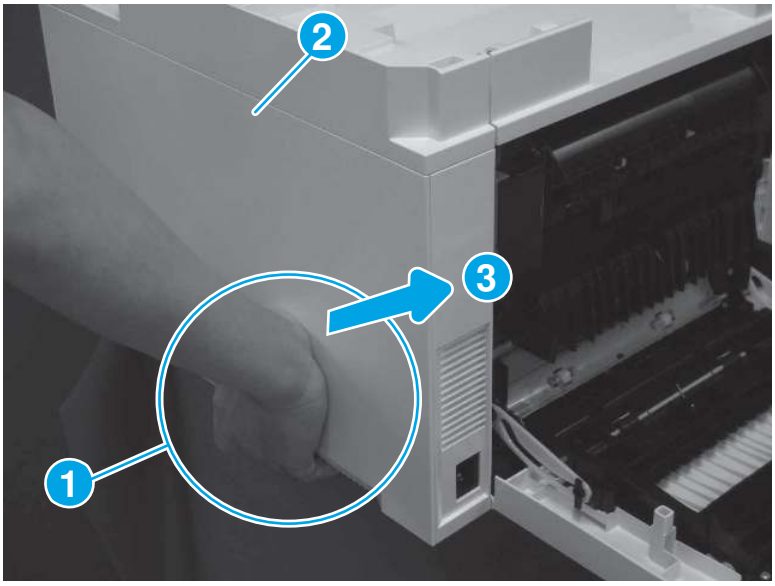Figure 4-1031 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

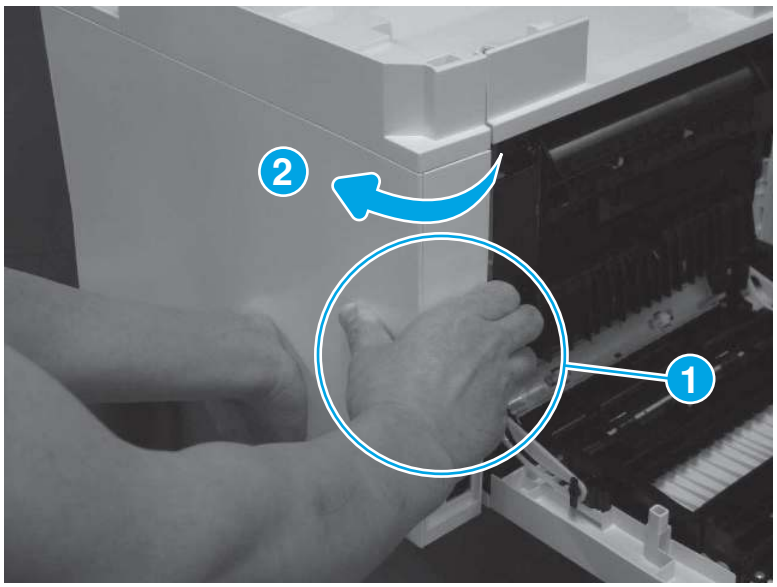Figure 4-1032 Disengage the cover corner



5. Remove the right cover (callout 1).

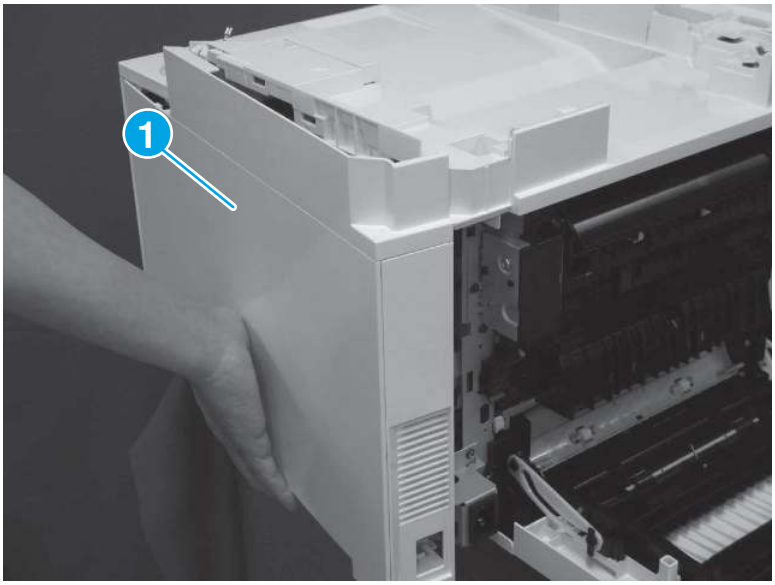Figure 4-1033 **Remove the cover**




7. Remove the rear door

Follow the procedure below to remove and replace the rear door.


1. Open the rear door, and then raise the secondary transfer feed assembly (callout 1) up and into the locked position.

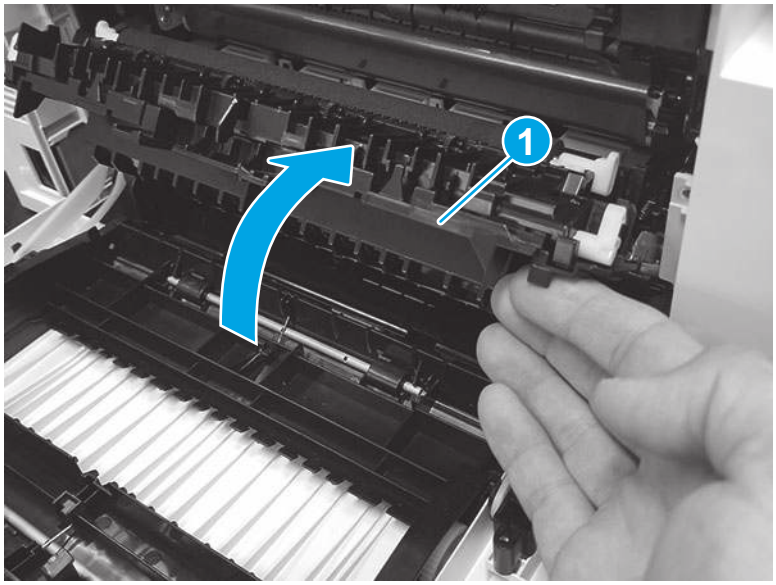Figure 4-1034 **Place the T2 feed assembly in the locked position**




2. Remove two screws (callout 1), and then release the left- and right-side retainer arms (callout 2)

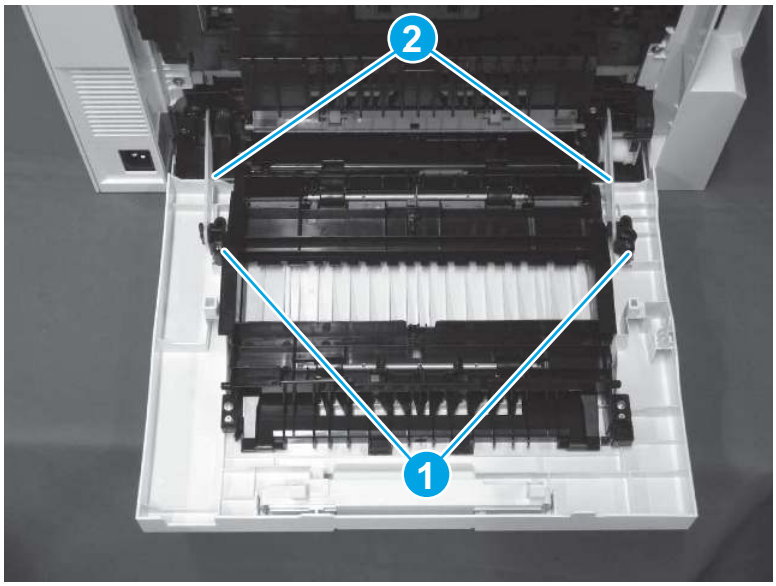Figure 4-1035 **Release the retainer arms**



3. Carefully position the printer at the edge of the work surface and allow the rear door to open to an angle greater than 90 degrees (callout 1). Slide the door away (callout 2) from the formatter side of the printer (callout 3) to release it, and then remove the rear door.

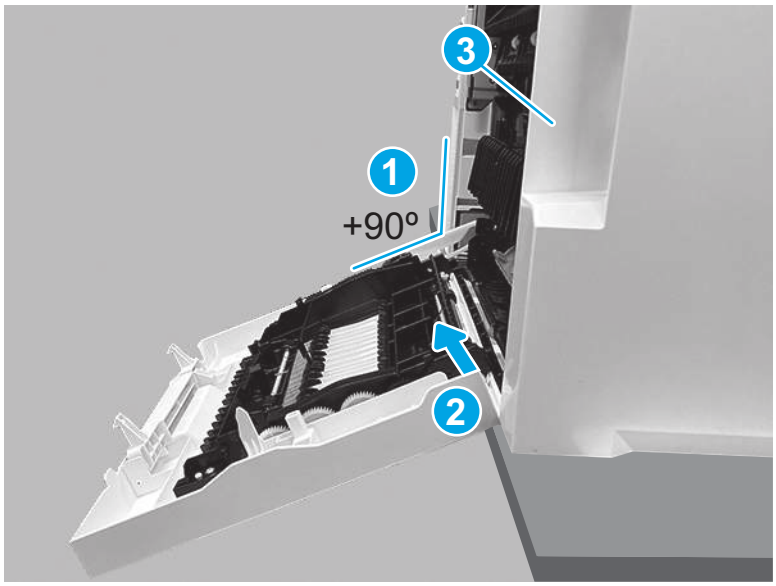Figure 4-1036 **Remove the door**




8. Remove the secondary transfer roller (T2) assembly

Follow the procedure below to remove and replace the T2 roller assembly.


1. Open the rear door, and then rotate the bushing (callout 1) in the direction shown below.

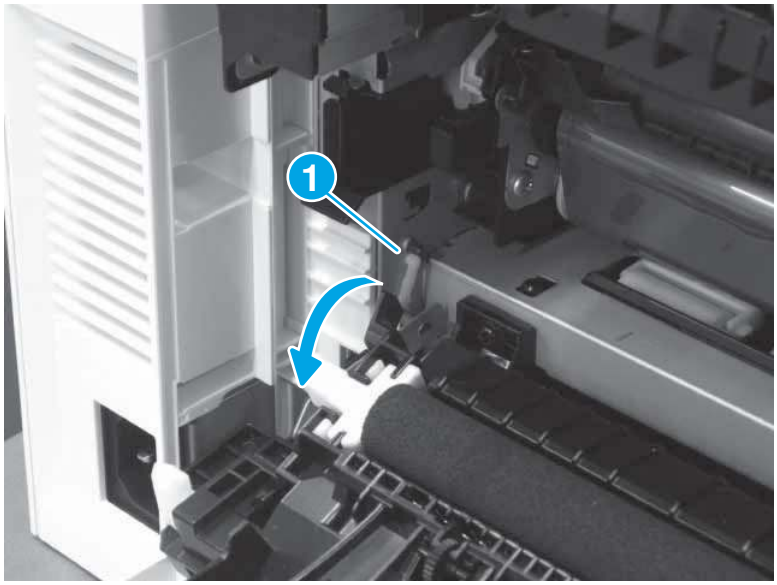Figure 4-1037 Rotate the bushing




2. Slide the bushing in the direction shown below.

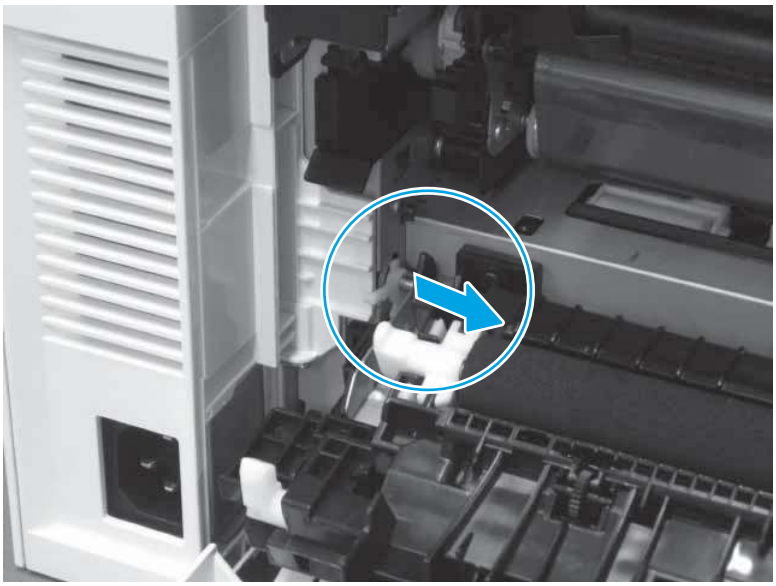Figure 4-1038 Slide the bushing




3. Slide the T2 assembly (callout 1) in the direction shown below to remove it.

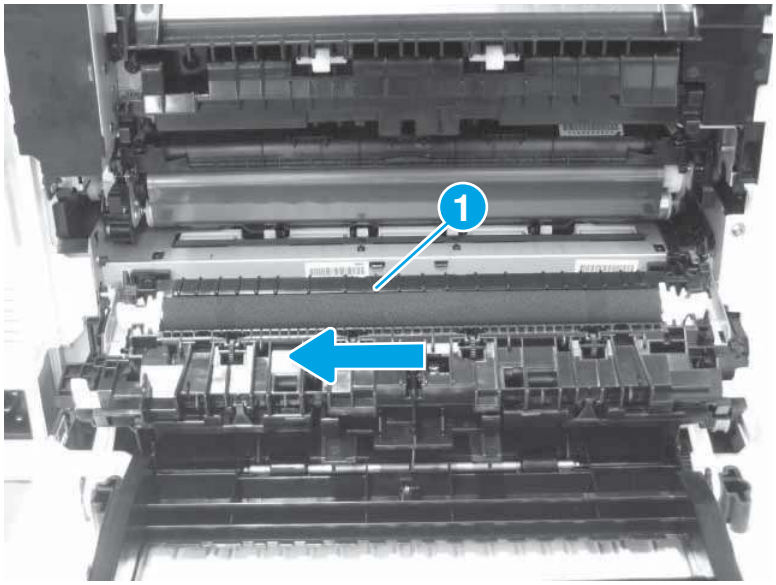Figure 4-1039 Remove the T2 assembly



4. The bushing shown in the figure below is supplied with the replacement assembly.

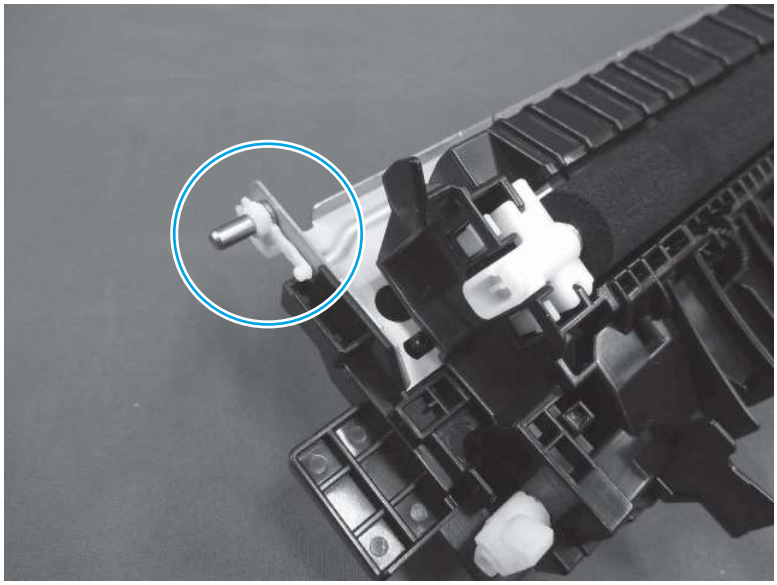Figure 4-1040 T2 assembly bushing




9. Remove the duplexing bottom cover

Follow the procedure below to remove and replace the duplexing bottom cover.

- Release two tabs (callout 1), and then remove the duplexing bottom cover (callout 2).

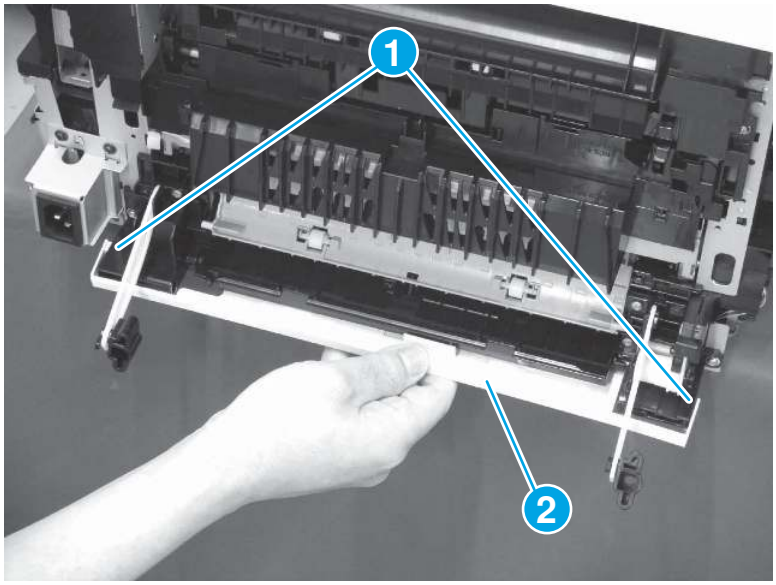Figure 4-1041 **Remove the duplexing bottom cover**




10. Remove the MP paper feed assembly

Follow the procedure below to remove the MP paper feed assembly.


1. Position the printer with the rear-door side down.

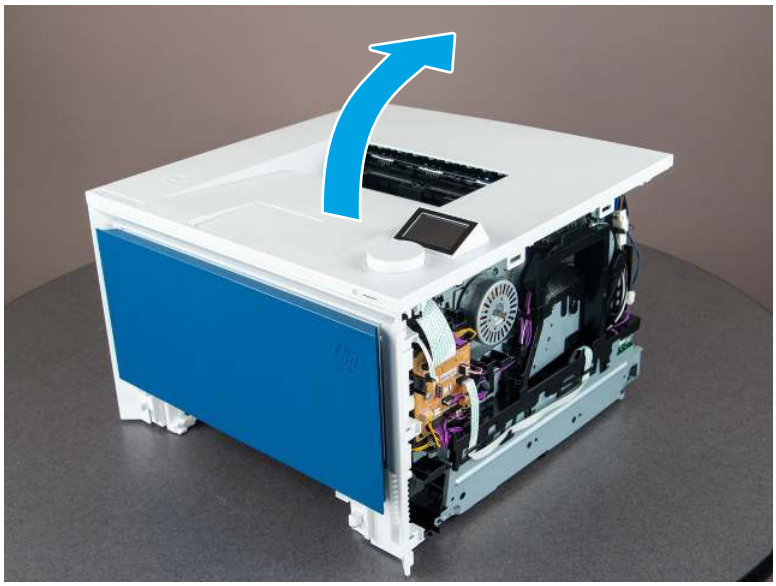Figure 4-1042 **Position the printer**



2. Press the green button to release the assembly.

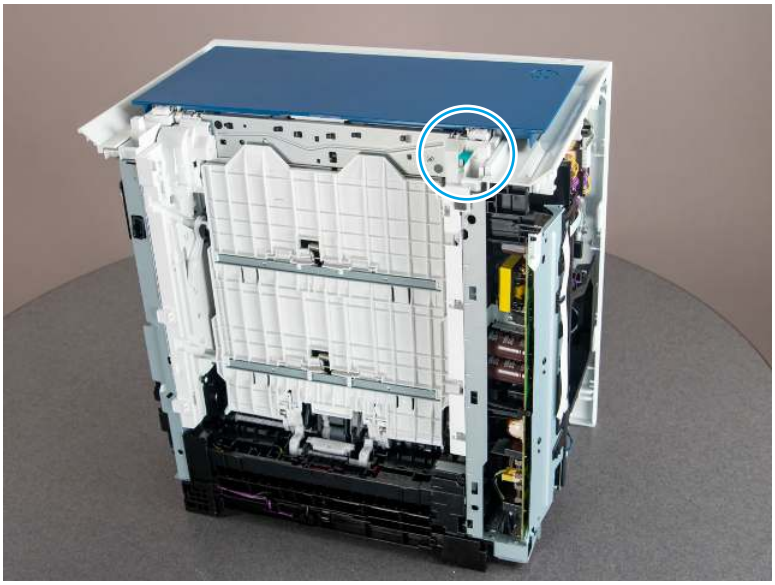
Figure 4-1043 Release the assembly



3. Slide the assembly up (callout 1), and then toward the right-side of the printer (callout 2) to remove it.


NOTE: There is a retainer arm (callout 3) on one of the assembly legs. Carefully disengage the retainer arm and leg when removing the assembly.

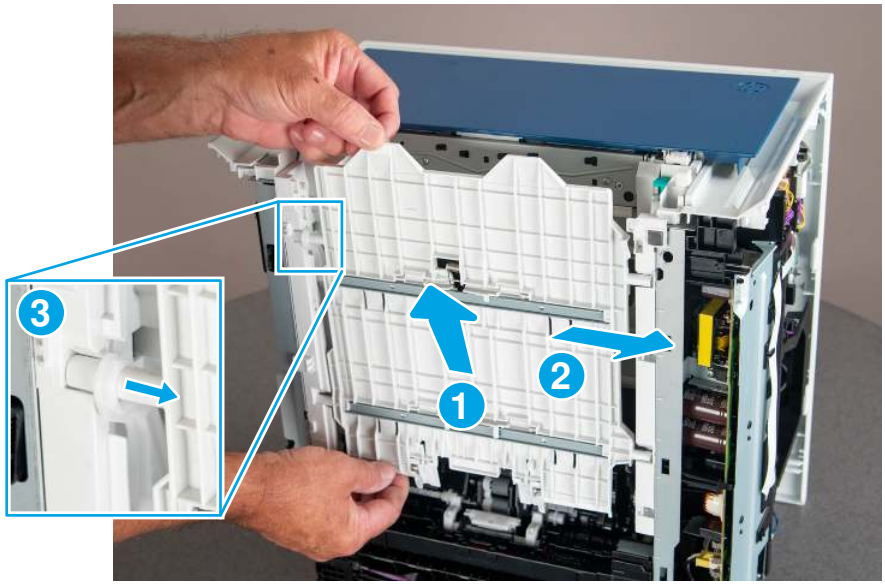Figure 4-1044 Remove the assembly



4. If the retainer arm becomes dislodged, reinstall it as shown below.

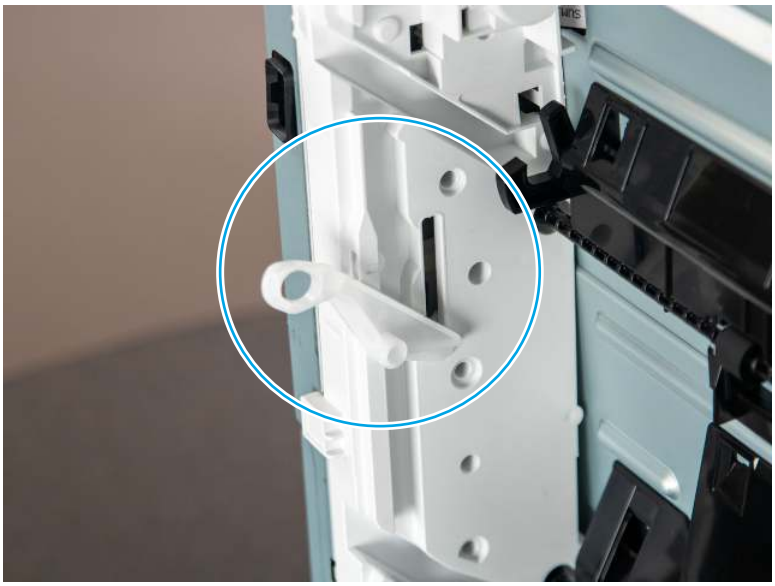Figure 4-1045 **Install the retainer arm**




11. Remove the low-voltage power supply (LVPS)

Follow the procedure below to remove and replace the LVPS.

⚠ **CAUTION:** ESD sensitive part.


1. Disconnect one flat-flexible cable (FFC; callout 1) and one connector (callout 2), and then remove one screw (callout 3).

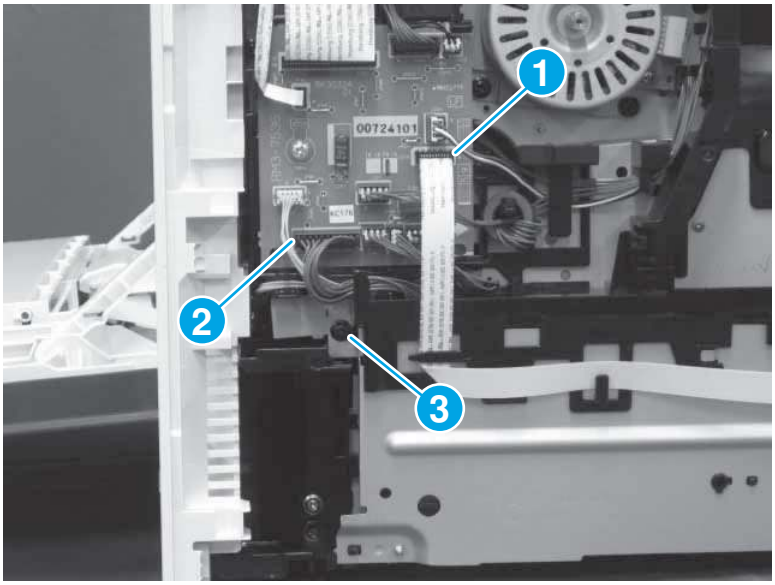Figure 4-1046 **Disconnect FFC, connector, and remove one screw**




2. Disconnect two connectors (callout 1), and then remove two screws (callout 2).

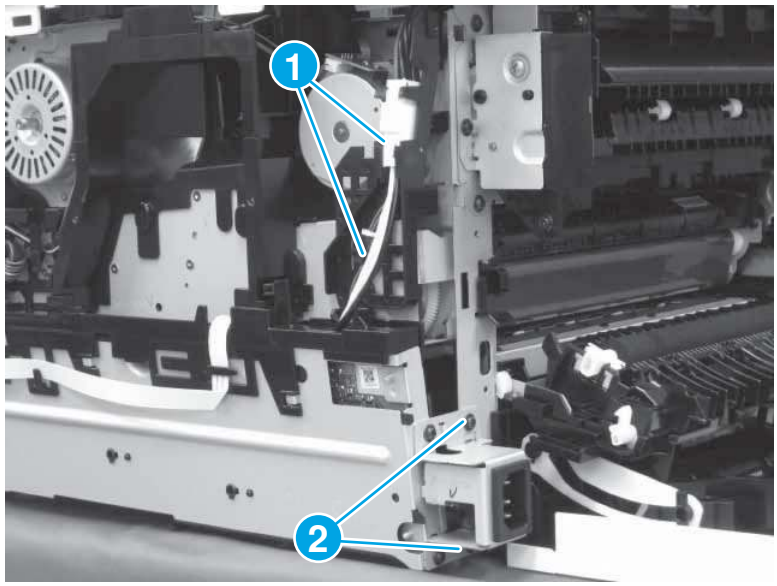Figure 4-1047 **Disconnect connectors and remove screws**



3. Release three tabs (callout 1), and then remove the LVPS (callout 2).

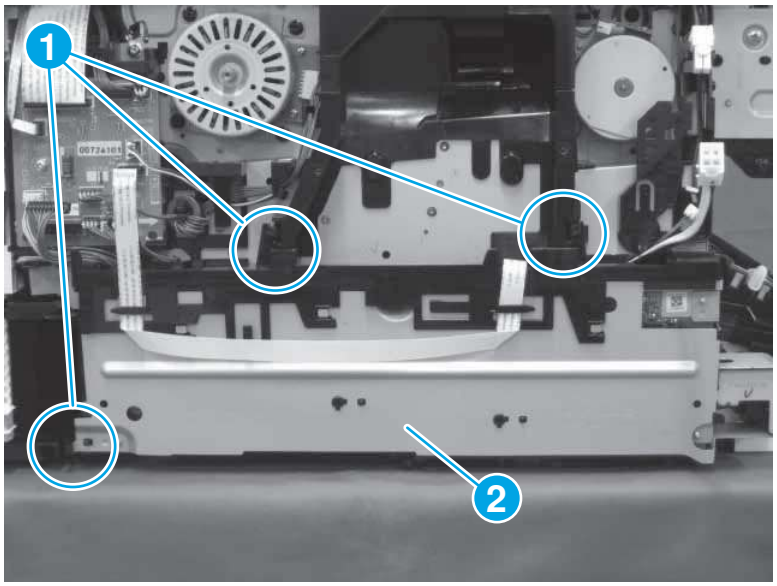Figure 4-1048 **Remove the LVPS**



12. Remove the duplex guide assembly


Follow the procedure below to remove and replace the duplex guide assembly.

1. Disconnect one connector (callout 1), and then release the wire harness from the retainer (callout 2).

NOTE: The correct cable to release is the purple three-wire harness.

Disconnect other connectors and release other wire harnesses as necessary.

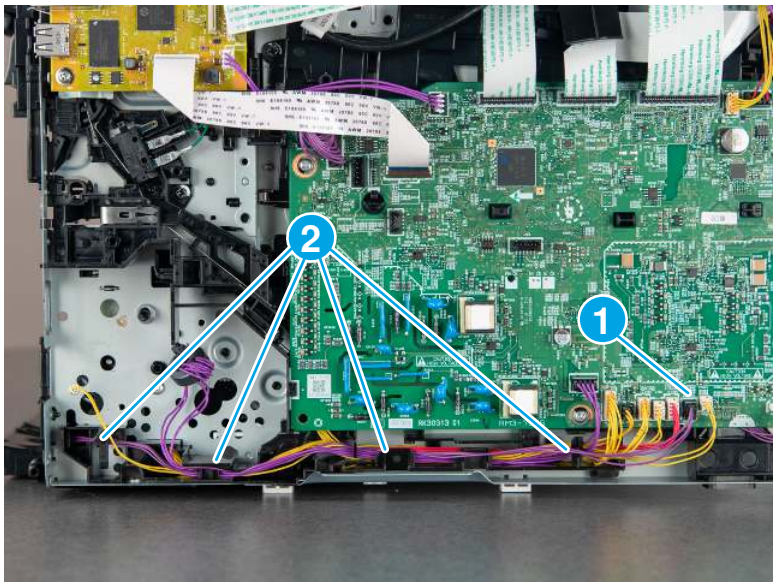Figure 4-1049 Disconnect one connector




2. Do the following:

   a. Remove one (tapping) screw (callout 1).

   b. Remove one (TP) screw (callout 2)

   c. Remove the holder (callout 3).

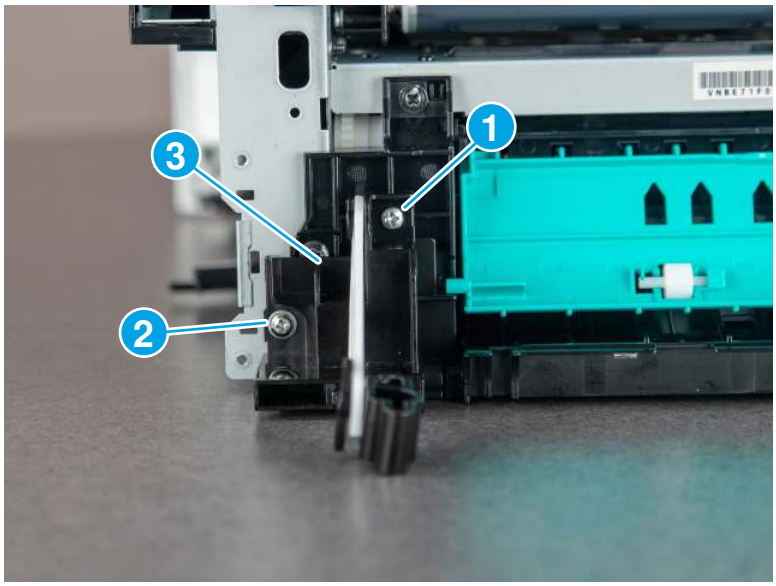Figure 4-1050 Remove two screws and the holder




3. Do the following:

   a. Remove two (tapping) screws (callout 1).

   b. Remove one (TP) screw (callout 2)

   c. Remove the holder (callout 3).

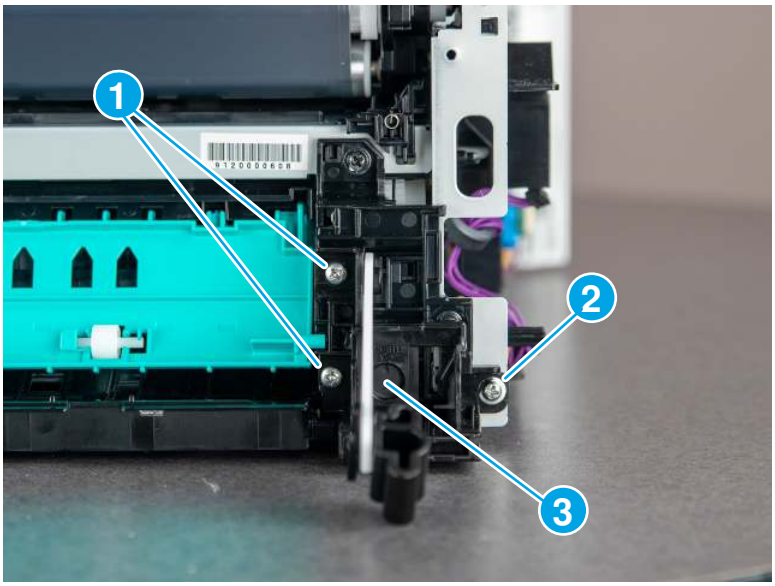
Figure 4-1051 Remove three screws and the holder



4. Use a small flat-blade screwdriver to release one boss at each end of the duplex guide (callout 1), and then remove the guide (callout 2).

⚠ CAUTION: Parts of this assembly are fragile and can easily be damaged during removal.

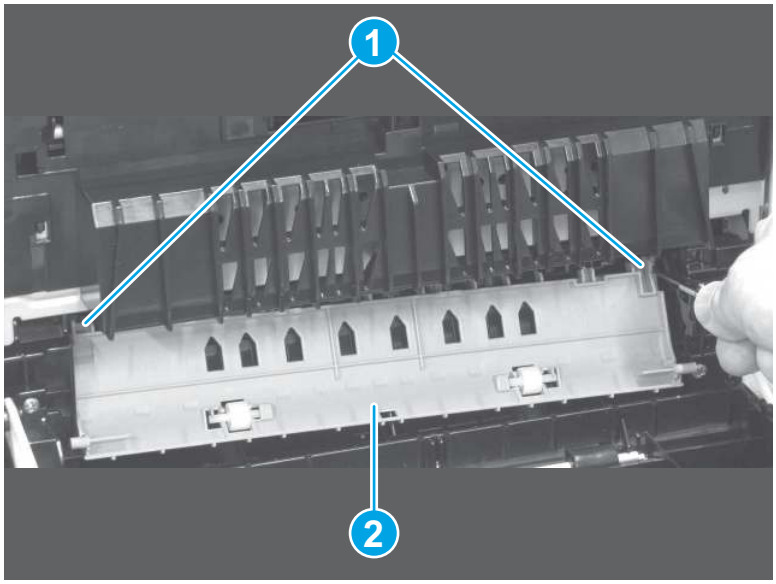
Figure 4-1052 Remove the duplex upper guide



5. Carefully position the printer at the edge of the work surface. Slightly pull the duplex guide assembly down to release it, and then remove the assembly.

NOTE: Pass the wire harness through the opening in the chassis as the assembly is removed (callout 1).

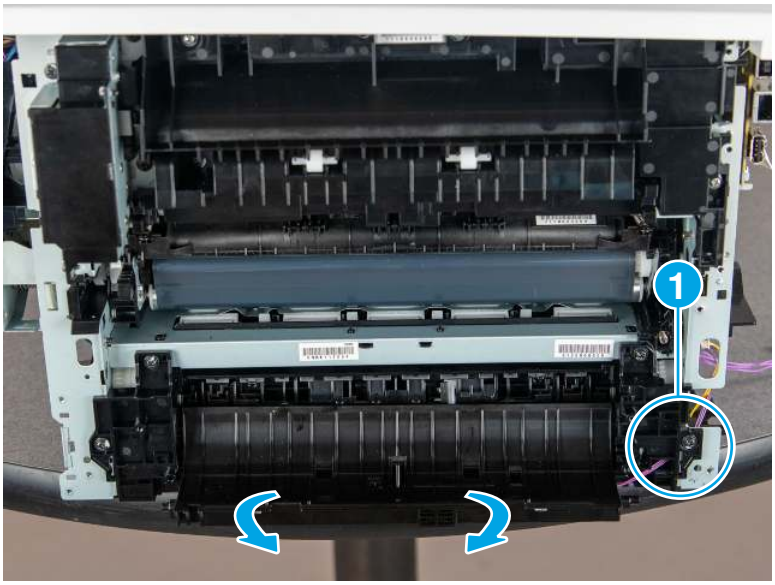Figure 4-1053 Remove the duplex guide assembly




13. Remove the feed lower guide assembly

Follow the procedure below to remove and replace the feed lower guide assembly.

1. Disconnect four connectors (callout 1), and then release the wire harnesses from the guide (callout 2).

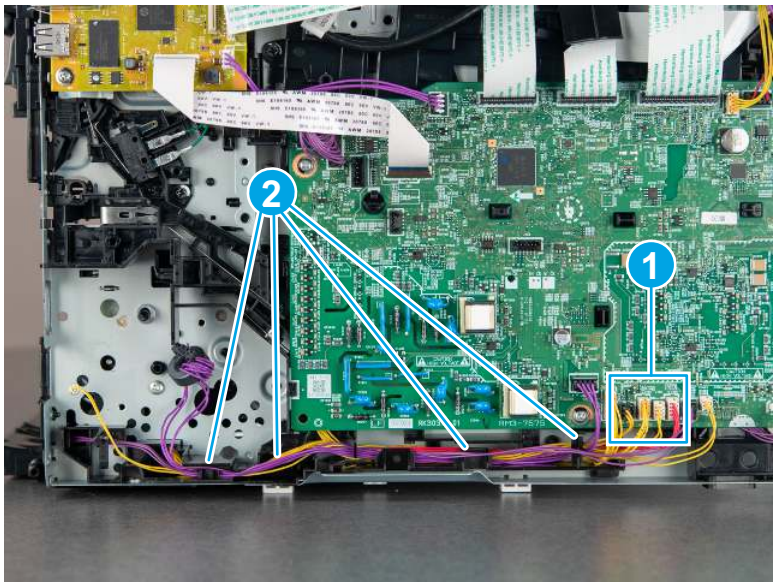
Figure 4-1054 Disconnect connectors and release the wire harnesses



2. Position the printer with the front-side down, release one tab (callout 1), and then remove the rubber pad (callout 2). Repeat this step for the rubber pad on the opposite side.


⚠ CAUTION: **MFP only**: The integrated scanner assembly (ISA) can suddenly open when the printer is place in any postilion other than top-side up. Secure the ISA when repositioning the printer.

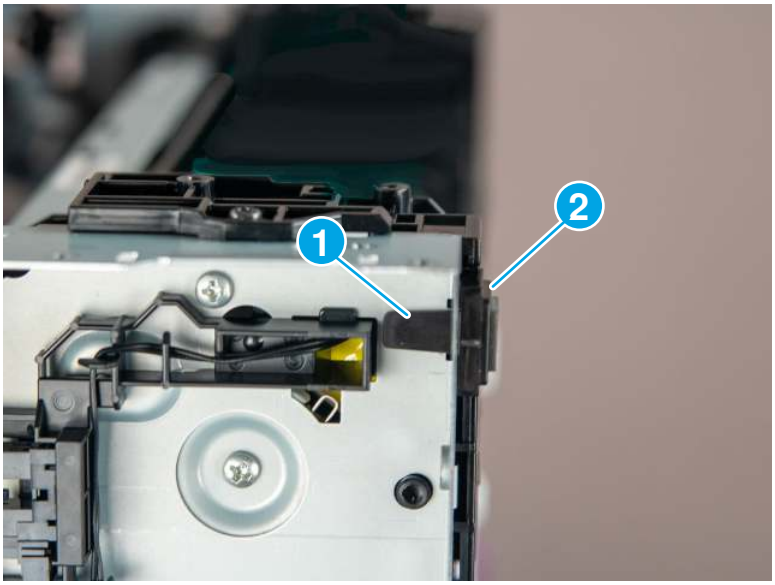Figure 4-1055 Remove the pad



3. Position the printer with the top-side up (normal position), and then remove four screws.

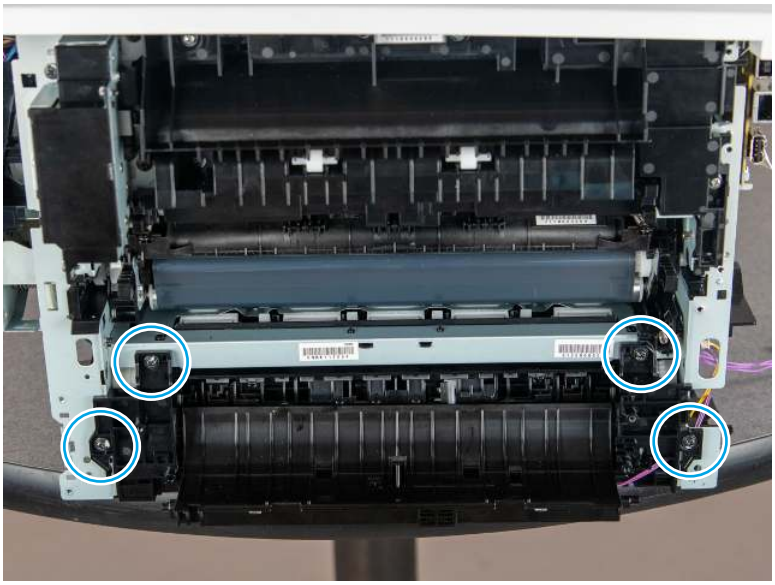Figure 4-1056 Remove four screws



4. Use a small flat-blade screwdriver to release two bosses (callout 1).


Figure 4-1057 Release two bosses



5. Carefully position the printer at the edge of the work surface. Slightly pull down on the assembly to release it, and then remove the feed lower guide assembly (callout 1).

NOTE: Carefully pull the wire harness through the opening in the chassis (callout 2) while removing the assembly.

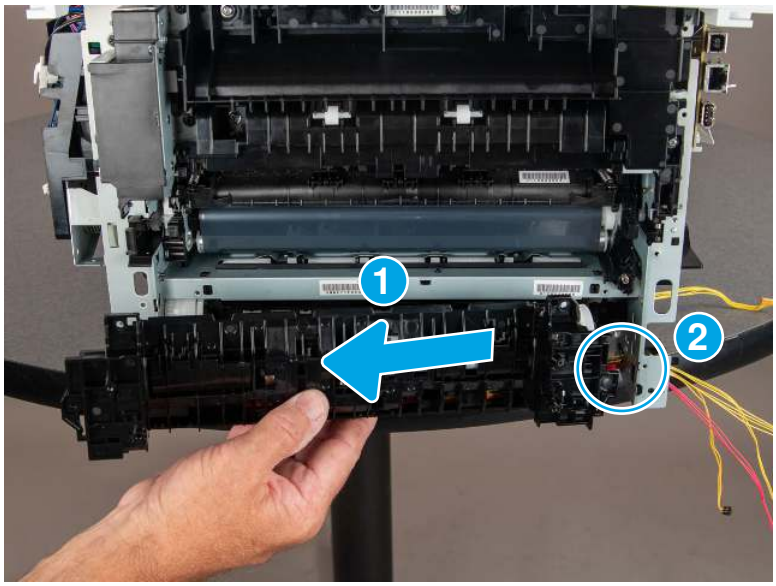Figure 4-1058 Remove the feed lower guide assembly




14. Remove the lifter drive assembly

Follow the procedure below to remove and replace the lifter drive assembly.


1. Release two tabs (callout 1), and the remove the cover (callout 2).

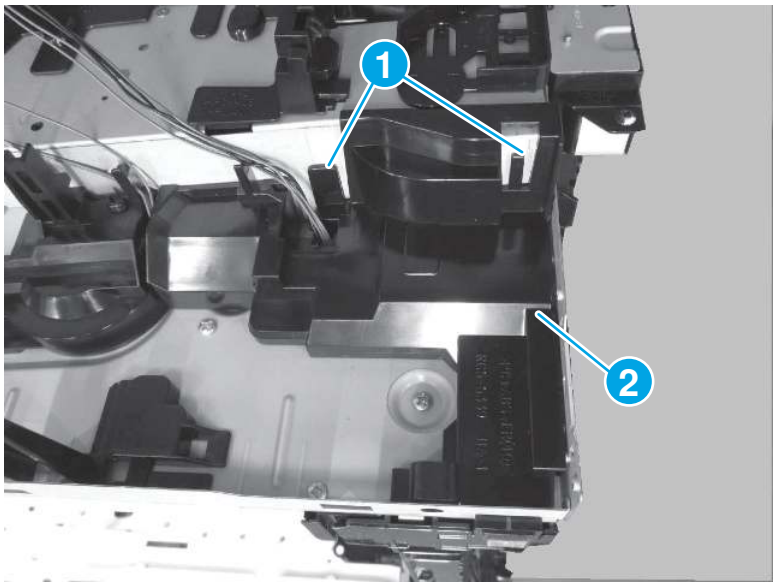Figure 4-1059 **Remove the cover**




2. Disconnect one connector (callout 1), and then release the wire harness from the retainers (callout 2).

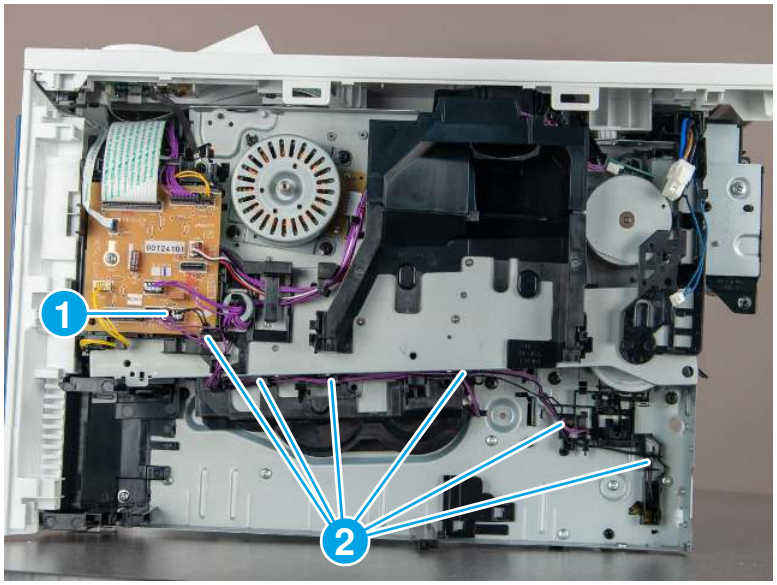Figure 4-1060 **Disconnect one connector**



3. Remove three screws.

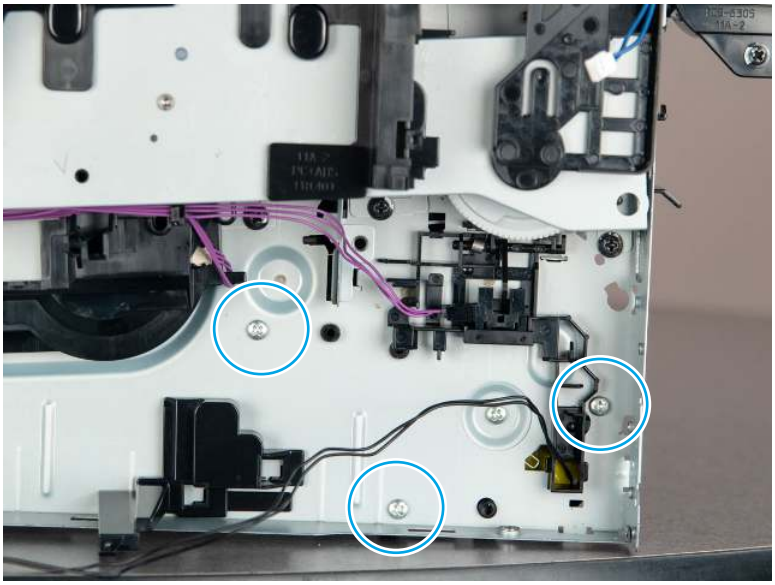
Figure 4-1061 **Remove three screws**



4. Position the printer with the front-side down, and then release one tab.

⚠ CAUTION: **MFP only**: The integrated scanner assembly (ISA) can suddenly open when the printer is place in any postilion other than top-side up. Secure the ISA when repositioning the printer.

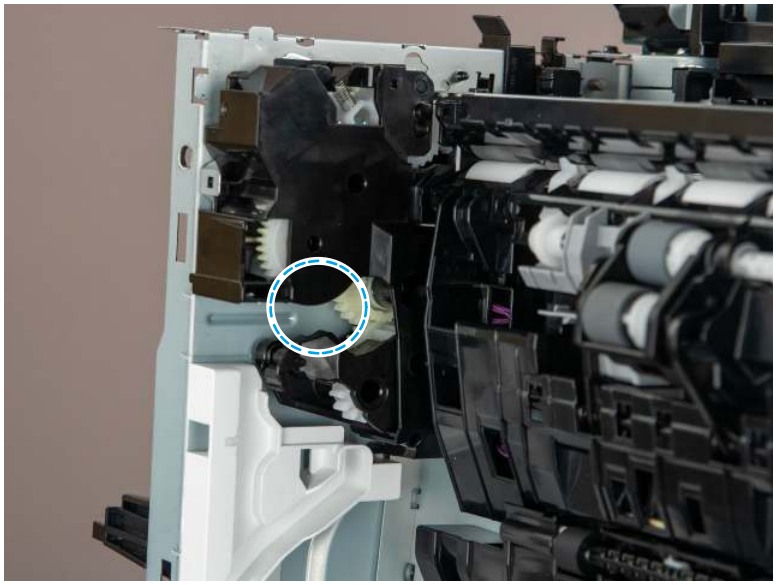
Figure 4-1062 **Release one tab**



5. Remove the lifter drive assembly.

NOTE: Carefully pull the wire harness through the opening in the chassis while removing the assembly.

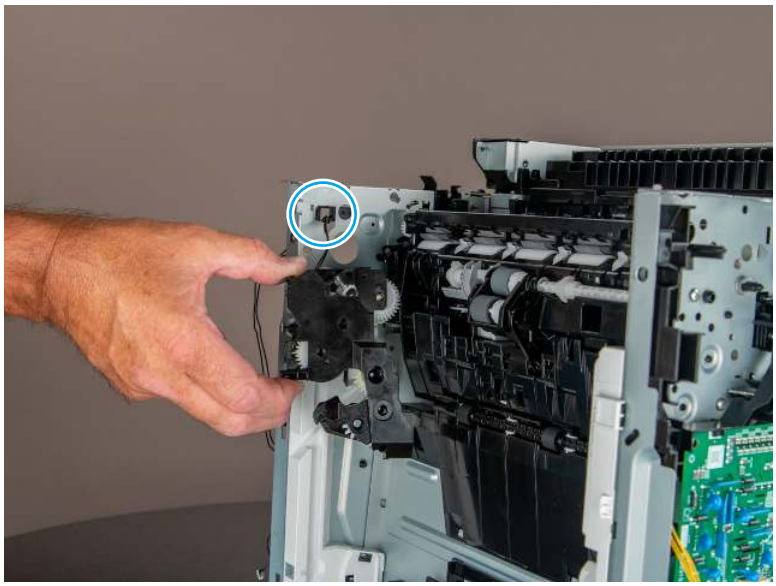Figure 4-1063 Remove the lifter drive assembly




15. Remove the feed upper guide assembly

Follow the procedure below to remove and replace the feed upper guide assembly.

1. Disconnect one connector (callout 1), and then release the wire harness from the retainer (callout 2).

NOTE: The wire harness will not be removed with the assembly. However, it does need to be disconnected and released to provide sufficient slack to separate the assembly from the printer.

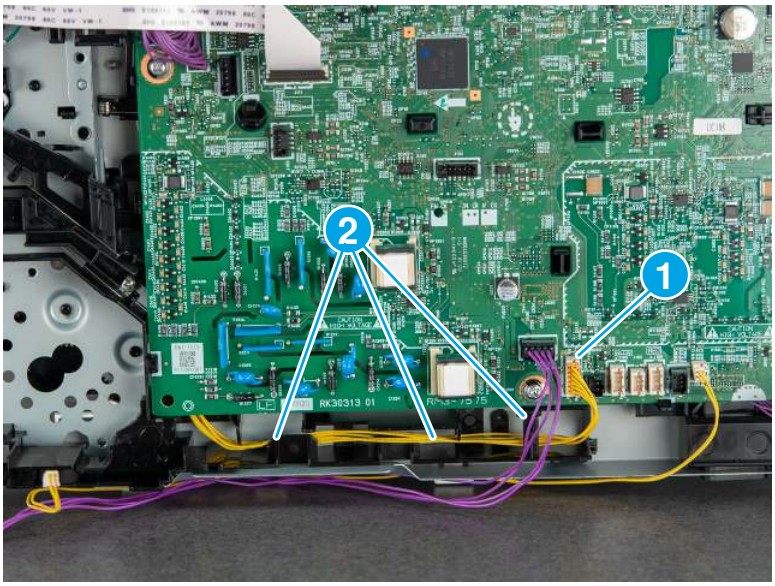
Figure 4-1064 Disconnect one connector



2. Position the printer with the front-side down. Release one tab (callout 1), and then slide the guide (callout 2) and the roller (callout 3) together as shown below to release them.

⚠ **CAUTION:** **MFP only**: The integrated scanner assembly (ISA) can suddenly open when the printer is place in any postilion other than top-side up. Secure the ISA when repositioning the printer.

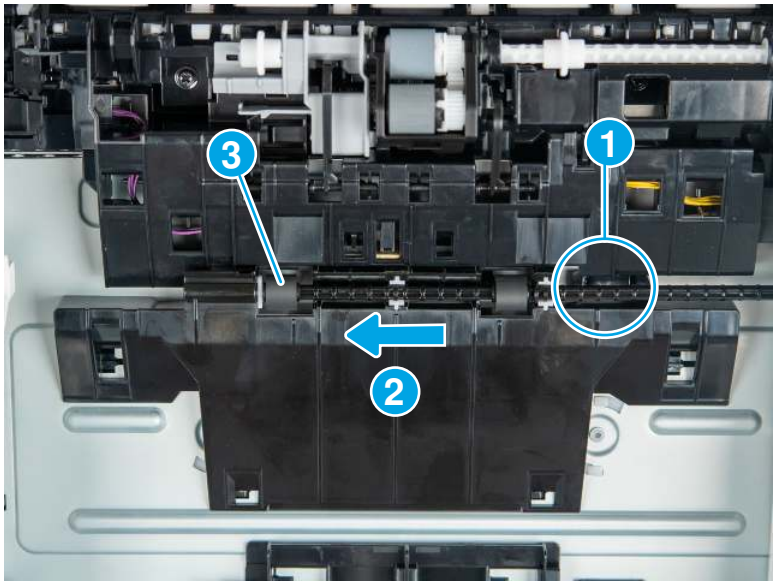
Figure 4-1065 Release the guide and roller



3. Remove the guide and roller assembly.


NOTE: The roller and shaft are not captive on the guide and can easily be dislodged.

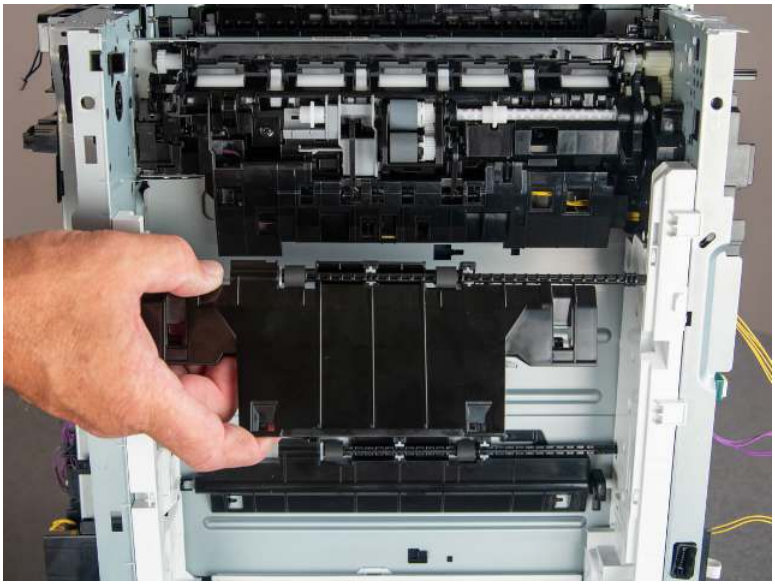Figure 4-1066 Remove the guide and roller



4. Remove two screws (callout 1), and then release four bosses (callout 2).

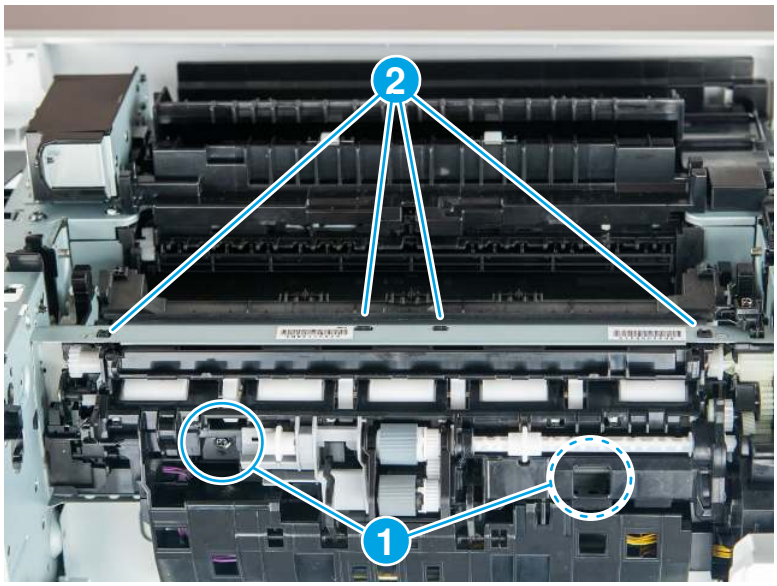
Figure 4-1067 Remove screws and release bosses



5. Separate the assembly from the printer, disconnect one connector (callout 1), and then release the wire harness from the retainers (callout 2).


⚠ CAUTION: Do not attempt to completely remove the assembly. It is still attached to the printer by a wire harness.

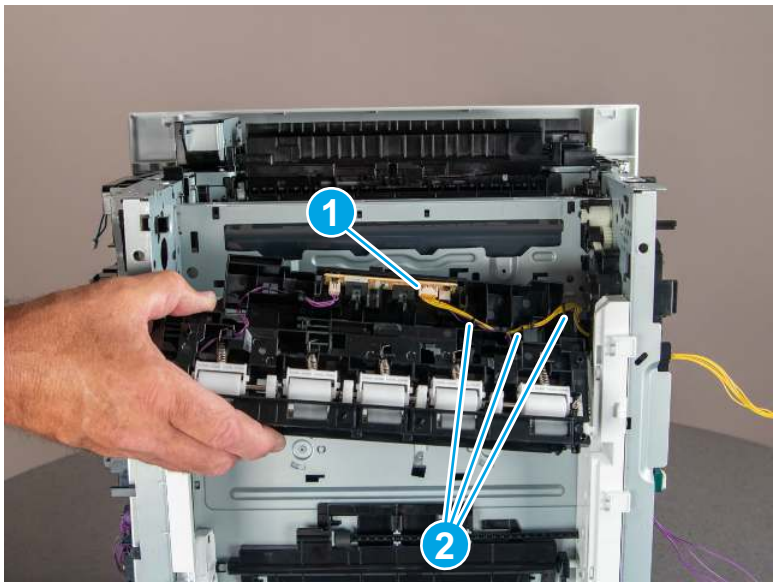Figure 4-1068 Disconnect one connector



6. Remove the feed upper guide assembly.

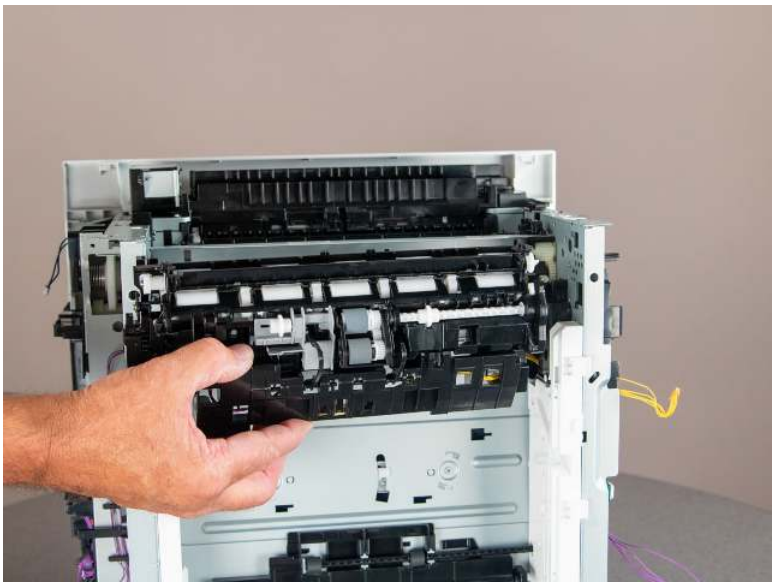Figure 4-1069 **Remove the feed upper guide assembly**



16. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.


17. Special installation instructions - Feed upper guide assembly

Follow the special instructions below to install the feed upper guide assembly.

NOTE: The printer is shown upside down in the figure below for clarity.

- When the assembly is installed, make sure to match the engagement portion of the gear (callout 1) on the printer with the gear (callout 2) of the feed upper guide assembly.

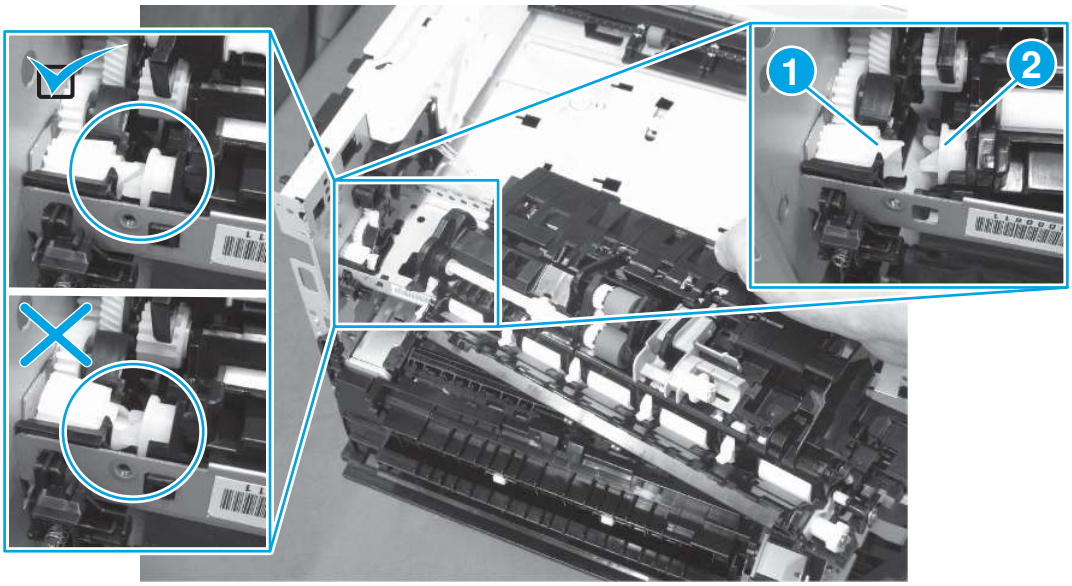Figure 4-1070 **Install the feed upper guide assembly**




18. Special installation instructions - Feed lower guide assembly

Follow the special instructions below to install the feed lower guide assembly.

NOTE: The printer is shown upside down in the figure below for clarity.

- When the assembly is installed, make sure that the link arm (callout 1) on the printer is correctly inserted in the gear (callout 2) of the feed lower guide assembly.

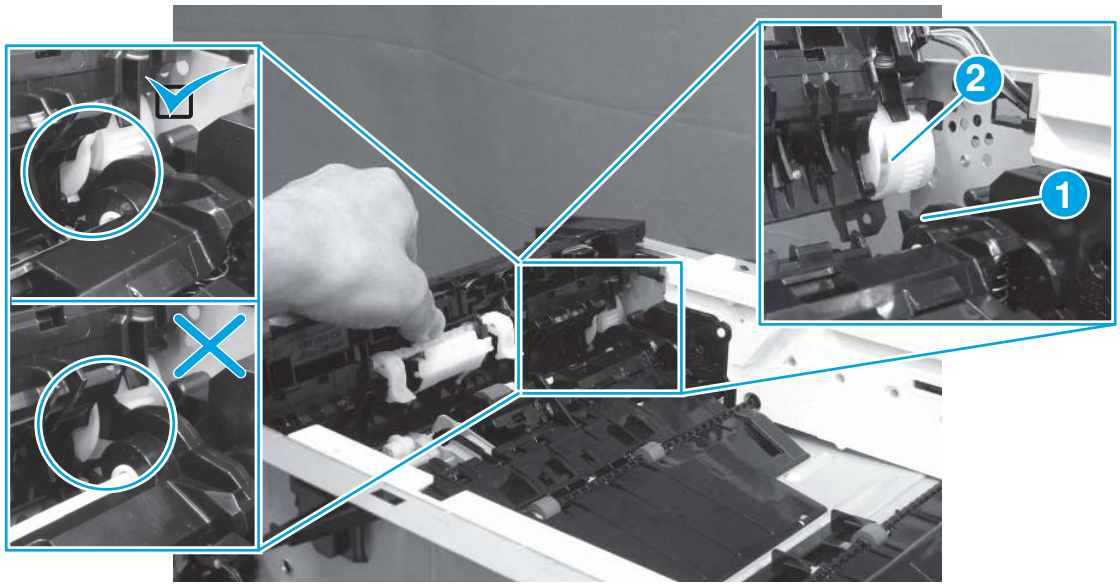Figure 4-1071 **Install the feed lower guide assembly**




19. Special installation instructions - Low-voltage power supply (LVPS)

Follow the special instructions below to install a replacement LVPS.

⚠ **CAUTION:** ESD sensitive part.


1. When the LVPS is installed, make sure that the sheet-metal tab (callout 1) near the power receptacle is inserted in the slot (callout 2) in the chassis.

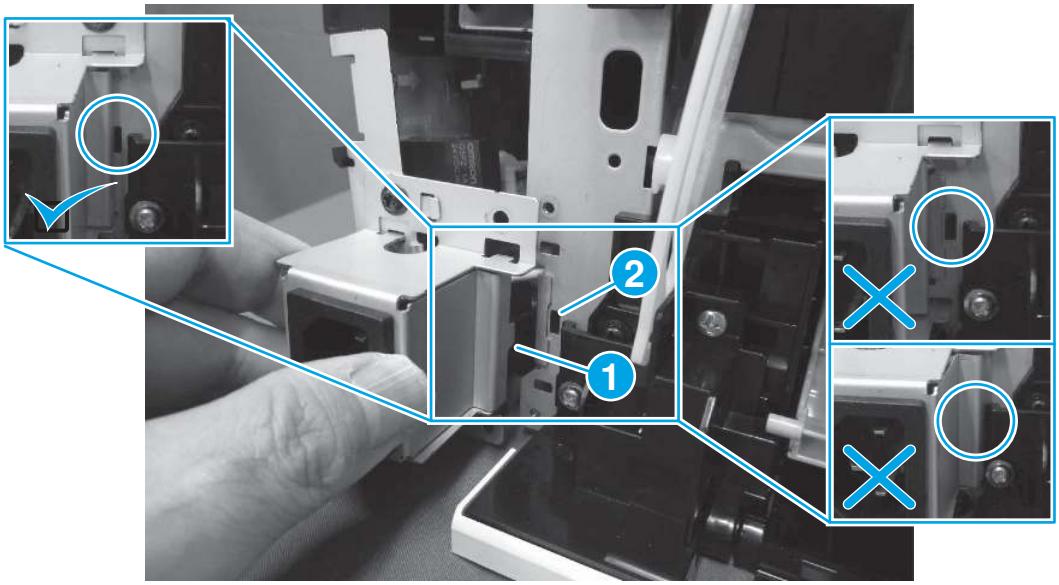Figure 4-1072 **Install the LVPS tab**



2. Make sure that the fuser temperature fuse cable (callout 1) is positioned behind the thick cable (callout 2). This prevents the fuser cable from unnecessary movement.

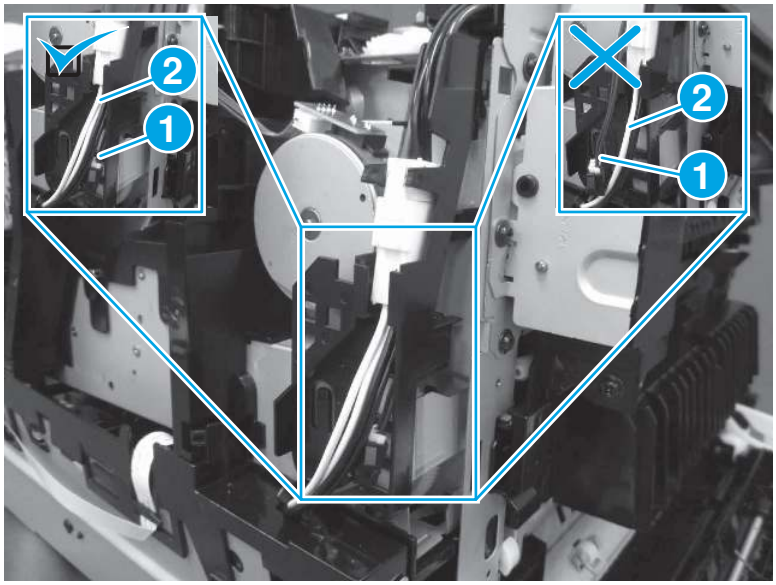Figure 4-1073 **Check the fuser temperature fuse cable**



Removal and replacement: Pickup drive assembly

Learn about pickup drive assembly removal.

View a video of removing and replacing the pickup drive assembly.

Mean time to repair: 60 minutes

Service level: Difficult

Before performing service

Turn the printer power off

- Disconnect the power cable.

WARNING! To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-51 **Part information**

Part number	Part description
RM2-2763-000CN	Paper pickup drive assembly

Required tools

- #1 Phillips screwdriver with a magnetic tip
- #2 Phillips screwdriver with a magnetic tip and a 152 mm (6 in) shaft length

- Small flat-blade screwdriver
- Needle-nose pliers

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test

Print any pages necessary to make sure the printer is functioning correctly.

1. Remove the left cover (SFP)


Follow the procedure below to remove and replace the left cover (SFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.

TIP: There might be a small cover installed on the USB port located at the back of the printer. If installed, remove this cover now.


1. Remove one screw (callout 1).

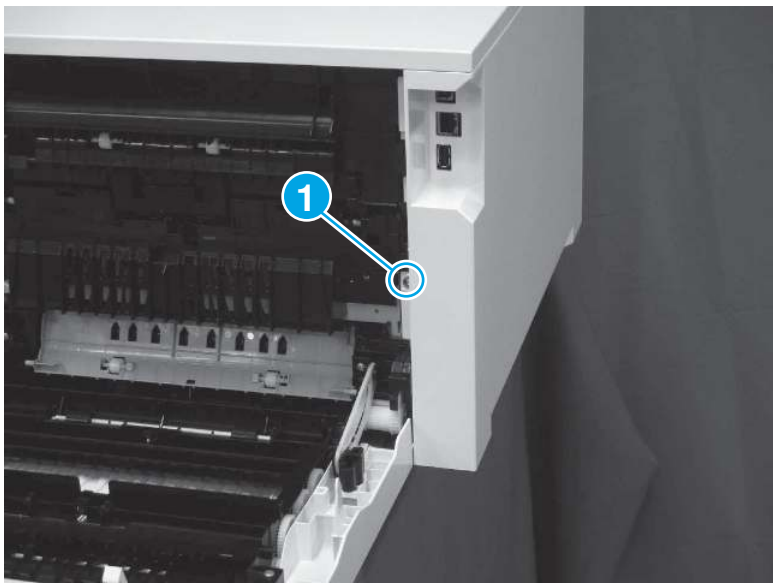Figure 4-1074 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

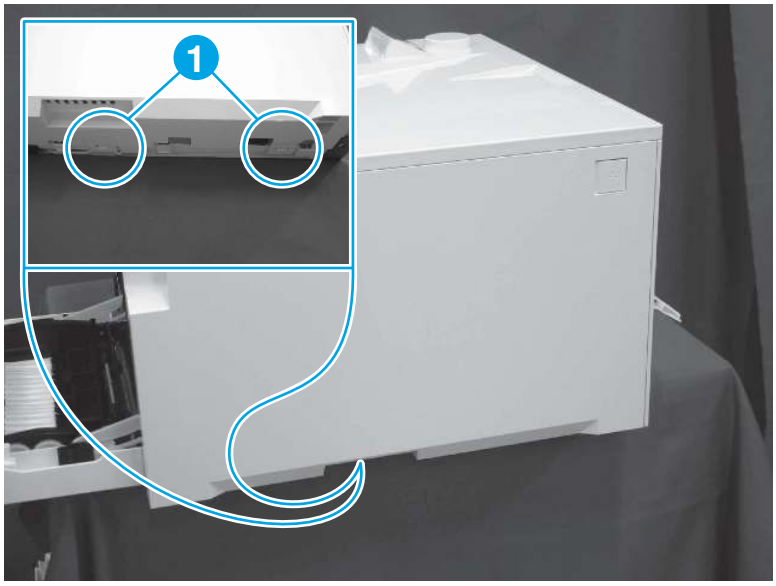Figure 4-1075 Release two tabs




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

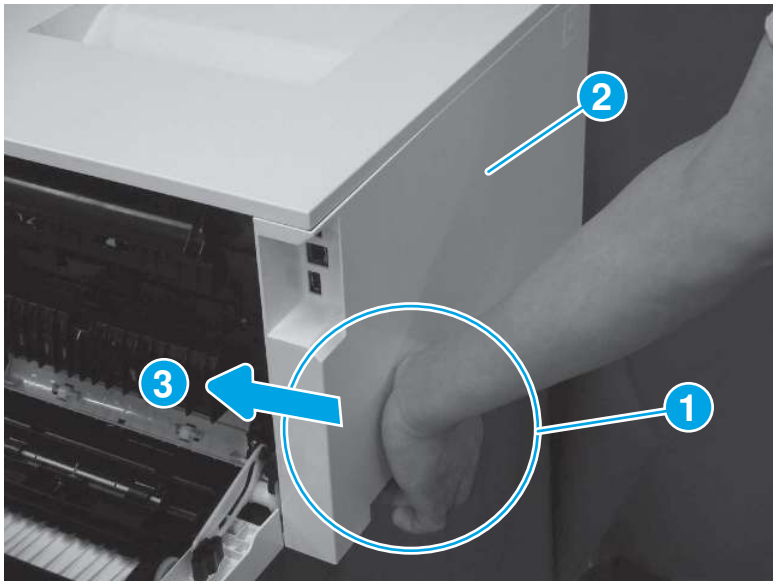Figure 4-1076 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

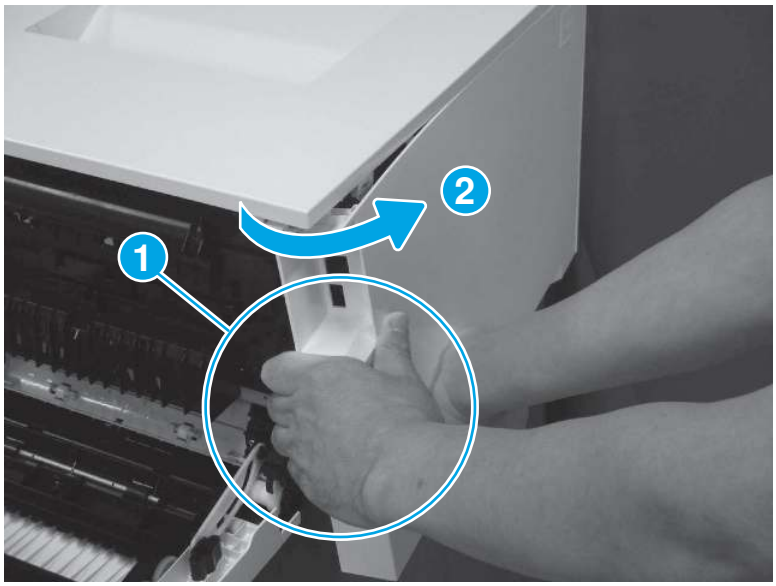Figure 4-1077 Disengage the cover corner



5. Remove the left cover (callout 1).

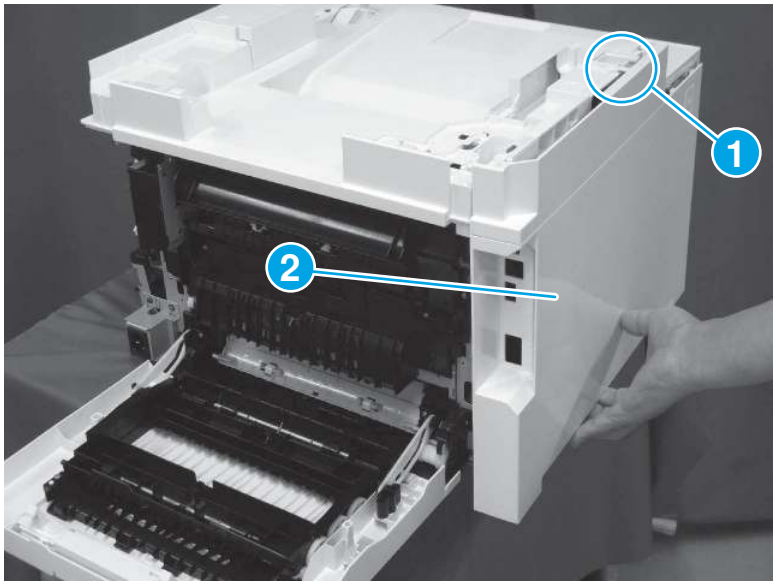Figure 4-1078 Remove the cover



2. Remove the left cover (MFP)


Follow the procedure below to remove and replace the left cover (MFP).

NOTE: The following procedure is for an MFP printer only. If this assembly is being removed to gain access to dependency parts for a SFP printer, skip this step.

TIP: There might be a small cover installed on the USB port and/or the fax port located at the back of the printer. If installed, remove these covers now.


1. Remove one screw (callout 1).

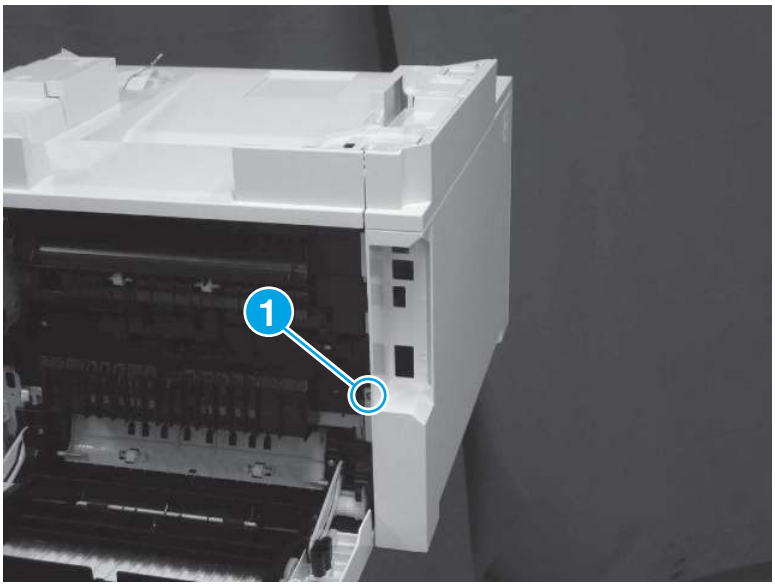Figure 4-1079 **Remove one screw**




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to two tabs (callout 1). Release two tabs.

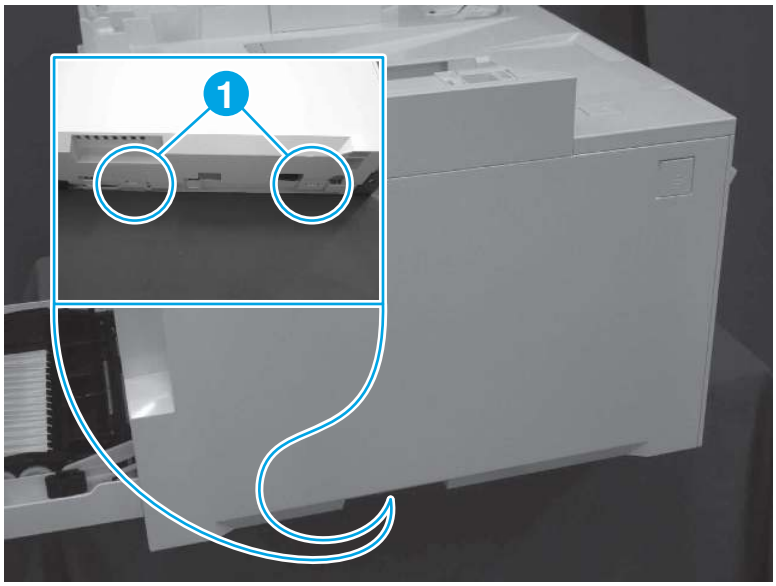Figure 4-1080 **Release two tabs**




3. Press in on the side (callout 1) of the left cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

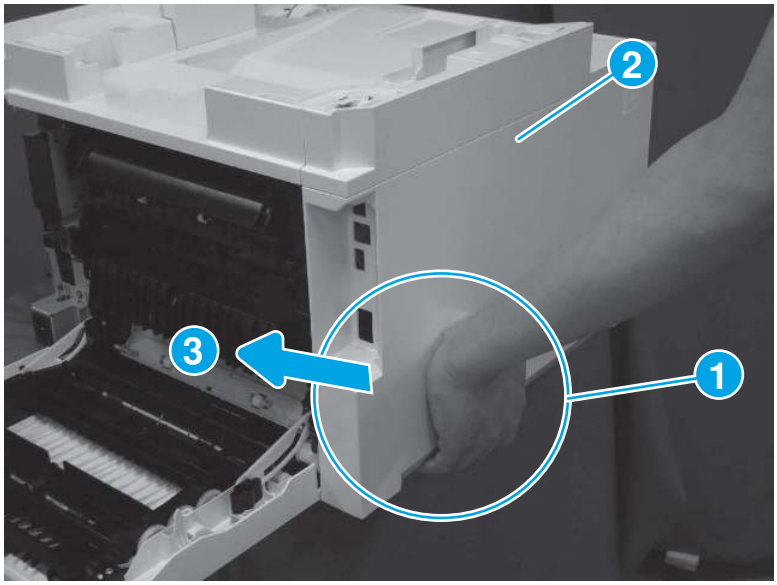Figure 4-1081 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

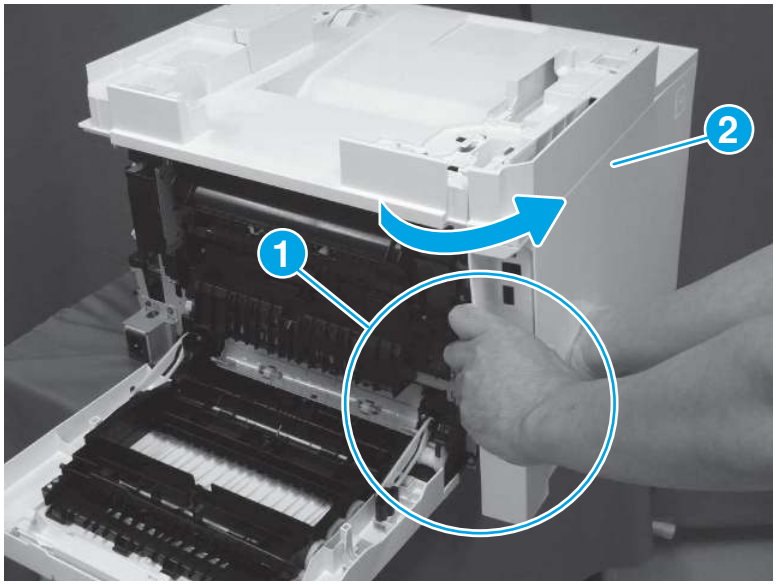Figure 4-1082 Disengage the cover corner



5. Remove the left cover (callout 1).

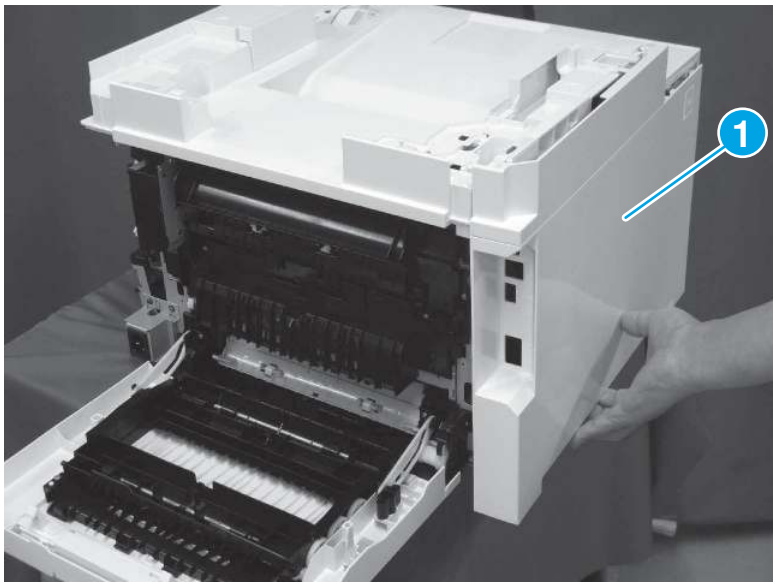Figure 4-1083 **Remove the cover**




3. Remove the duplex re-pick clutch

Follow the procedure below to remove and replace the duplex re-pick clutch.

1. Remove one screw (callout 1), and then remove the hinge (callout 2).

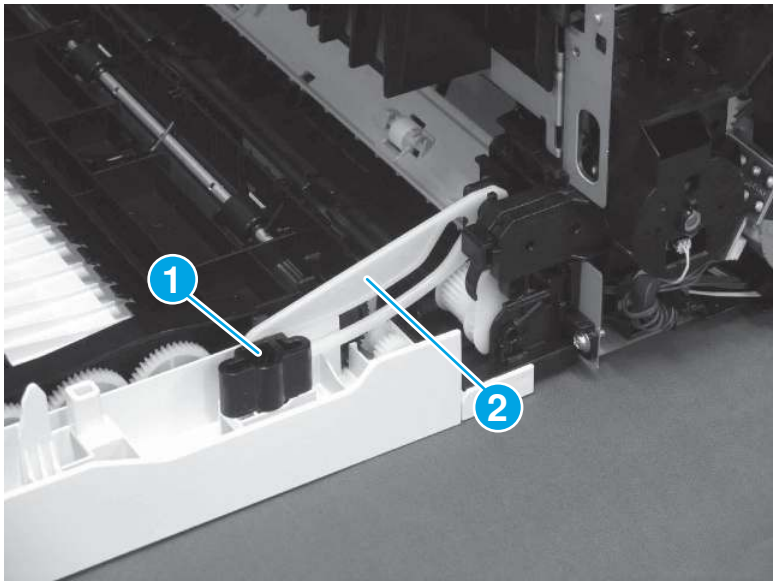
Figure 4-1084 **Remove the hinge**



2. Release the retainer (callout 1), rotate the shaft as shown below (callout 2) to remove it, and then remove the gear (callout 3).

Reinstallation tip: Take note of how the gear is installed before removing it. The shaft cannot be reinstalled if the gear is incorrectly installed.

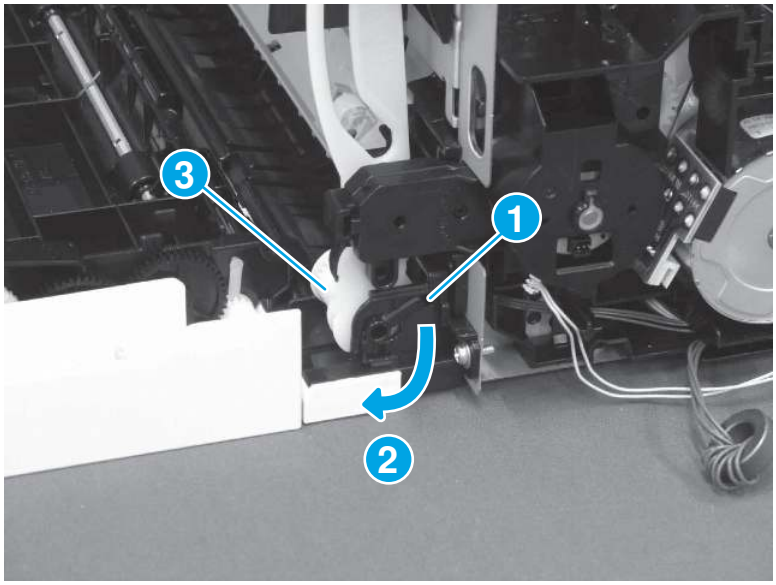
Figure 4-1085 Remove the gear



3. Disconnect one connector (callout 1), remove one screw (callout 2), and then release one tab (callout 3).

NOTE: The connector (callout 1) has a tab that must be released to disconnect it. It can be difficult to disconnect when the duplex re-pick clutch is installed. It might be easier to remove the duplex re-pick clutch (see the following step), and then disconnect the connector.

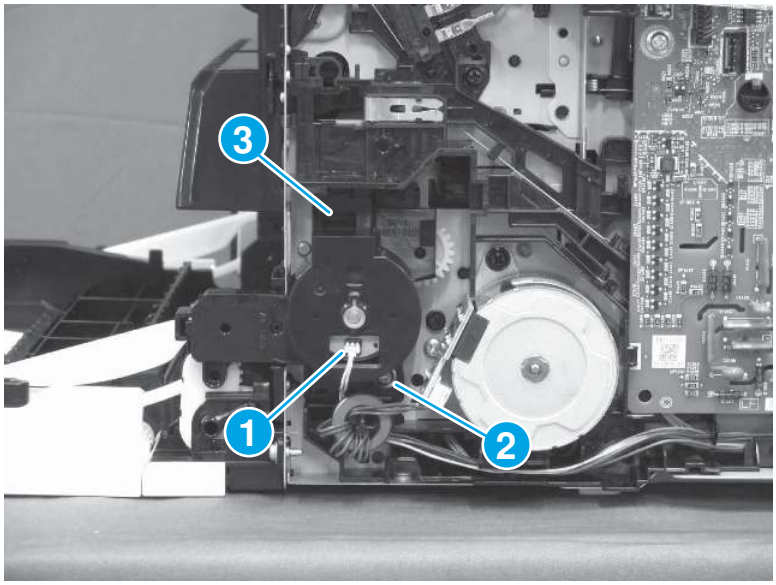Figure 4-1086 Disconnect one connector, remove one screw, and release one tab




4. Remove the duplex re-pick clutch (callout 1).

CAUTION: When handling the assembly, do not lose the spring that is inside the left gear holder (callout 2).

Reinstallation tip: **For a replacement duplex re-pick clutch only**: Remove the spring from the assembly (callout 2), and then install it on the replacement duplex re-pick clutch.

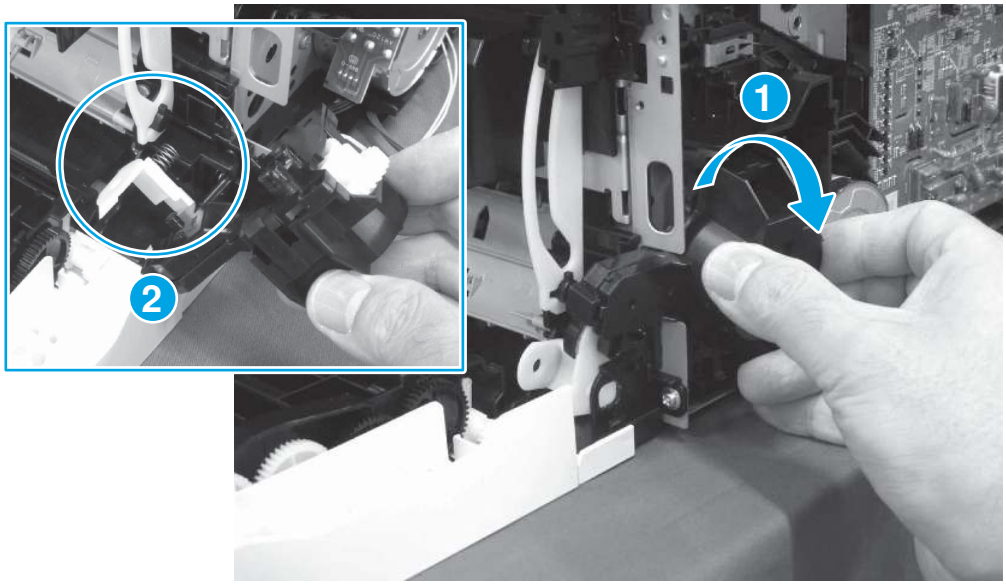Figure 4-1087 Remove the duplex re-pick clutch




4. Remove the feed motor

Follow the procedure below to remove and replace the feed motor.

- Disconnect one connector (callout 1), remove two screws (callout 2), and then remove the feed motor (callout 3).

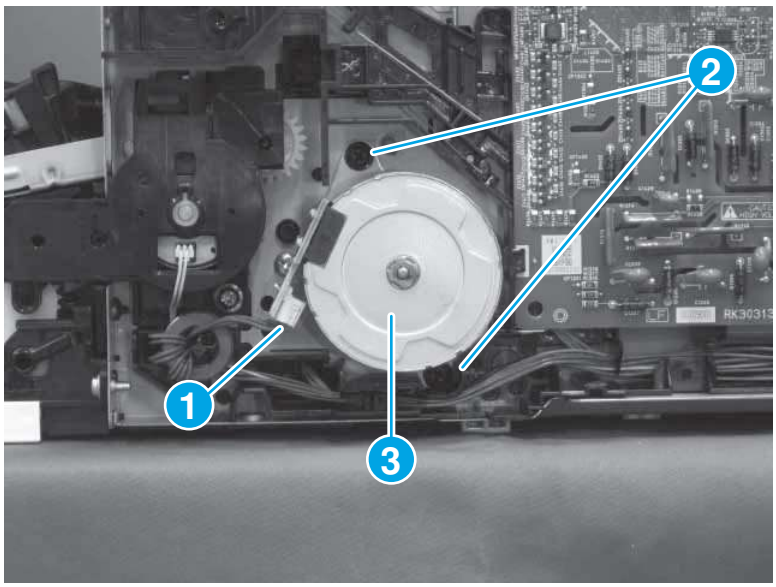Figure 4-1088 Remove the feed motor




5. Remove the right cover (SFP)

Follow the procedure below to remove and replace the right cover (SFP).

NOTE: The following procedure is for a SFP printer only. If this assembly is being removed to gain access to dependency parts for an MFP printer, skip this step.


1. Remove one screw (callout 1).

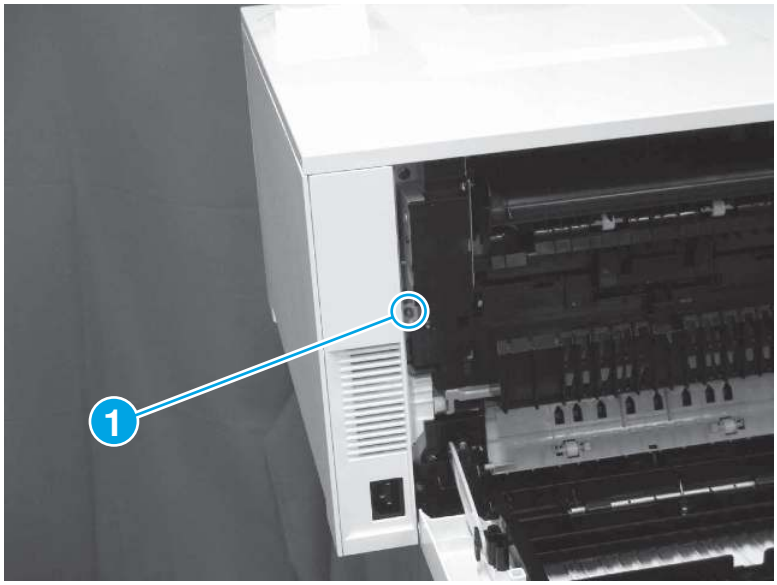Figure 4-1089 **Remove one screw**




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to three tabs (callout 1). Release three tabs.

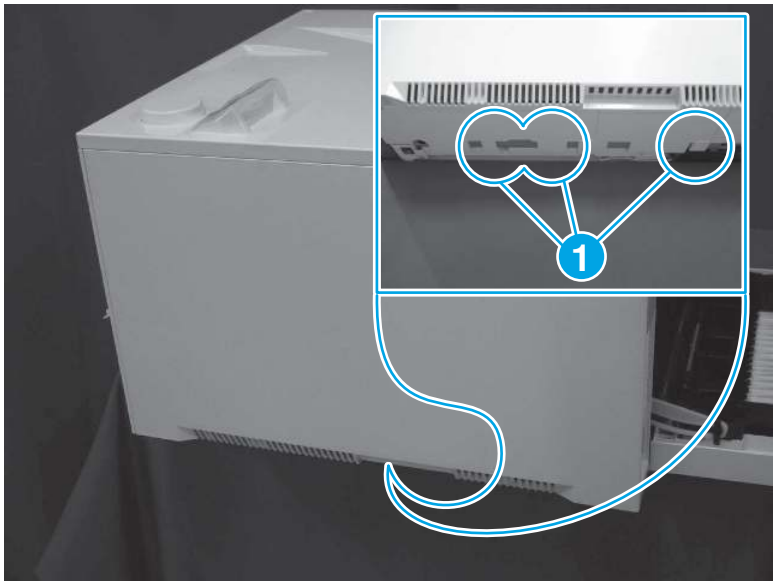Figure 4-1090 **Release three tabs**




3. Press in on the side (callout 1) of the right cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

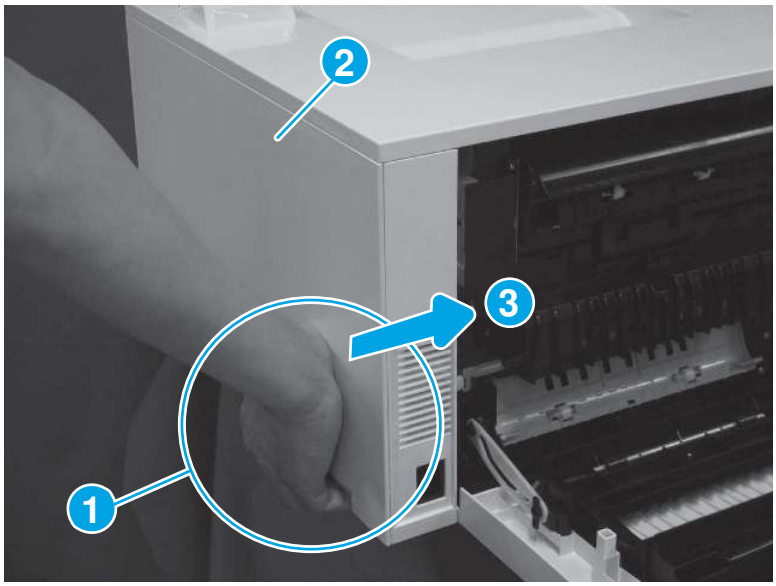Figure 4-1091 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

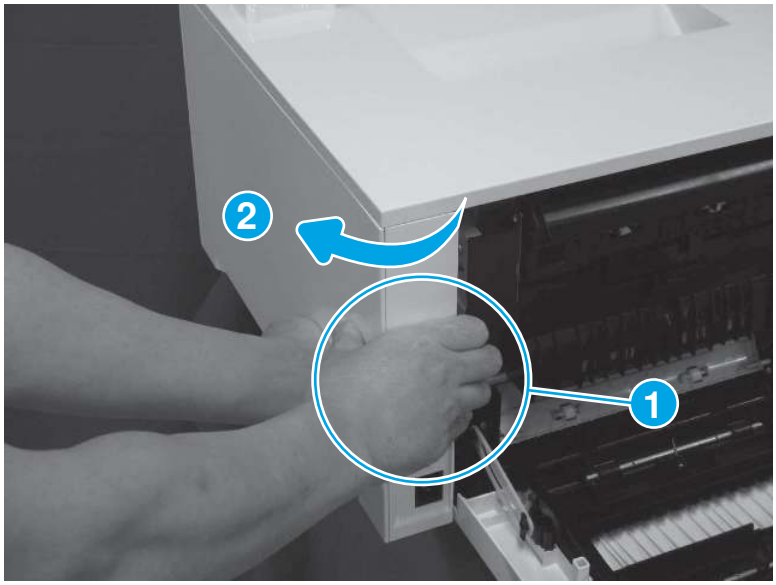Figure 4-1092 Disengage the cover corner



5. Remove the right cover (callout 1).

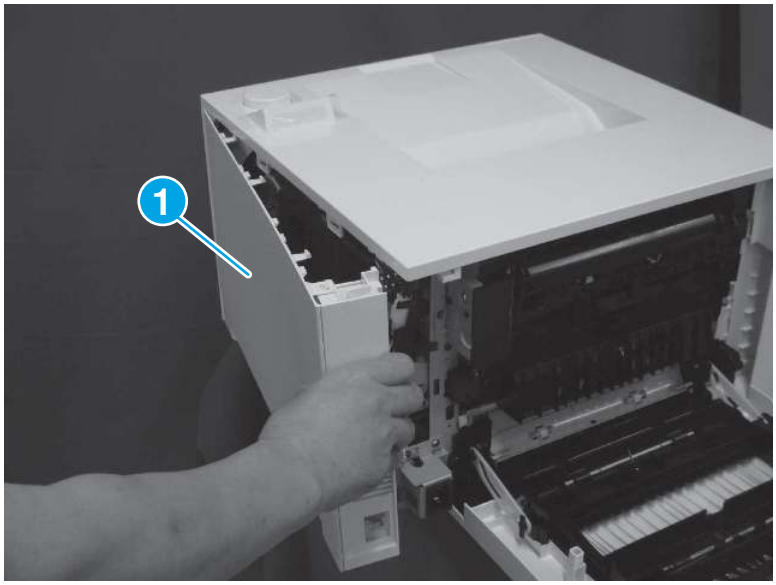Figure 4-1093 Remove the cover




6. Remove the right cover (MFP)

Follow the procedure below to remove and replace the right cover (MFP).

NOTE: The following procedure is for an MFP printer only. If this assembly is being removed to gain access to dependency parts for a SFP printer, skip this step.


1. Remove one screw (callout 1).

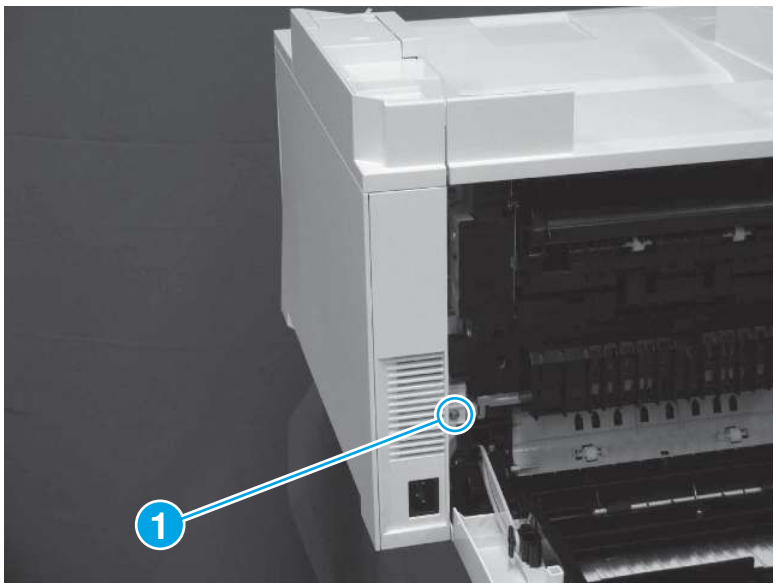Figure 4-1094 Remove one screw




2. Open the cartridge and rear doors, and then set the printer on the edge of the work surface to gain access to three tabs (callout 1). Release three tabs.

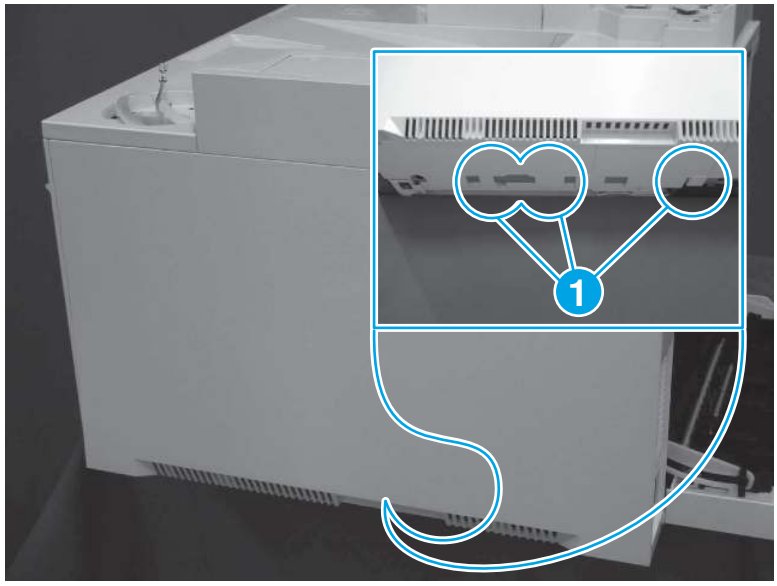Figure 4-1095 Release three tabs




3. Press in on the side (callout 1) of the right cover (callout 2), and then slide the cover as shown (callout 3) to release the rear corner.

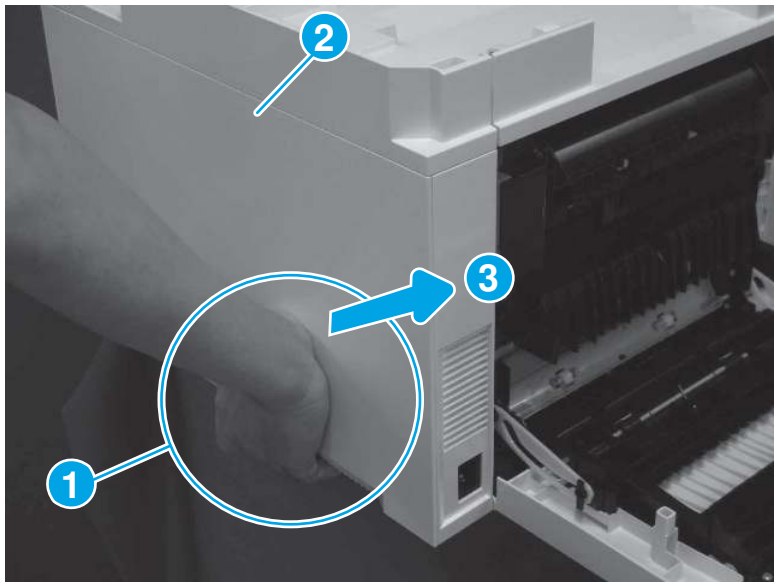Figure 4-1096 Release the rear cover corner




4. Pull out on the rear corner (callout 1) of the cover, and then slide the cover as shown (callout 2) to disengage it.

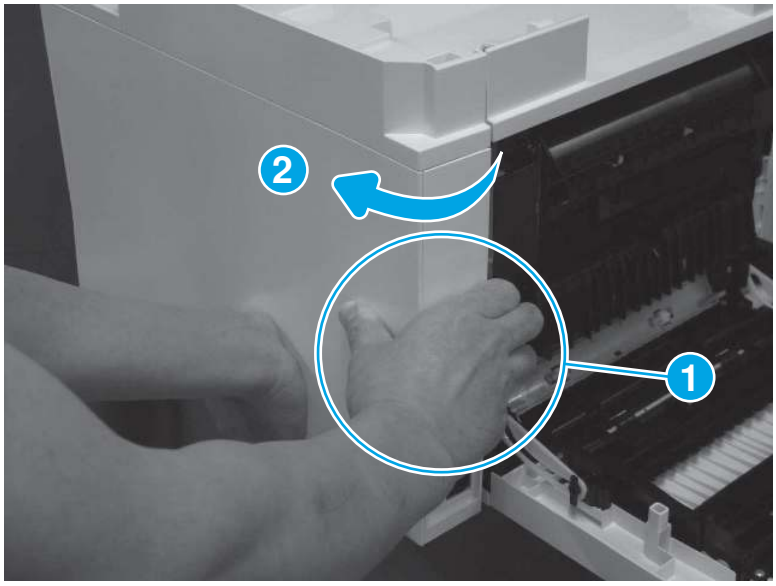Figure 4-1097 Disengage the cover corner



5. Remove the right cover (callout 1).

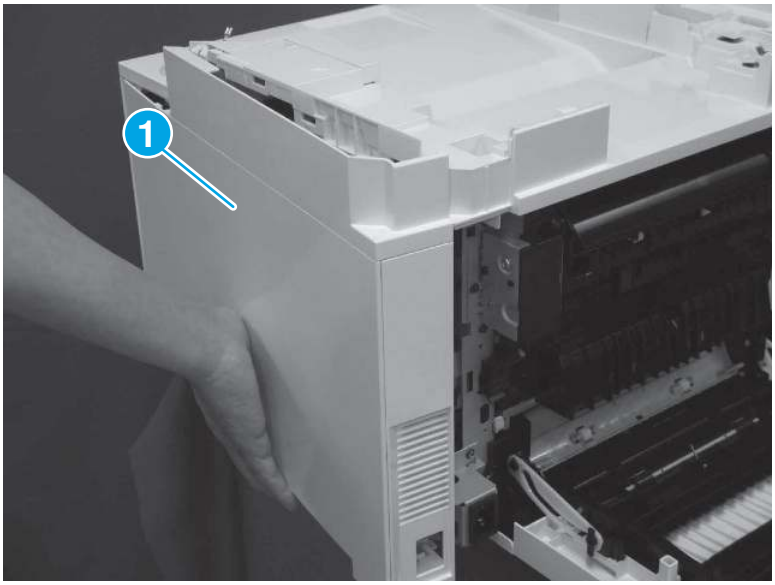Figure 4-1098 Remove the cover




7. Remove the rear door

Follow the procedure below to remove and replace the rear door.


1. Open the rear door, and then raise the secondary transfer feed assembly (callout 1) up and into the locked position.

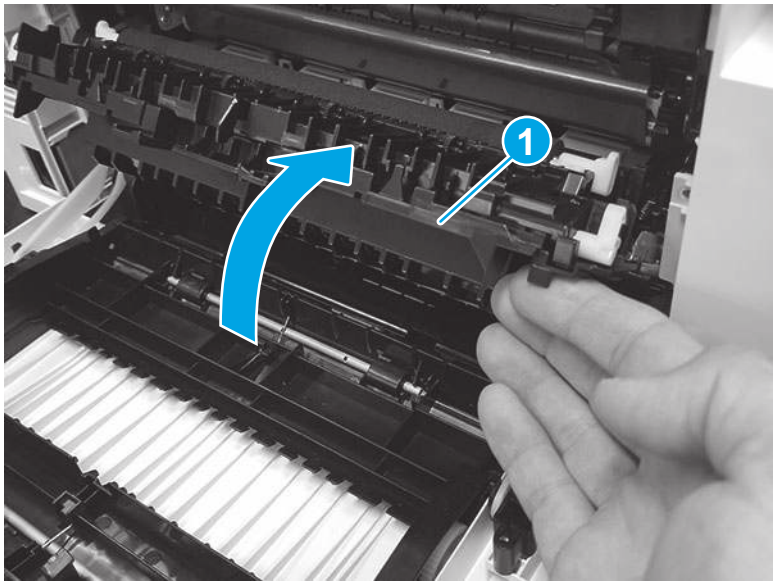Figure 4-1099 Place the T2 feed assembly in the locked position




2. Remove two screws (callout 1), and then release the left- and right-side retainer arms (callout 2)

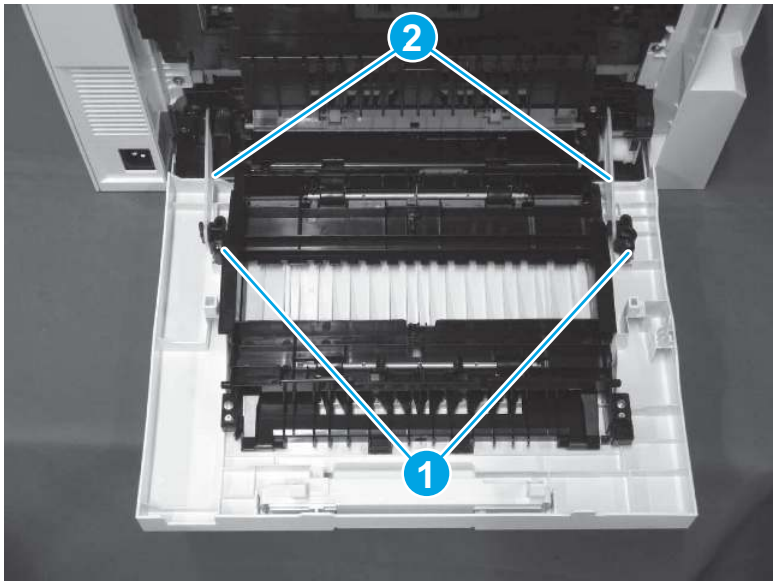Figure 4-1100 Release the retainer arms



3. Carefully position the printer at the edge of the work surface and allow the rear door to open to an angle greater than 90 degrees (callout 1). Slide the door away (callout 2) from the formatter side of the printer (callout 3) to release it, and then remove the rear door.

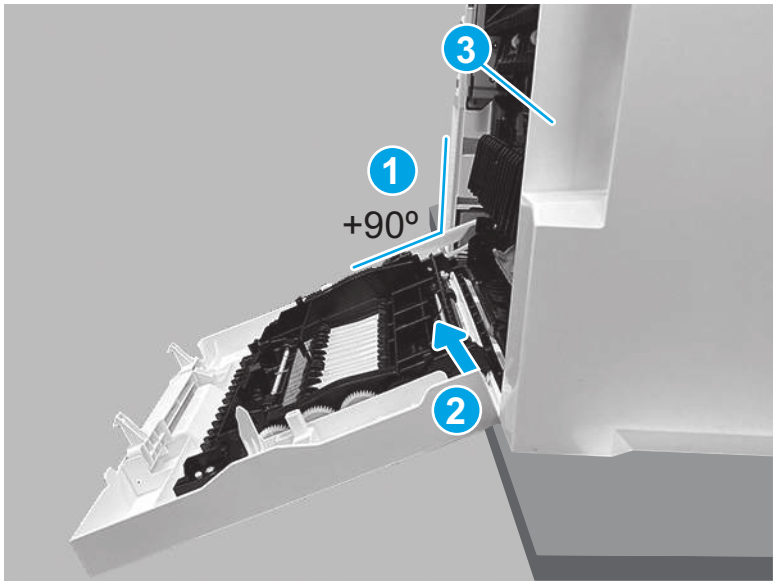Figure 4-1101 **Remove the door**




8. Remove the secondary transfer roller (T2) assembly

Follow the procedure below to remove and replace the T2 roller assembly.


1. Open the rear door, and then rotate the bushing (callout 1) in the direction shown below.

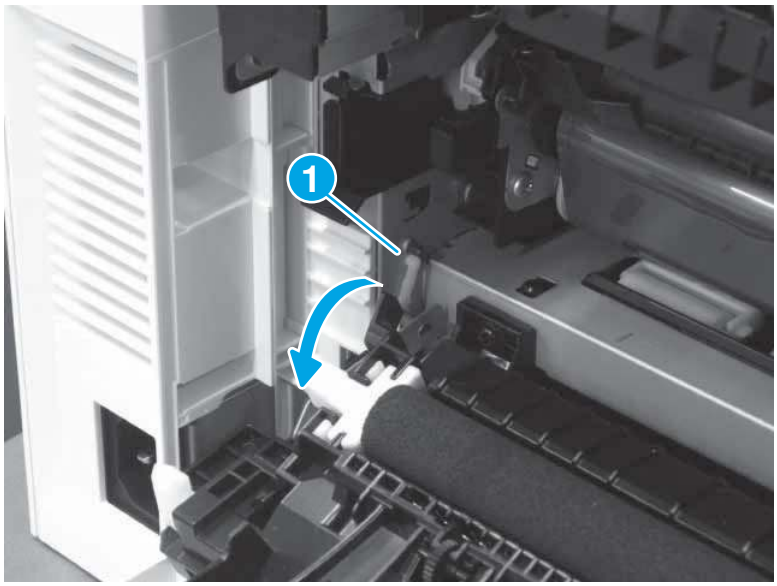Figure 4-1102 **Rotate the bushing**




2. Slide the bushing in the direction shown below.

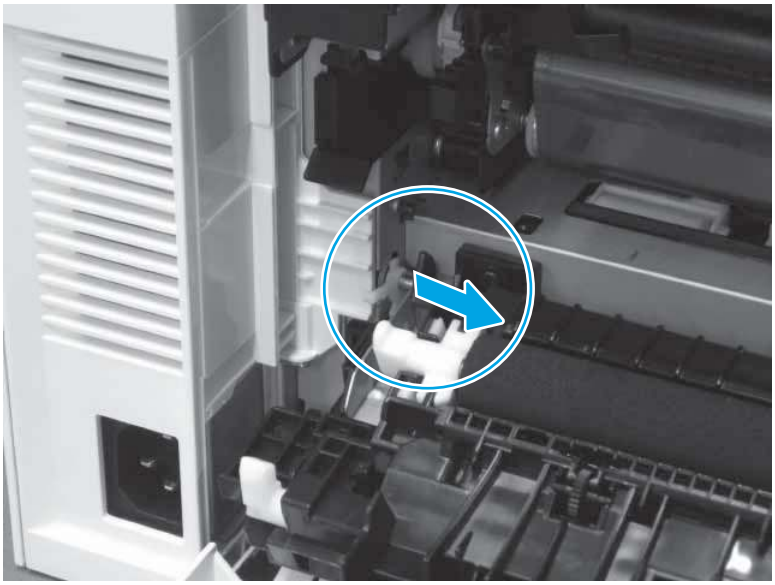Figure 4-1103 Slide the bushing




3. Slide the T2 assembly (callout 1) in the direction shown below to remove it.

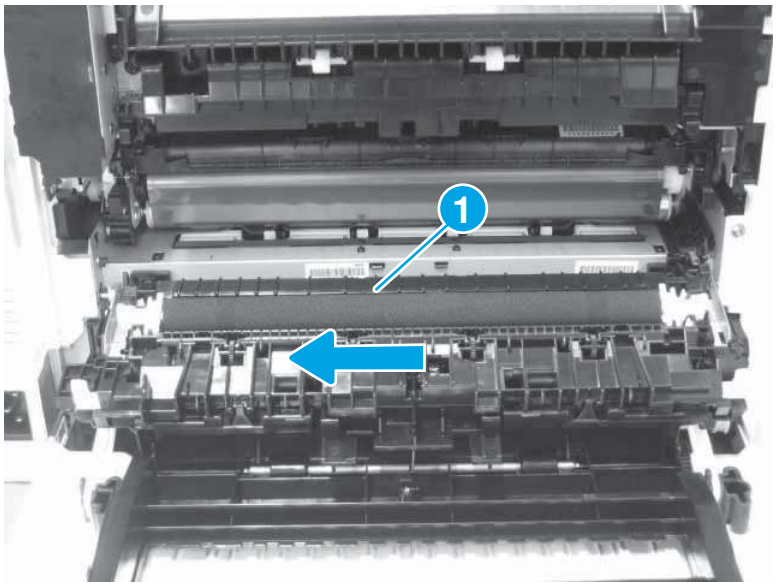Figure 4-1104 Remove the T2 assembly



4. The bushing shown in the figure below is supplied with the replacement assembly.

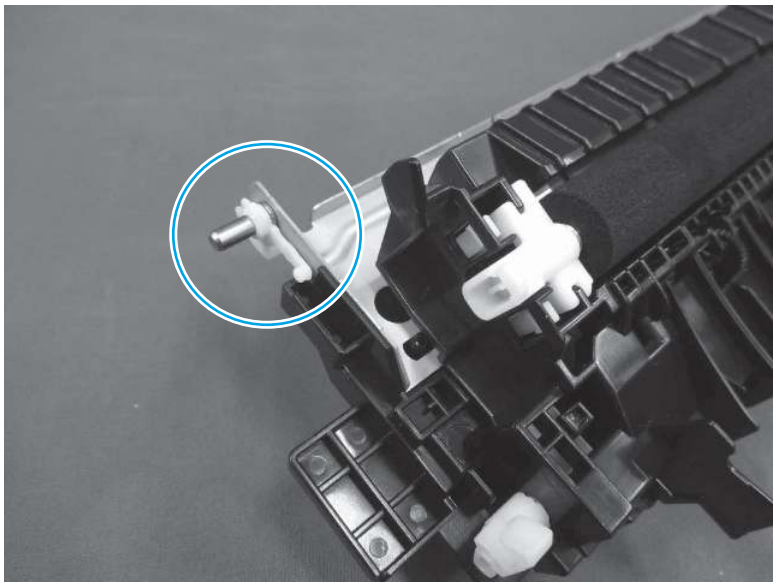Figure 4-1105 T2 assembly bushing




9. Remove the duplexing bottom cover

Follow the procedure below to remove and replace the duplexing bottom cover.

- Release two tabs (callout 1), and then remove the duplexing bottom cover (callout 2).

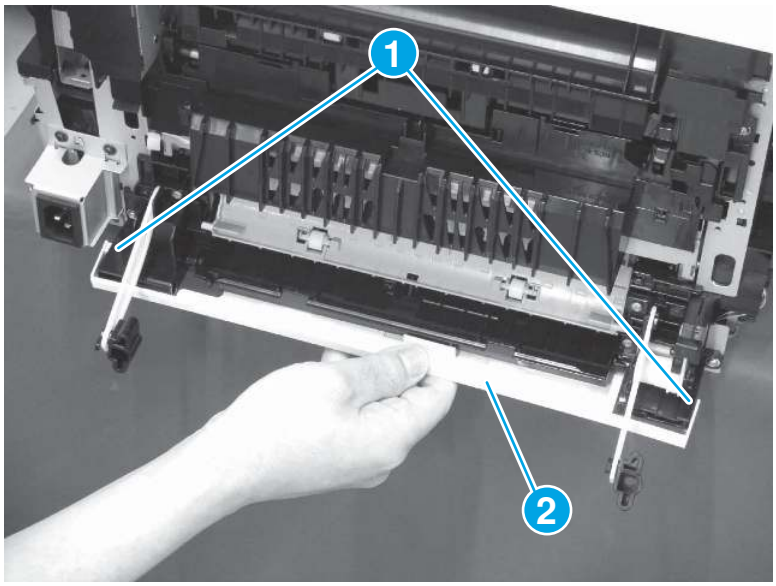Figure 4-1106 Remove the duplexing bottom cover




10. Remove the MP paper feed assembly

Follow the procedure below to remove the MP paper feed assembly.


1. Position the printer with the rear-door side down.

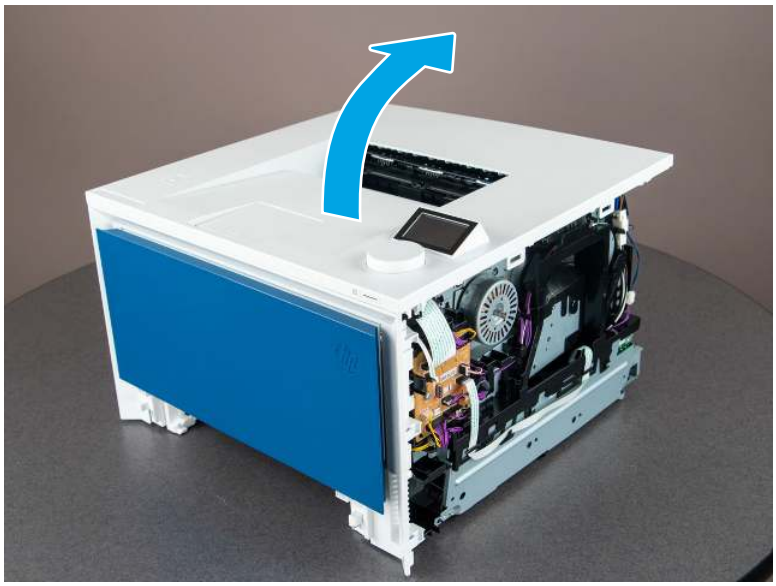Figure 4-1107 **Position the printer**



2. Press the green button to release the assembly.

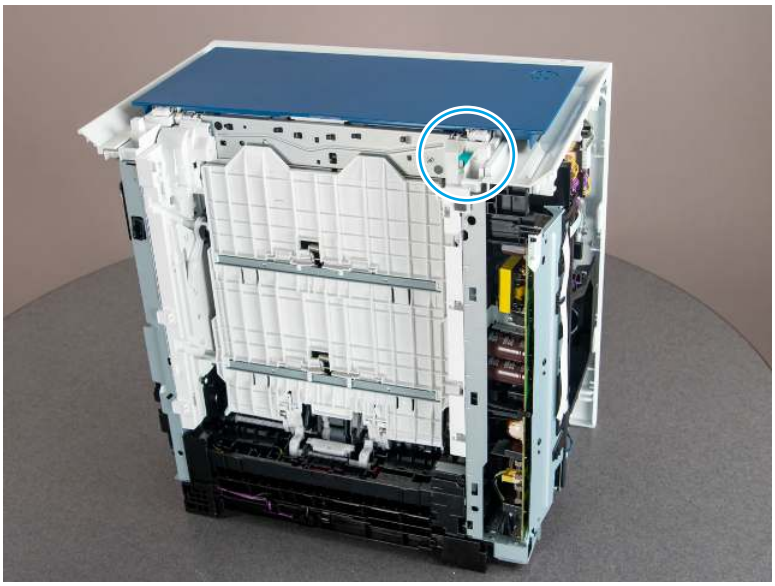
Figure 4-1108 **Release the assembly**



3. Slide the assembly up (callout 1), and then toward the right-side of the printer (callout 2) to remove it.


NOTE: There is a retainer arm (callout 3) on one of the assembly legs. Carefully disengage the retainer arm and leg when removing the assembly.

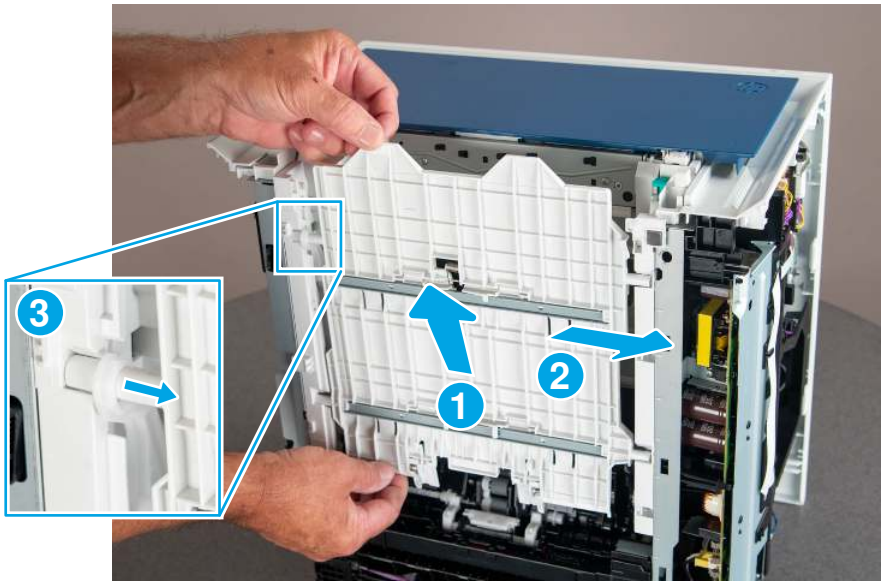Figure 4-1109 Remove the assembly



4. If the retainer arm becomes dislodged, reinstall it as shown below.

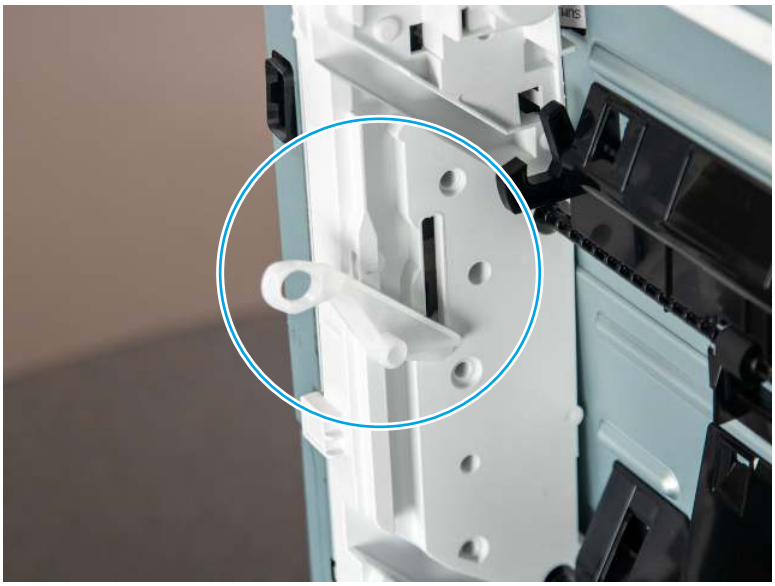Figure 4-1110 Install the retainer arm




11. Remove the low-voltage power supply (LVPS)

Follow the procedure below to remove and replace the LVPS.

⚠ CAUTION: ESD sensitive part.


1. Disconnect one flat-flexible cable (FFC; callout 1) and one connector (callout 2), and then remove one screw (callout 3).

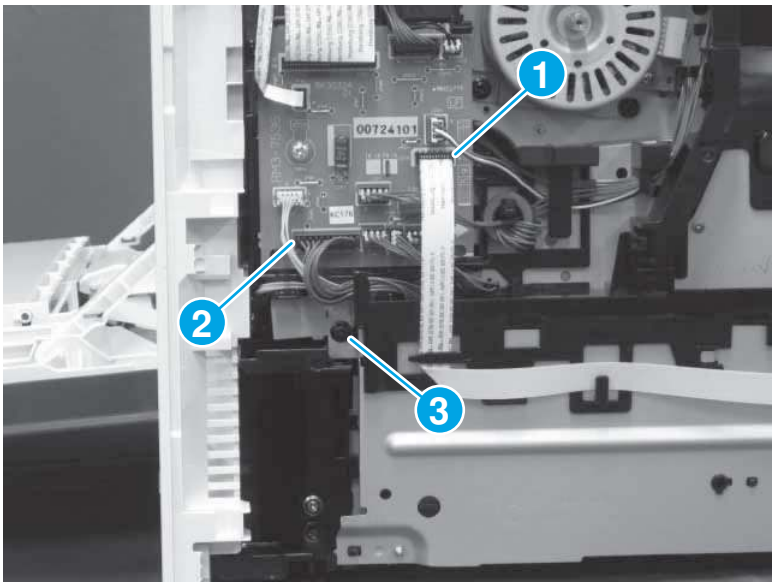Figure 4-1111 Disconnect FFC, connector, and remove one screw




2. Disconnect two connectors (callout 1), and then remove two screws (callout 2).

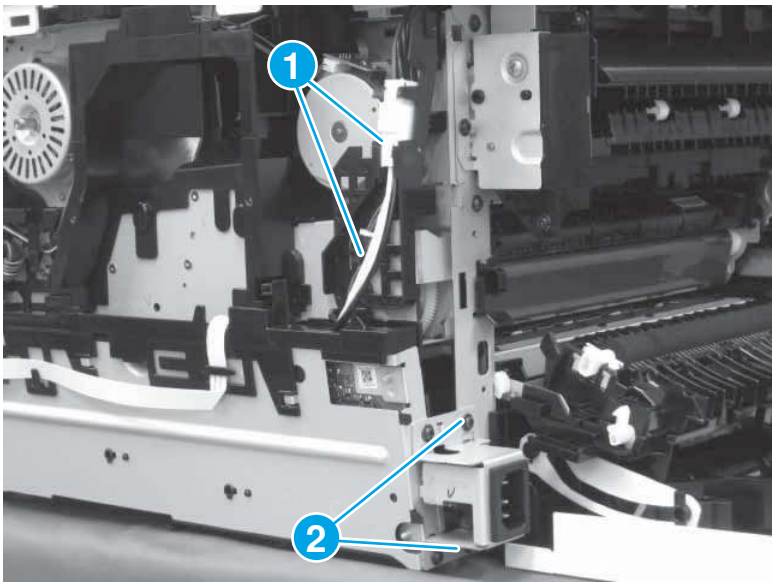Figure 4-1112 Disconnect connectors and remove screws



3. Release three tabs (callout 1), and then remove the LVPS (callout 2).

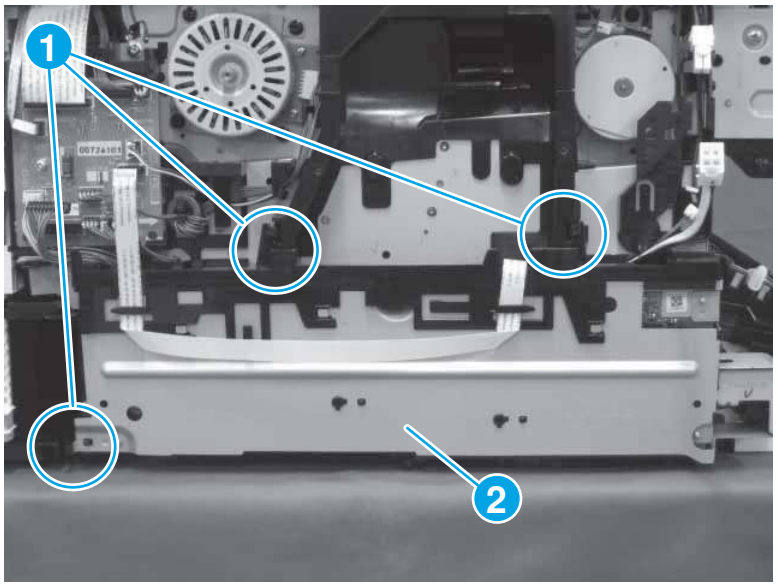Figure 4-1113 Remove the LVPS



12. Remove the duplex guide assembly


Follow the procedure below to remove and replace the duplex guide assembly.

1. Disconnect one connector (callout 1), and then release the wire harness from the retainer (callout 2).

NOTE: The correct cable to release is the purple three-wire harness.

Disconnect other connectors and release other wire harnesses as necessary.

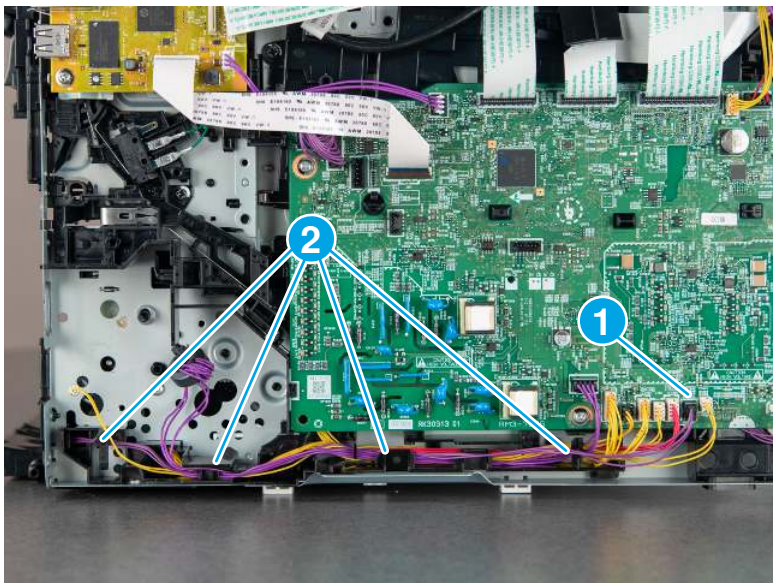Figure 4-1114 Disconnect one connector




2. Do the following:

   a. Remove one (tapping) screw (callout 1).

   b. Remove one (TP) screw (callout 2)

   c. Remove the holder (callout 3).

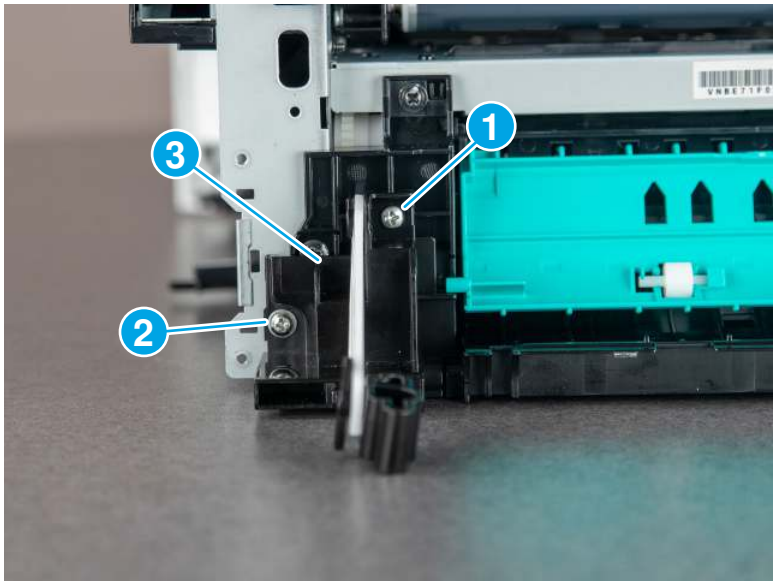Figure 4-1115 **Remove two screws and the holder**




3. Do the following:

   a. Remove two (tapping) screws (callout 1).

   b. Remove one (TP) screw (callout 2)

   c. Remove the holder (callout 3).

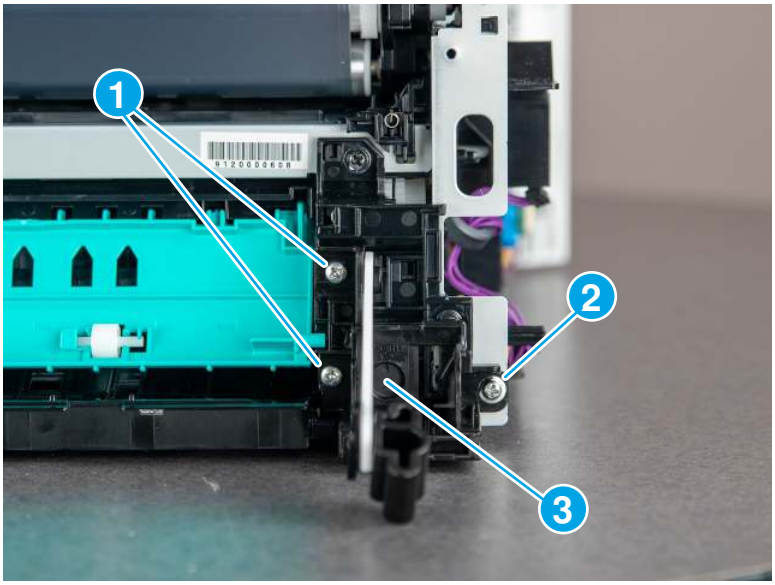
Figure 4-1116 **Remove three screws and the holder**



4. Use a small flat-blade screwdriver to release one boss at each end of the duplex guide (callout 1), and then remove the guide (callout 2).

⚠ **CAUTION:** Parts of this assembly are fragile and can easily be damaged during removal.

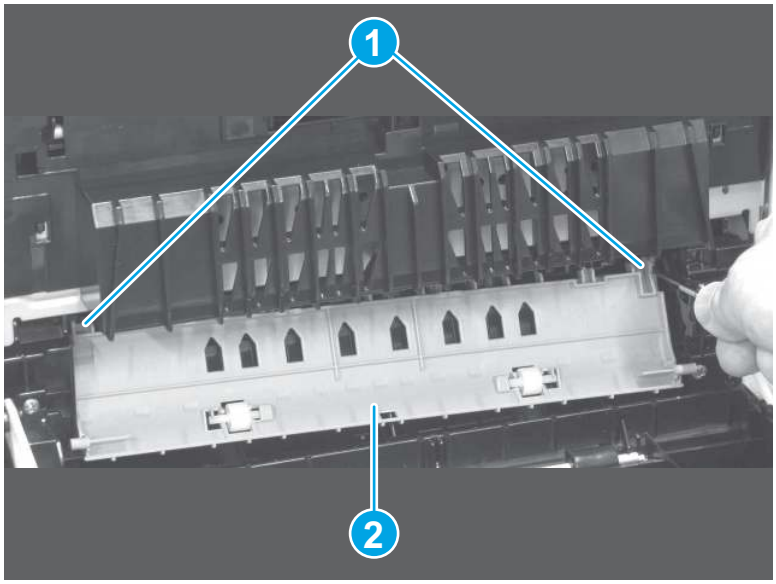
Figure 4-1117 **Remove the duplex upper guide**



5. Carefully position the printer at the edge of the work surface. Slightly pull the duplex guide assembly down to release it, and then remove the assembly.

NOTE: Pass the wire harness through the opening in the chassis as the assembly is removed (callout 1).

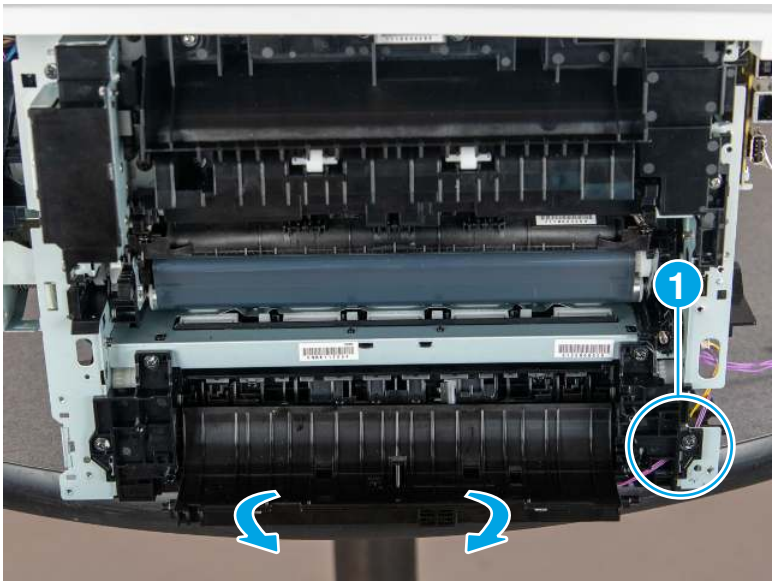Figure 4-1118 **Remove the duplex guide assembly**




13. Remove the feed lower guide assembly

Follow the procedure below to remove and replace the feed lower guide assembly.

1. Disconnect four connectors (callout 1), and then release the wire harnesses from the guide (callout 2).

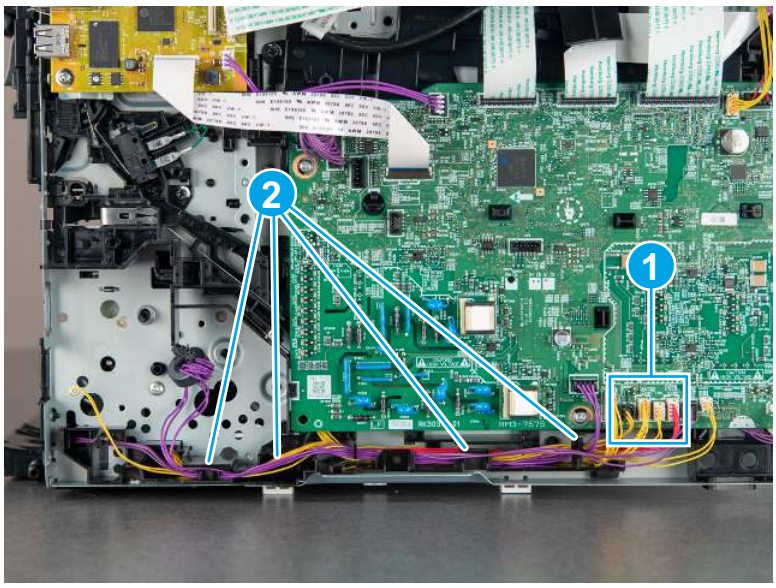
Figure 4-1119 **Disconnect connectors and release the wire harnesses**



2. Position the printer with the front-side down, release one tab (callout 1), and then remove the rubber pad (callout 2). Repeat this step for the rubber pad on the opposite side.


⚠ CAUTION: **MFP only**: The integrated scanner assembly (ISA) can suddenly open when the printer is place in any postilion other than top-side up. Secure the ISA when repositioning the printer.

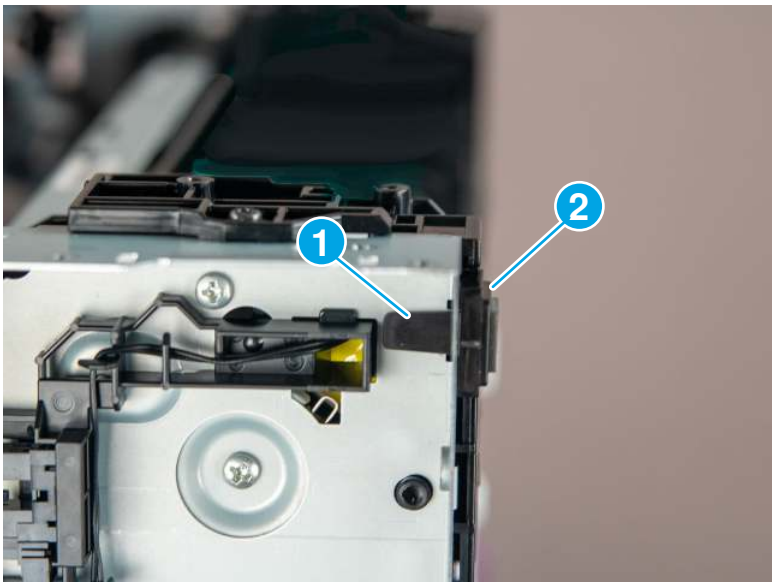Figure 4-1120 **Remove the pad**



3. Position the printer with the top-side up (normal position), and then remove four screws.

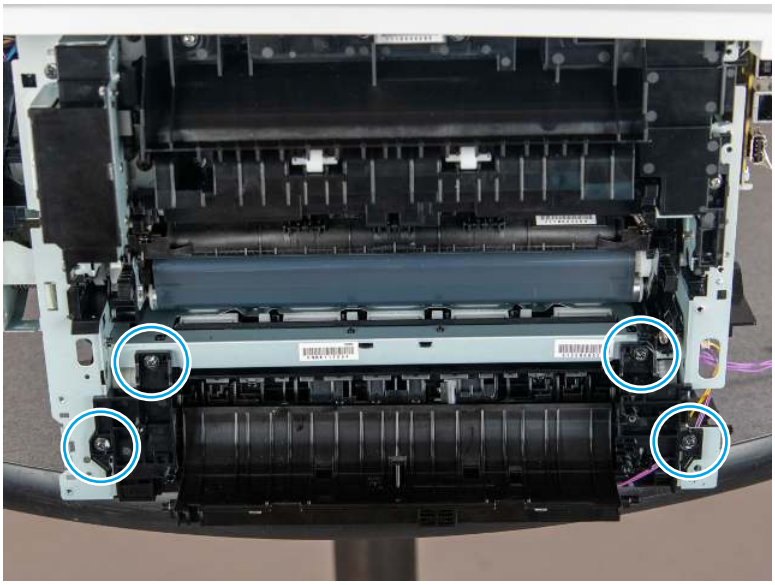Figure 4-1121 Remove four screws



4. Use a small flat-blade screwdriver to release two bosses (callout 1).


Figure 4-1122 Release two bosses



5. Carefully position the printer at the edge of the work surface. Slightly pull down on the assembly to release it, and then remove the feed lower guide assembly (callout 1).

NOTE: Carefully pull the wire harness through the opening in the chassis (callout 2) while removing the assembly.

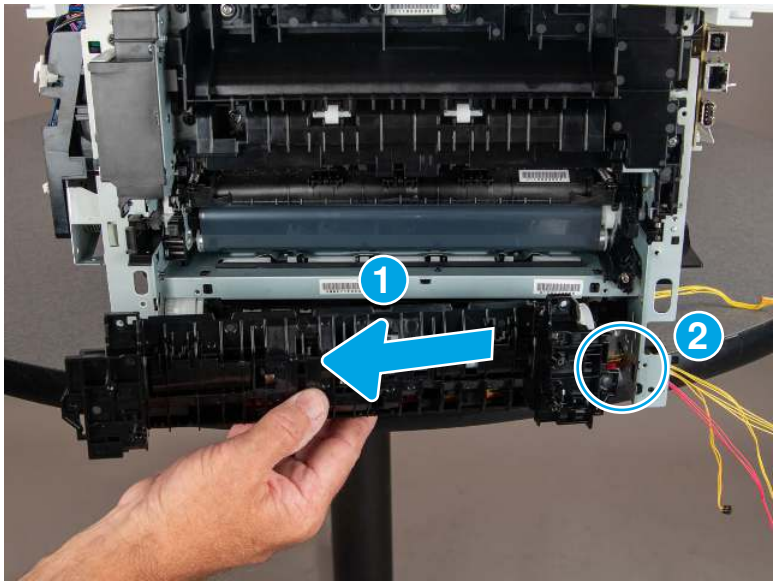Figure 4-1123 Remove the feed lower guide assembly




14. Remove the lifter drive assembly

Follow the procedure below to remove and replace the lifter drive assembly.


1. Release two tabs (callout 1), and the remove the cover (callout 2).

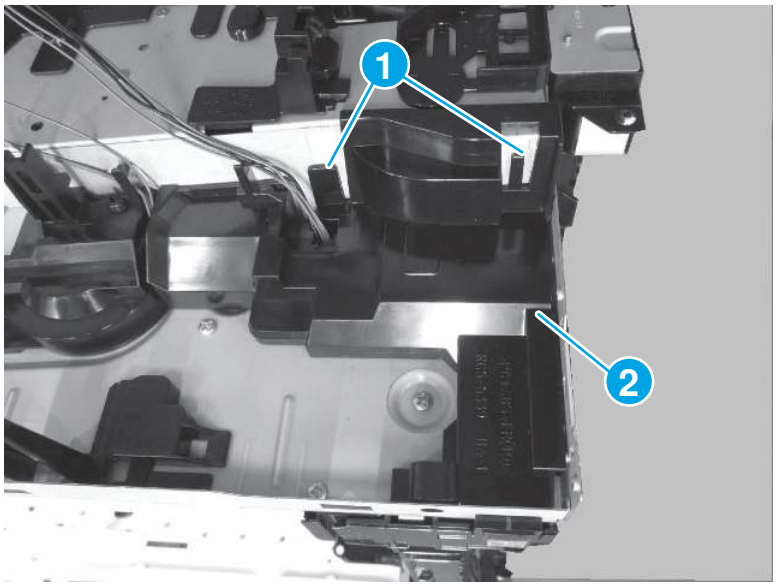Figure 4-1124 Remove the cover




2. Disconnect one connector (callout 1), and then release the wire harness from the retainers (callout 2).

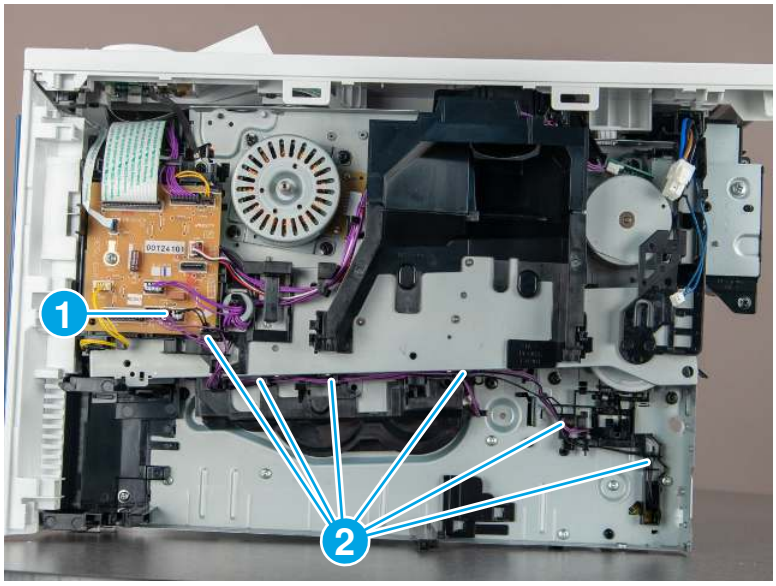Figure 4-1125 Disconnect one connector



3. Remove three screws.

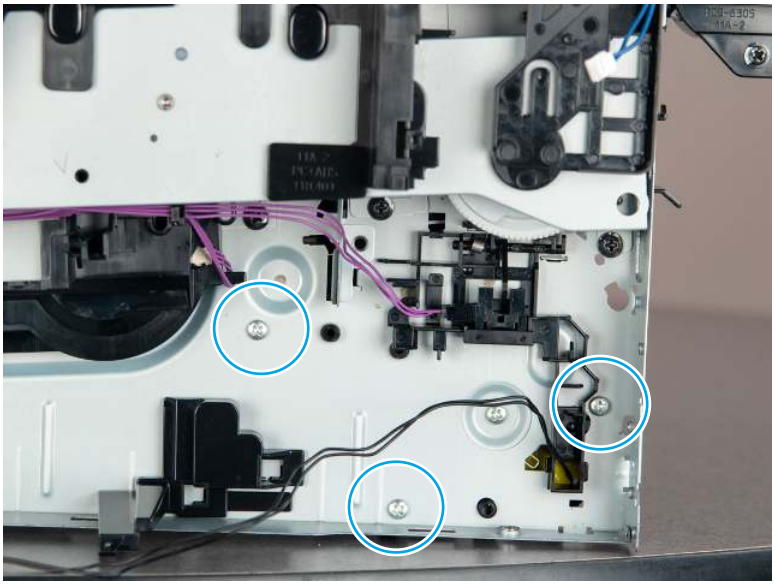
Figure 4-1126 Remove three screws



4. Position the printer with the front-side down, and then release one tab.

⚠ CAUTION: **MFP only**: The integrated scanner assembly (ISA) can suddenly open when the printer is place in any postilion other than top-side up. Secure the ISA when repositioning the printer.

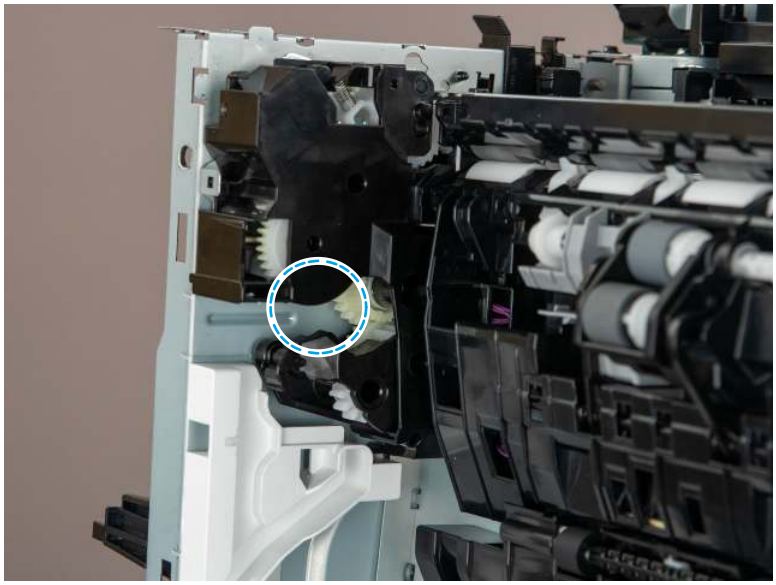
Figure 4-1127 Release one tab



5. Remove the lifter drive assembly.

NOTE: Carefully pull the wire harness through the opening in the chassis while removing the assembly.

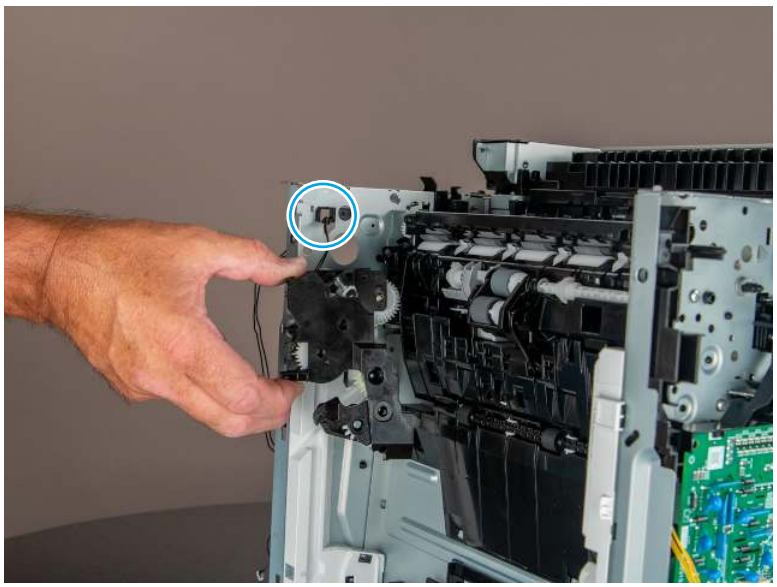Figure 4-1128 Remove the lifter drive assembly




15. Remove the feed upper guide assembly

Follow the procedure below to remove and replace the feed upper guide assembly.

1. Disconnect one connector (callout 1), and then release the wire harness from the retainer (callout 2).

NOTE: The wire harness will not be removed with the assembly. However, it does need to be disconnected and released to provide sufficient slack to separate the assembly from the printer.

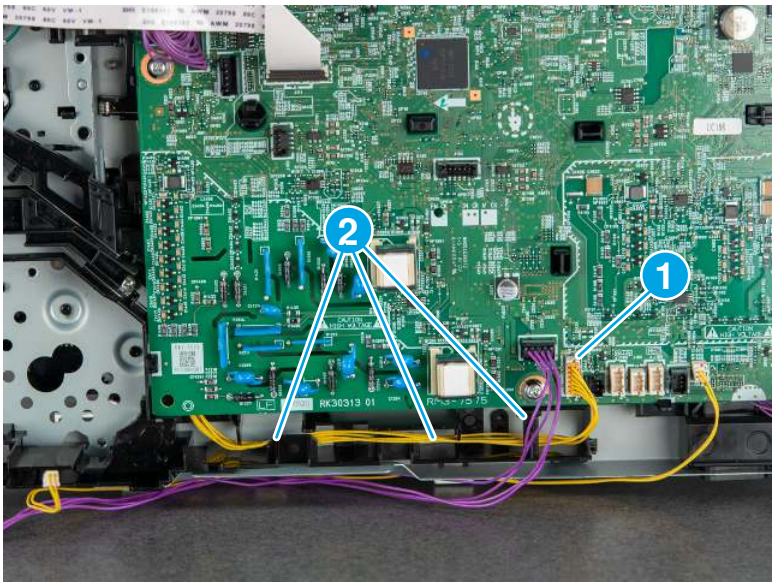
Figure 4-1129 Disconnect one connector



2. Position the printer with the front-side down. Release one tab (callout 1), and then slide the guide (callout 2) and the roller (callout 3) together as shown below to release them.

CAUTION: **MFP only**: The integrated scanner assembly (ISA) can suddenly open when the printer is place in any postilion other than top-side up. Secure the ISA when repositioning the printer.

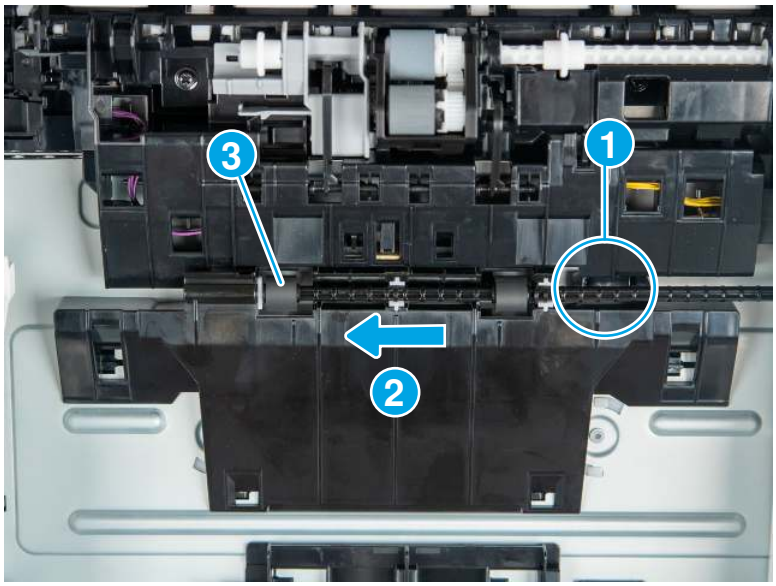
Figure 4-1130 Release the guide and roller



3. Remove the guide and roller assembly.


NOTE: The roller and shaft are not captive on the guide and can easily be dislodged.

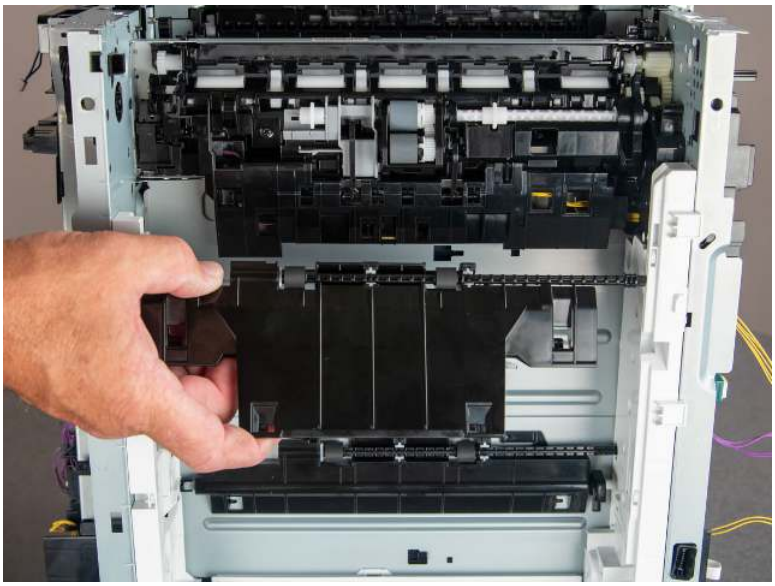Figure 4-1131 Remove the guide and roller



4. Remove two screws (callout 1), and then release four bosses (callout 2).

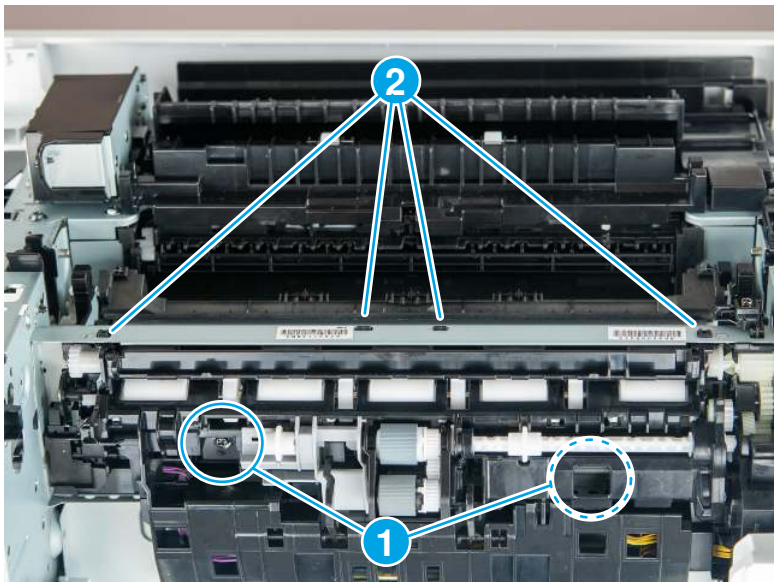
Figure 4-1132 Remove screws and release bosses



5. Separate the assembly from the printer, disconnect one connector (callout 1), and then release the wire harness from the retainers (callout 2).


⚠ CAUTION: Do not attempt to completely remove the assembly. It is still attached to the printer by a wire harness.

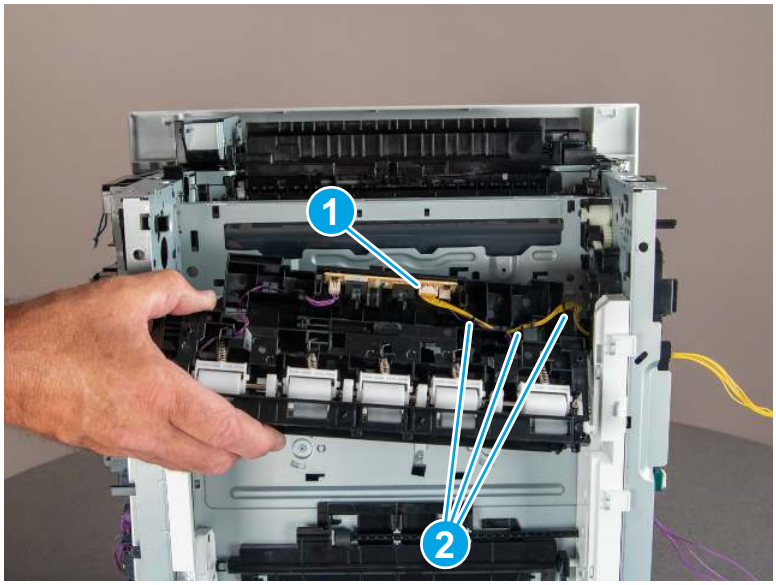Figure 4-1133 Disconnect one connector



6. Remove the feed upper guide assembly.

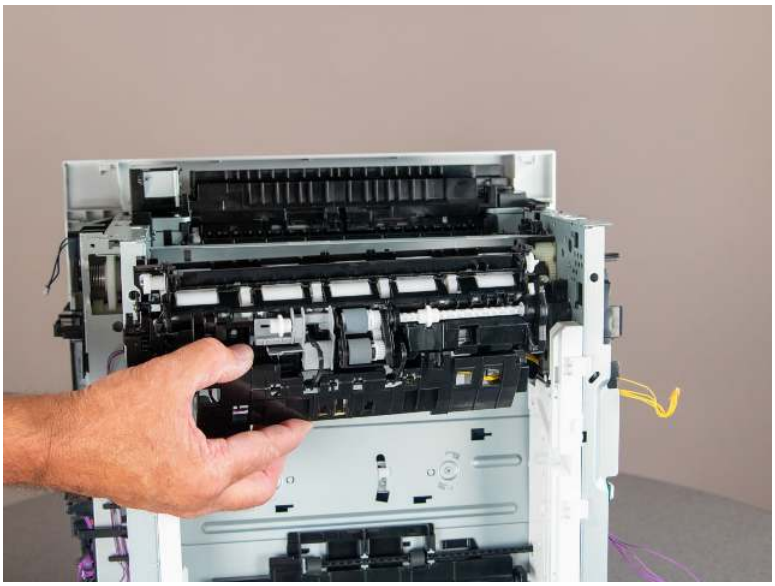Figure 4-1134 Remove the feed upper guide assembly




16. Remove the pickup drive assembly

Follow the procedure below to remove and replace the pickup drive assembly.

1. Remove two screws.

NOTE: Use a #1 Phillips screwdriver with a magnetic tip to remove one screw (callout 1). Use a pair of needle-nose pliers to remove this screw from behind the guide.

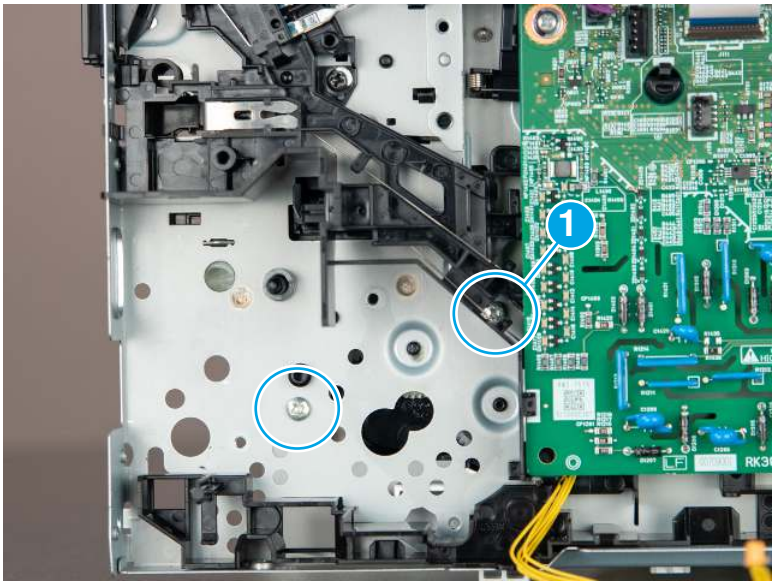
Figure 4-1135 Remove two screws



2. Remove the pickup drive assembly.

⚠ CAUTION: The gears on the back-side of the assembly are not captive and can be easily dislodged.

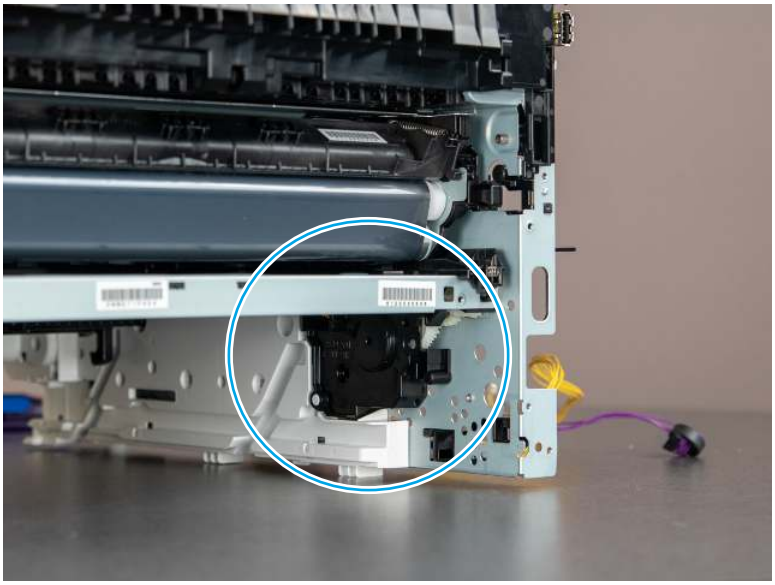Figure 4-1136 Remove the pickup drive assembly



17. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.


18. Special installation instructions - Feed upper guide assembly

Follow the special instructions below to install the feed upper guide assembly.

NOTE: The printer is shown upside down in the figure below for clarity.

- When the assembly is installed, make sure to match the engagement portion of the gear (callout 1) on the printer with the gear (callout 2) of the feed upper guide assembly.

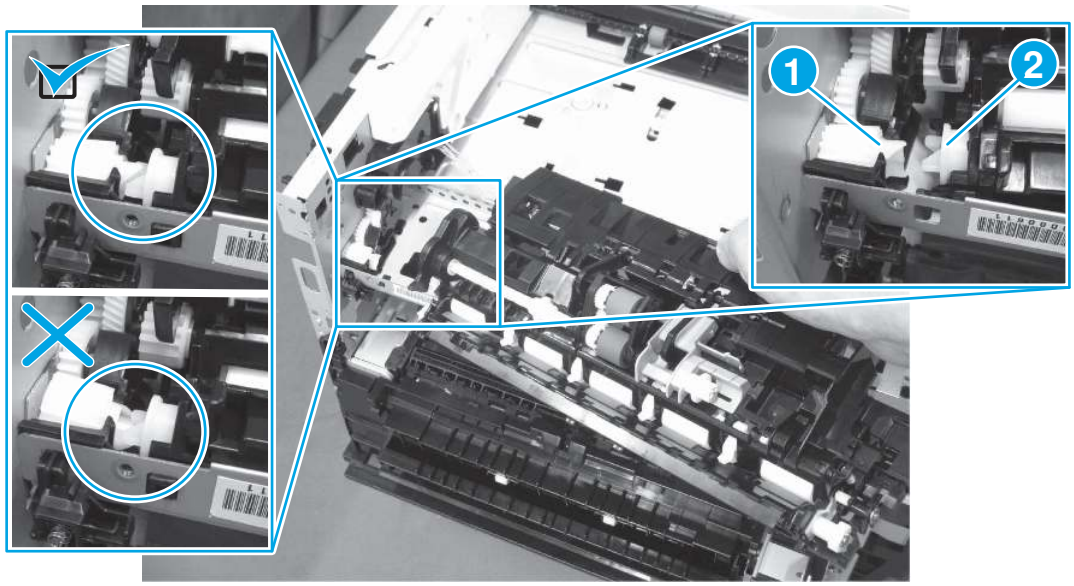Figure 4-1137 **Install the feed upper guide assembly**




19. Special installation instructions - Feed lower guide assembly

Follow the special instructions below to install the feed lower guide assembly.

NOTE: The printer is shown upside down in the figure below for clarity.

- When the assembly is installed, make sure that the link arm (callout 1) on the printer is correctly inserted in the gear (callout 2) of the feed lower guide assembly.

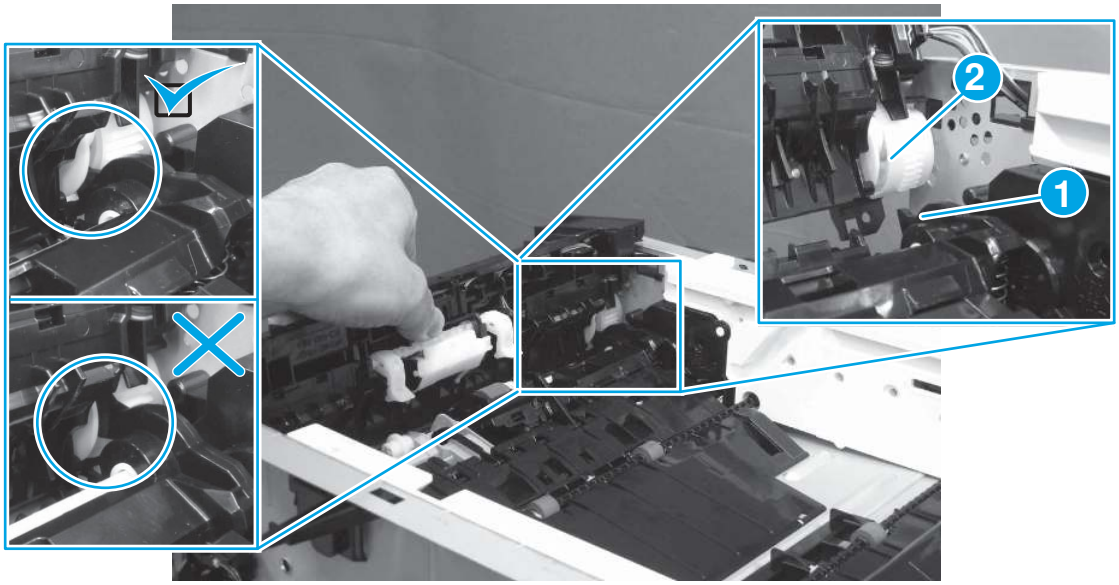Figure 4-1138 **Install the feed lower guide assembly**




20. Special installation instructions - Low-voltage power supply (LVPS)

Follow the special instructions below to install a replacement LVPS.

CAUTION: ESD sensitive part.


1. When the LVPS is installed, make sure that the sheet-metal tab (callout 1) near the power receptacle is inserted in the slot (callout 2) in the chassis.

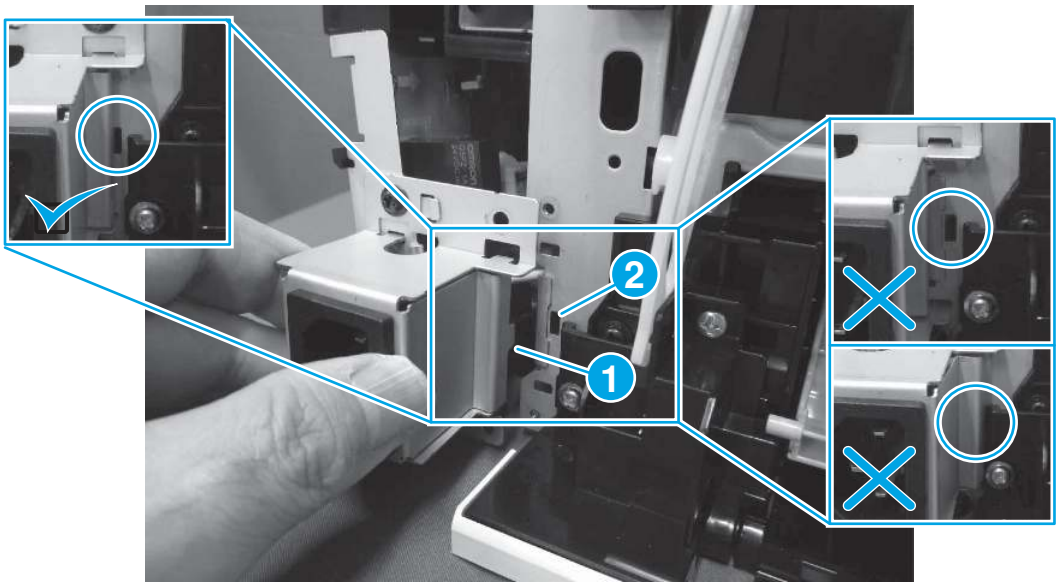Figure 4-1139 Install the LVPS tab



2. Make sure that the fuser temperature fuse cable (callout 1) is positioned behind the thick cable (callout 2). This prevents the fuser cable from unnecessary movement.

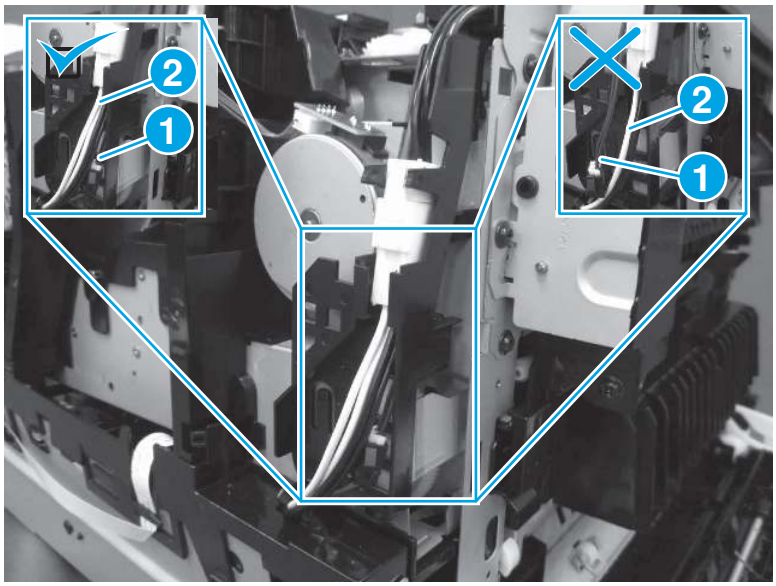Figure 4-1140 Check the fuser temperature fuse cable



Input device - 550-sheet paper feeder

Learn how to remove and replace the 550-sheet paper feeder parts and assemblies.

Field-replaceable units (FRUs)

Learn about FRU parts removal and replacement.

Covers, panels, and doors

Learn about covers, panels, and doors removal and replacement.

Removal and replacement: Right cover (550-sheet paper feeder)

Learn about right cover removal (550-sheet paper feeder).

Mean time to repair: 3 minutes

Service level: Easy

Before performing service

Turn the printer power off

- Disconnect the power cable.

> ⚠ **WARNING!** To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-52 Part information

Part number	Part description
RM2-2771-000CN	Right cover assembly

Required tools

- #2 Phillips screwdriver with a magnetic tip and a 152 mm (6 in) shaft length

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test


No post service test is available for this assembly.

1. Remove the right cover (550-sheet paper feeder)

Follow the procedure below to remove and replace the right cover (550-sheet paper feeder).


1. Remove one screw (callout 1).

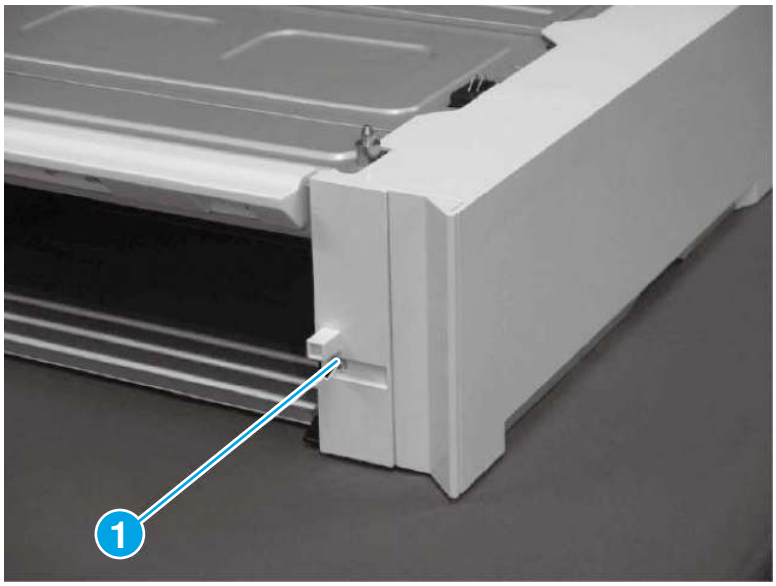Figure 4-1141 Remove one screw



2. Before proceeding, take note of the location of the mounting tabs (callout 1) and bosses (callout 2) on the inside of the cover.

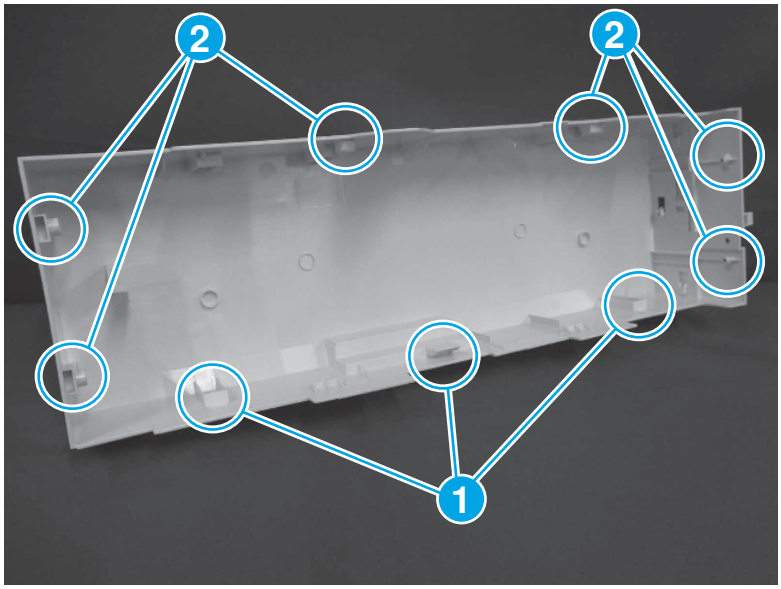
Figure 4-1142 Location of the mounting tabs and bosses



3. Release three tabs (callout 1), release six bosses (callout 2), and then remove the right cover (callout 3).

TIP: It might be easier to remove the cover if the top front boss is released first.

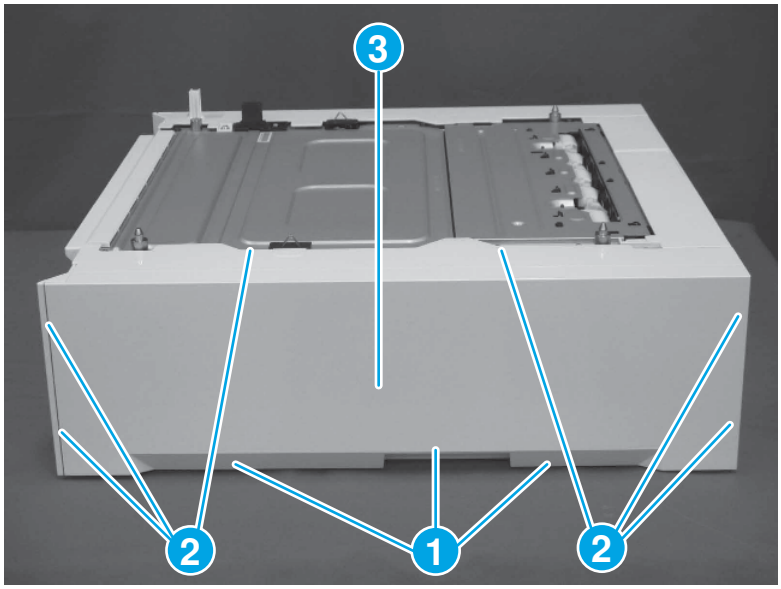Figure 4-1143 Remove the right cover



2. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.

Removal and replacement: Left cover (550-sheet paper feeder)

Learn about left cover removal (550-sheet paper feeder).

Mean time to repair: 3 minutes

Service level: Easy

Before performing service

Turn the printer power off

- Disconnect the power cable.

WARNING! To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-53 Part information

Part number	Part description
RM2-2770-000CN	Left cover assembly

Required tools

- #2 Phillips screwdriver with a magnetic tip and a 152 mm (6 in) shaft length

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test


No post service test is available for this assembly.

1. Remove the left cover (550-sheet paper feeder)

Follow the procedure below to remove and replace the left cover (550-sheet paper feeder).


1. Remove two screws (callout 1).

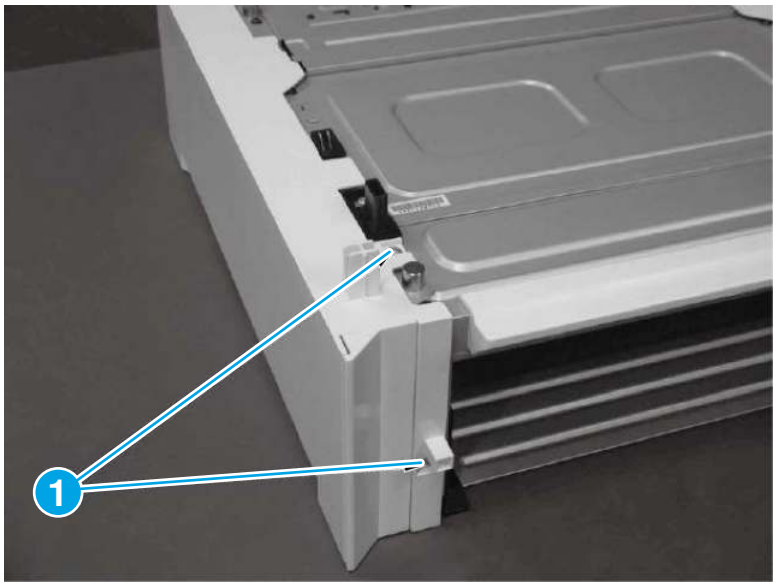Figure 4-1144 Remove two screws




2. Before proceeding, take note of the location of the mounting tabs (callout 1) and bosses (callout 2) on the inside of the cover.

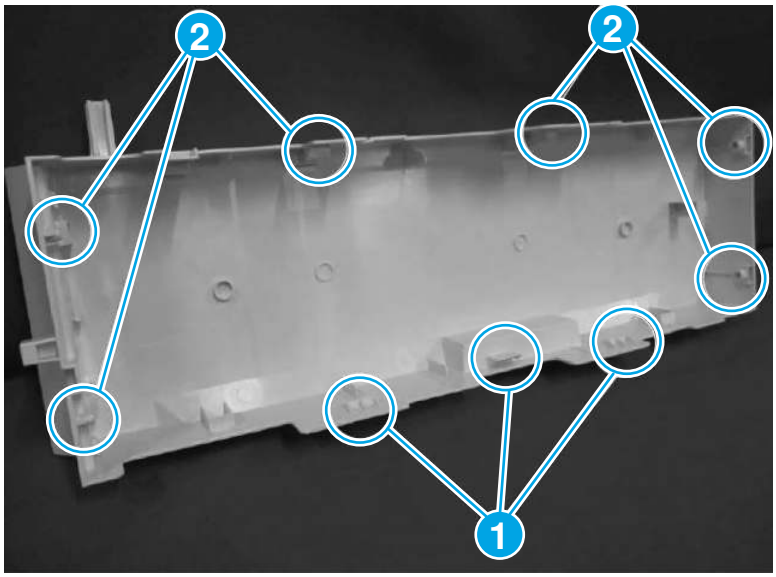Figure 4-1145 Location of the mounting tabs and bosses



3. Release three tabs (callout 1), release six bosses (callout 2), and then remove the left cover (callout 3).

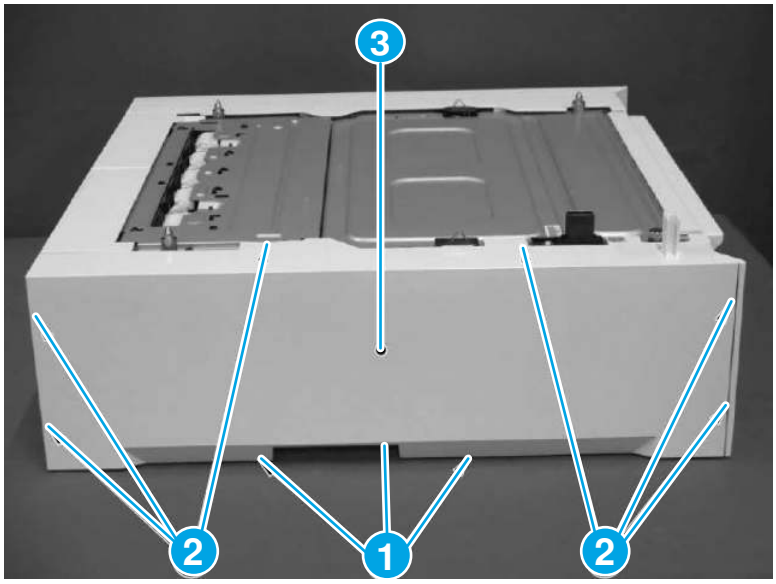Figure 4-1146 Remove the left cover



2. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.

Removal and replacement: Rear cover (550-sheet paper feeder)

Learn about rear cover removal (550-sheet paper feeder).

Mean time to repair: 7 minutes

Service level: Easy

Before performing service

Turn the printer power off

- Disconnect the power cable.

WARNING! To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-54 Part information

Part number	Part description
RC5-6741-000CN	Cover, rear

Required tools

- #2 Phillips screwdriver with a magnetic tip and a 152 mm (6 in) shaft length

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test


No post service test is available for this assembly.

1. Remove the right cover (550-sheet paper feeder)

Follow the procedure below to remove and replace the right cover (550-sheet paper feeder).


1. Remove one screw (callout 1).

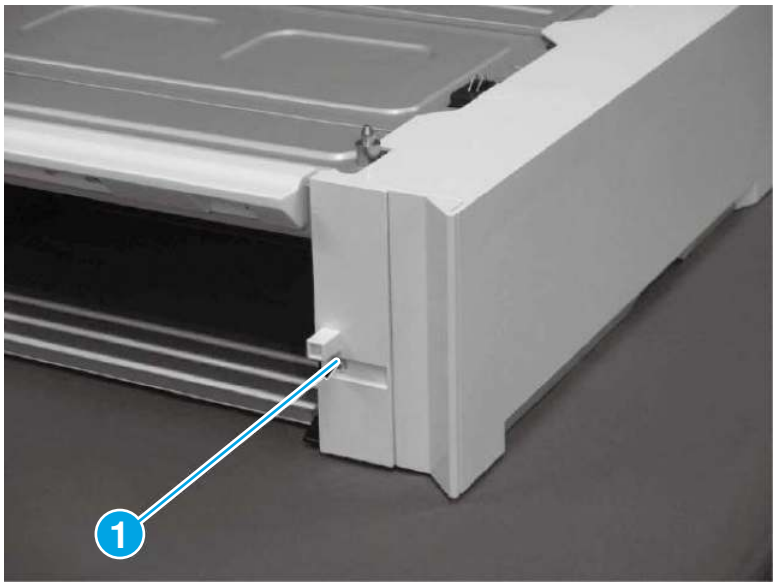Figure 4-1147 Remove one screw



2. Before proceeding, take note of the location of the mounting tabs (callout 1) and bosses (callout 2) on the inside of the cover.

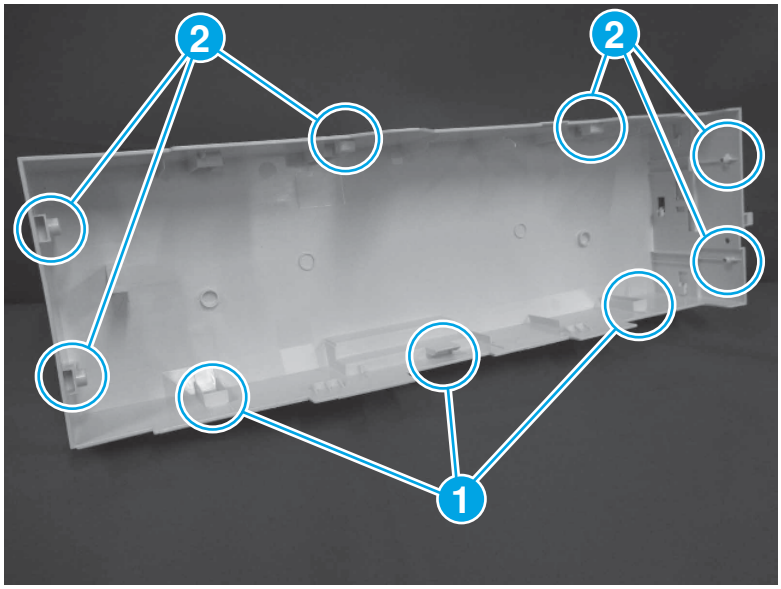
Figure 4-1148 Location of the mounting tabs and bosses



3. Release three tabs (callout 1), release six bosses (callout 2), and then remove the right cover (callout 3).

TIP: It might be easier to remove the cover if the top front boss is released first.

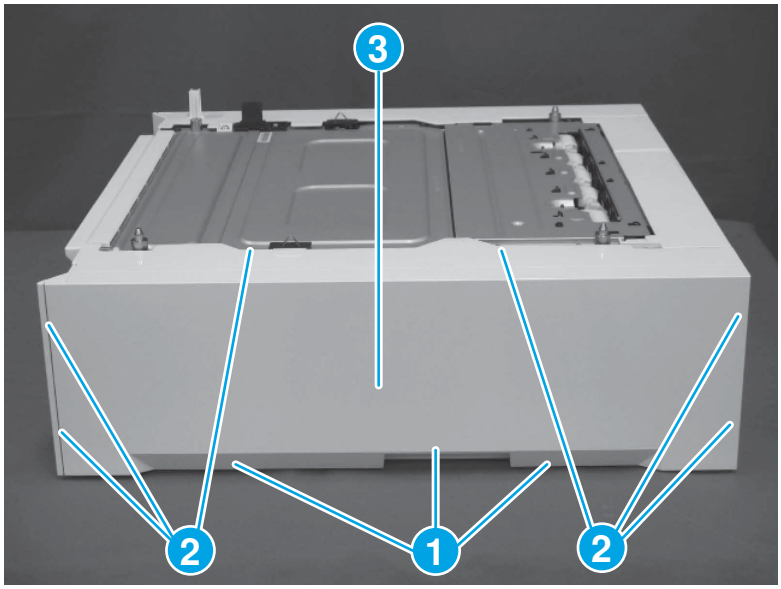Figure 4-1149 Remove the right cover




2. Remove the left cover (550-sheet paper feeder)

Follow the procedure below to remove and replace the left cover (550-sheet paper feeder).


1. Remove two screws (callout 1).

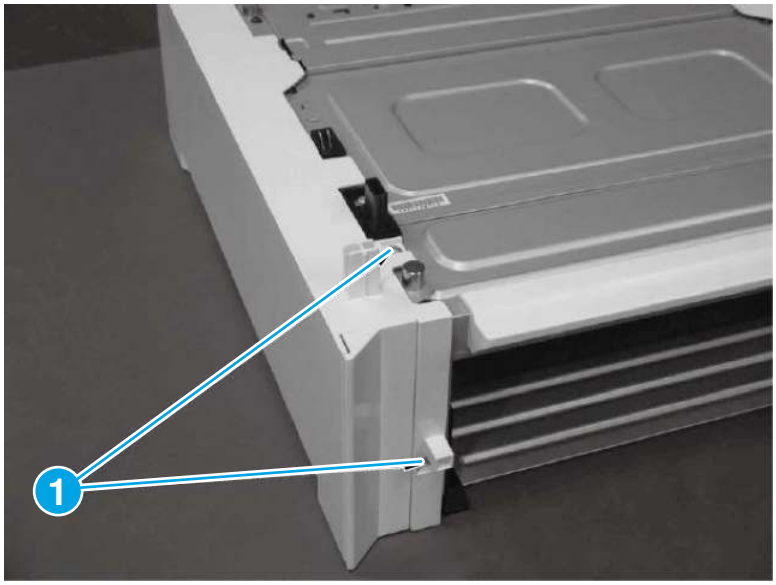Figure 4-1150 Remove two screws




2. Before proceeding, take note of the location of the mounting tabs (callout 1) and bosses (callout 2) on the inside of the cover.

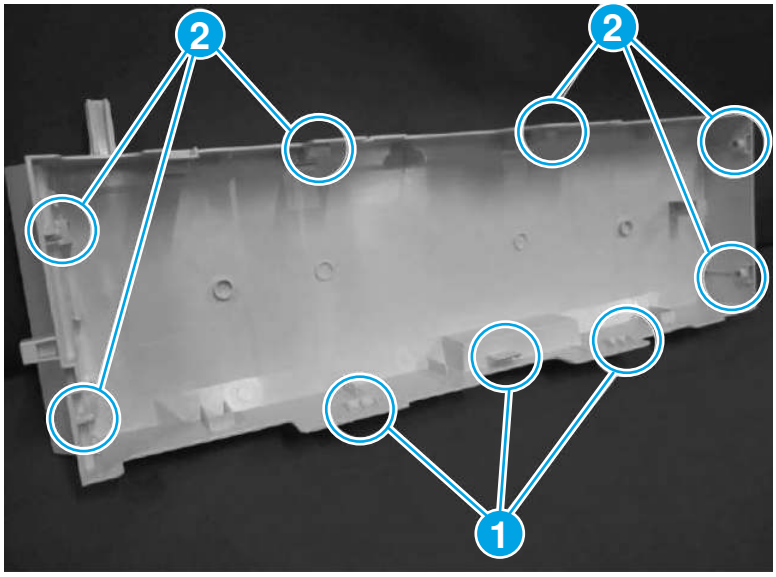Figure 4-1151 Location of the mounting tabs and bosses



3. Release three tabs (callout 1), release six bosses (callout 2), and then remove the left cover (callout 3).

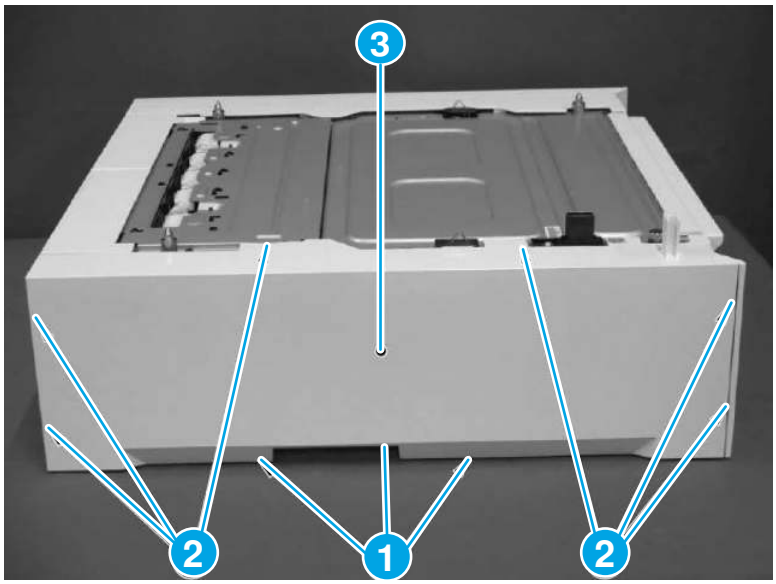Figure 4-1152 Remove the left cover




3. Remove the rear cover (550-sheet paper feeder)

Follow the procedure below to remove and replace the rear cover (550-sheet paper feeder).

1. Before proceeding, take note of the location of the mounting tabs (callout 1) on the inside of the cover.

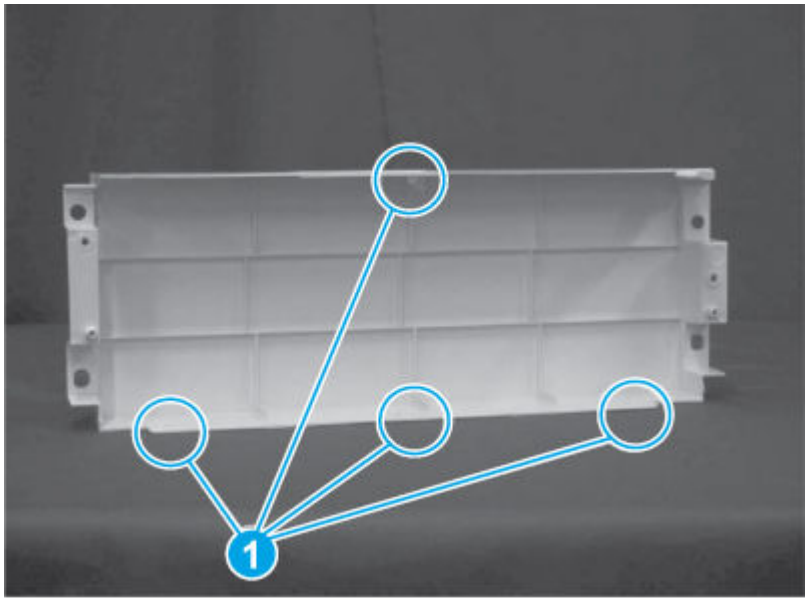
Figure 4-1153 Location of the mounting tabs



2. Remove two screws (callout 1), release four tabs (callout 2), and then remove the rear cover (callout 3).

TIP: It might be easier to remove the cover if the bottom tabs are released first.

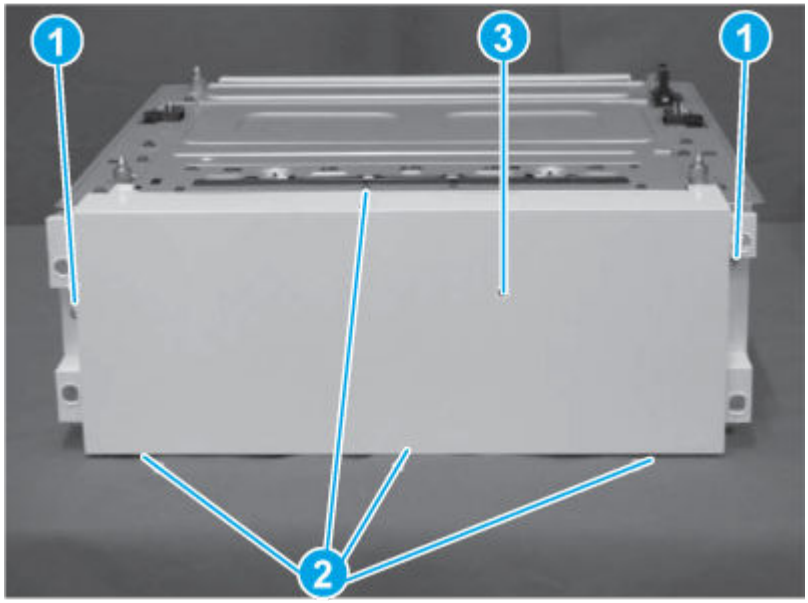Figure 4-1154 Remove the rear cover



4. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: 

Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.

Internal parts and assemblies

Learn how to remove and replace the printer internal parts and assemblies.

Removal and replacement: Tray 3 pickup and feed rollers (550-sheet paper feeder)

Learn about Tray 3 pickup and feed rollers assembly removal.

Mean time to repair: 2 minutes

Service level: Easy

Before performing service

Turn the printer power off

- Disconnect the power cable.

WARNING! To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-55 Part information

Part number	Part description
RM2-2695-000CN	Paper pickup roller assembly NOTE: The pickup and feed rollers are identical parts. To replace both rollers, order a quantity of two using the part number in this table.

Required tools

- No special tools are required to remove or install this assembly.

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test


Print any pages necessary to make sure the printer is functioning correctly.

1. Remove the Tray 3 pickup and feed rollers

Follow the procedure below to remove and replace the Tray 3 pickup and feed rollers.


1. Turn the paper feeder over to gain access to the roller assembly.
2. Use a small flat-blade screwdriver to release two tabs (callout 1), and then remove the cover (callout 2).

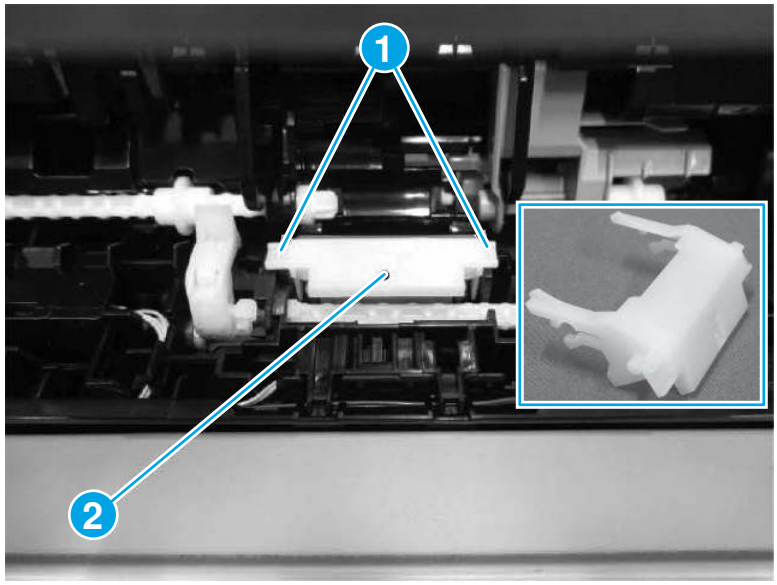Figure 4-1155 Remove the cover



3. Push the lever (callout 1) and move the holder (callout 2) as shown below, and then remove the pickup/feed roller assembly (callout 3).

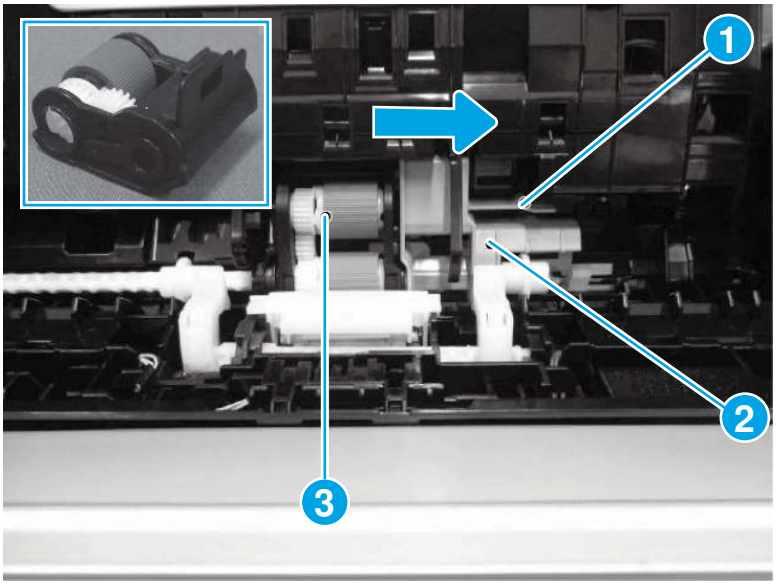Figure 4-1156 Remove the roller assembly




4. Do the following:

   a. Rotate the retainer (callout 1) as shown below to remove it.

   b. Remove the pickup roller (callout 2) and the feed roller (callout 3) from the holder (callout 4).

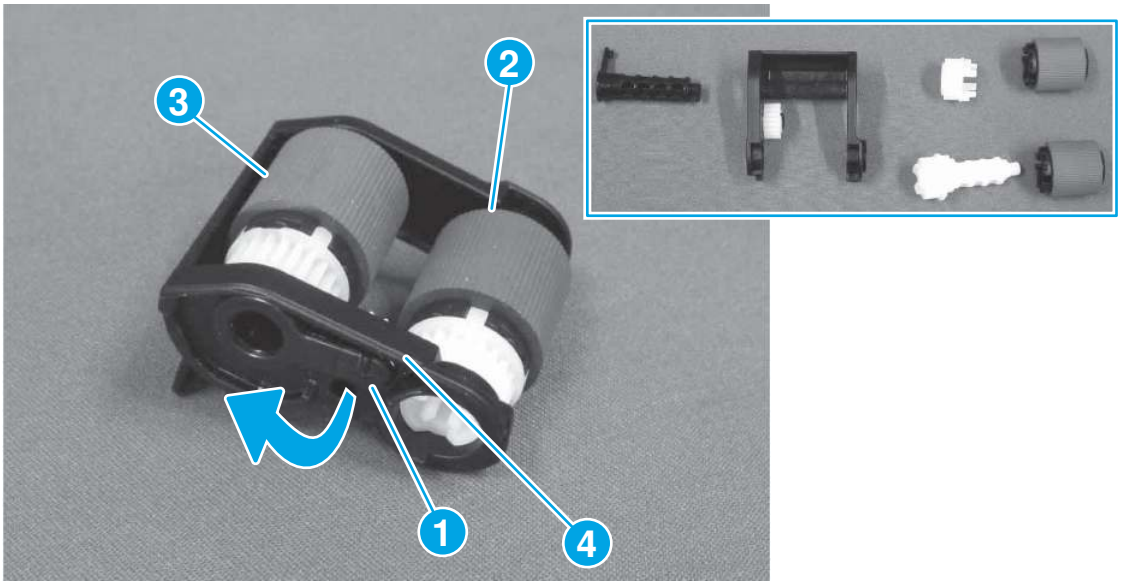Figure 4-1157 Remove the rollers



2. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: 

Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.

Removal and replacement: Tray 3 separation roller (550-sheet paper feeder)

Learn about Tray 3 separation roller assembly removal.

Mean time to repair: 2 minutes

Service level: Easy

Before performing service

Turn the printer power off

- Disconnect the power cable.

WARNING! To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-56 Part information

Part number	Part description
RM2-2692-000CN	Separation roller assembly (Tray1/2/3)

Required tools

- No special tools are required to remove or install this assembly.
- Small flat-blade screwdriver

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test


Print any pages necessary to make sure the printer is functioning correctly.

1. Remove the Tray 3 separation roller

Follow the procedure below to remove and replace the Tray 3 separation roller.


1. Turn the paper feeder over to gain access to the roller assembly.
2. Use a small flat-blade screwdriver to release two tabs (callout 1), and then remove the cover (callout 2).

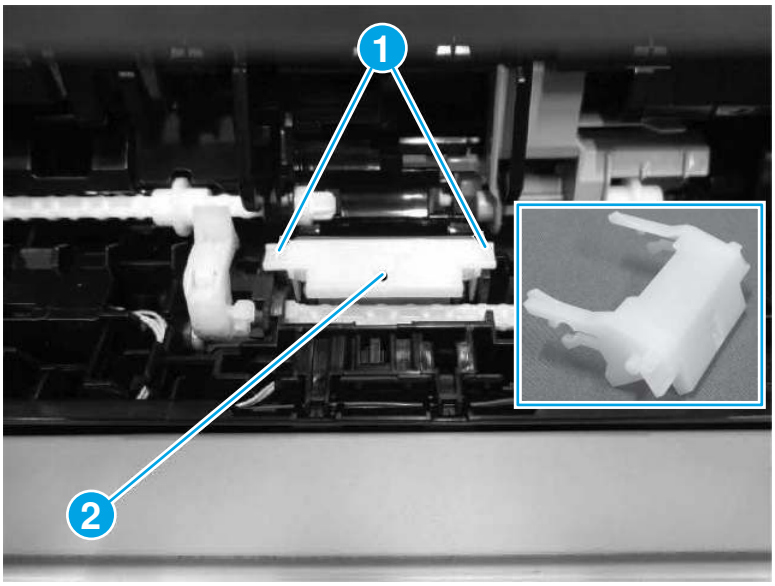Figure 4-1158 **Remove the cover**




3. Remove the Tray 3 separation roller assembly (callout 1).

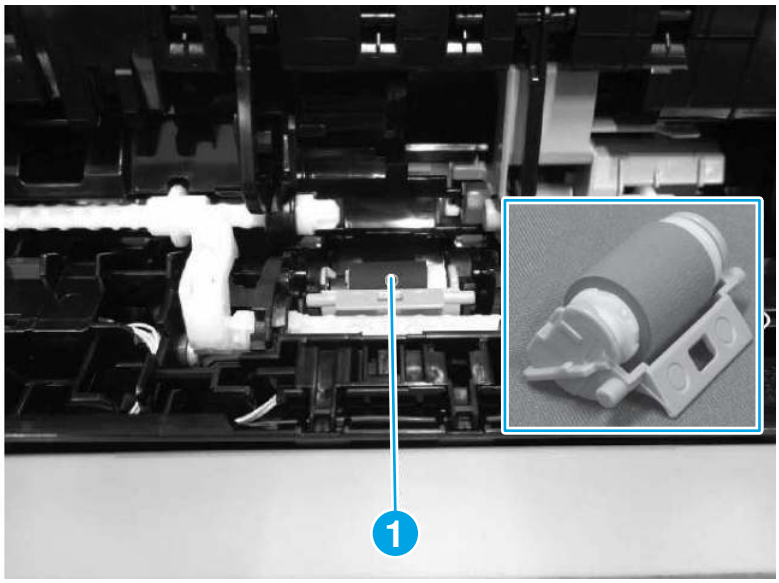Figure 4-1159 Move the roller assembly



4. Release one tab (callout 1), and then remove the roller (callout 2) from the holder (callout 3).

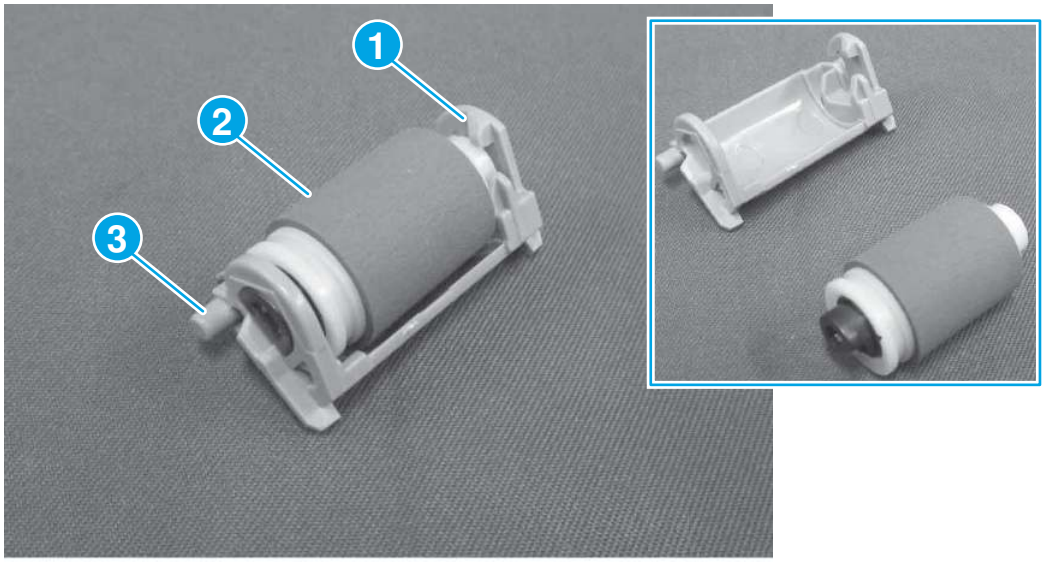Figure 4-1160 Disassemble the roller assembly



2. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: 

Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.

Removal and replacement: Feed lower guide assembly (550-sheet paper feeder)

Learn about feed lower guide removal (550-sheet paper feeder).

Mean time to repair: 18 minutes

Service level: Medium

Before performing service

Turn the printer power off

- Disconnect the power cable.

WARNING! To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-57 Part information

Part number	Part description
RM2-2774-000CN	Paper feed guide assembly, lower

Required tools

- #2 Phillips screwdriver with a magnetic tip and a 152 mm (6 in) shaft length

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test


Print any pages necessary to make sure the printer is functioning correctly.

1. Remove the right cover (550-sheet paper feeder)

Follow the procedure below to remove and replace the right cover (550-sheet paper feeder).


1. Remove one screw (callout 1).

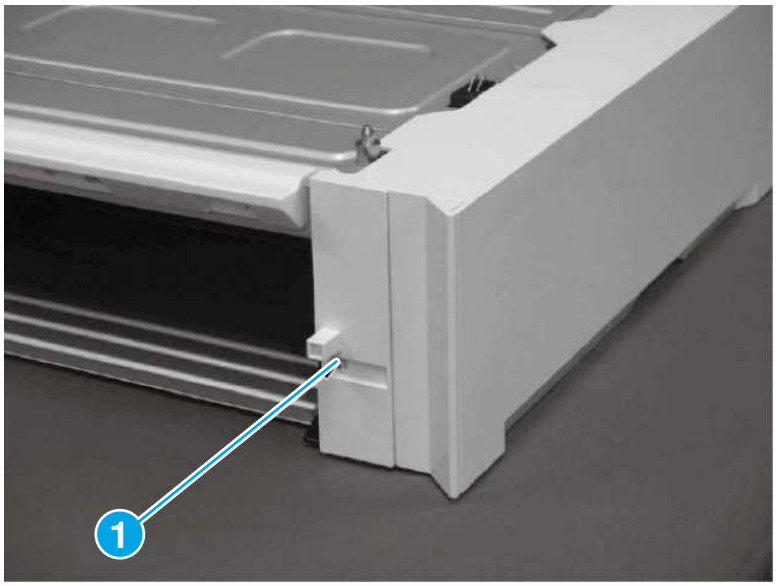Figure 4-1161 **Remove one screw**



2. Before proceeding, take note of the location of the mounting tabs (callout 1) and bosses (callout 2) on the inside of the cover.

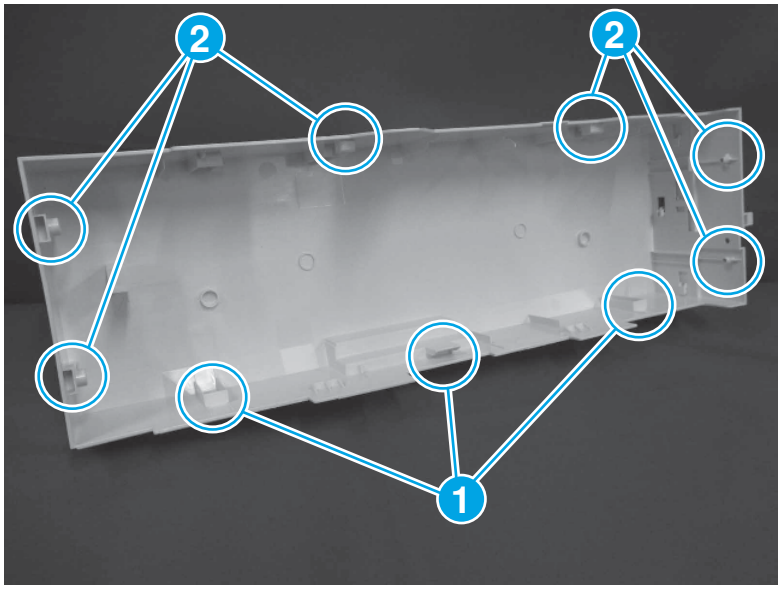
Figure 4-1162 Location of the mounting tabs and bosses



3. Release three tabs (callout 1), release six bosses (callout 2), and then remove the right cover (callout 3).

TIP: It might be easier to remove the cover if the top front boss is released first.

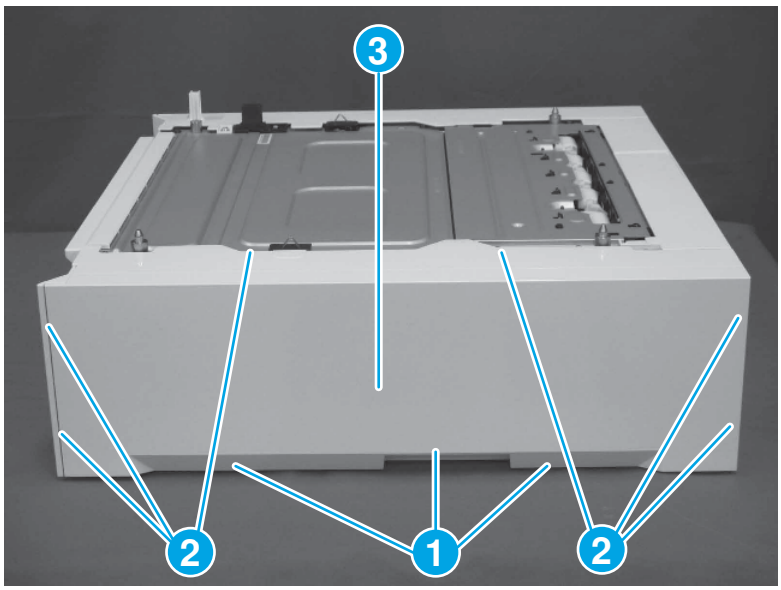Figure 4-1163 Remove the right cover




2. Remove the left cover (550-sheet paper feeder)

Follow the procedure below to remove and replace the left cover (550-sheet paper feeder).


1. Remove two screws (callout 1).

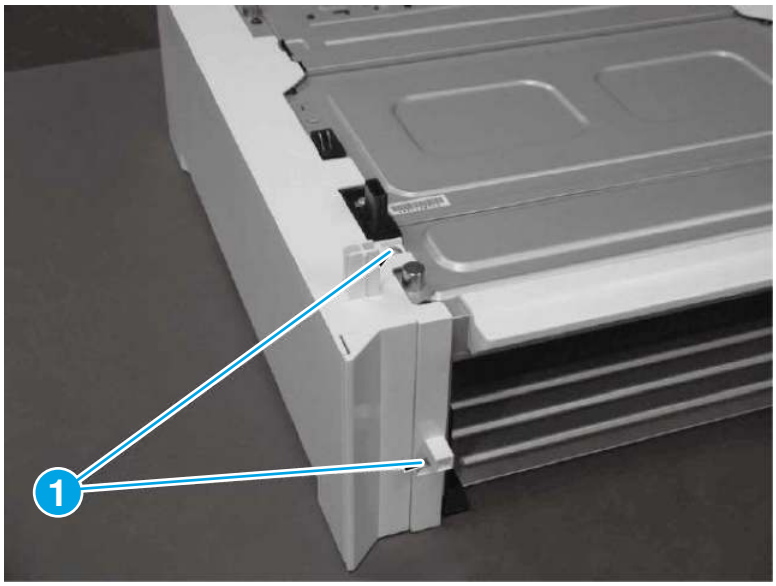Figure 4-1164 Remove two screws




2. Before proceeding, take note of the location of the mounting tabs (callout 1) and bosses (callout 2) on the inside of the cover.

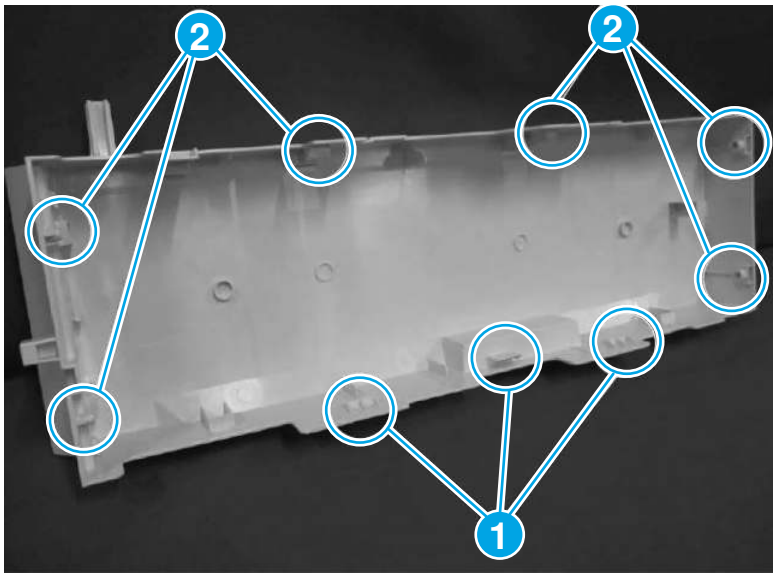Figure 4-1165 Location of the mounting tabs and bosses



3. Release three tabs (callout 1), release six bosses (callout 2), and then remove the left cover (callout 3).

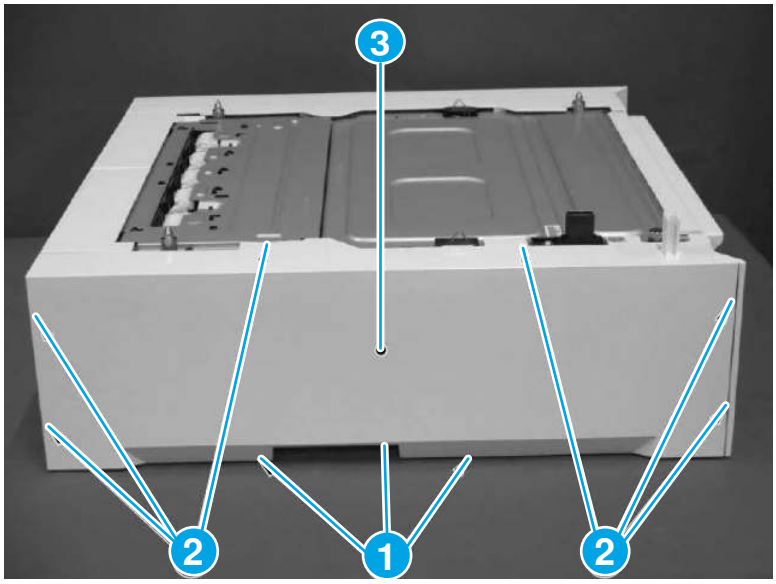Figure 4-1166 Remove the left cover




3. Remove the rear cover (550-sheet paper feeder)

Follow the procedure below to remove and replace the rear cover (550-sheet paper feeder).

1. Before proceeding, take note of the location of the mounting tabs (callout 1) on the inside of the cover.

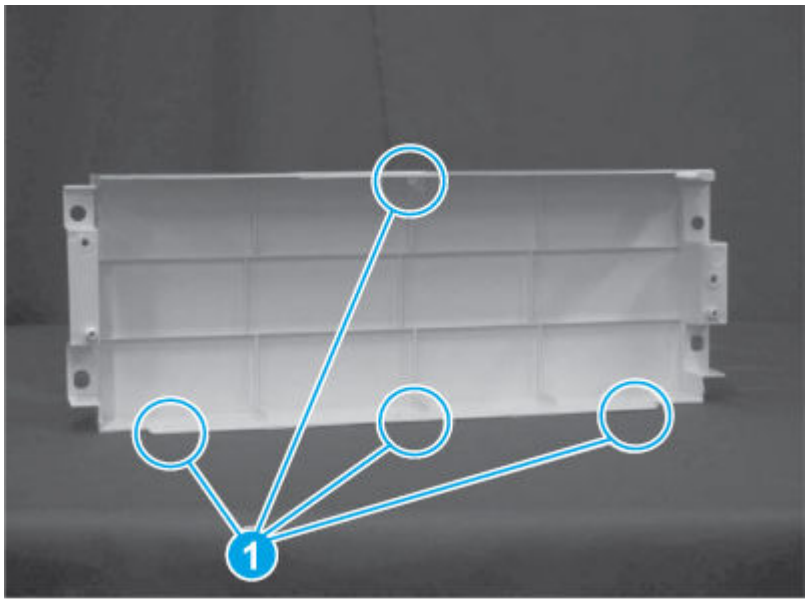
Figure 4-1167 Location of the mounting tabs



2. Remove two screws (callout 1), release four tabs (callout 2), and then remove the rear cover (callout 3).

TIP: It might be easier to remove the cover if the bottom tabs are released first.

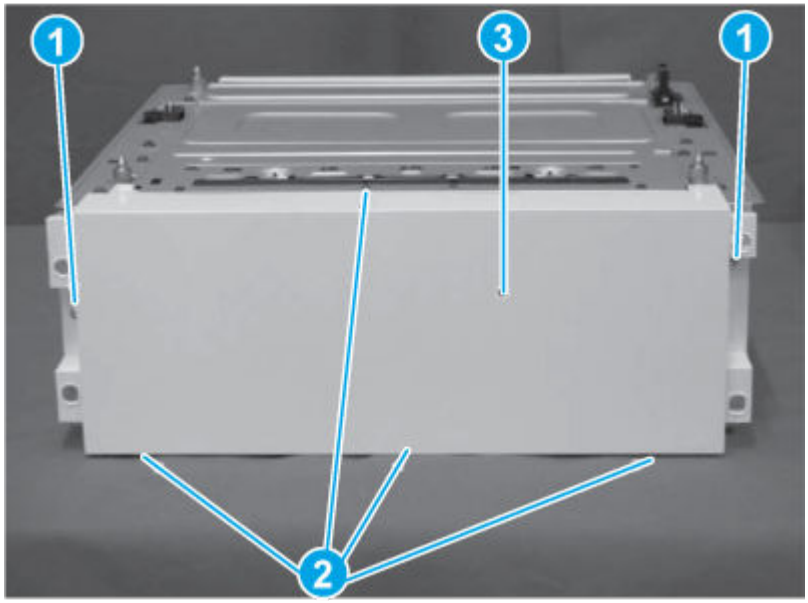Figure 4-1168 Remove the rear cover




4. Remove the feed lower guide assembly (550-sheet paper feeder)

Follow the procedure below to remove and replace the feed lower guide.


1. Disconnect all of the connectors on the controller PCA.

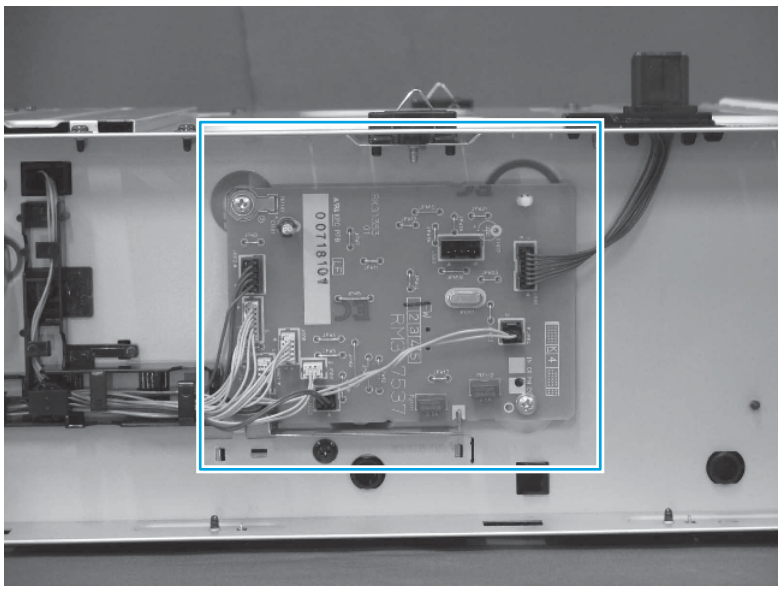Figure 4-1169 Disconnect all connectors




2. Remove five screws (callout 1), and then remove the sheet-metal plate (callout 2).

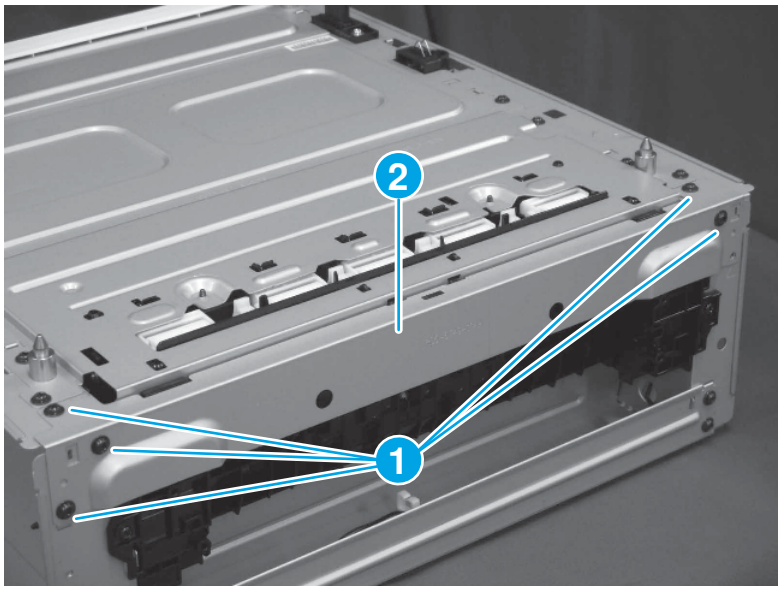Figure 4-1170 **Remove the plate**



3. Release the wire harness (callout 1) from the retainer (callout 2), and then pass it through the opening in the chassis (callout 3).

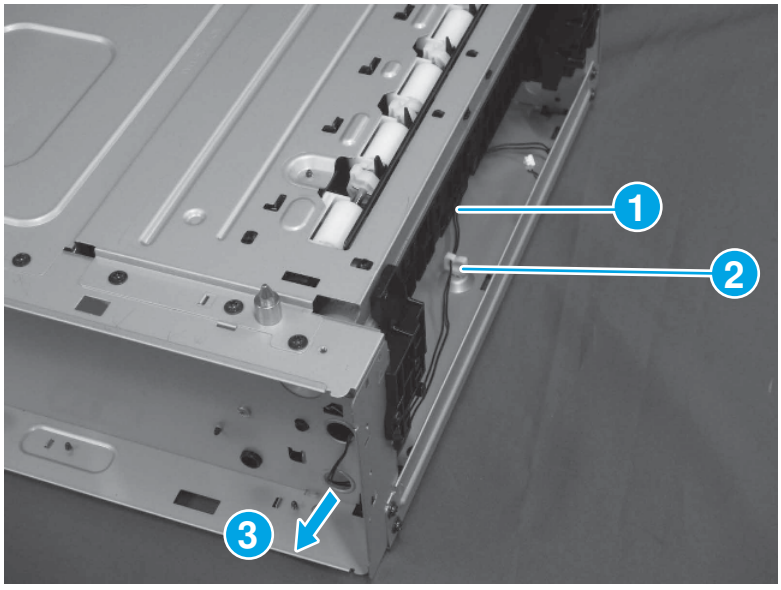Figure 4-1171 **Release the wire harness**




4. Turn the paper feeder over, and then do the following:

   - Remove one screw (callout 1), and then remove the holder (callout 2).
   - Release one tab (callout 3), and then remove the rubber foot pad (callout 4).


   NOTE: Repeat this step for a foot pad (not shown) located at the other end of the sheet-metal plate.

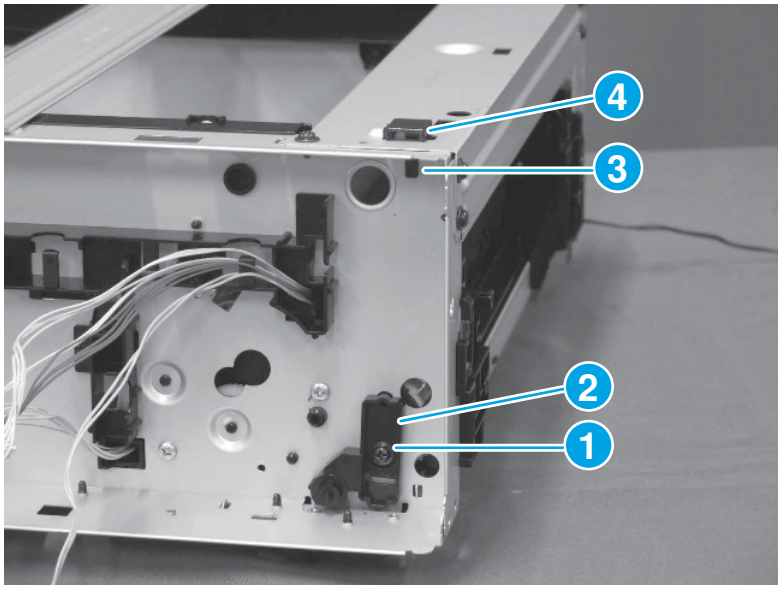Figure 4-1172 Remove the holder and foot pads




5. Remove six screws (callout 1), and then remove the sheet-metal plate (callout 2).

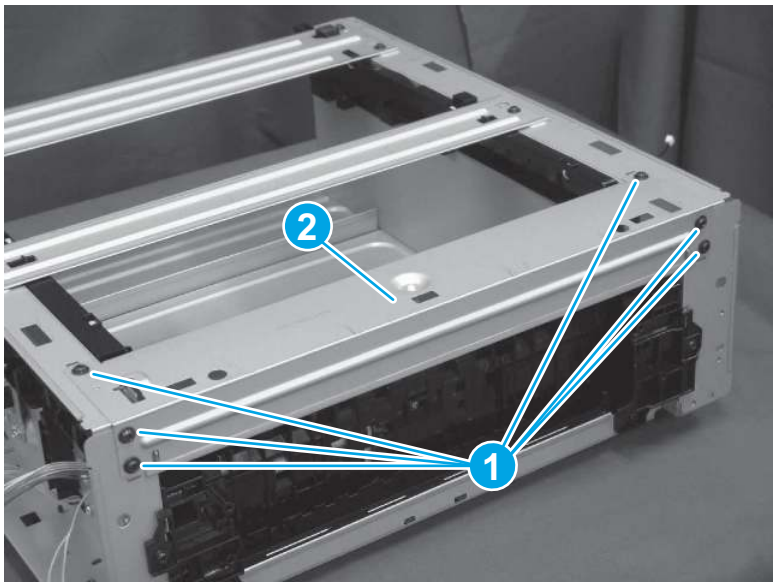Figure 4-1173 Remove the plate




6. Remove four screws.

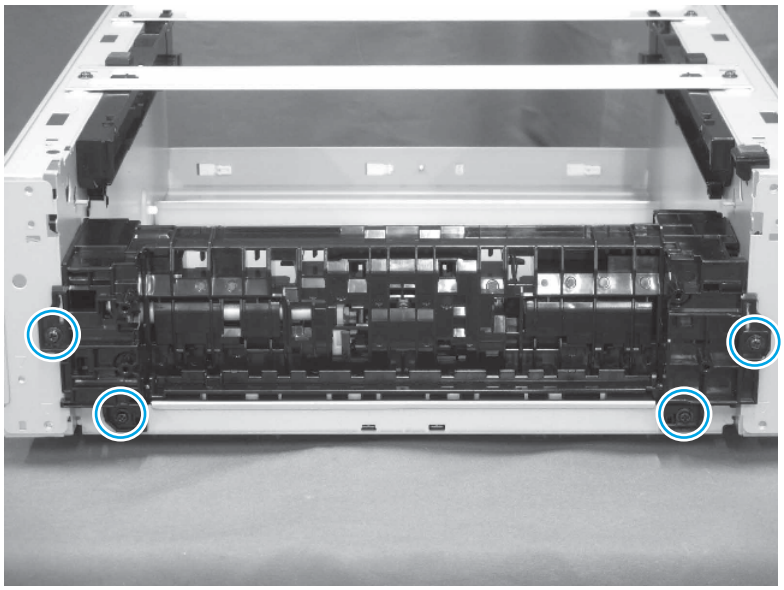Figure 4-1174 Remove four screws



7. Use a small flat-blade screwdriver to release two bosses.

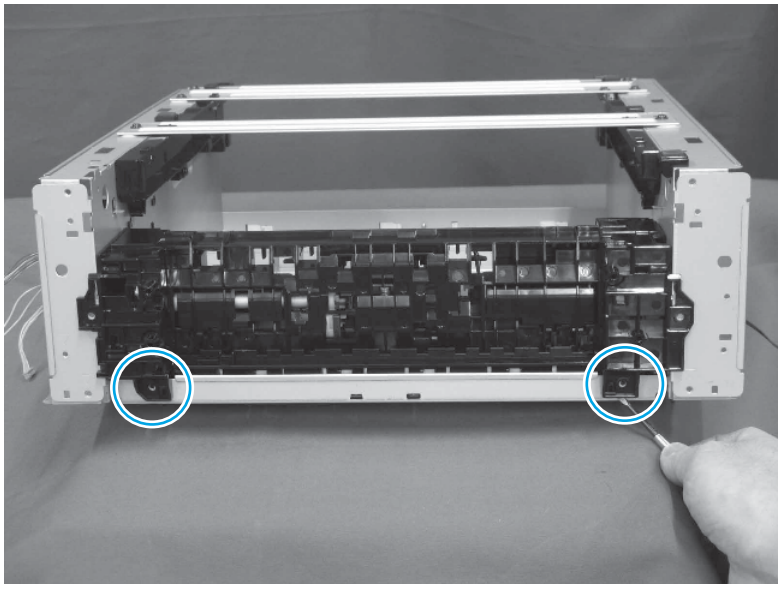
Figure 4-1175 Release two bosses



8. Remove the feed lower guide assembly.

NOTE: As the assembly is removed, pass the wire harness through the opening in the chassis (callout 1).

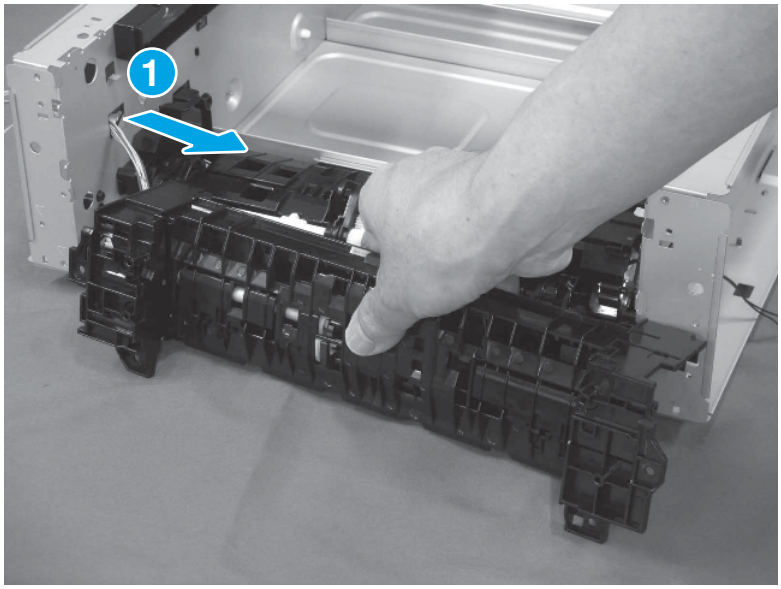Figure 4-1176 Remove the assembly



5. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.

Removal and replacement: Lifter drive assembly (550-sheet paper feeder)

Learn about lifter drive assembly removal (550-sheet paper feeder).

Mean time to repair: 22 minutes

Service level: Medium

Before performing service

Turn the printer power off

- Disconnect the power cable.

WARNING! To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-58 Part information

Part number	Part description
RM2-2769-000CN	Lift drive assembly

Required tools

- #2 Phillips screwdriver with a magnetic tip and a 152 mm (6 in) shaft length

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test


Print any pages necessary to make sure the printer is functioning correctly.

1. Remove the right cover (550-sheet paper feeder)

Follow the procedure below to remove and replace the right cover (550-sheet paper feeder).


1. Remove one screw (callout 1).

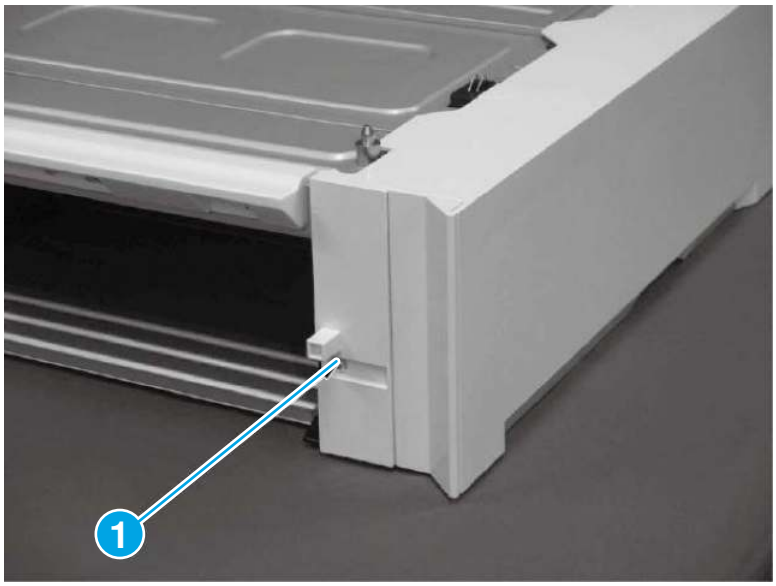Figure 4-1177 Remove one screw



2. Before proceeding, take note of the location of the mounting tabs (callout 1) and bosses (callout 2) on the inside of the cover.

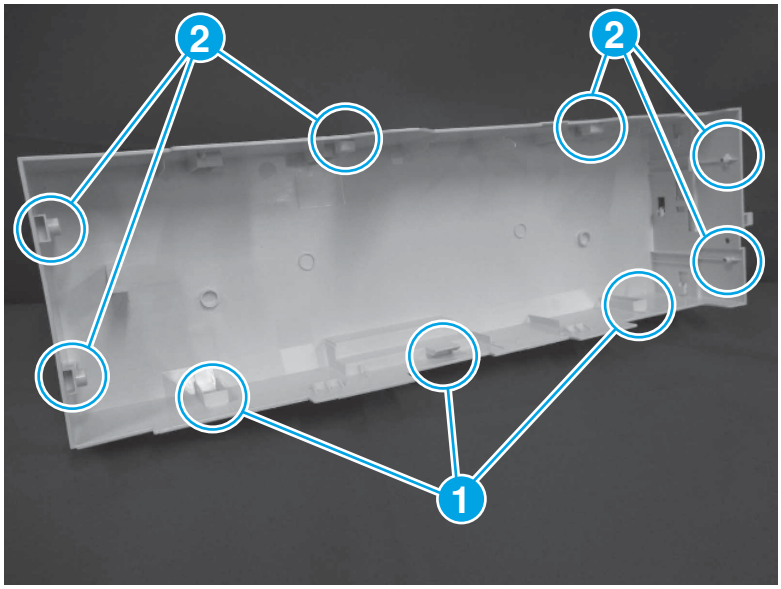
Figure 4-1178 Location of the mounting tabs and bosses



3. Release three tabs (callout 1), release six bosses (callout 2), and then remove the right cover (callout 3).

TIP: It might be easier to remove the cover if the top front boss is released first.

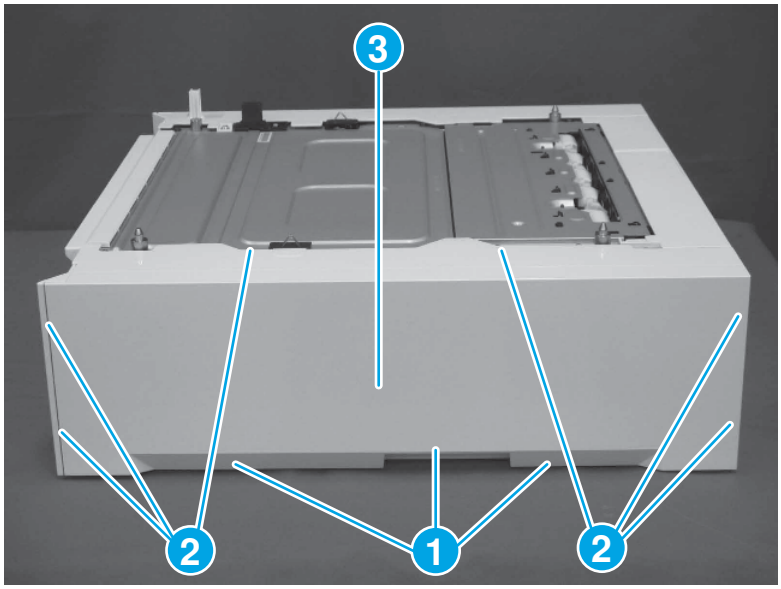Figure 4-1179 Remove the right cover




2. Remove the left cover (550-sheet paper feeder)

Follow the procedure below to remove and replace the left cover (550-sheet paper feeder).


1. Remove two screws (callout 1).

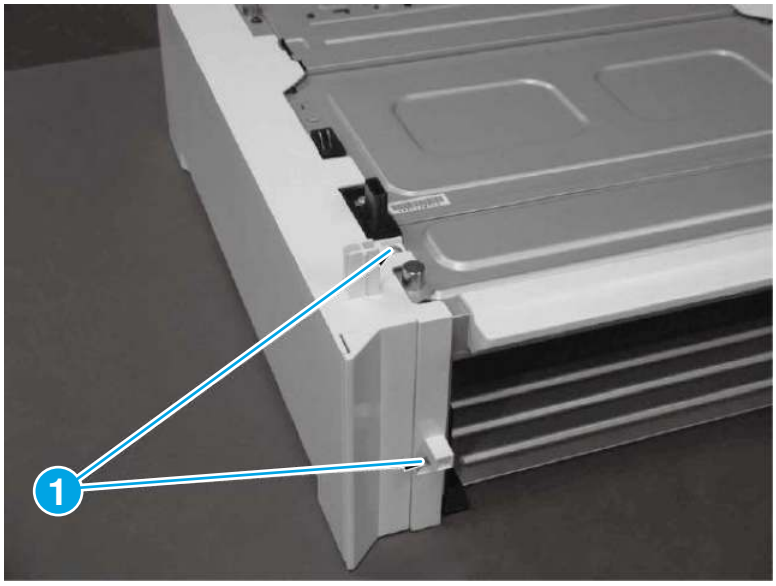Figure 4-1180 Remove two screws




2. Before proceeding, take note of the location of the mounting tabs (callout 1) and bosses (callout 2) on the inside of the cover.

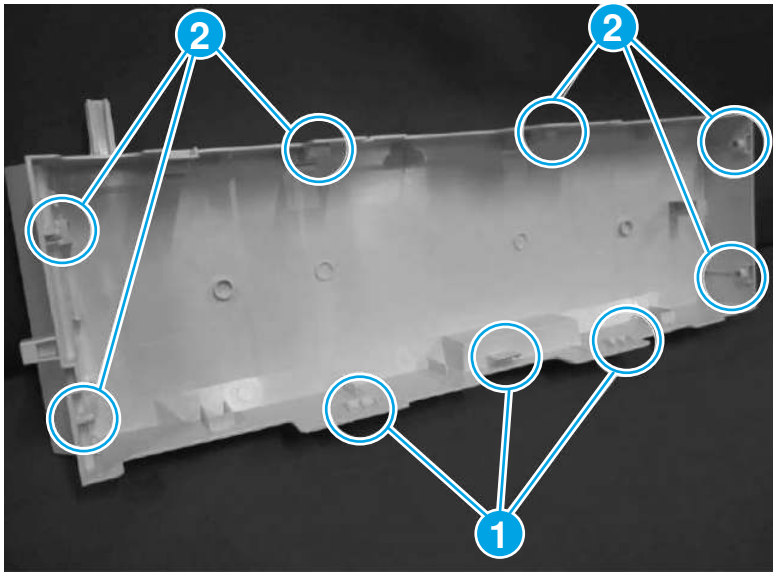Figure 4-1181 Location of the mounting tabs and bosses



3. Release three tabs (callout 1), release six bosses (callout 2), and then remove the left cover (callout 3).

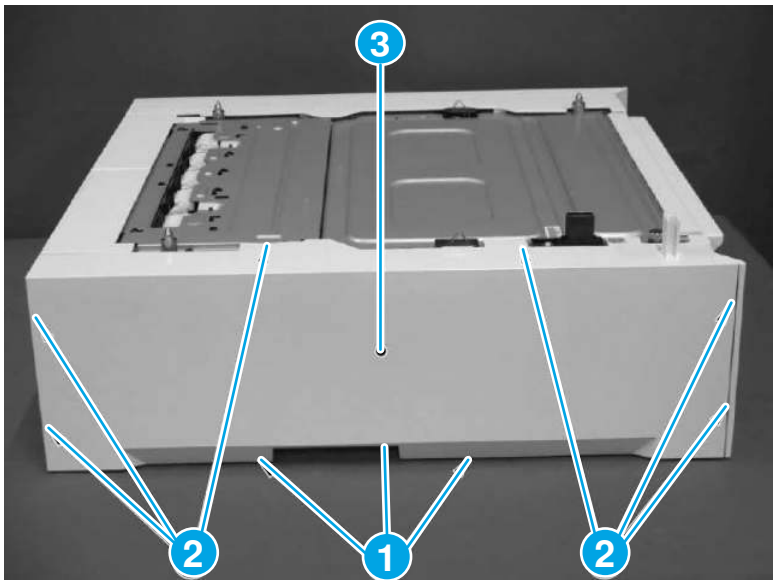Figure 4-1182 Remove the left cover




3. Remove the rear cover (550-sheet paper feeder)

Follow the procedure below to remove and replace the rear cover (550-sheet paper feeder).

1. Before proceeding, take note of the location of the mounting tabs (callout 1) on the inside of the cover.

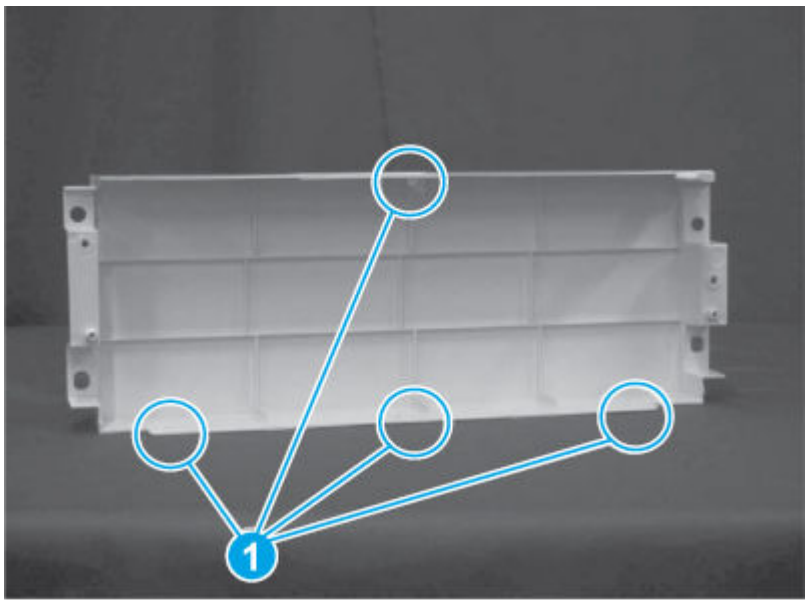
Figure 4-1183 Location of the mounting tabs



2. Remove two screws (callout 1), release four tabs (callout 2), and then remove the rear cover (callout 3).

TIP: It might be easier to remove the cover if the bottom tabs are released first.

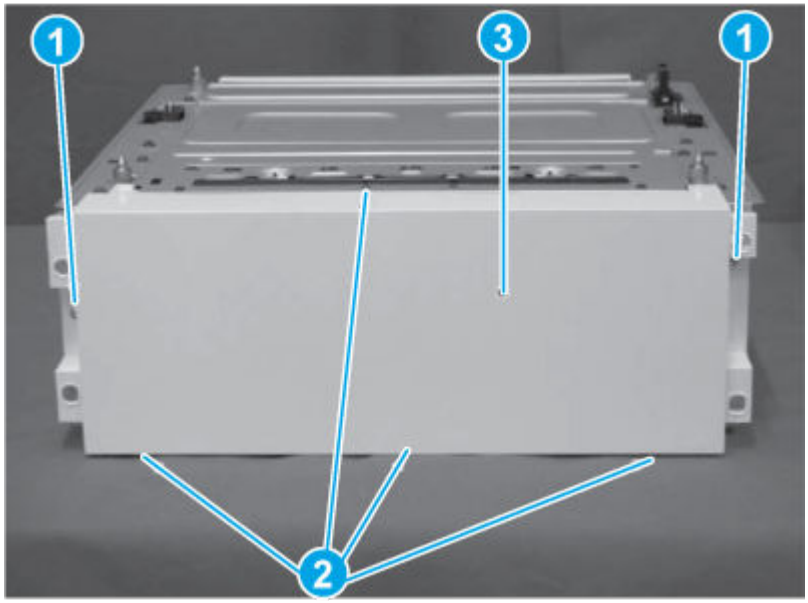Figure 4-1184 Remove the rear cover




4. Remove the feed lower guide assembly (550-sheet paper feeder)

Follow the procedure below to remove and replace the feed lower guide.


1. Disconnect all of the connectors on the controller PCA.

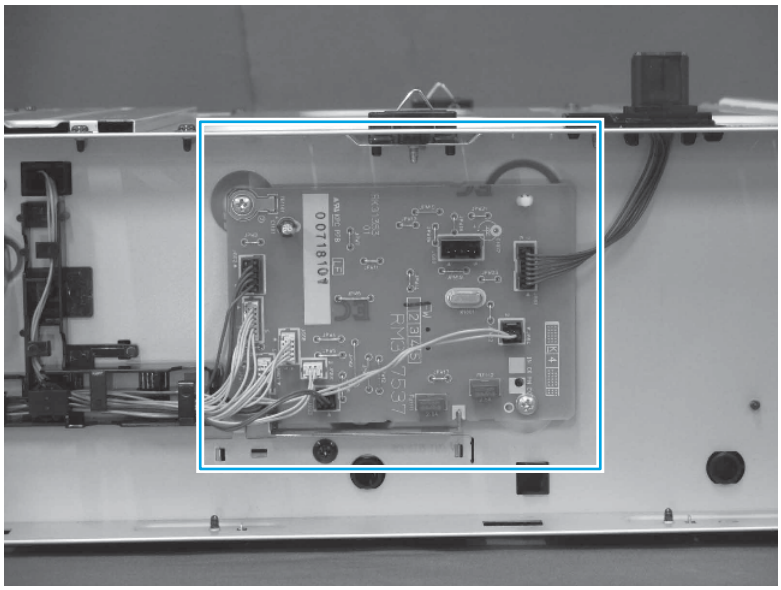Figure 4-1185 **Disconnect all connectors**




2. Remove five screws (callout 1), and then remove the sheet-metal plate (callout 2).

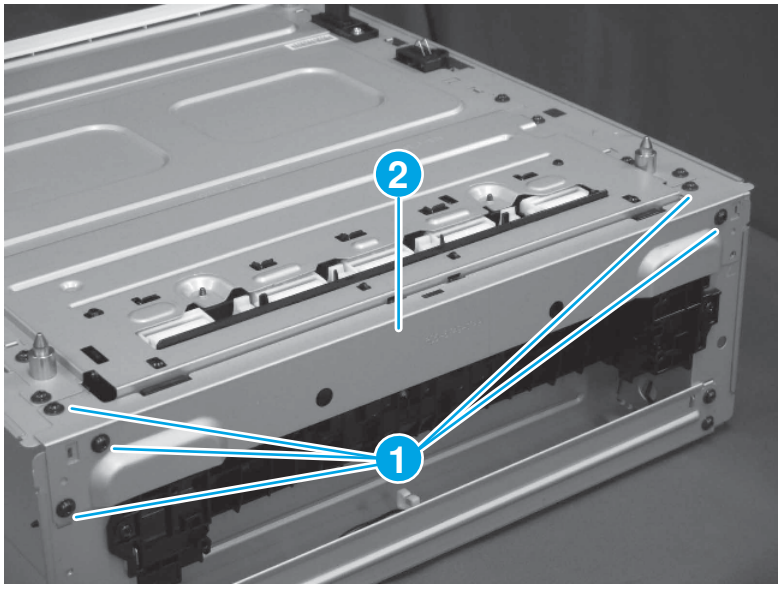Figure 4-1186 **Remove the plate**



3. Release the wire harness (callout 1) from the retainer (callout 2), and then pass it through the opening in the chassis (callout 3).

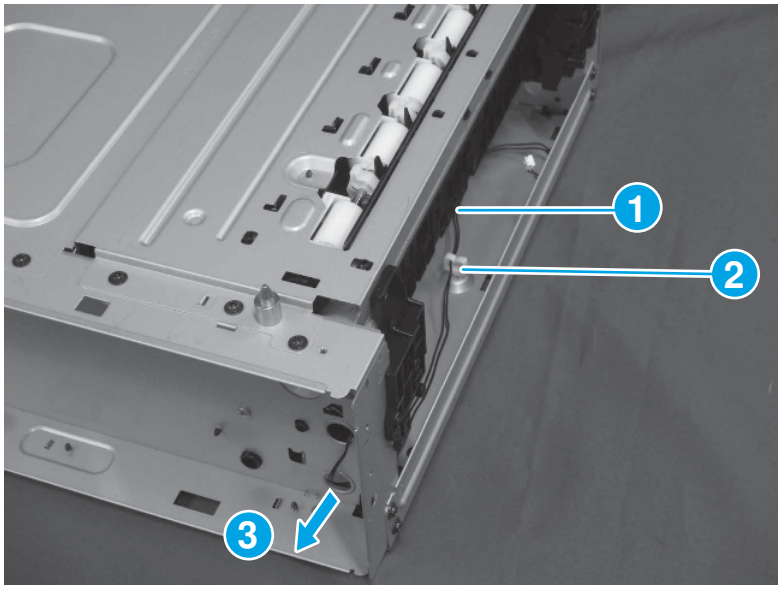Figure 4-1187 Release the wire harness




4. Turn the paper feeder over, and then do the following:

- Remove one screw (callout 1), and then remove the holder (callout 2).
- Release one tab (callout 3), and then remove the rubber foot pad (callout 4).


NOTE: Repeat this step for a foot pad (not shown) located at the other end of the sheet-metal plate.

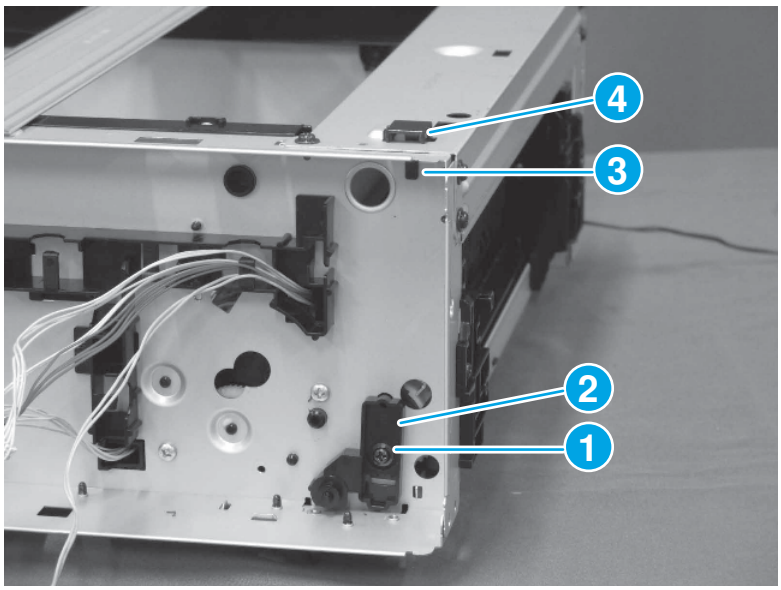Figure 4-1188 Remove the holder and foot pads




5. Remove six screws (callout 1), and then remove the sheet-metal plate (callout 2).

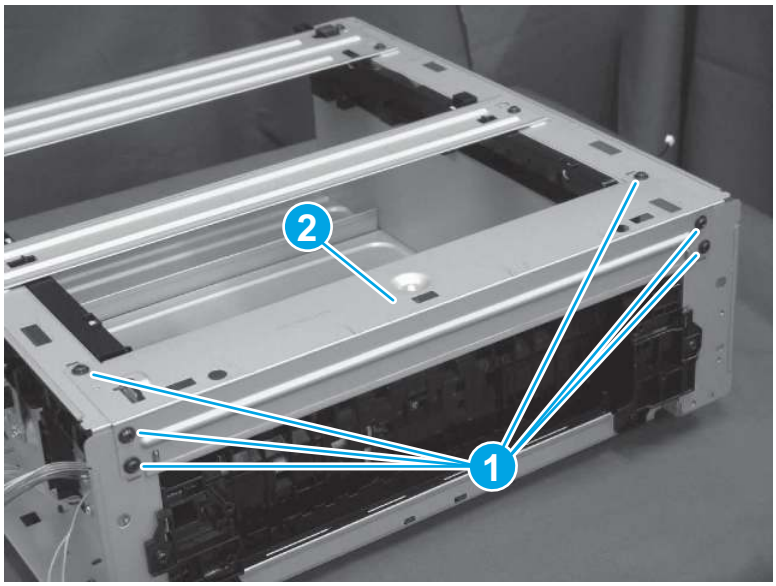Figure 4-1189 Remove the plate




6. Remove four screws.

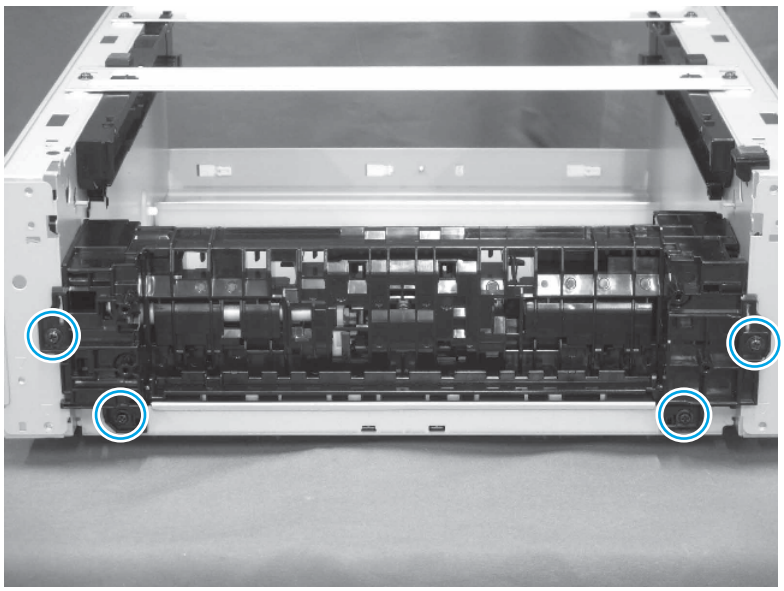Figure 4-1190 Remove four screws



7. Use a small flat-blade screwdriver to release two bosses.

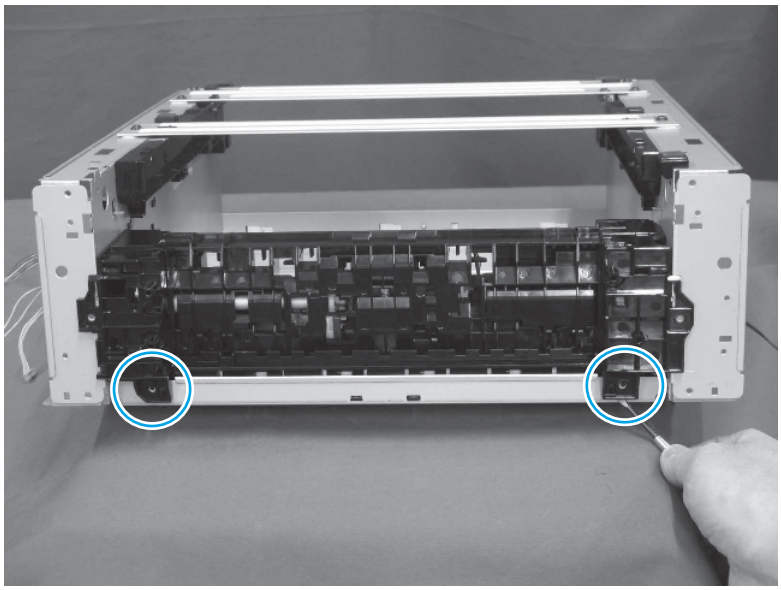
Figure 4-1191 Release two bosses



8. Remove the feed lower guide assembly.

NOTE: As the assembly is removed, pass the wire harness through the opening in the chassis (callout 1).

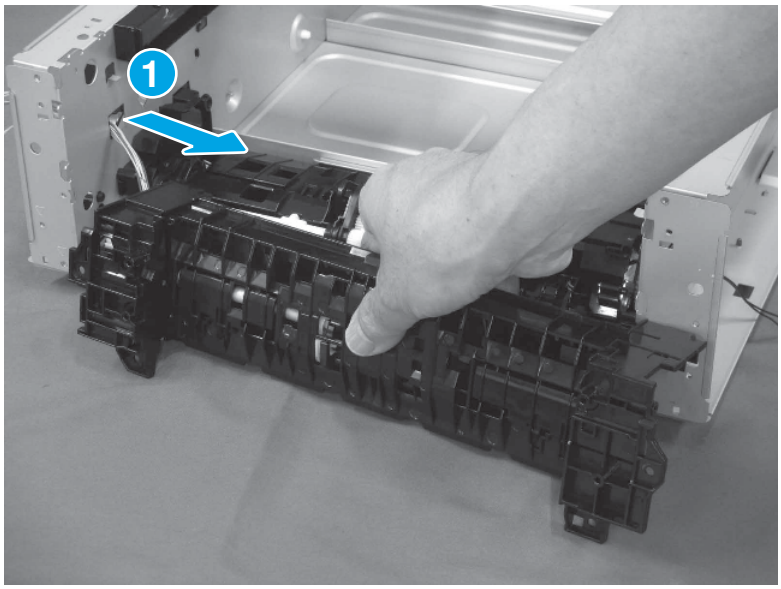Figure 4-1192 Remove the assembly




5. Remove the lifter drive assembly (550-sheet paper feeder)

Follow the procedure below to remove and replace the lifter drive assembly.


1. Remove three screws (callout 1), and then release one tab (callout 2).

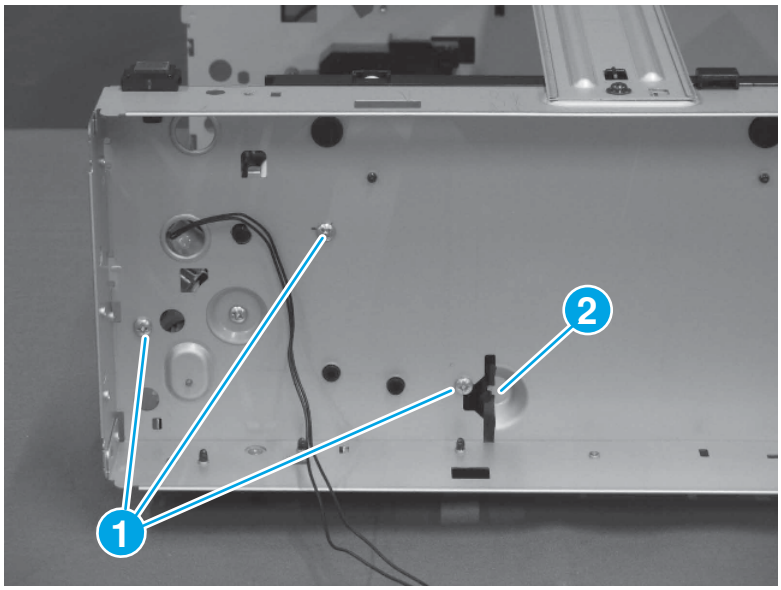Figure 4-1193 Remove the screws and release the tab



2. Pass the wire harness through the opening in the chassis (callout 1), and then remove the lifter drive assembly (callout 2).

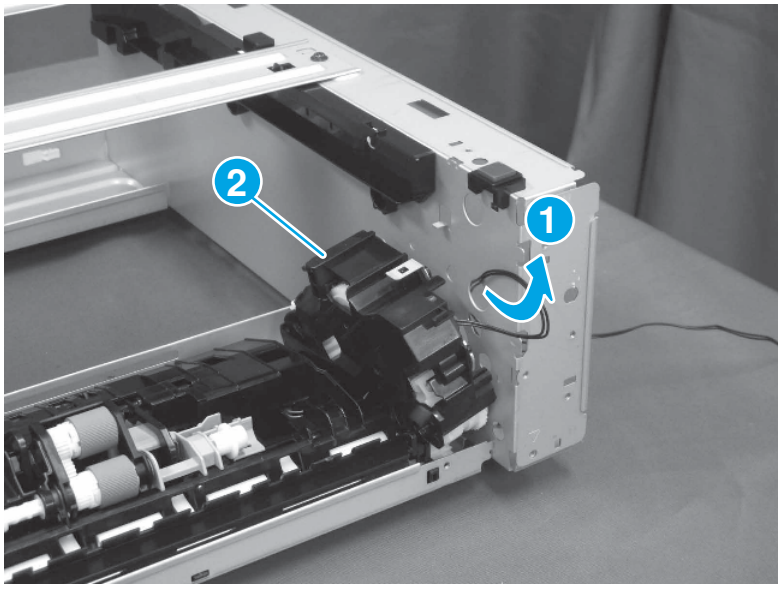Figure 4-1194 Remove the assembly



6. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: 

Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.

Removal and replacement: Feed upper guide assembly (550-sheet paper feeder)

Learn about feed upper guide removal (550-sheet paper feeder).

Mean time to repair: 27 minutes

Service level: Medium

Before performing service

Turn the printer power off

- Disconnect the power cable.

WARNING! To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-59 Part information

Part number	Part description
RM2-2775-000CN	Paper feed guide assembly, upper

Required tools

- #2 Phillips screwdriver with a magnetic tip and a 152 mm (6 in) shaft length

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test


Print any pages necessary to make sure the printer is functioning correctly.

1. Remove the right cover (550-sheet paper feeder)

Follow the procedure below to remove and replace the right cover (550-sheet paper feeder).


1. Remove one screw (callout 1).

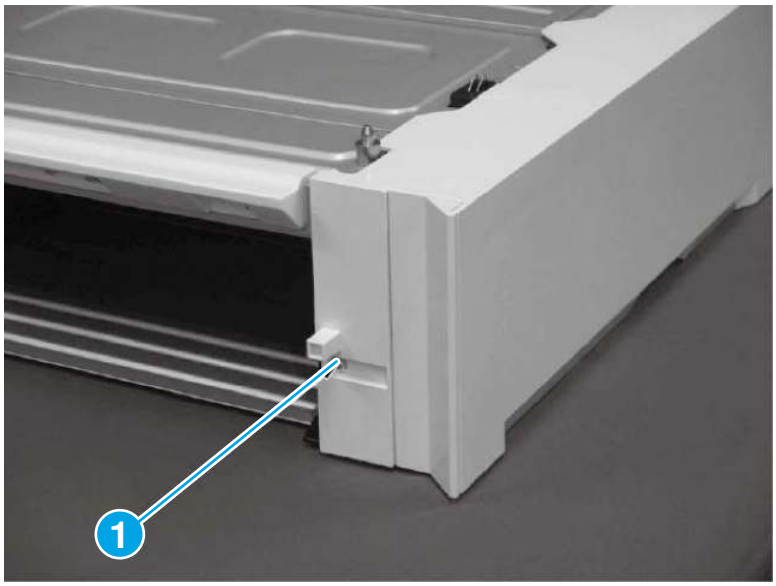Figure 4-1195 **Remove one screw**



2. Before proceeding, take note of the location of the mounting tabs (callout 1) and bosses (callout 2) on the inside of the cover.

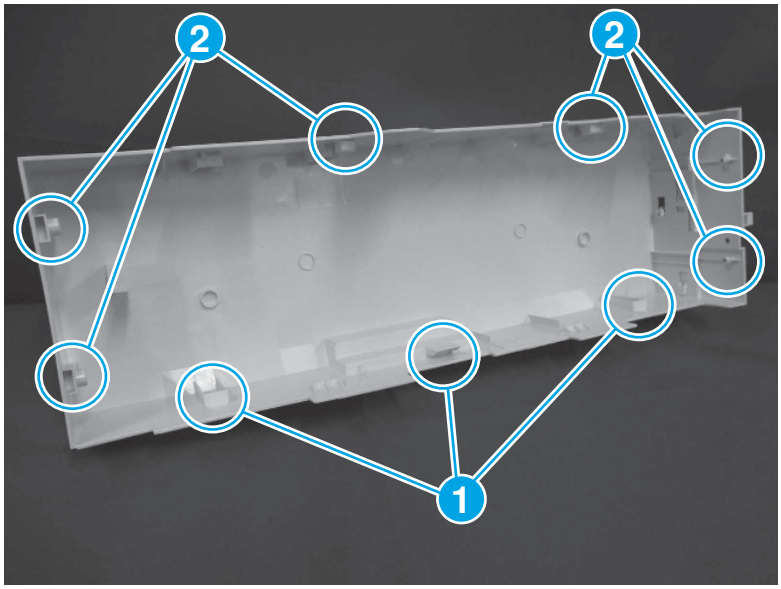
Figure 4-1196 Location of the mounting tabs and bosses



3. Release three tabs (callout 1), release six bosses (callout 2), and then remove the right cover (callout 3).

TIP: It might be easier to remove the cover if the top front boss is released first.

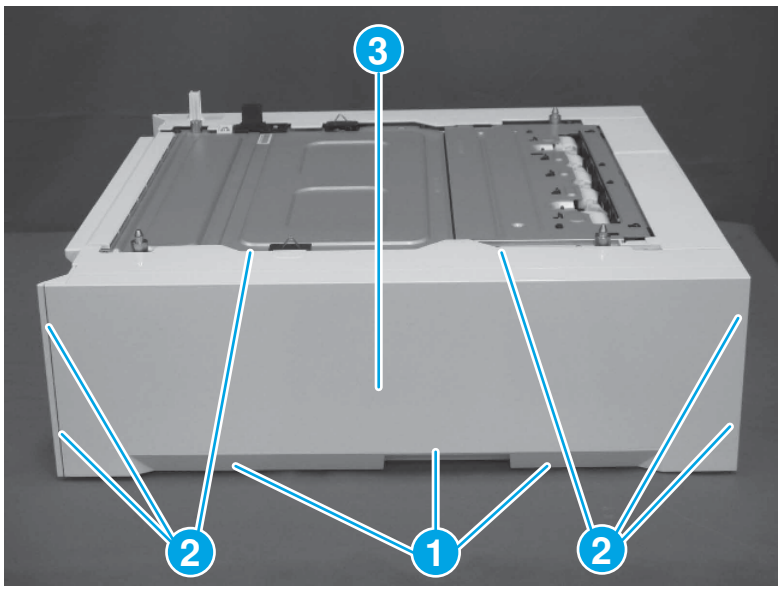Figure 4-1197 Remove the right cover




2. Remove the left cover (550-sheet paper feeder)

Follow the procedure below to remove and replace the left cover (550-sheet paper feeder).


1. Remove two screws (callout 1).

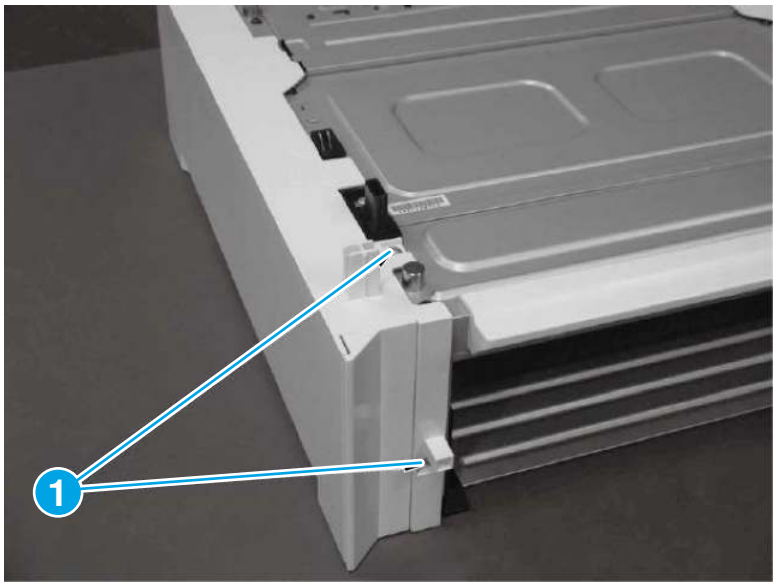Figure 4-1198 Remove two screws




2. Before proceeding, take note of the location of the mounting tabs (callout 1) and bosses (callout 2) on the inside of the cover.

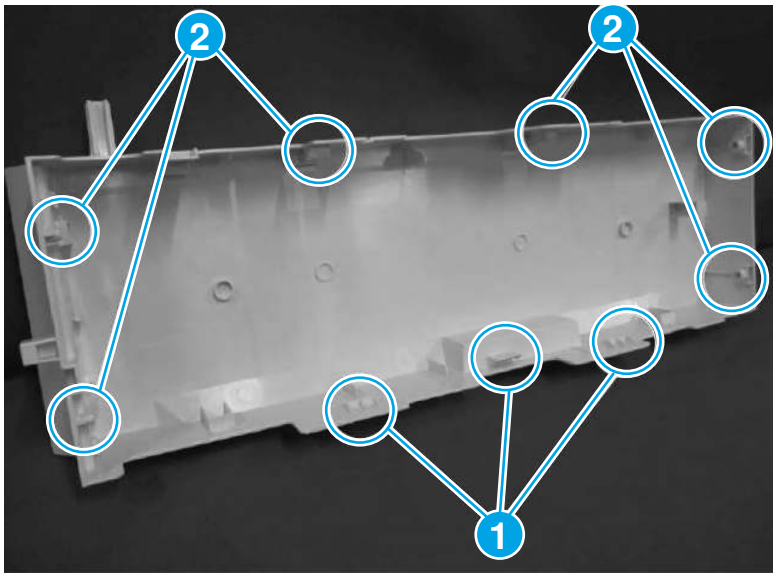Figure 4-1199 Location of the mounting tabs and bosses



3. Release three tabs (callout 1), release six bosses (callout 2), and then remove the left cover (callout 3).

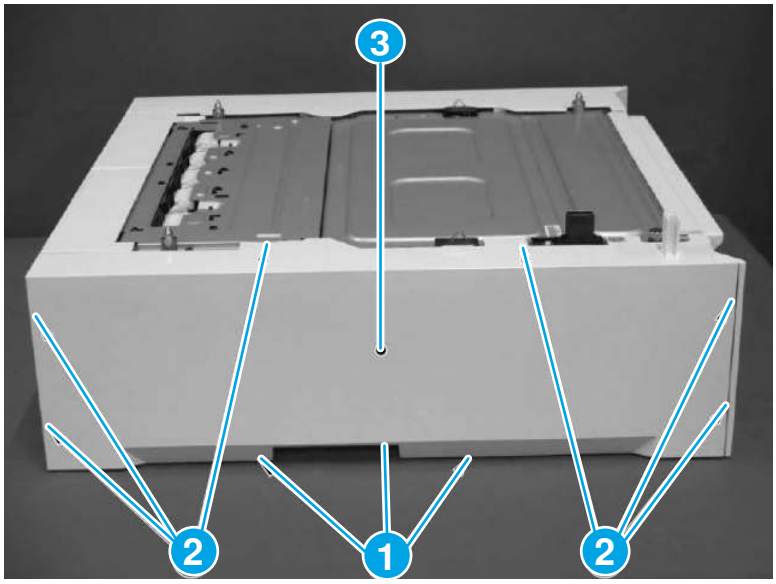Figure 4-1200 **Remove the left cover**




3. Remove the rear cover (550-sheet paper feeder)

Follow the procedure below to remove and replace the rear cover (550-sheet paper feeder).

1. Before proceeding, take note of the location of the mounting tabs (callout 1) on the inside of the cover.

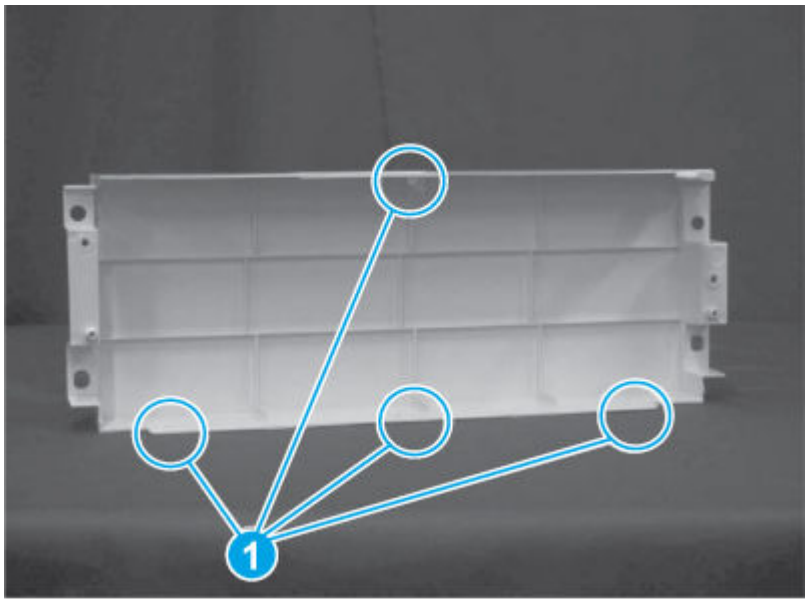
Figure 4-1201 **Location of the mounting tabs**



2. Remove two screws (callout 1), release four tabs (callout 2), and then remove the rear cover (callout 3).

TIP: It might be easier to remove the cover if the bottom tabs are released first.

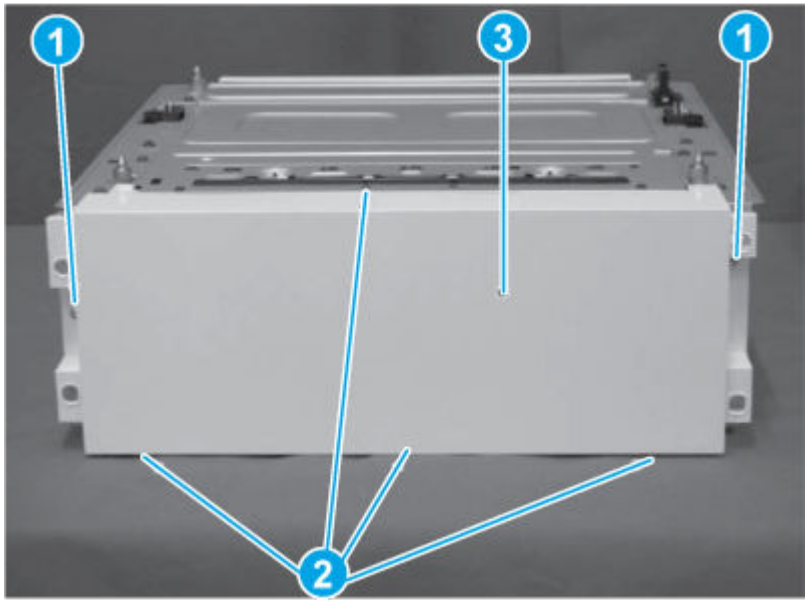Figure 4-1202 Remove the rear cover




4. Remove the feed lower guide assembly (550-sheet paper feeder)

Follow the procedure below to remove and replace the feed lower guide.


1. Disconnect all of the connectors on the controller PCA.

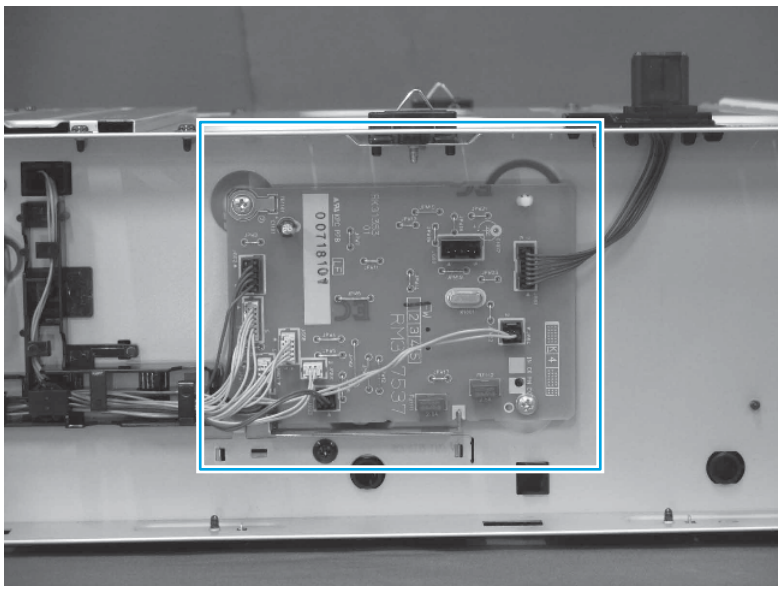Figure 4-1203 Disconnect all connectors




2. Remove five screws (callout 1), and then remove the sheet-metal plate (callout 2).

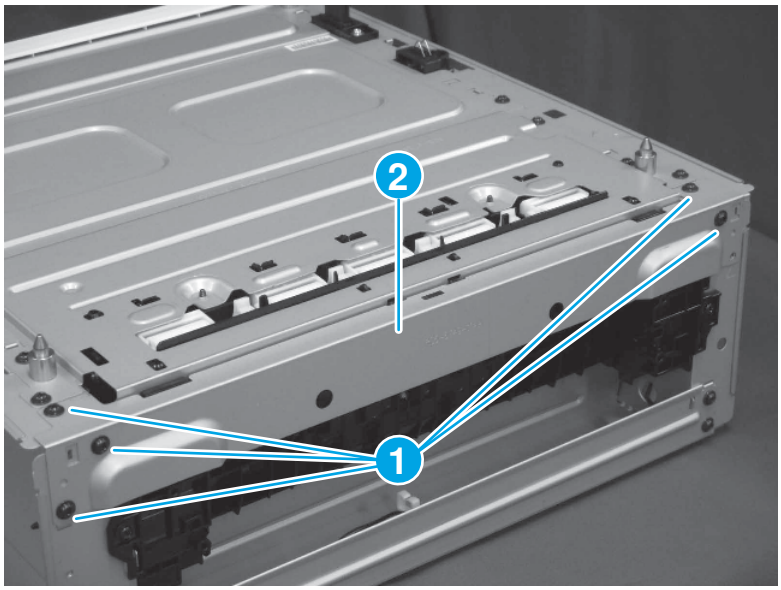Figure 4-1204 **Remove the plate**



3. Release the wire harness (callout 1) from the retainer (callout 2), and then pass it through the opening in the chassis (callout 3).

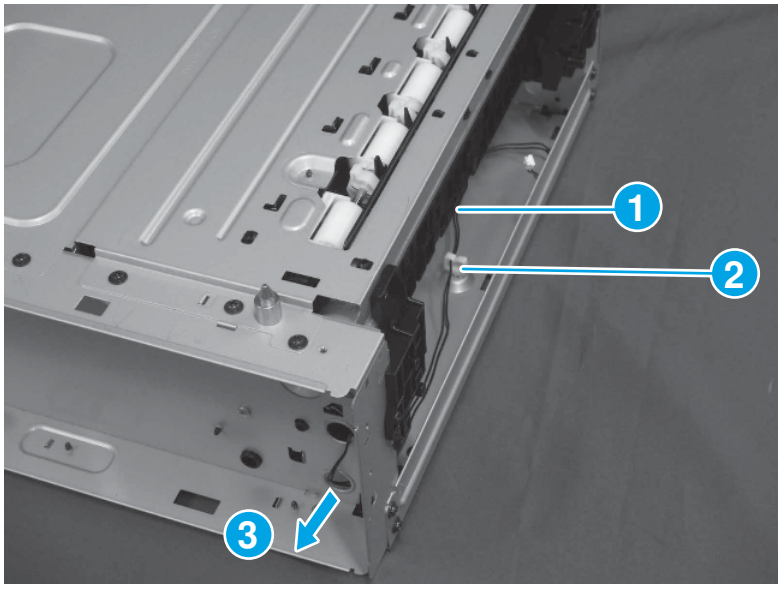Figure 4-1205 **Release the wire harness**




4. Turn the paper feeder over, and then do the following:

   - Remove one screw (callout 1), and then remove the holder (callout 2).
   - Release one tab (callout 3), and then remove the rubber foot pad (callout 4).


   NOTE: Repeat this step for a foot pad (not shown) located at the other end of the sheet-metal plate.

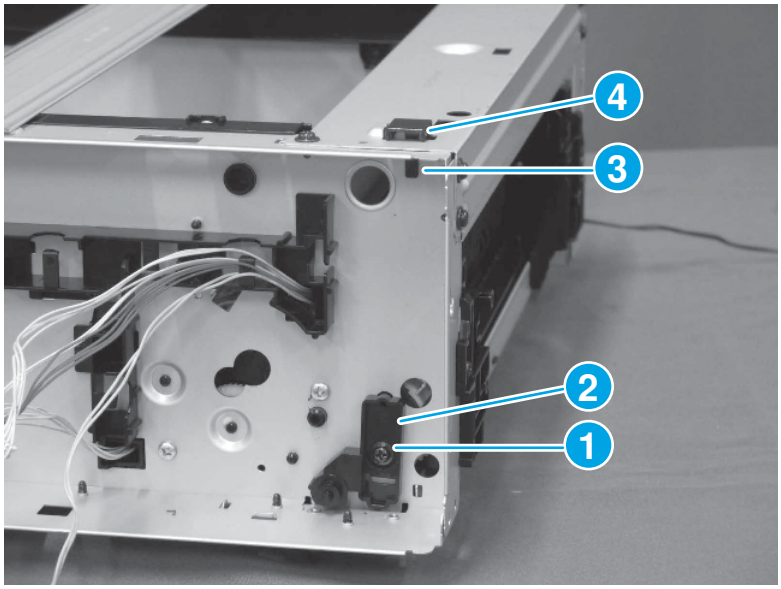Figure 4-1206 Remove the holder and foot pads




5. Remove six screws (callout 1), and then remove the sheet-metal plate (callout 2).

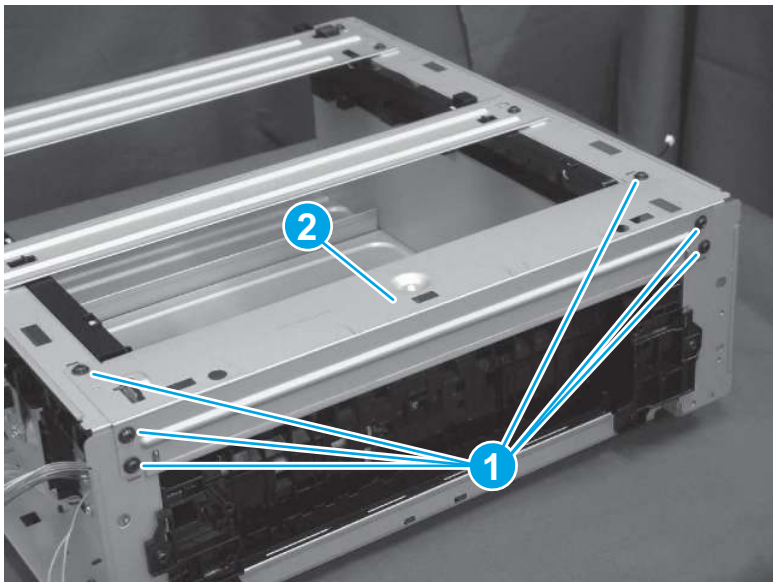Figure 4-1207 Remove the plate




6. Remove four screws.

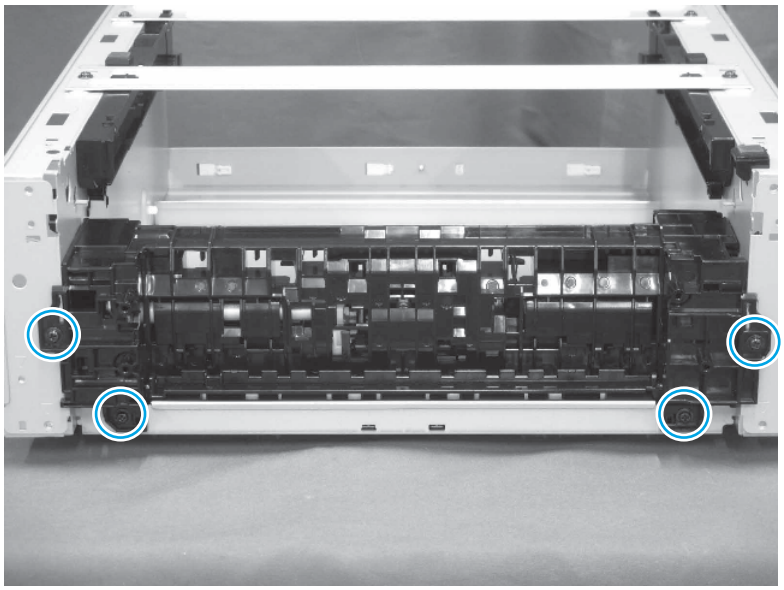Figure 4-1208 **Remove four screws**



7. Use a small flat-blade screwdriver to release two bosses.

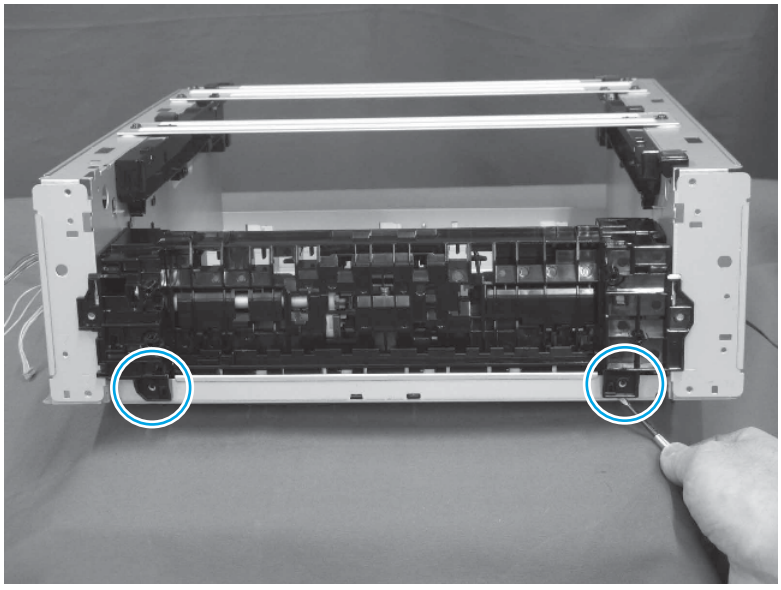
Figure 4-1209 **Release two bosses**



8. Remove the feed lower guide assembly.

NOTE: As the assembly is removed, pass the wire harness through the opening in the chassis (callout 1).

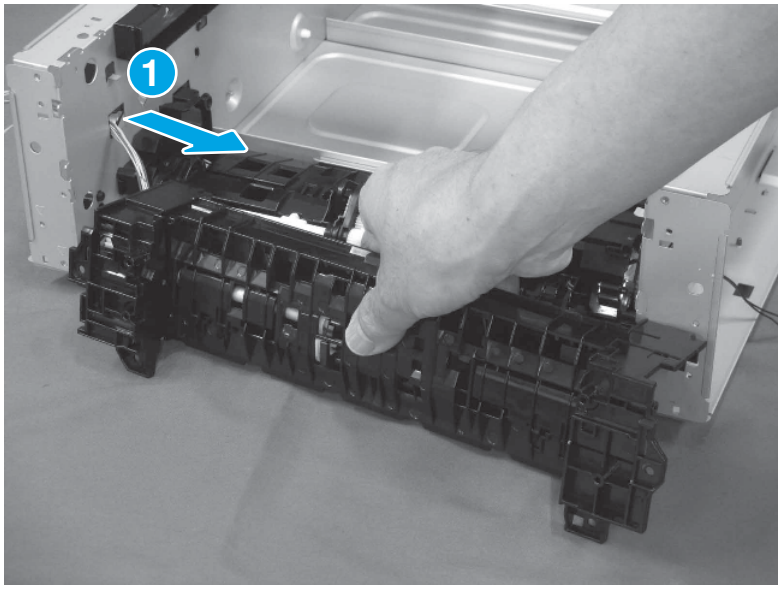Figure 4-1210 Remove the assembly




5. Remove the lifter drive assembly (550-sheet paper feeder)

Follow the procedure below to remove and replace the lifter drive assembly.


1. Remove three screws (callout 1), and then release one tab (callout 2).

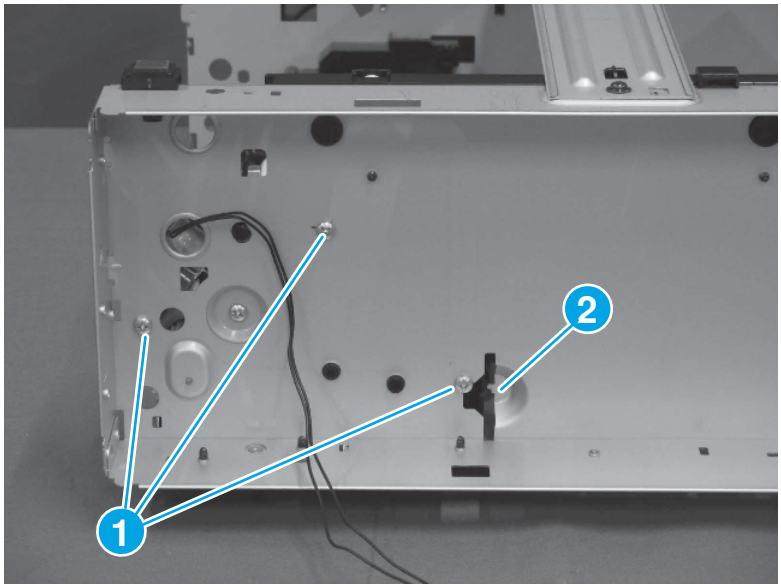Figure 4-1211 Remove the screws and release the tab



2. Pass the wire harness through the opening in the chassis (callout 1), and then remove the lifter drive assembly (callout 2).

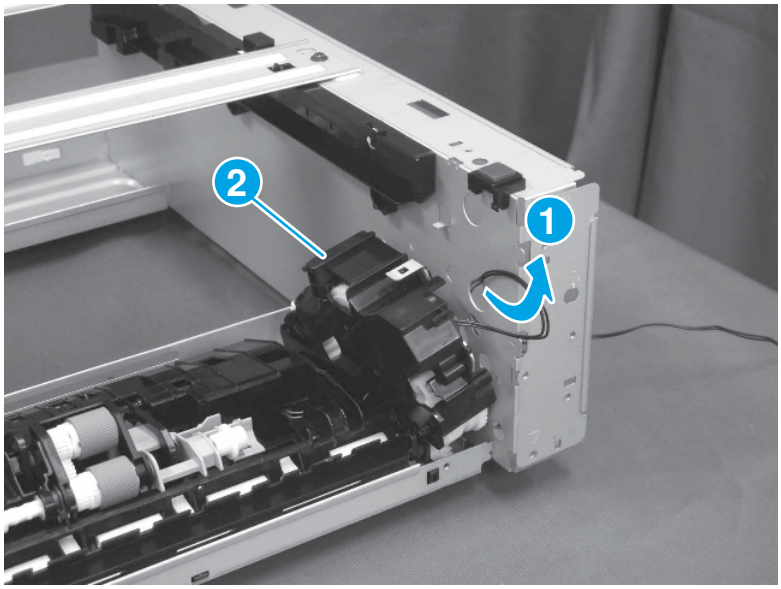Figure 4-1212 Remove the assembly




6. Remove the feed upper guide (550-sheet paper feeder)

Follow the procedure below to remove and replace the feed upper guide.

1. Do the following:


   - Remove one screw (callout 1), and then remove the holder (callout 2).
   - Remove three screws (callout 3), and then remove the sheet-metal plate 9callout 4)

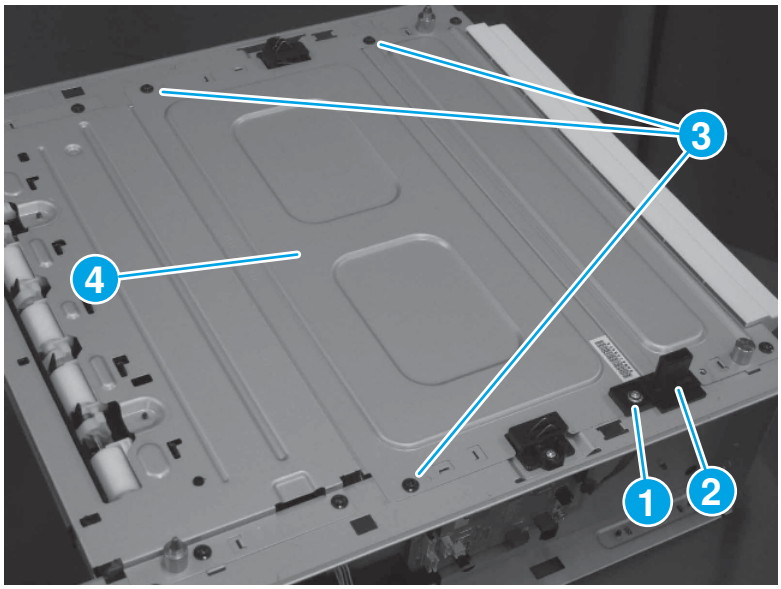Figure 4-1213 Remove the holder and plate



2. Remover two screws (callout 1), and then release four bosses (callout 2).

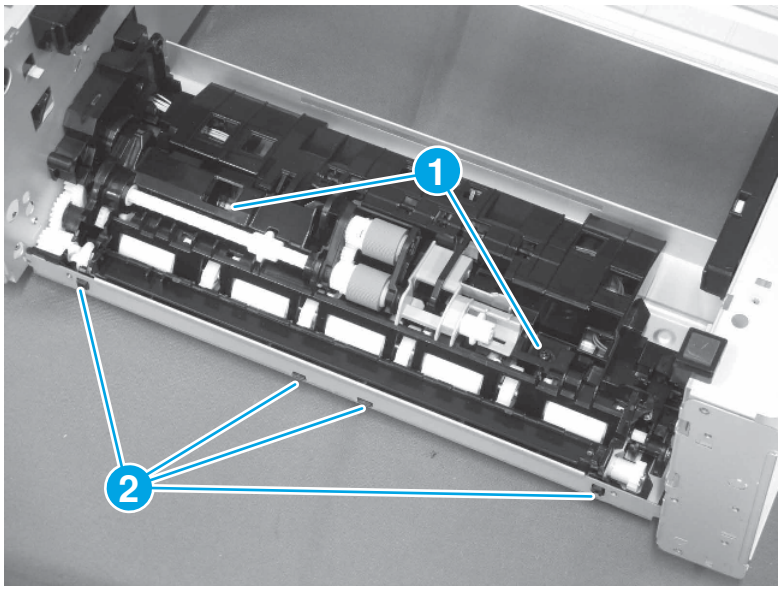
Figure 4-1214 **Remove the screws and release the bosses**



3. Remove the feed upper guide assembly.

NOTE: As the assembly is removed, pass the wire harness through the opening in the chassis (callout 1).

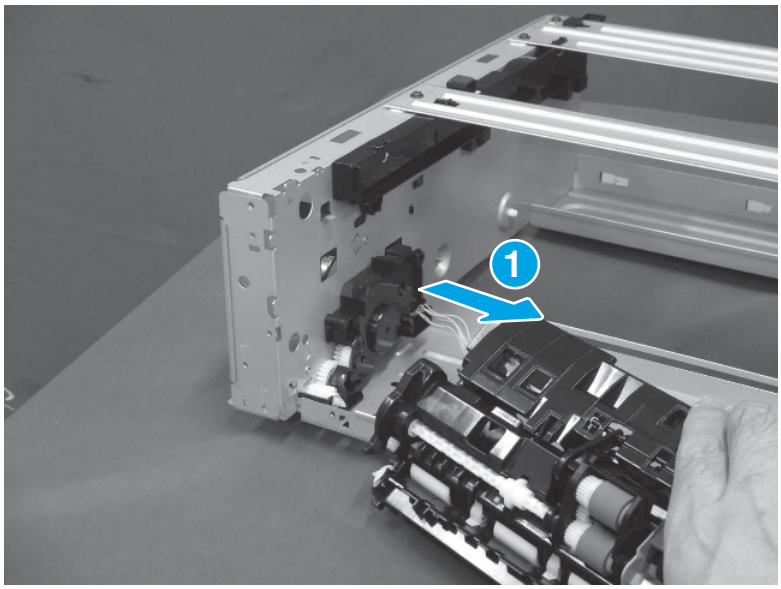Figure 4-1215 **Remove the assembly**



7. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: 

Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.

Removal and replacement: Pickup drive assembly (550-sheet paper feeder)

Learn about pickup drive assembly removal (550-sheet paper feeder).

Mean time to repair: 30 minutes

Service level: Medium

Before performing service

Turn the printer power off

- Disconnect the power cable.

WARNING! To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-60 Part information

Part number	Part description
RM2-2776-000CN	Paper pickup drive assembly

Required tools

- #2 Phillips screwdriver with a magnetic tip and a 152 mm (6 in) shaft length

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test


Print any pages necessary to make sure the printer is functioning correctly.

1. Remove the right cover (550-sheet paper feeder)

Follow the procedure below to remove and replace the right cover (550-sheet paper feeder).


1. Remove one screw (callout 1).

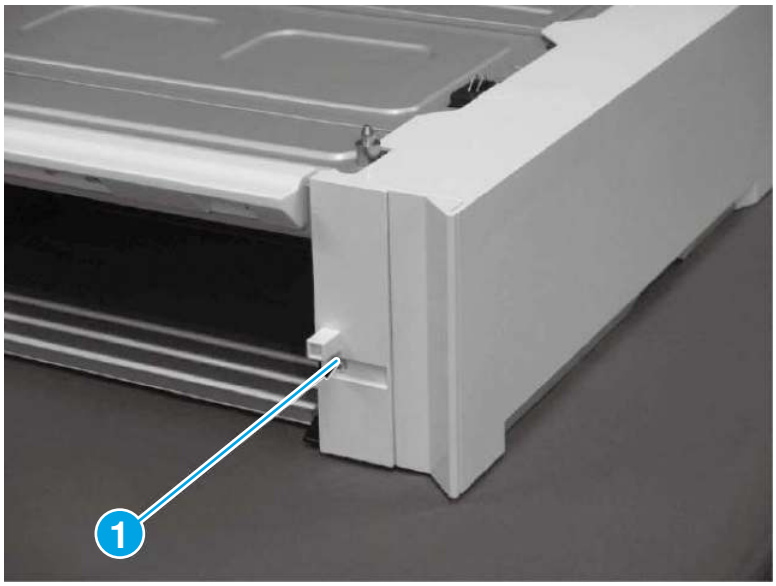Figure 4-1216 **Remove one screw**



2. Before proceeding, take note of the location of the mounting tabs (callout 1) and bosses (callout 2) on the inside of the cover.

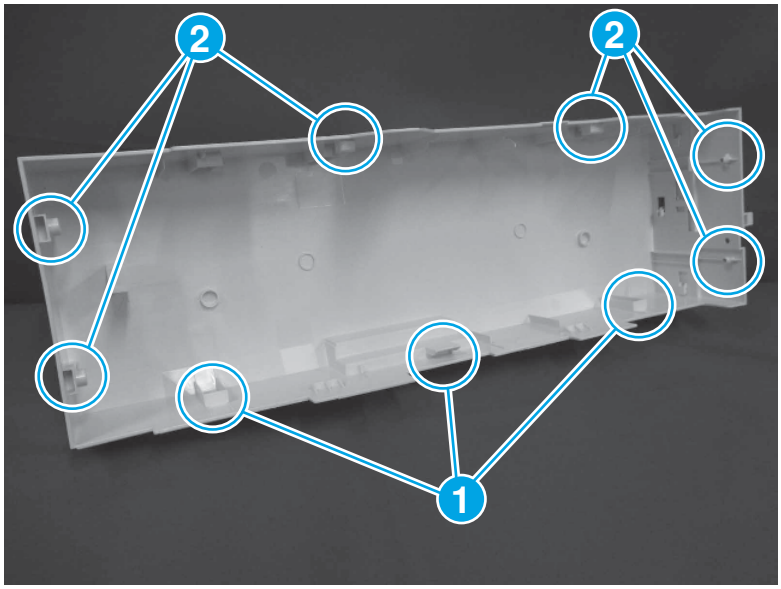
Figure 4-1217 Location of the mounting tabs and bosses



3. Release three tabs (callout 1), release six bosses (callout 2), and then remove the right cover (callout 3).

TIP: It might be easier to remove the cover if the top front boss is released first.

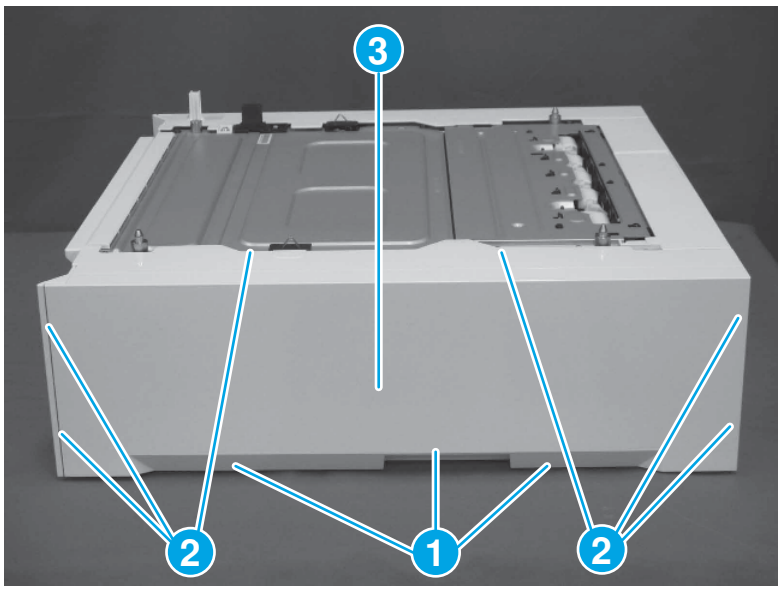Figure 4-1218 Remove the right cover




2. Remove the left cover (550-sheet paper feeder)

Follow the procedure below to remove and replace the left cover (550-sheet paper feeder).


1. Remove two screws (callout 1).

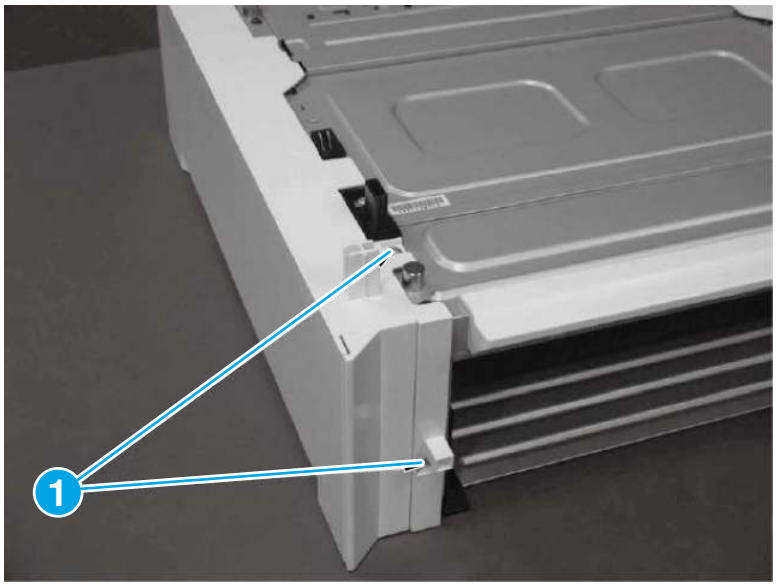Figure 4-1219 Remove two screws




2. Before proceeding, take note of the location of the mounting tabs (callout 1) and bosses (callout 2) on the inside of the cover.

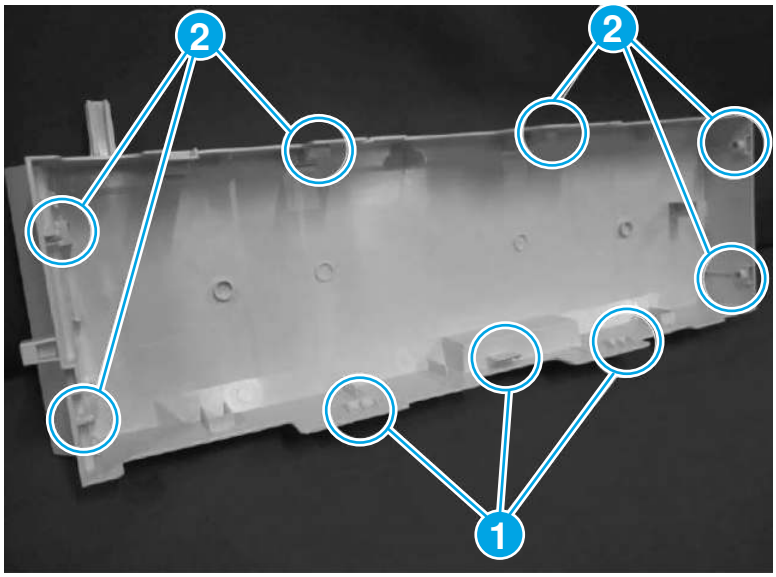Figure 4-1220 Location of the mounting tabs and bosses



3. Release three tabs (callout 1), release six bosses (callout 2), and then remove the left cover (callout 3).

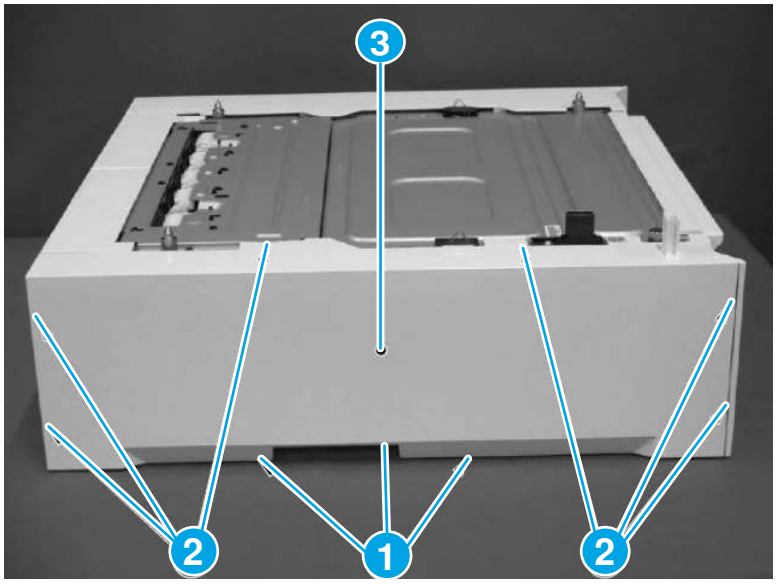Figure 4-1221 Remove the left cover




3. Remove the rear cover (550-sheet paper feeder)

Follow the procedure below to remove and replace the rear cover (550-sheet paper feeder).

1. Before proceeding, take note of the location of the mounting tabs (callout 1) on the inside of the cover.

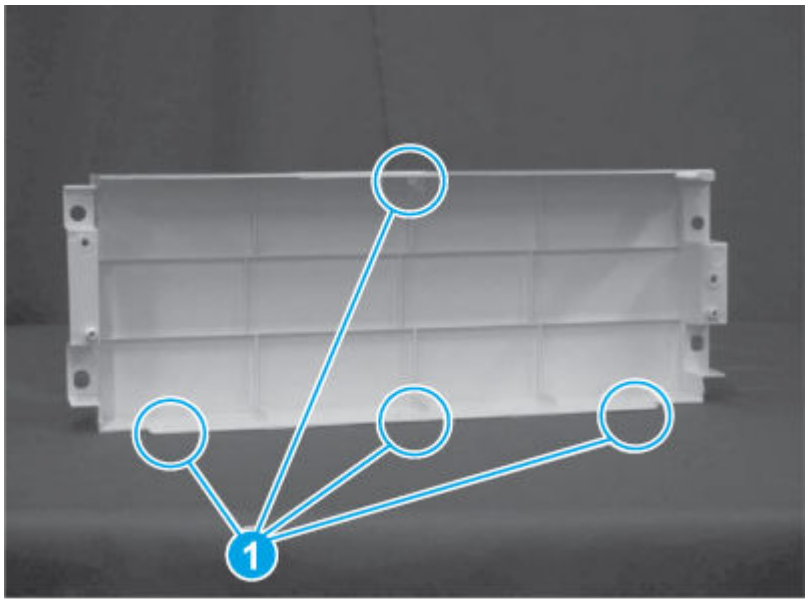
Figure 4-1222 Location of the mounting tabs



2. Remove two screws (callout 1), release four tabs (callout 2), and then remove the rear cover (callout 3).

TIP: It might be easier to remove the cover if the bottom tabs are released first.

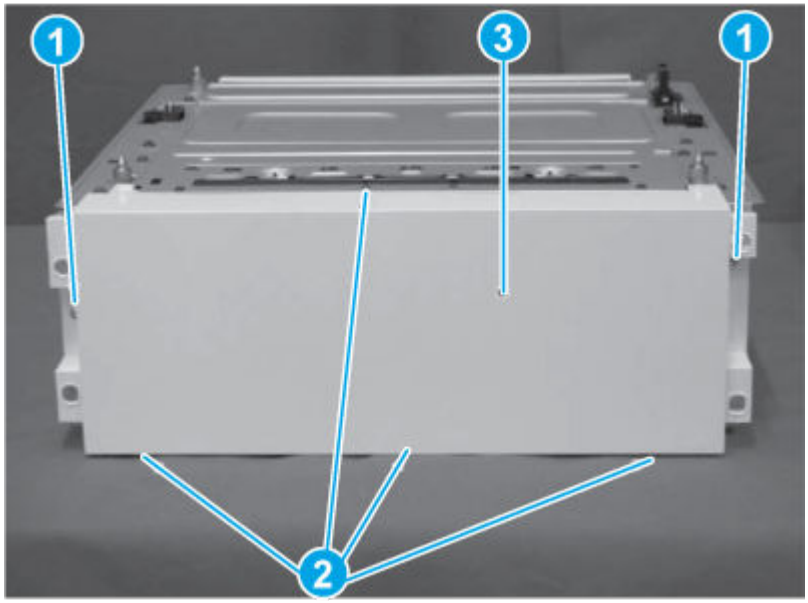Figure 4-1223 Remove the rear cover




4. Remove the feed lower guide assembly (550-sheet paper feeder)

Follow the procedure below to remove and replace the feed lower guide.


1. Disconnect all of the connectors on the controller PCA.

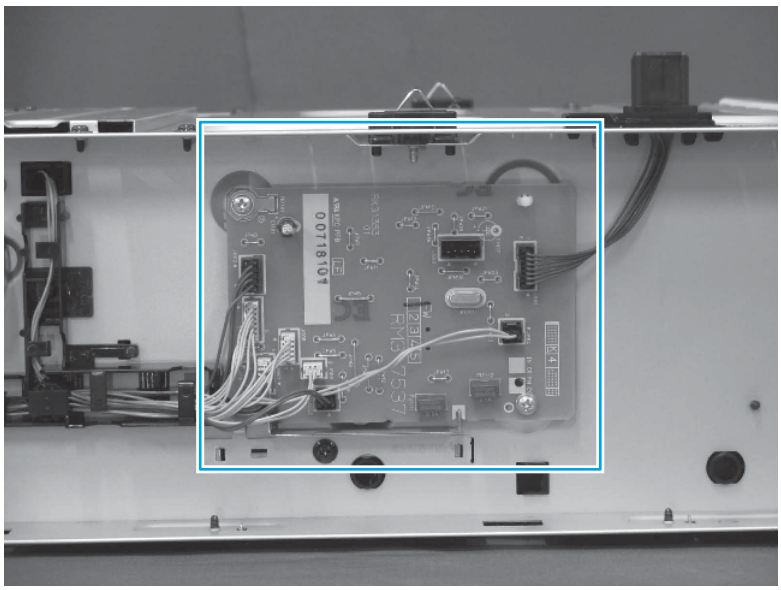Figure 4-1224 Disconnect all connectors




2. Remove five screws (callout 1), and then remove the sheet-metal plate (callout 2).

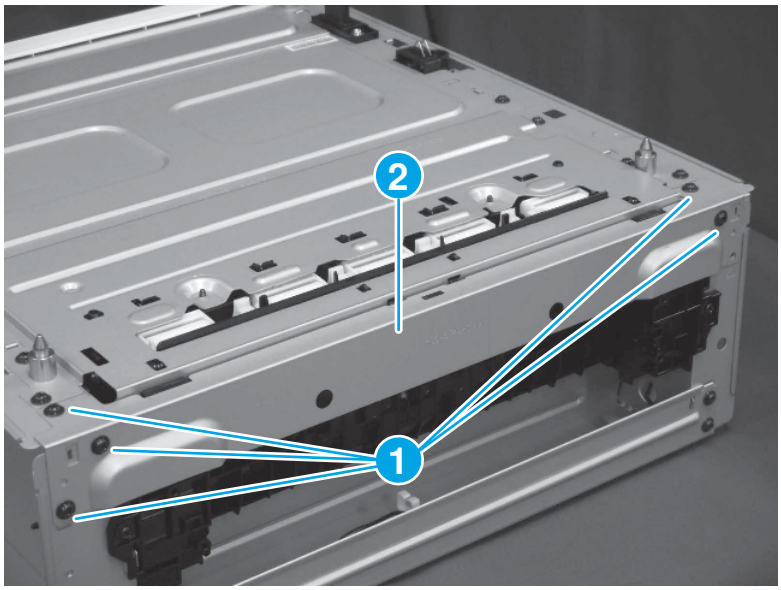Figure 4-1225 **Remove the plate**



3. Release the wire harness (callout 1) from the retainer (callout 2), and then pass it through the opening in the chassis (callout 3).

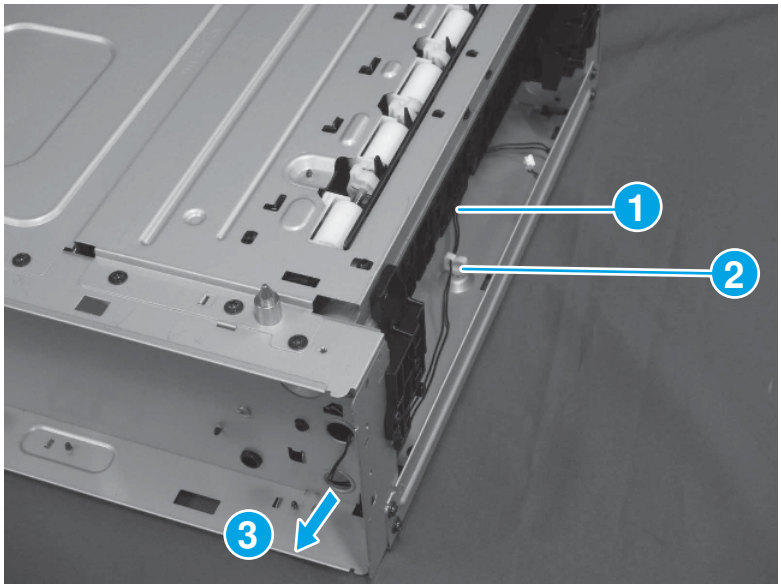Figure 4-1226 **Release the wire harness**




4. Turn the paper feeder over, and then do the following:

   - Remove one screw (callout 1), and then remove the holder (callout 2).
   - Release one tab (callout 3), and then remove the rubber foot pad (callout 4).


   NOTE: Repeat this step for a foot pad (not shown) located at the other end of the sheet-metal plate.

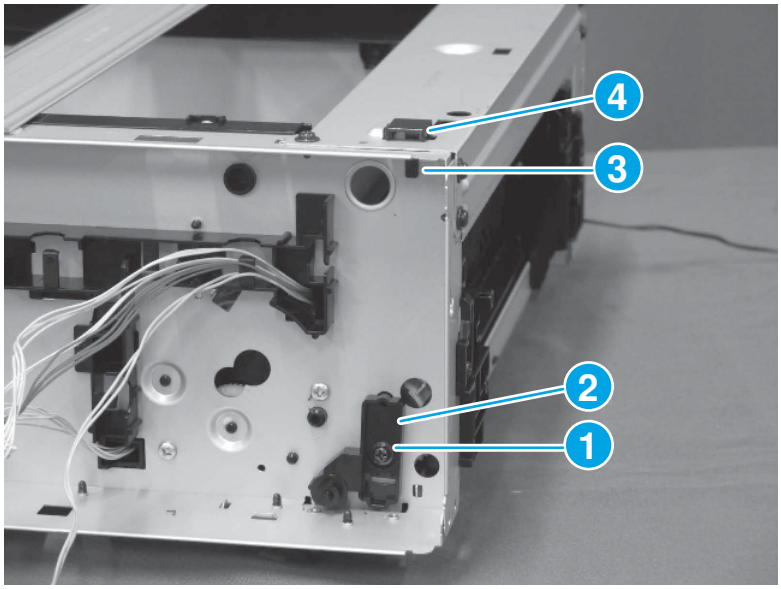Figure 4-1227 Remove the holder and foot pads




5. Remove six screws (callout 1), and then remove the sheet-metal plate (callout 2).

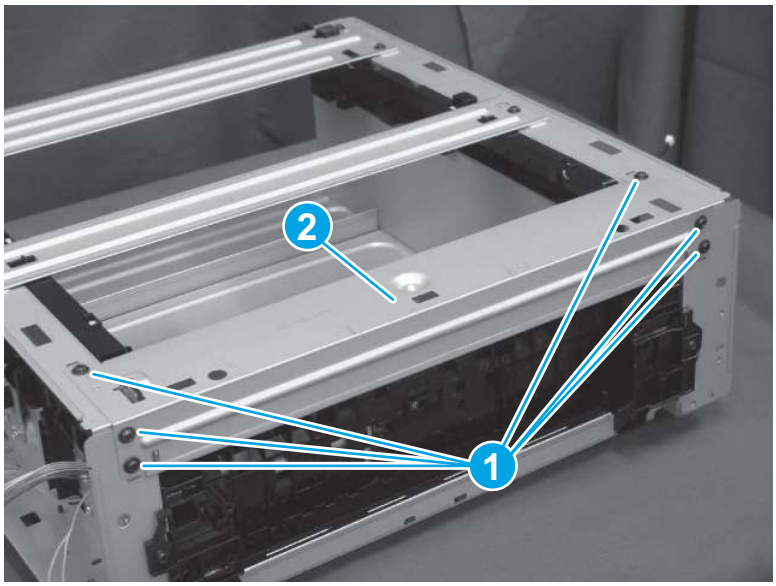Figure 4-1228 Remove the plate




6. Remove four screws.

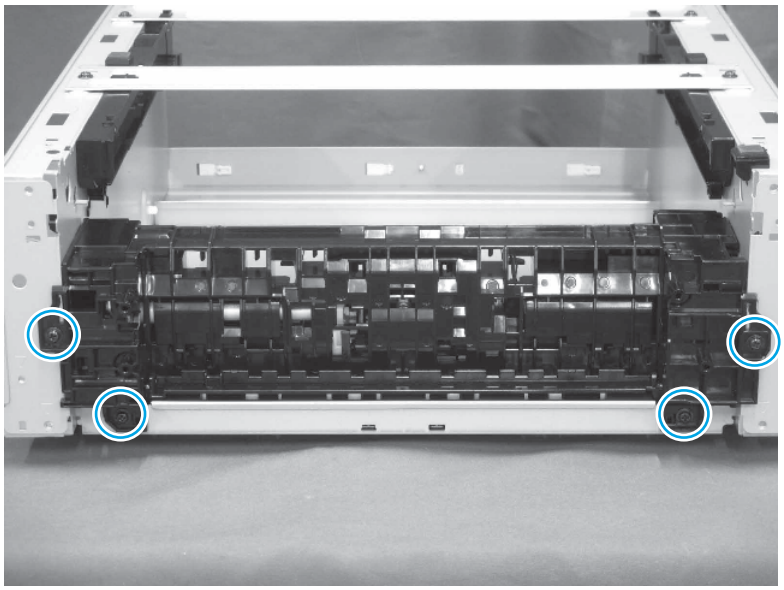Figure 4-1229 **Remove four screws**



7. Use a small flat-blade screwdriver to release two bosses.

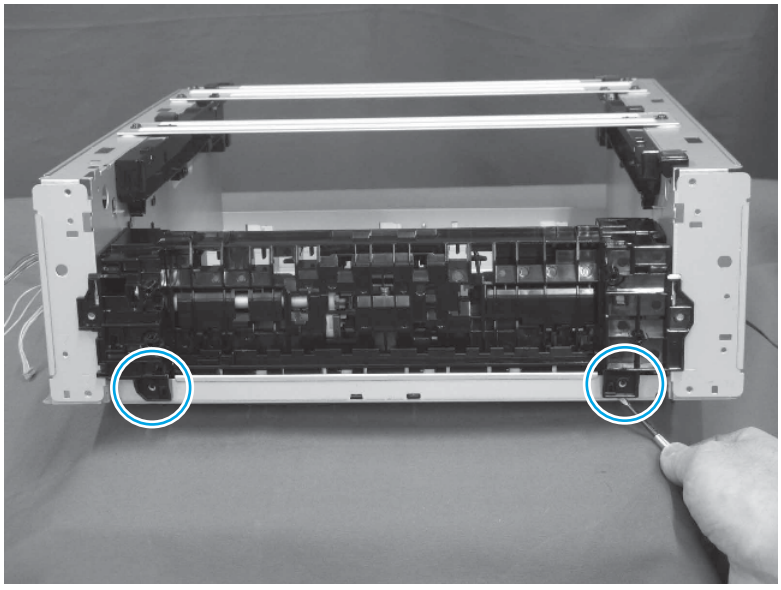
Figure 4-1230 **Release two bosses**



8. Remove the feed lower guide assembly.

NOTE: As the assembly is removed, pass the wire harness through the opening in the chassis (callout 1).

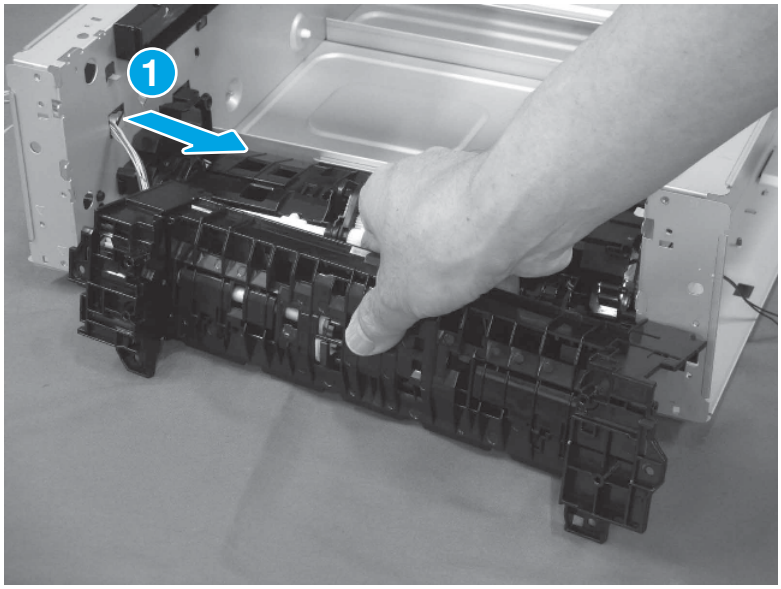Figure 4-1231 Remove the assembly




5. Remove the lifter drive assembly (550-sheet paper feeder)

Follow the procedure below to remove and replace the lifter drive assembly.


1. Remove three screws (callout 1), and then release one tab (callout 2).

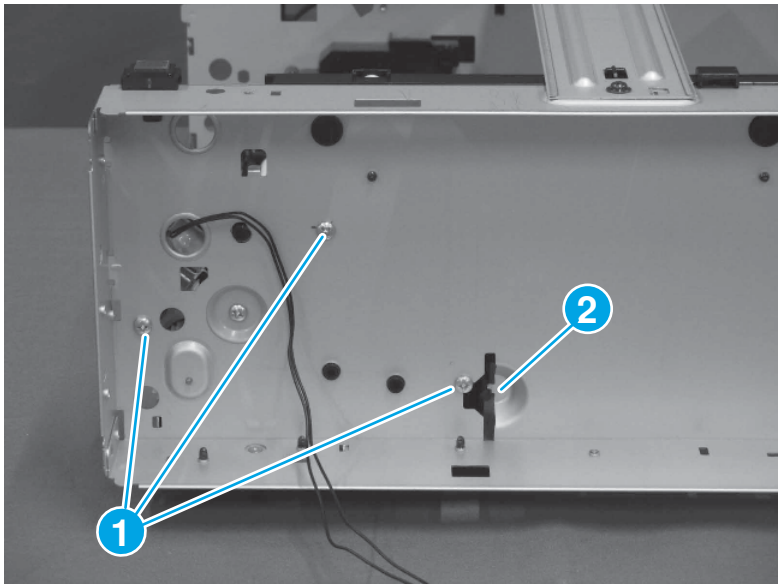Figure 4-1232 Remove the screws and release the tab



2. Pass the wire harness through the opening in the chassis (callout 1), and then remove the lifter drive assembly (callout 2).

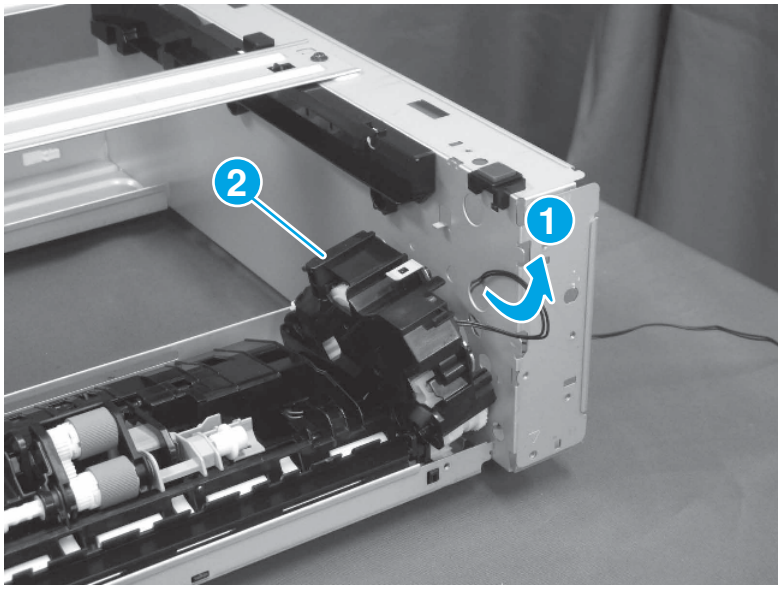Figure 4-1233 Remove the assembly




6. Remove the feed upper guide (550-sheet paper feeder)

Follow the procedure below to remove and replace the feed upper guide.

1. Do the following:


   - Remove one screw (callout 1), and then remove the holder (callout 2).
   - Remove three screws (callout 3), and then remove the sheet-metal plate 9callout 4)

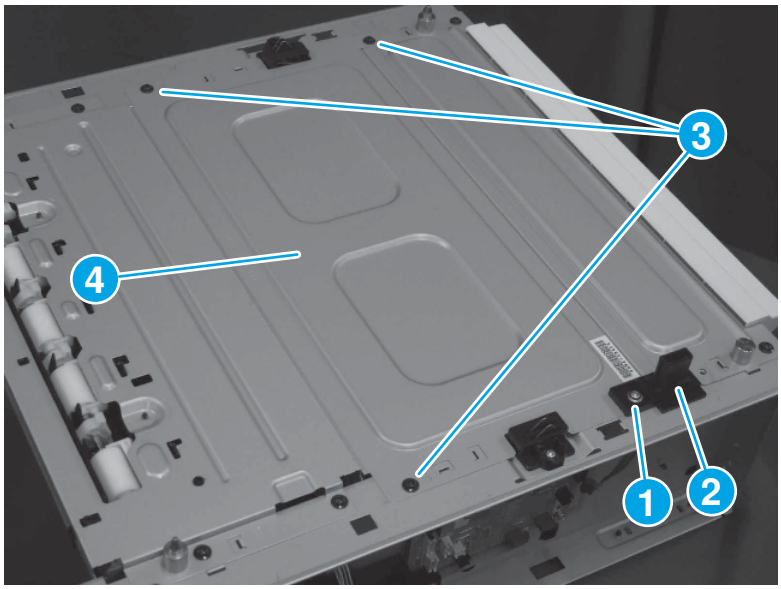Figure 4-1234 Remove the holder and plate



2. Remover two screws (callout 1), and then release four bosses (callout 2).

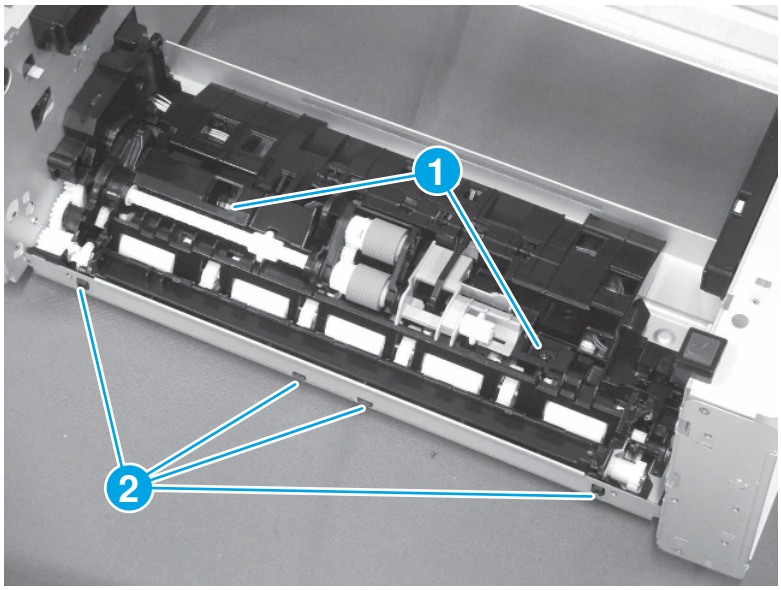
Figure 4-1235 **Remove the screws and release the bosses**



3. Remove the feed upper guide assembly.

NOTE: As the assembly is removed, pass the wire harness through the opening in the chassis (callout 1).

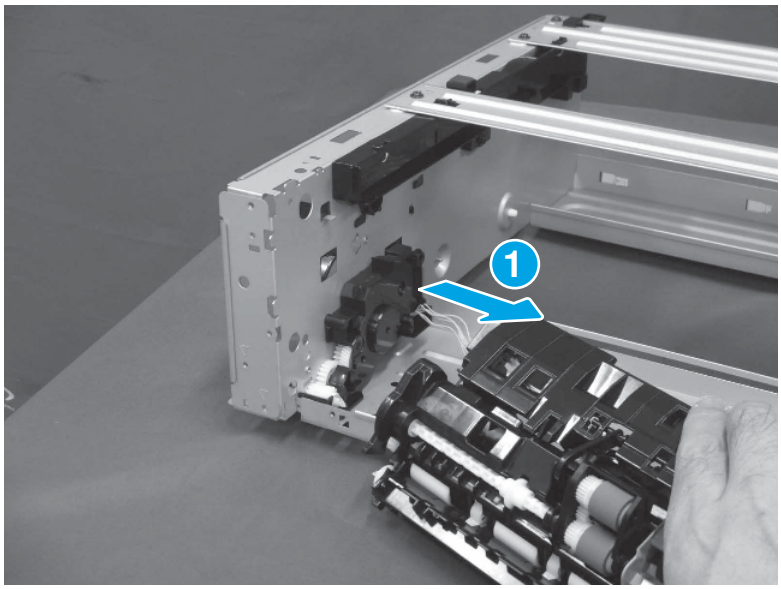Figure 4-1236 **Remove the assembly**




7. Remove the pickup drive assembly (550-sheet paper feeder)

Follow the procedure below to remove and replace the pickup drive assembly.


1. Remove two screws.

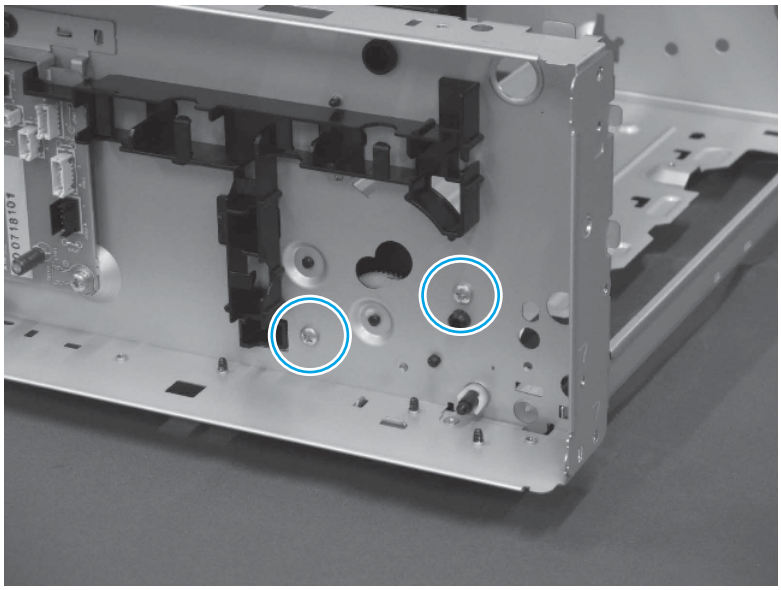Figure 4-1237 **Remove two screws**



2. Remove the pickup drive assembly.

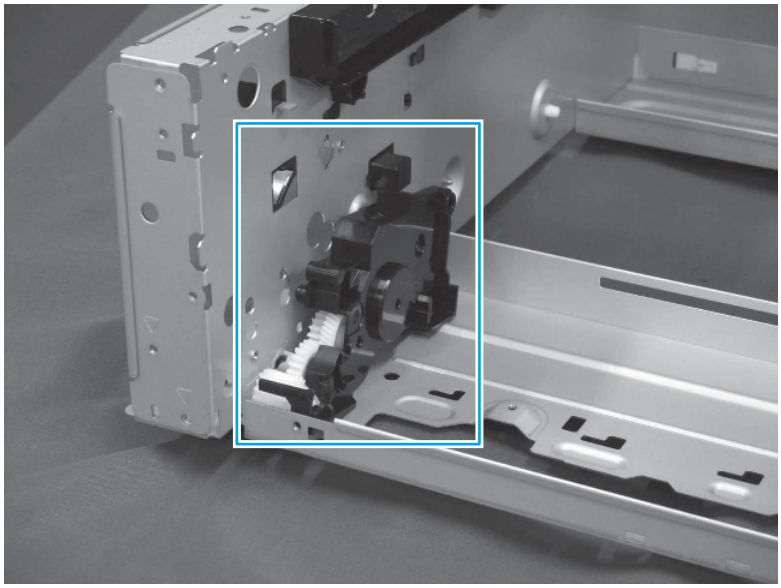Figure 4-1238 **Remove the assembly**



8. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: 

Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.

Removal and replacement: Controller PCA (550-sheet paper feeder)

Learn about controller PCA removal (550-sheet paper feeder).

Mean time to repair: 6 minutes

Service level: Easy

Before performing service

Turn the printer power off

- Disconnect the power cable.

WARNING! To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-61 Part information

Part number	Part description
RM3-7537-000CN	Paper feeder driver PCA

Required tools

- #2 Phillips screwdriver with a magnetic tip and a 152 mm (6 in) shaft length

- Needle-nose pliers

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test


Print any pages necessary to make sure the printer is functioning correctly.

1. Remove the left cover (550-sheet paper feeder)

Follow the procedure below to remove and replace the left cover (550-sheet paper feeder).


1. Remove two screws (callout 1).

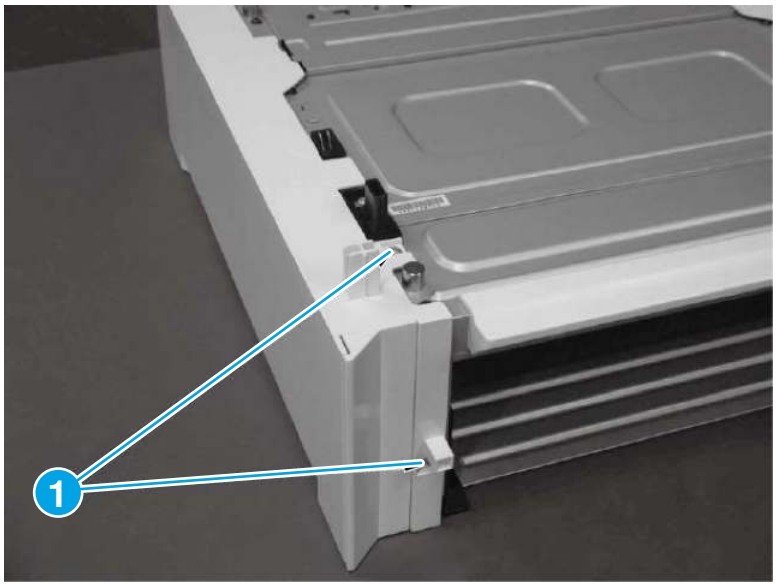Figure 4-1239 **Remove two screws**




2. Before proceeding, take note of the location of the mounting tabs (callout 1) and bosses (callout 2) on the inside of the cover.

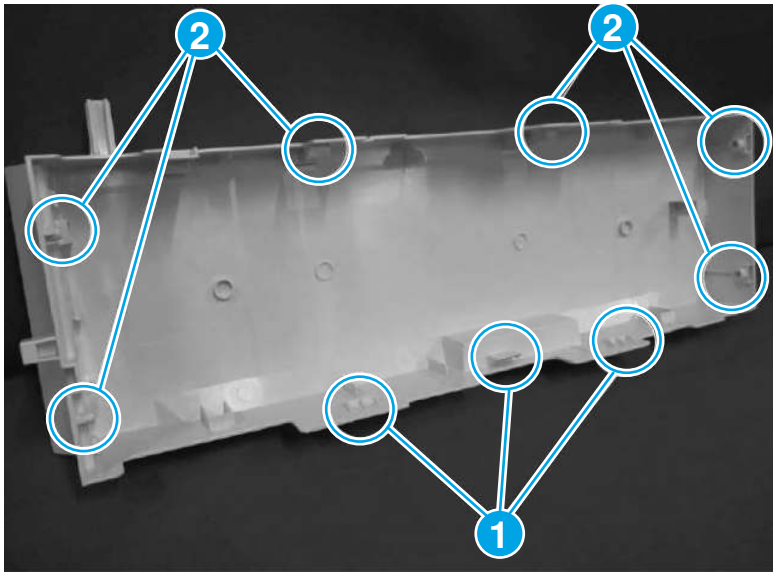Figure 4-1240 Location of the mounting tabs and bosses



3. Release three tabs (callout 1), release six bosses (callout 2), and then remove the left cover (callout 3).

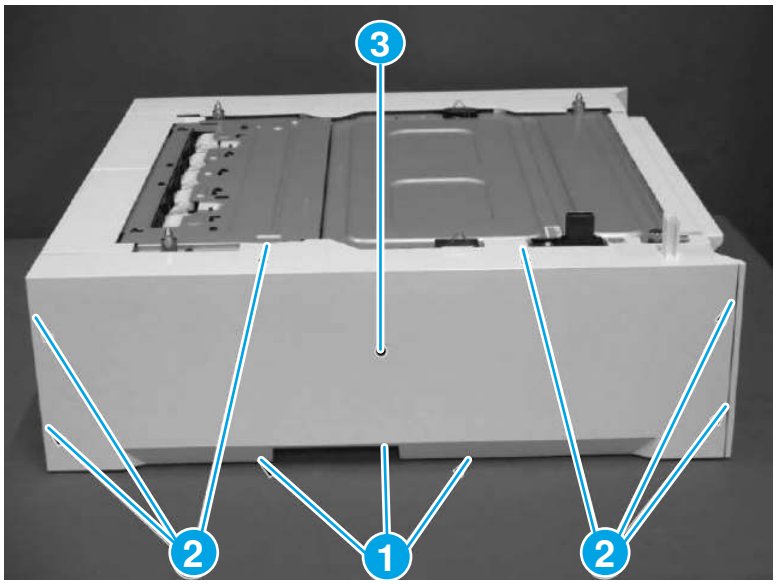Figure 4-1241 Remove the left cover



2. Remove the controller PCA (550-sheet paper feeder)


Follow the procedure below to remove and replace the controller PCA (550-sheet paper feeder).

- Do the following:
  a. Disconnect all of the connectors on the controller PCA.
  b. Remove two screws (callout 1).

c. Use a pair of needle-nose pliers to release on PCA support (callout 2).

d. Remove the controller PCA (callout 3).

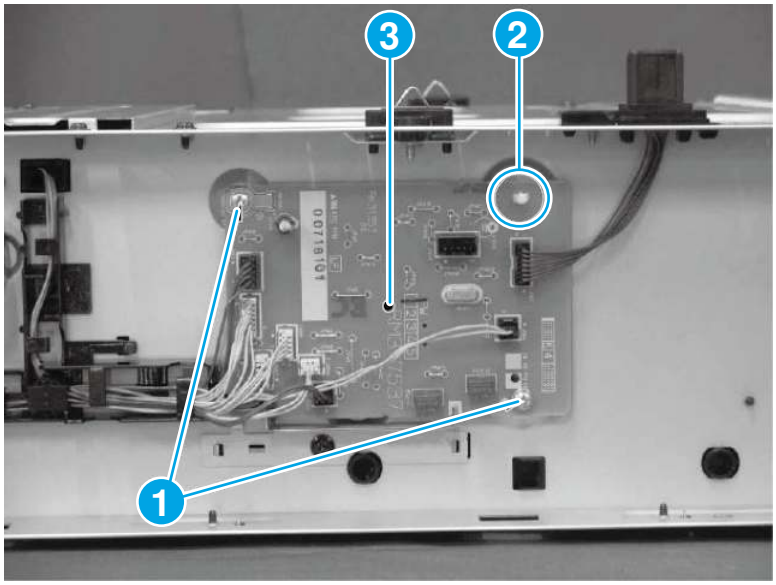Figure 4-1242 Remove the controller PCA



3. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.

Removal and replacement: Feed motor (550-sheet paper feeder)

Learn about feed motor removal (550-sheet paper feeder).

Mean time to repair: 6 minutes

Service level: Easy

Before performing service

Turn the printer power off

- Disconnect the power cable.

WARNING! To avoid damage to the printer, turn the printer off, wait 30 seconds, and then remove the power cord before attempting to service the printer.

Use the table below to identify the correct part number for your printer. To order the part, go to www.hp.com/buy/parts.

Table 4-62 Part information

Part number	Part description
RK3-0335-000CN	Motor, stepping DC (feed; M5)

Required tools

- #2 Phillips screwdriver with a magnetic tip and a 152 mm (6 in) shaft length
- Needle-nose pliers

After performing service

Turn the printer power on

- Connect the power cable.
- Use the power switch to turn the power on.

Post service test


Print any pages necessary to make sure the printer is functioning correctly.

1. Remove the right cover (550-sheet paper feeder)

Follow the procedure below to remove and replace the right cover (550-sheet paper feeder).


1. Remove one screw (callout 1).

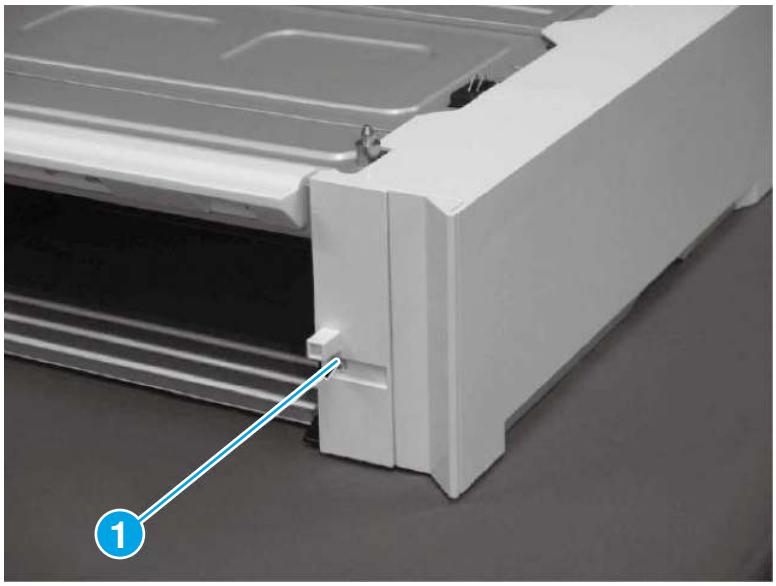Figure 4-1243 Remove one screw



2. Before proceeding, take note of the location of the mounting tabs (callout 1) and bosses (callout 2) on the inside of the cover.

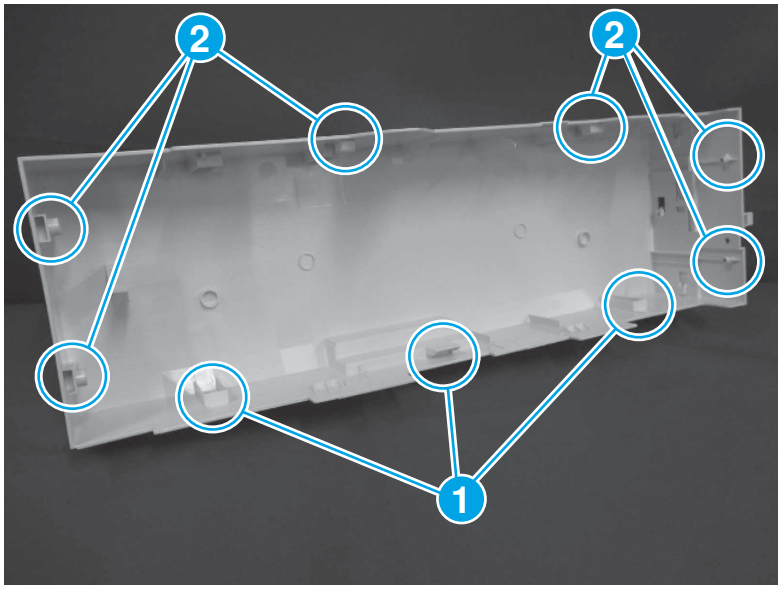
Figure 4-1244 Location of the mounting tabs and bosses



3. Release three tabs (callout 1), release six bosses (callout 2), and then remove the right cover (callout 3).

TIP: It might be easier to remove the cover if the top front boss is released first.

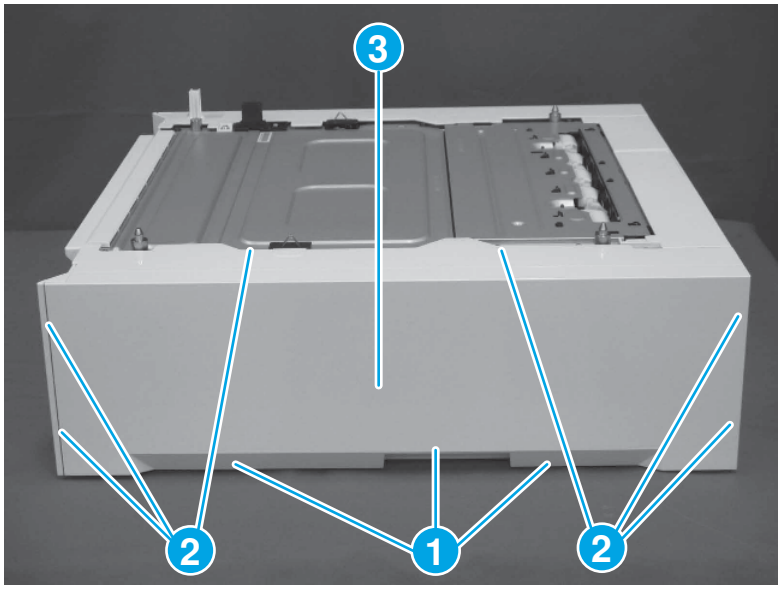Figure 4-1245 Remove the right cover




2. Remove the feed motor (550-sheet paper feeder)

Follow the procedure below to remove and replace the feed motor (550-sheet paper feeder).

- Disconnect one connector (callout 1), remove two screws (callout 2), and then remove the feed motor (callout 3).

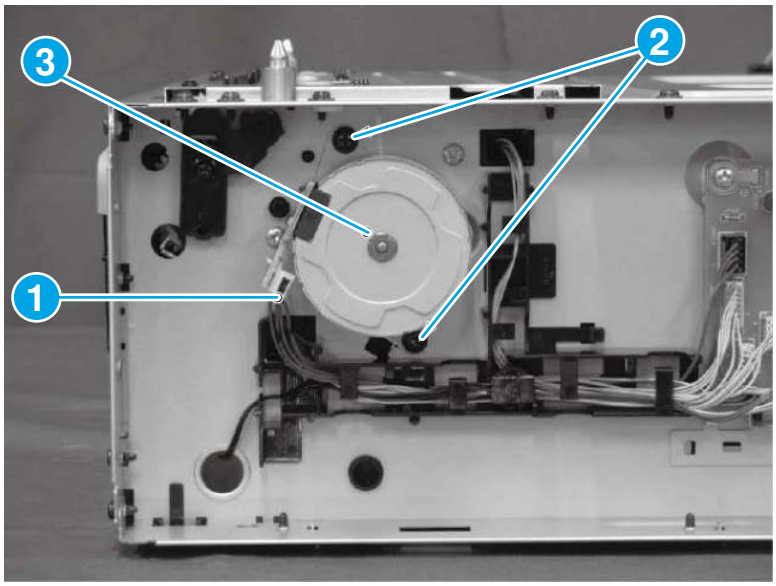Figure 4-1246 Remove the feed motor



3. Unpack the replacement assembly

Follow these steps to unpack the replacement assembly.

1. Dispose of the defective part.

NOTE: HP recommends responsible disposal of the defective part.

http://www8.hp.com/us/en/hp-information/environment/product-recycling.html

2. Unpack the replacement part from the packaging.

CAUTION: 

Some parts are sensitive to electrostatic discharge (ESD). Always perform service work at an ESD-protected workstation or mat. If an ESD workstation or mat is not available, touch the sheet-metal chassis to provide a static ground before touching an ESD-sensitive assembly. Protect the ESD-sensitive assemblies by placing them in ESD pouches when they are out of the printer.

IMPORTANT: Make sure that all of the shipping materials (for example shipping tape) are removed from the replacement part prior to installation.

NOTE: If the replacement part is a roller or pad, avoid touching the spongy part of it. Skin oils on the roller or pad can cause paper pickup and/or print-quality problems. HP recommends using disposable gloves when handling rollers or pads or washing your hands before touching rollers or pads.

3. To install an assembly, reverse the removal steps.

NOTE: When applicable, special installation instructions are provided for an assembly at the end of the removal procedure. Always completely read the removal instructions and follow all special installation instructions.

5 Parts and diagrams

Printer parts information including exploded assembly diagrams and part number lists.

Document feeder / scanner

Learn about the integrated scanner assembly (ISA) parts and assemblies.

NOTE: This section is for MFP printers only.

Integrated scanner assembly

Parts diagram and part list for the integrated scanner assembly (ISA).

Figure 5-1 Integrated scanner assembly

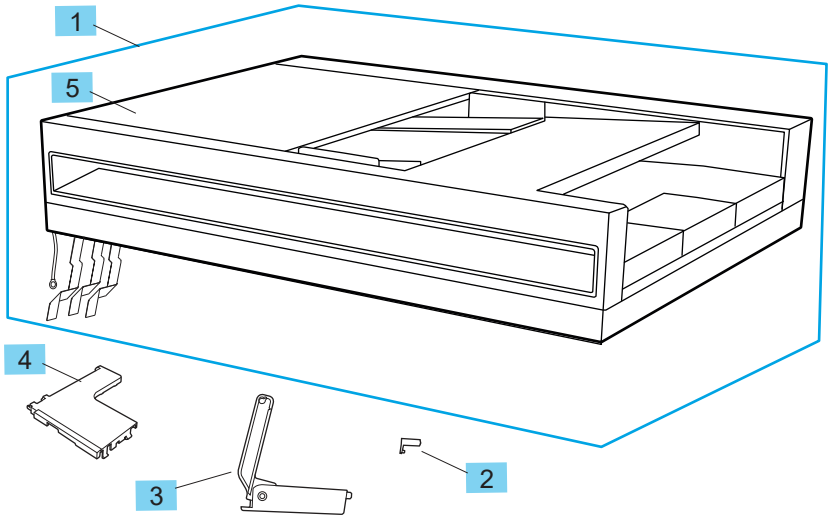


Table 5-1 Integrated scanner assembly

Ref No	Part number	Description	Qty
1	4RA80-67002	ISA assembly duplex blue and folded FFC	1
1	4RA80-67004	ISA assembly duplex gray and folded FFC	1
1	4RA80-67003	ISA assembly simplex blue and folded FFC	1

Table 5-1 Integrated scanner assembly (continued)

Ref No	Part number	Description	Qty
1	4RA80-67005	ISA assembly simplex gray and folded FFC	1
2	B3Q10-40041	ISA lift slider pin	1
3	B3Q10-60128	ISA lift assembly	1
4	4RA80-40045	Cover, FFC	1
5	4RA80-67006	ADF top cover assembly (includes rollers)	1

Base printer

Learn about the printer engine parts and assemblies.

Control panels

Parts diagrams and part lists for the control panels.

Control panel (SFP)

Parts diagrams and parts lists for the SFP printer control panels.

Figure 5-2 Control panel (4201/4202/4203)

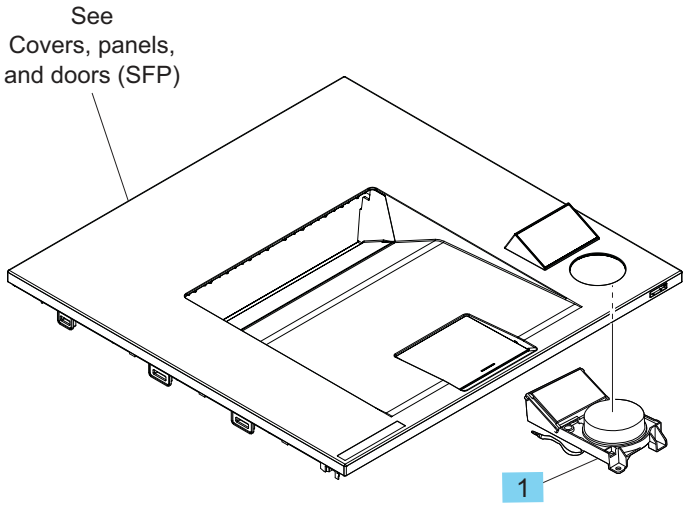


Table 5-2 Control panel (4201/4202/4203)

Ref No	Part number	Description	Qty
1	4RA89-60101	Dial control panel with display	1
Not shown	RK3-0383-000CN	Cable, flexible flat	1

Control panel (MFP)

Parts diagrams and parts lists for the MFP printer control panel.

Figure 5-3 Control panel (4301/4302/4303)

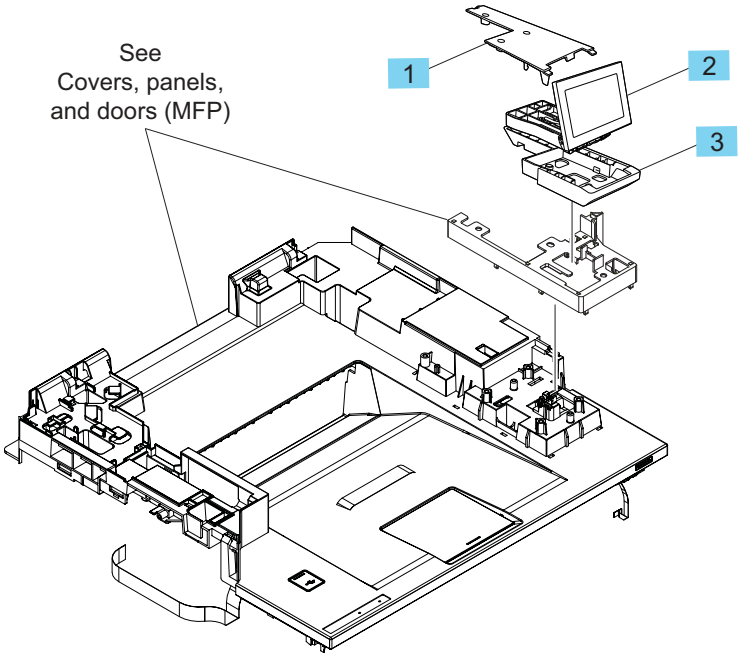


Table 5-3 Control panel (4301/4302/4303)

Ref No	Part number	Description	Qty
1	4RA83-40006	Control panel base cover	1
2	4RA83-60101	Control panel touchscreen assembly	1
3	4RA83-40005	Control panel base	1

Covers, panels, and doors

Parts diagrams and part lists for the covers, panels, and doors.

Parts and diagrams: Whole unit replacement and toner cartridges

Parts diagram and parts list for whole unit replacement (WUR) and the toner cartridges.

Figure 5-4 **Whole unit replacement and toner cartridges**

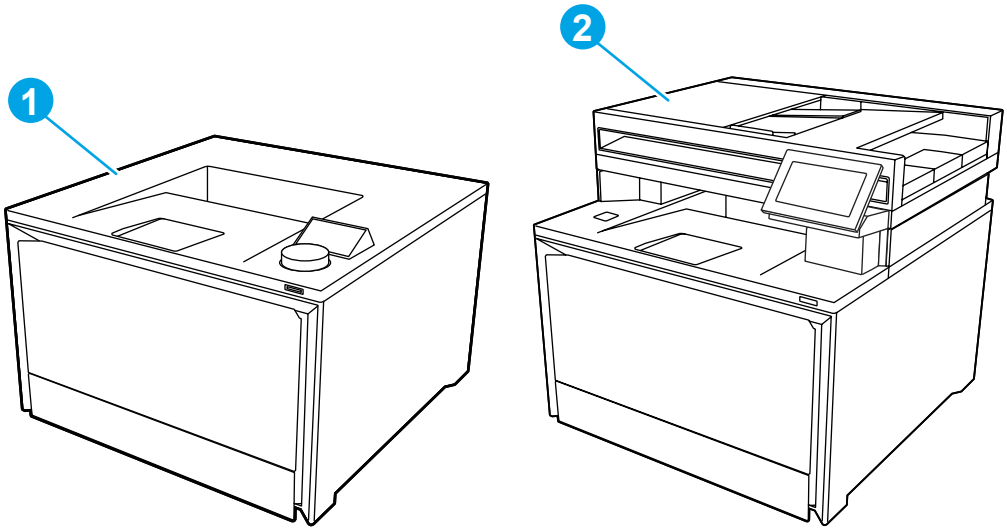


Table 5-4 **Whole unit replacement and toner cartridges**

Ref No	Part number	Description	Qty
1	4RA85-69001	Prod-Exchange 220V 4201dne WUR	1
1	4RA85-69002	Prod-Exchange 110V 4201dne WUR	1
1	4RA85-69003	Prod-Exchange 220V 4201dn WUR	1
1	4RA85-69004	Prod-Exchange 110V 4201dn WUR	1
1	4RA86-69001	Prod-Exchange 220V 4201dwe WUR	1
1	4RA86-69002	Prod-Exchange 110V 4201dwe WUR	1
1	4RA86-69003	Prod-Exchange 220V 4201dw WUR	1
1	4RA86-69004	Prod-Exchange 110V 4201dw WUR	1
1	4RA87-69002	Prod-Exchange 220V 4202dn WUR	1
1	4RA88-69001	Prod-Exchange 220V 4202dwe WUR	1
1	4RA88-69002	Prod-Exchange 220V 4202dw WUR	1
1	4RA89-69001	Prod-Exchange 220V 4203dn Blue WUR	1
1	4RA89-69002	Prod-Exchange 110V 4203dn WUR TW	1
1	4RA89-69003	Prod-Replace New 220V 4203dn China GV WUR	1
1	4RA89-69004	Prod-Replace New 220V 4203dn IN WUR	1

Table 5-4 Whole unit replacement and toner cartridges (continued)

Ref No	Part number	Description	Qty
1	4RA89-69005	Prod-Exchange 220V 4203dn Gray WUR RU	1
1	5HH48-69001	Prod-Exchange 220V 4203dw WUR	1
1	5HH48-69002	Prod-Exchange 110V 4203dw WUR TW	1
1	5HH48-69003	Prod-Replace New 220V 4203dw CN WUR	1
1	5HH48-69004	Prod-Exchange 110V 4203dw WUR LAR	1
1	5HH48-69005	Prod-Exchange 110V 4203dw WUR Brazil	1
1	5HH48-69006	Prod-Exchange 220V 4203dw WUR LAR	1
1	5HH48-69007	Prod-Exchange 220V 4203dw Gray WUR RU	1
1	5HH53-69001	Prod-Exchange 220V 4203cdn Gray CN WUR	1
2	4RA80-69001	Prod-Exchange 220V 4301dwe WUR	1
2	4RA80-69002	Prod-Exchange 110V 4301dwe WUR	1
2	4RA80-69003	Prod-Exchange 220V 4301dw WUR	1
2	4RA80-69004	Prod-Exchange 110V 4301dw WUR	1
2	4RA81-69001	Prod-Exchange 220V 4301fdne WUR	1
2	4RA81-69002	Prod-Exchange 110V 4301fdne WUR	1
1	4RA81-69003	Prod-Exchange 220V 4301fdn WUR	1
2	4RA81-69004	Prod-Exchange 110V 4301fdn WUR	
2	4RA82-69001	Prod-Exchange 220V 4301fdwe WUR	1
2	4RA82-69002	Prod-Exchange 110V 4301fdwe WUR	1
2	4RA82-69003	Prod-Exchange 220V 4301fdw WUR	1
2	4RA82-69004	Prod-Exchange 110V 4301fdw WUR	1
2	4RA83-69001	Prod-Exchange 220V 4302dwe WUR	1
2	4RA83-69002	Prod-Exchange 220V 4302dw WUR	1
2	4RA84-69002	Prod-Exchange 220V 4302fdn WUR	1
2	5HH64-69001	Prod-Exchange 220V 4302fdw WUR	1
2	5HH64-69002	Prod-Exchange 220V 4302fdwe WUR	1
2	5HH65-69001	Prod-Exchange 110V 4303dw WUR TW	1
2	5HH65-69002	Prod-Exchange 220V 4303dw WUR	1
2	5HH65-69003	Prod-Exchange 110V 4303dw WUR LAR	1
2	5HH65-69004	Prod-Exchange 220V 4303dw CN WUR	1
2	5HH65-69005	Prod-Replace New 220V 4303dw IN WUR	1
2	5HH65-69006	Prod-Replace New 220V 4303dw IN GOV WUR	1
2	5HH65-69007	Prod-Exchange 220V 4303dw Gray WUR RU	1

Table 5-4 Whole unit replacement and toner cartridges (continued)

Ref No	Part number	Description	Qty
2	5HH66-69001	Prod-Exchange 110V 4303fdn WUR TW	1
2	5HH66-69002	Prod-Exchange 220V 4303fdn WUR	1
2	5HH66-69003	Prod-Replace New 220V 4303fdn CN WUR	1
2	5HH66-69004	Prod-Replace New 220V 4303fdn IN WUR	1
2	5HH66-69005	Prod-Replace New 220V 4303fdn CN GOV WUR	1
2	5HH66-69006	Prod-Exchange 220V 4303fdn Gray WUR	1
2	5HH67-69001	Prod-Exchange 110V 4303fdw WUR TW	1
2	5HH67-69002	Prod-Exchange 220V 4303fdw WUR	1
2	5HH67-69003	Prod-Replace New 220V 4303fdw CN WUR	1
2	5HH67-69004	Prod-Replace New 220V 4303fdw IN WUR	1
2	5HH67-69005	Prod-Exchange 110V 4303fdw WUR LAR	1
2	5HH67-69006	Prod-Exchange 110V 4303fdw WUR	1
2	5HH67-69007	Prod-Exchange 220V 4303fdw WUR LAR	1
2	5HH67-69008	Prod-Exchange 220V 4303fdw Gray WUR RU	1
Not shown	W2100A	210A Black Toner Crtg; standard (4201/4301)	1
Not shown	W2101A	210A Cyan Toner Crtg; standard (4201/4301)	1
Not shown	W2102A	210A Yellow Toner Crtg; standard (4201/4301)	1
Not shown	W2103A	210A Magenta Toner Crtg; standard (4201/4301)	1
Not shown	W2100X	210X Black Toner Crtg; high capacity (4201/4301)	1
Not shown	W2101X	210X Cyan Toner Crtg; high capacity (4201/4301)	1
Not shown	W2102X	210X Yellow Toner Crtg; high capacity (4201/4301)	1
Not shown	W2103X	210X Magenta Toner Crtg; high capacity (4201/4301)	1
Not shown	W2200A	220A Black Toner Crtg EMEA; standard (4202/4302)	1
Not shown	W2201A	220A Cyan Toner Crtg EMEA; standard (4202/4302)	1
Not shown	W2202A	220A Yellow Toner Crtg EMEA; standard (4202/4302)	
Not shown	W2203A	220A Magenta Toner Crtg EMEA; standard (4202/4302)	
Not shown	W2200X	220X Black Toner Crtg EMEA; high capacity (4202/4302)	

Table 5-4 Whole unit replacement and toner cartridges (continued)

Ref No	Part number	Description	Qty
Not shown	W2201X	220X Cyan Toner Crtg EMEA; high capacity (4202/4302)	
Not shown	W2202X	220X Yellow Toner Crtg EMEA; high capacity (4202/4302)	
Not shown	W2203X	220X Magenta Toner Crtg EMEA; high capacity (4202/4302)	
Not shown	W2300A	230A Black Toner Crtg; standard (4203/4303)	
Not shown	W2301A	230A Cyan Toner Crtg; standard (4203/4303)	
Not shown	W2302A	230A Yellow Toner Crtg; standard (4203/4303)	
Not shown	W2303A	230A Magenta Toner Crtg; standard (4203/4303)	
Not shown	W2300X	230X Black Toner Crtg; high capacity (4203/4303)	
Not shown	W2301X	230X Cyan Toner Crtg; high capacity (4203/4303)	
Not shown	W2302X	230X Yellow Toner Crtg; high capacity (4203/4303)	
Not shown	W2303X	230X Magenta Toner Crtg; high capacity (4203/4303)	
Not shown	W2150XC	XC Black Contract Toner (all models)	
Not shown	W2151XC	XC Cyan Contract Toner (all models)	
Not shown	W2152XC	XC Yellow Contract Toner (all models)	
Not shown	W2153XC	XC Magenta Contract Toner (all models)	

Covers, panels, and doors (SFP)

Parts diagram and parts list for the SFP printer covers, panels, and doors.

Figure 5-5 Covers, panels, and doors (4201/4202/4203)

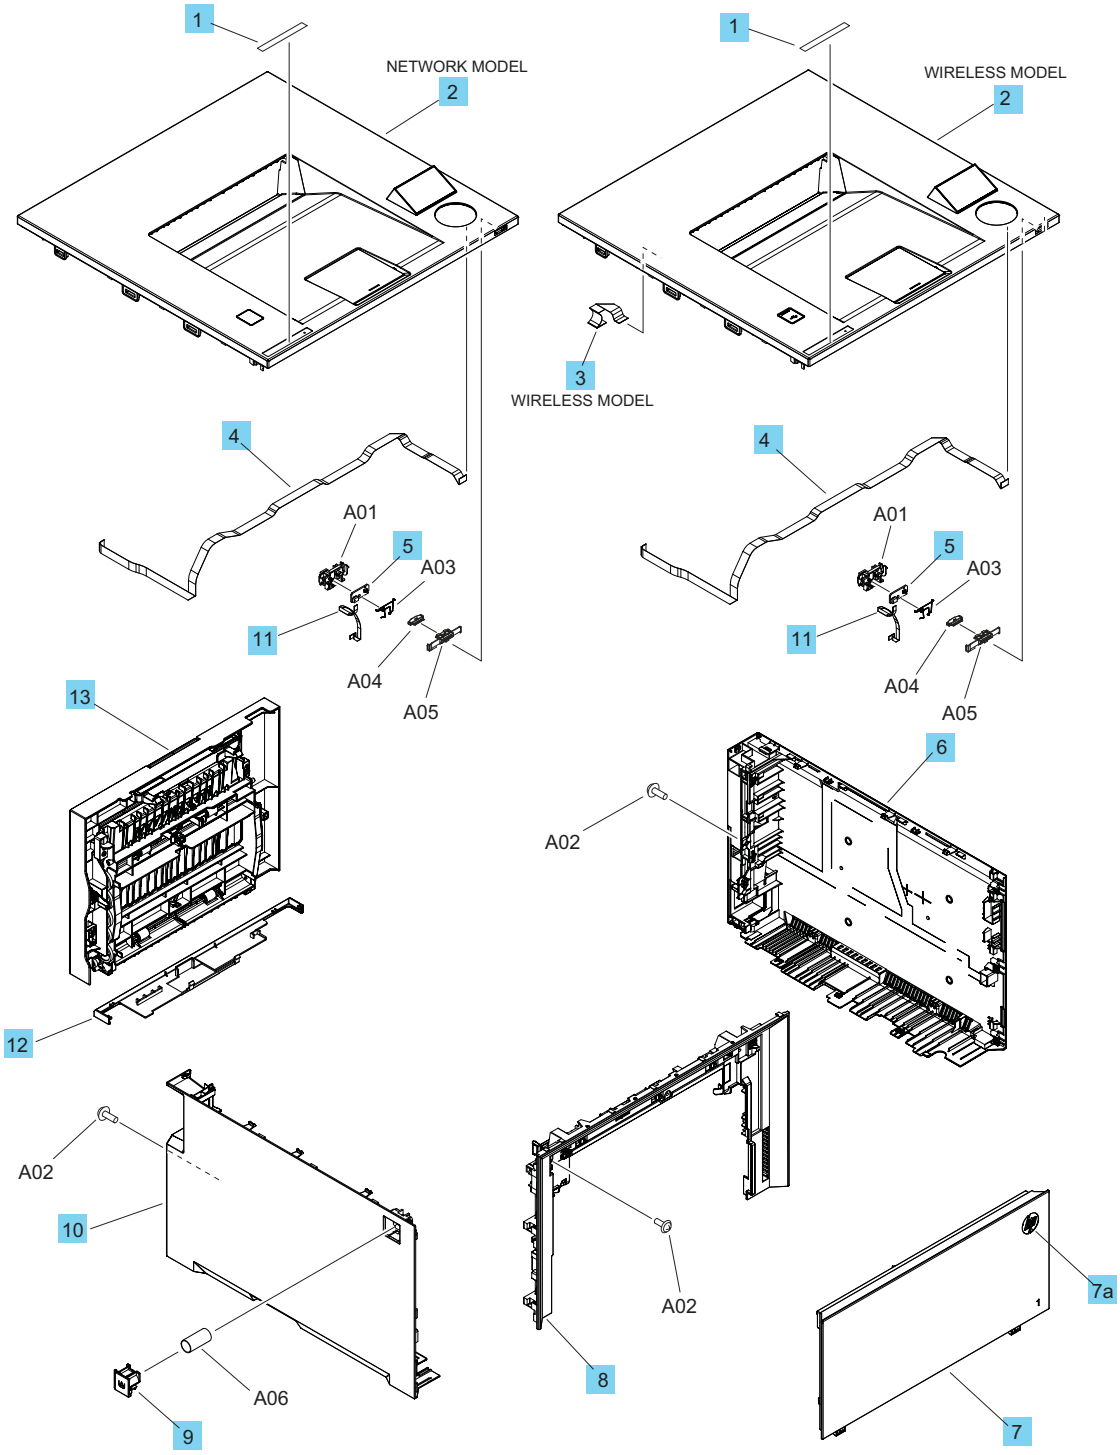


Table 5-5 Covers, panels, and doors (4201/4202/4203)

Ref No	Part number	Description	Qty
1	RC5-5464-000CN	Name plate 4201dwe	1
1	RC5-5465-000CN	Name plate 4201dne	1
1	RC5-5486-000CN	Name plate 4202dwe	1
1	RC5-5488-000CN	Name plate 4203dw	1
1	RC5-5489-000CN	Name plate 4203dn	1
1	RC5-5490-000CN	Name plate 4203cdn	1
1	RC5-5491-000CN	Name plate 4202dw	1
1	RC5-5492-000CN	Name plate 4202de	1
1	RC5-5496-000CN	Name plate 4201dw	1
1	RC5-5497-000CN	Name plate4201dn	1
2	RM2-2814-000CN	Cover, top assembly (SFP) (network model)	
2	RM2-2815-000CN	Cover, top assembly (SFP) (wireless model)	1
3	RK3-0392-000CN	Cable, flexible flat (SFP) (Wireless model)	1
4	RK3-0383-000CN	Cable, flexible flat	1
5	RM3-7568-000CN	Switch, power supply PCA	1
6	RM2-2812-000CN	Cover, right (SFP)	1
7	RM2-2843-000CN	Cartridge door assembly (blue) (SFP)	1
7	RM2-2847-000CN	Cartridge door assembly (gray) (SFP)	1
7a	7122-0718	HP logo gem	1
8	RM2-2824-000CN	Cover, front assembly	1
9	RC5-5411-000CN	Button, cartridge door	1
10	RC5-5450-000CN	Cover, left (SFP)	1
11	RK3-0377-000CN	Cable, flexible flat	1
12	RC5-6129-000CN	Cover, duplexing bottom	1
13	RM2-2754-000CN	Rear door assembly	1

Covers, panels, and doors (MFP)

Parts diagram and parts list for the MFP printer covers, panels, and doors.

Figure 5-6 **Covers, panels, and doors (4301/4302/4303)**

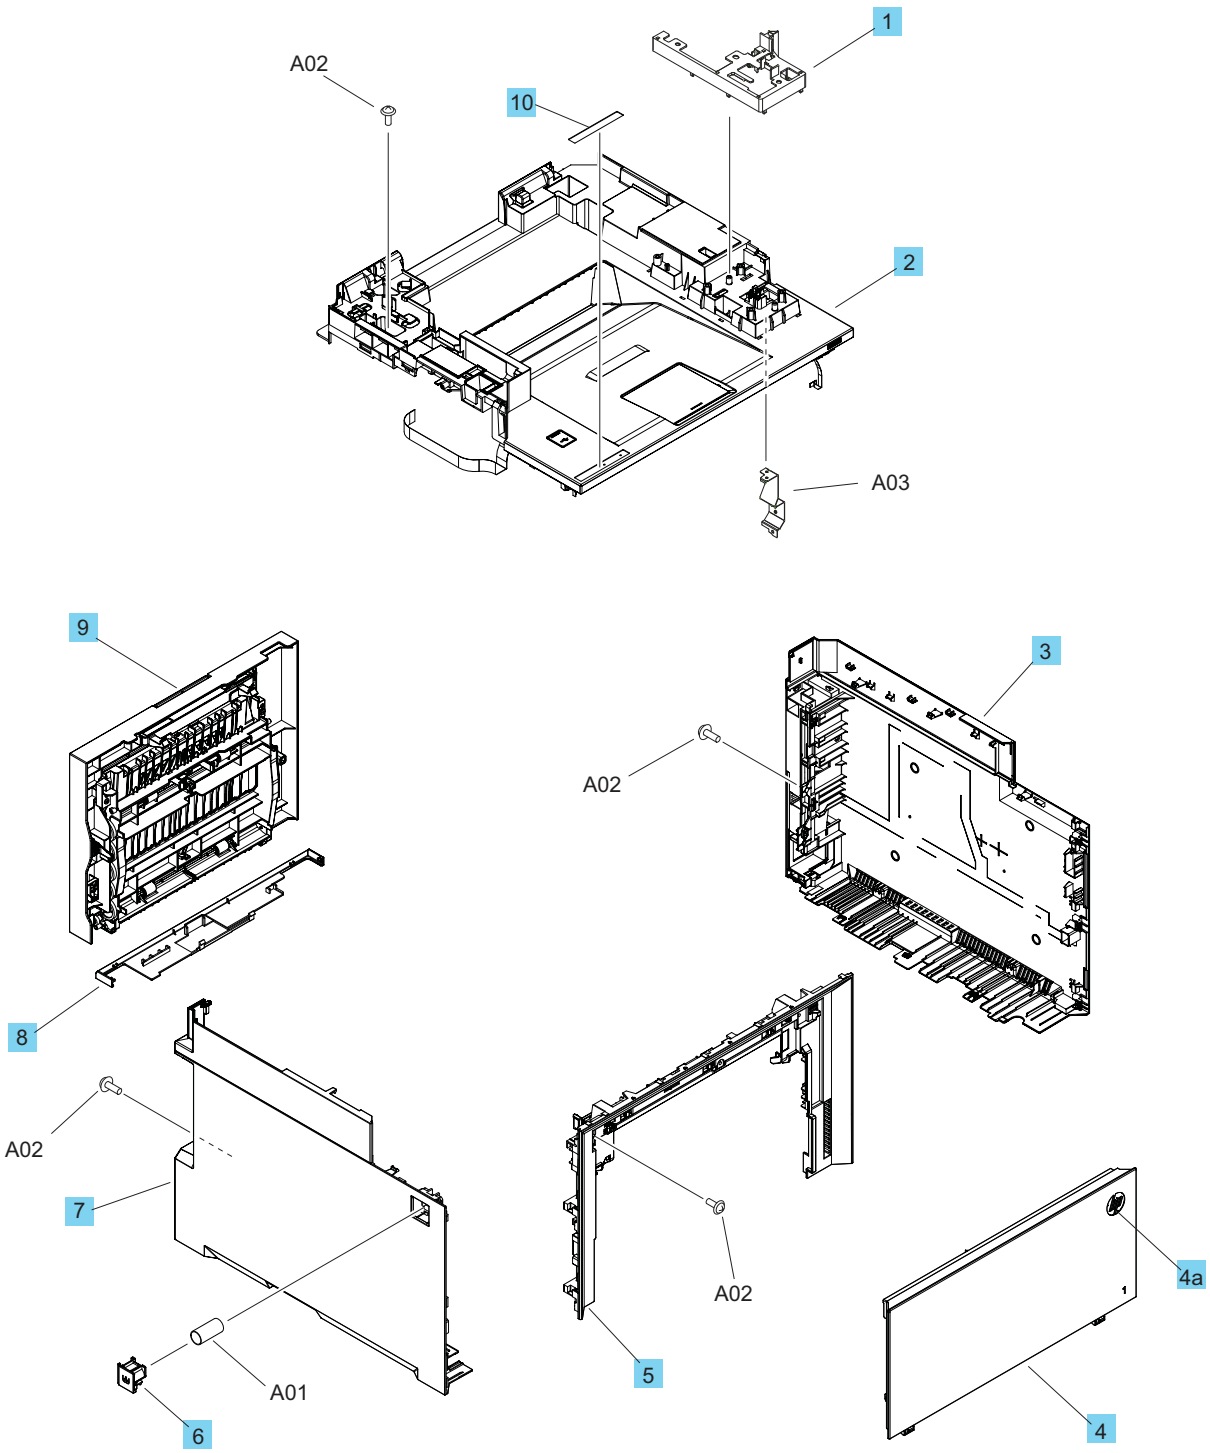


Table 5-6 **Covers, panels, and doors (4301/4302/4303)**

Ref No	Part number	Description	Qty
1	RC5-5444-000CN	Cover, pillar (MFP)	1
2	RM2-2762-000CN	Cover, top assembly (MFP)	1
3	RM2-2827-000CN	Cover, right (MFP)	1
4	RM2-2844-000CN	Cartridge door assembly (blue) (MFP)	1
4	RM2-2848-000CN	Cartridge door assembly (gray) (MFP)	1
4a	7122-0718	HP logo gem	1
5	RM2-2824-000CN	Cover, front assembly	1
6	RC5-5411-000CN	Button, cartridge door	1
7	RC5-5462-000CN	Cover, left (MFP)	1
8	RC5-6129-000CN	Cover, duplexing bottom	1
9	RM2-2754-000CN	Rear door assembly	1
10	4RA80-00012	Nameplate-Color LaserJet Pro MFP 4301dwe	1
10	4RA80-00008	Nameplate-Color LaserJet Pro MFP 4301fdne	1
10	4RA82-00012	Nameplate-Color LaserJet Pro MFP 4301fdwe	1
10	4RA83-00004	Nameplate-Color LaserJet Pro MFP 4302dwe	1
10	5HH64-00004	Nameplate-Color LaserJet Pro MFP 4302fdwe	1
10	5HH65-00004	Nameplate-Color LaserJet Pro MFP 4303dw	1
10	5HH66-00002	Nameplate-Color LaserJet Pro MFP 4302fdn	1
10	5HH67-00002	Nameplate-Color LaserJet Pro MFP 4302fdw	1
10	4RA80-40048	Nameplate-Color LaserJet Pro MFP 4301dw	1
10	4RA81-40002	Nameplate-Color LaserJet Pro MFP 4301fdn	1
10	4RA82-40004	Nameplate-Color LaserJet Pro MFP 4301fdw	1
10	4RA83-40002	Nameplate-Color LaserJet Pro MFP 4302dw	1
10	4RA84-40012	Nameplate-Color LaserJet Pro MFP 4302fdn	1
10	5HH64-40002	Nameplate-Color LaserJet Pro MFP 4302fdw	1

Internal parts and assemblies

Parts diagrams and part lists for the internal parts and assemblies.

Internal parts and assemblies (1 of 5)

Parts diagram and parts list for the internal printer assemblies.

Figure 5-7 **Internal parts and assemblies (1 of 5)**

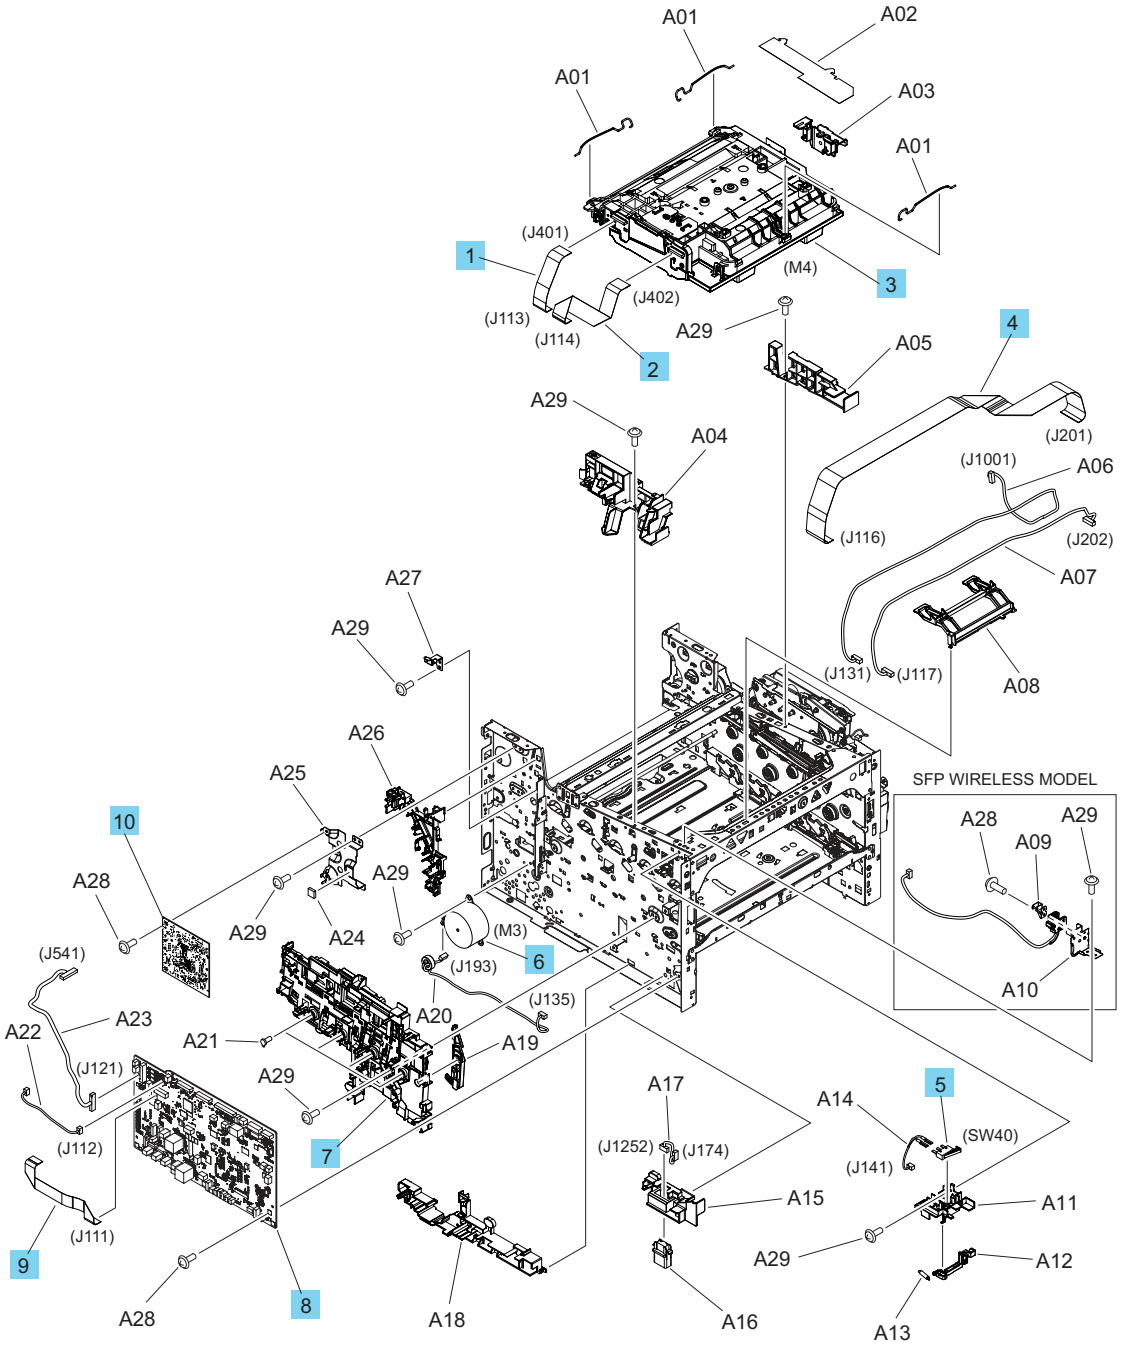


Table 5-7 Internal parts and assemblies (1 of 5)[1]

Ref No	Part number	Description	Qty
1	RK3-0363-000CN	Cable, flexible flat	1
2	RK3-0367-000CN	Cable, flexible flat	1
3	RM2-2630-000CN	Laser scanner assembly	1
4	RK3-0373-000CN	Cable, flexible flat	1
5	RK2-0534-000CN	Microswitch	1
6	RK3-0335-000CN	Motor, stepping DC	1
7	RM2-2819-000CN	PCA holder assembly	1
8	RM3-7577-010CN	Engine controller PCA	1
9	RK3-0360-000CN	Cable, flexible flat	1
10	4RA85-67001	Formatter PCA 4201dn and 4201dne	1
10	4RA86-67001	Formatter PCA 4201dw and 4201dwe	1
10	4RA87-67001	Formatter PCA 4202dn and 4202dne	1
10	4RA88-67001	Formatter PCA 4202dw and 4202dwe	1
10	5HH48-67001	Formatter PCA 4203dw	1
10	5HH53-67001	Formatter PCA 4203cdn	1
10	4RA80-67001	Formatter PCA 4301dw and 4301dwe	1
10	4RA81-67001	Formatter PCA 4301fdn and 4301fdne	1
10	4RA82-67001	Formatter PCA 4301fdw and 4301fdwe	1
10	4RA83-67001	Formatter PCA 4302dw and 4302dwe	1
10	4RA84-67001	Formatter PCA 4302fdn and 4302fdne	1
10	5HH64-67001	Formatter PCA 4302fdw and 4302fdwe	1
10	5HH65-67001	Formatter PCA 4303dw	1
10	5HH66-67001	Formatter PCA 4303fdn	1
10	5HH67-67001	Formatter PCA 4303fdw	1
Not shown	0960-4630	WIFI PCA 802.11N Dual Band Radio	1
Not shown	W1A78-67906	Fax PCA kit (USA)	1
Not shown	W1A78-67907	Fax PCA kit (EURO)	1
Not shown	W1A78-67908	Fax PCA kit (Brazil)	1
Not shown	W1A78-67909	Fax PCA kit (Philippines)	1

[1]A replacement DC controller must be paired to the printer formatter using a special HP Android application.

Internal parts and assemblies (2 of 5)

Parts diagram and parts list for the internal printer assemblies.

Figure 5-8 **Internal parts and assemblies (2 of 5)**

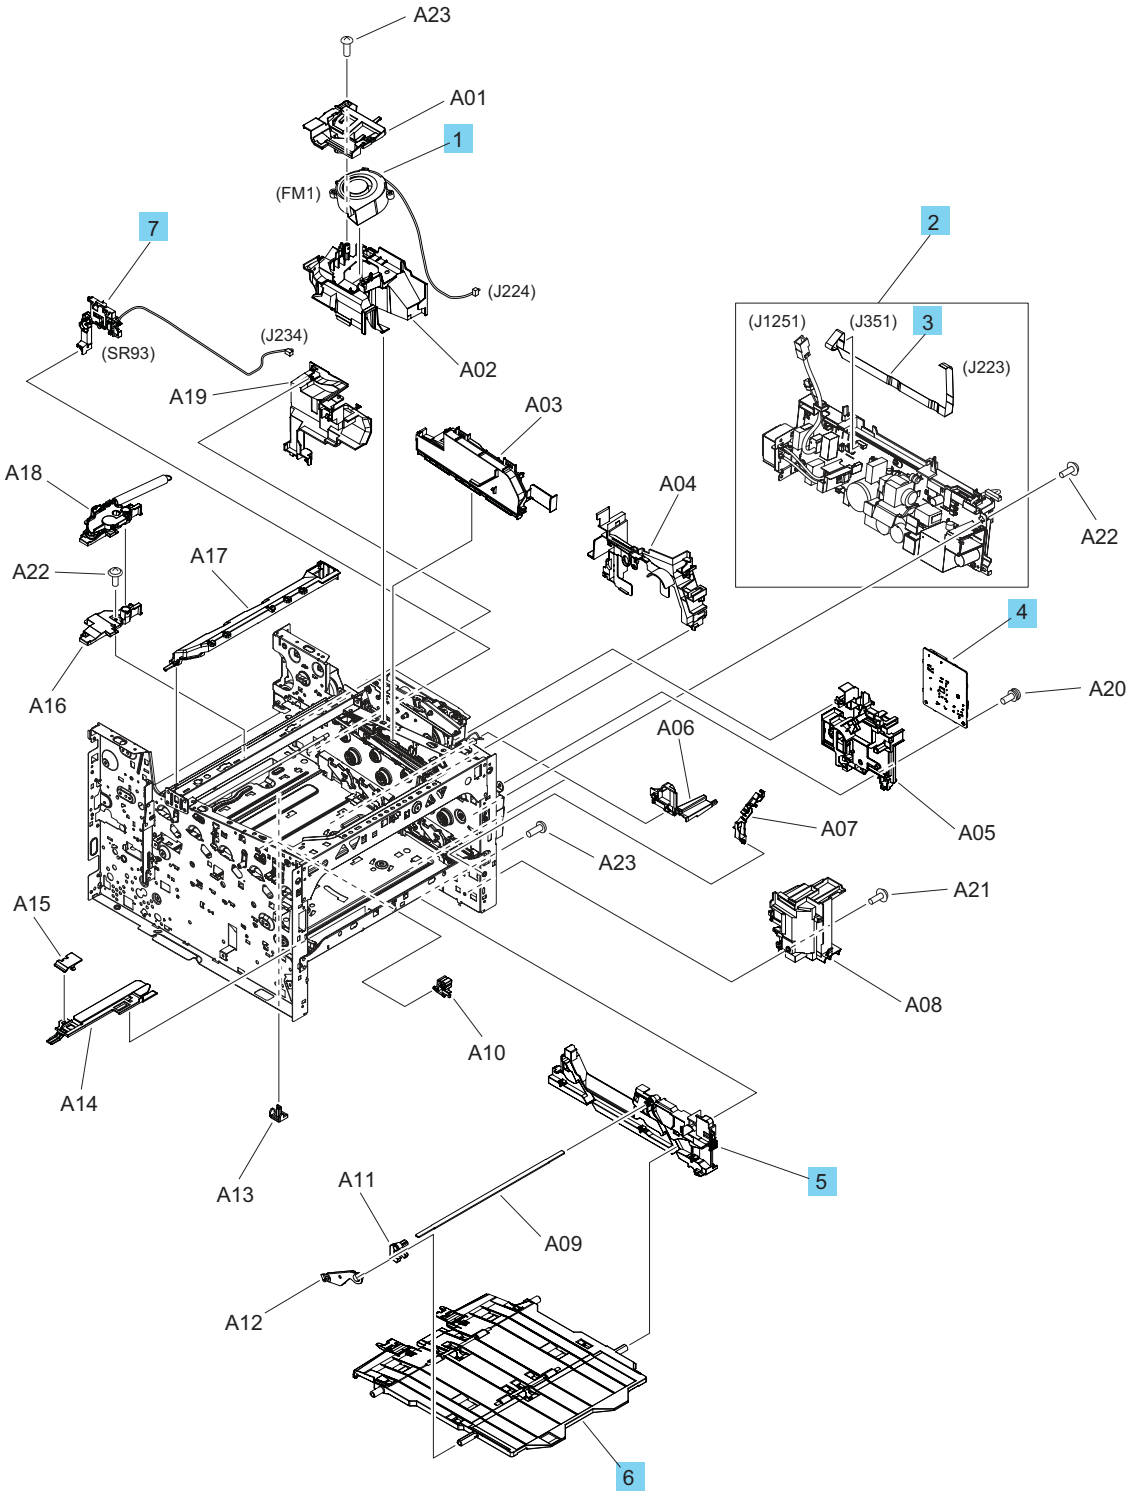


Table 5-8 Internal parts and assemblies (2 of 5)

Ref No	Part number	Description	Qty
1	RK3-0397-000CN	Fan	1
2	RM2-2834-000CN	Low-voltage power supply (110-127V)	1
2	RM2-2835-000CN	Low-voltage power supply (220-240V)	1
3	RK3-0380-000CN	Cable, flexible flat	1
4	RM3-7536-000CN	Fixing motor control PCA	1
5	RM2-2743-000CN	Cassette rail assembly. right	1
6	RM2-2741-000	MP paper feed assembly	1
7	RM2-2793-000	Sensor unit, waste toner	1

Internal parts and assemblies (3 of 5)

Parts diagram and parts list for the internal printer assemblies.

Figure 5-9 **Internal parts and assemblies (3 of 5)**

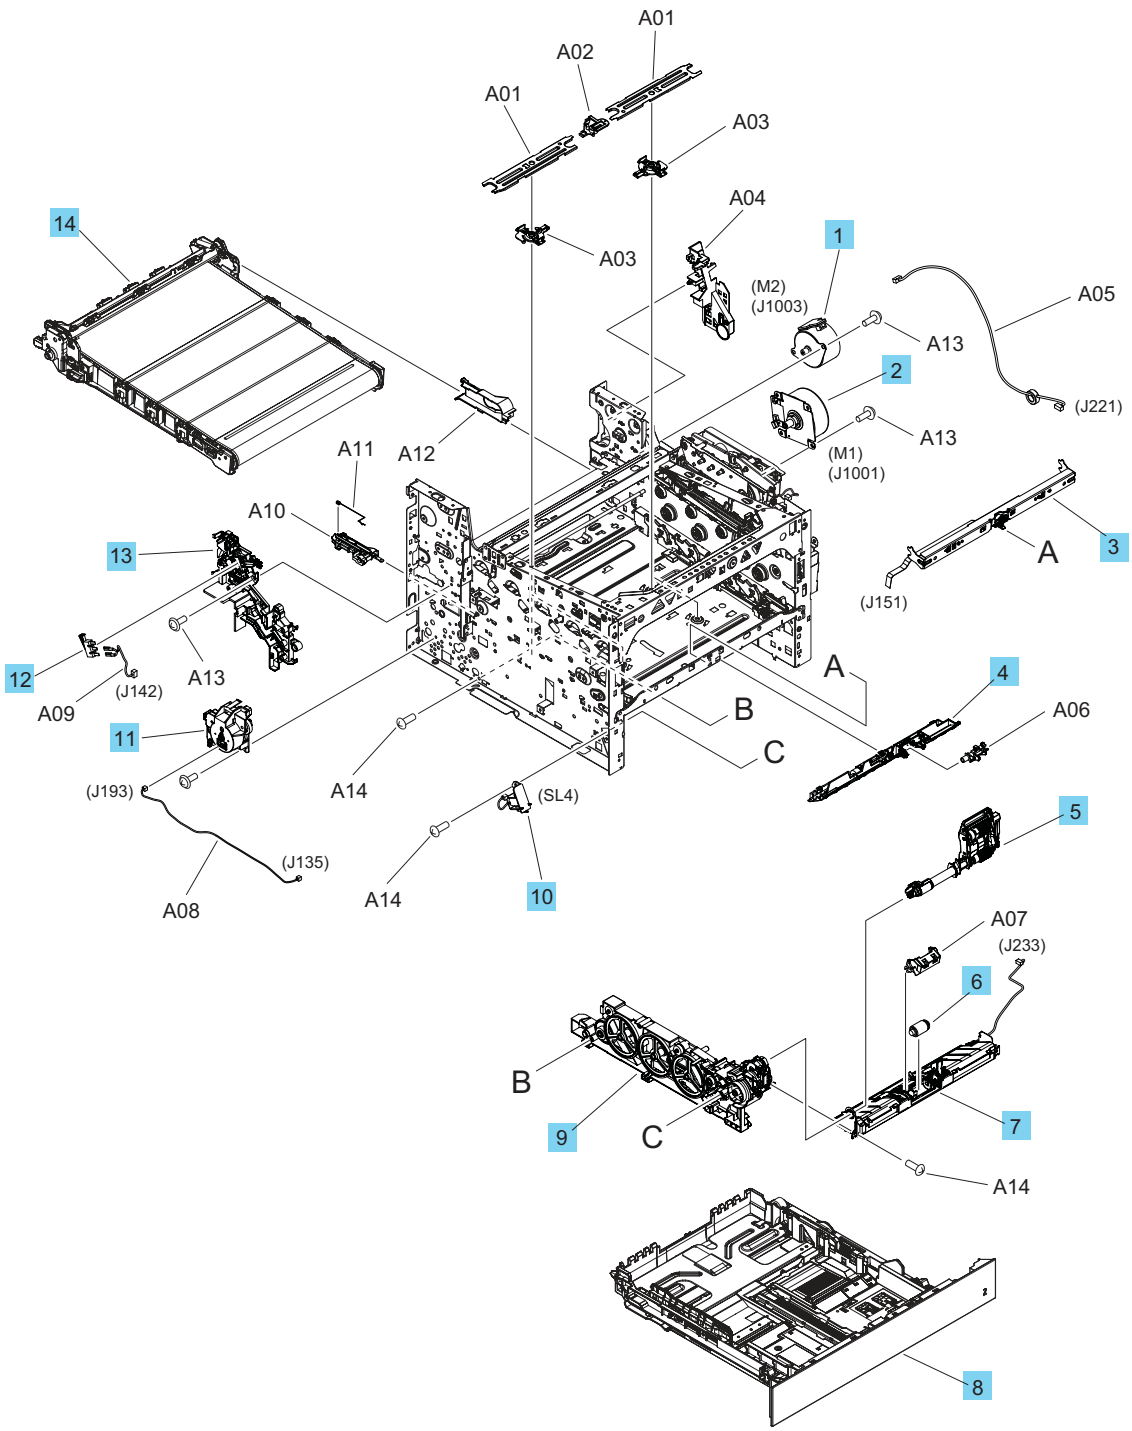


Table 5-9 Internal parts and assemblies (3 of 5)

Ref No	Part number	Description	Qty
1	RK3-0334-000CN	Motor, stepping DC	1
2	RM2-2779-000CN	Main motor assembly	1
3	RM2-2710-000CN	Density detect sensor assembly	1
4	RM2-2790-000CN	Multipurpose guide assembly, upper	1
5	RM2-2758-000CN	Multipurpose feed assembly	1
6	RM2-2692-000CN	Separation roller assembly (Tray1/2/3)	1
7	RM2-2749-000CN	Multipurpose guide assembly, lower	1
8	RM2-2737-000CN	Cassette assembly (Tray 2) (blue)	1
8	RM2-2849-000CN	Cassette assembly (Tray 2) (gray)	1
9	RM2-2742-000CN	Cassette rail assembly. left	1
10	RK3-0408-000CN	Solenoid	1
11	RM2-2714-000CN	Duplexing clutch assembly	1
12	RK2-0534-000CN	Microswitch	1
13	RM2-2759-000CN	Interlock holder assembly	1
14	RM2-2811-000CN	Intermediate transfer belt	1

Internal parts and assemblies (4 of 5)

Parts diagram and parts list for the internal printer assemblies.

Figure 5-10 Internal parts and assemblies (4 of 5)

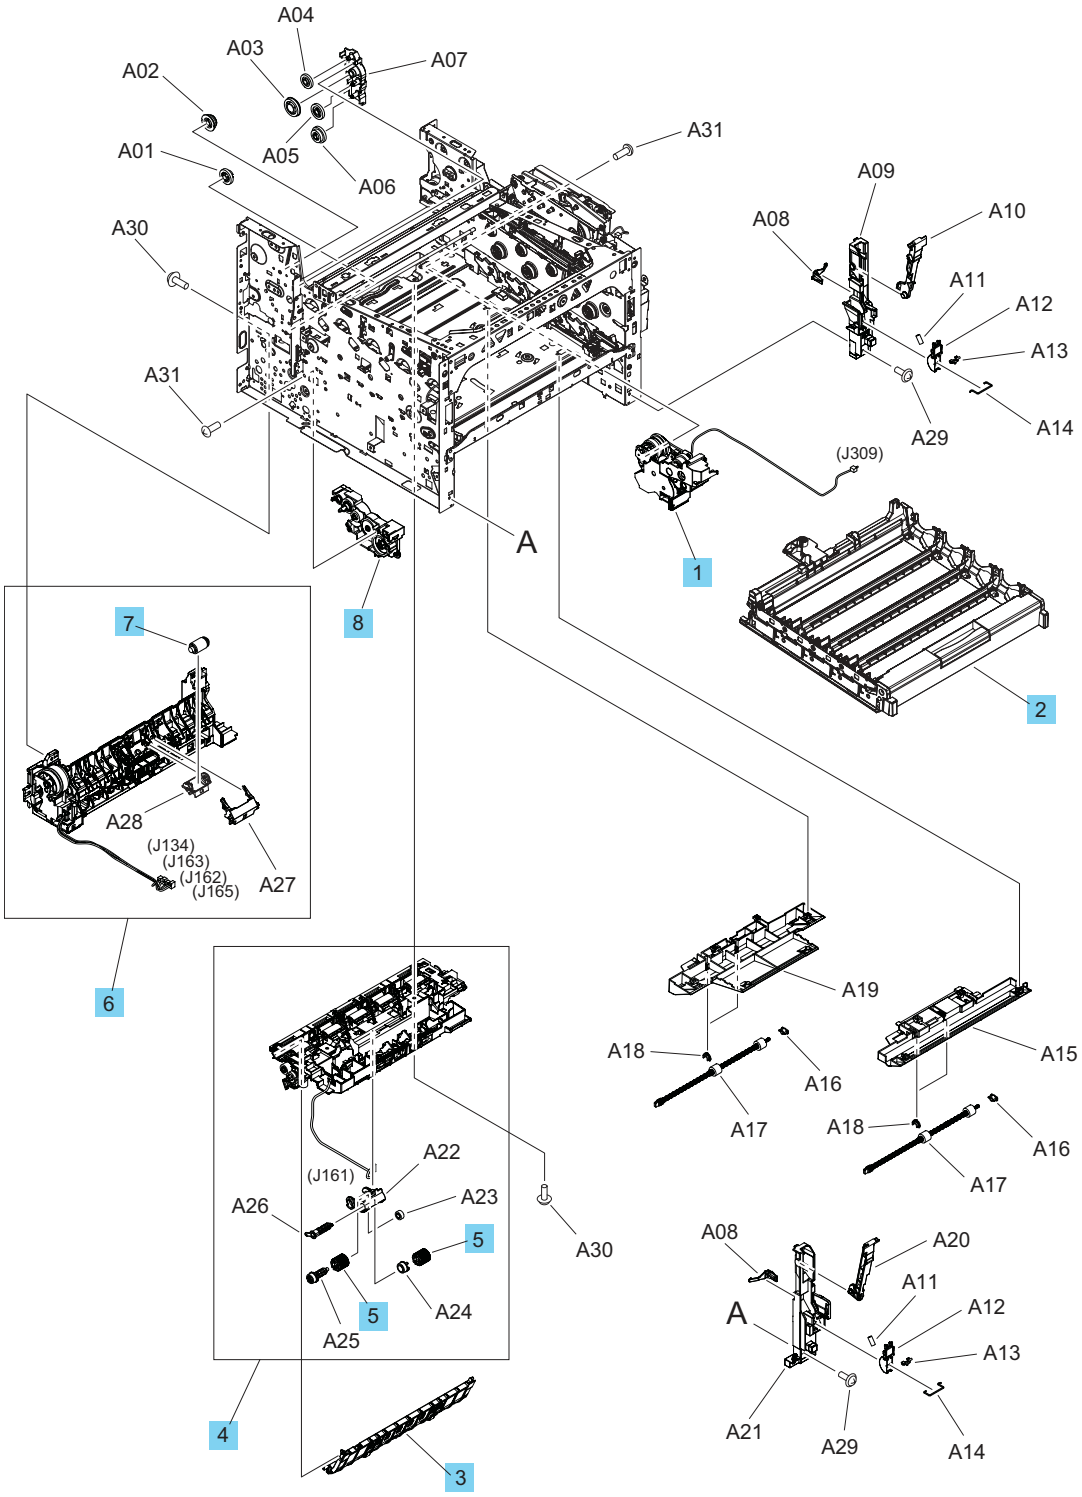


Table 5-10 Internal parts and assemblies (4 of 5)

Ref No	Part number	Description	Qty
1	RM2-2711-000CN	Lifter drive assembly	1
2	RM2-2750-000CN	Cartridge tray assembly	1
3	RM2-2716-000CN	Duplexing guide assembly, upper	1
4	RM2-2747-000CN	Paper feed guide assembly, upper	1
5	RM2-2695-000CN	Paper pickup roller assembly	2
6	RM2-2736-000CN	Paper feed guide assembly, lower	1
7	RM2-2692-000CN	Separation roller assembly (Tray1/2/3)	1
8	RM2-2763-000CN	Paper pickup drive assembly	1

Internal parts and assemblies (5 of 5)

Parts diagram and parts list for the internal printer assemblies.

Figure 5-11 Internal parts and assemblies (5 of 5)

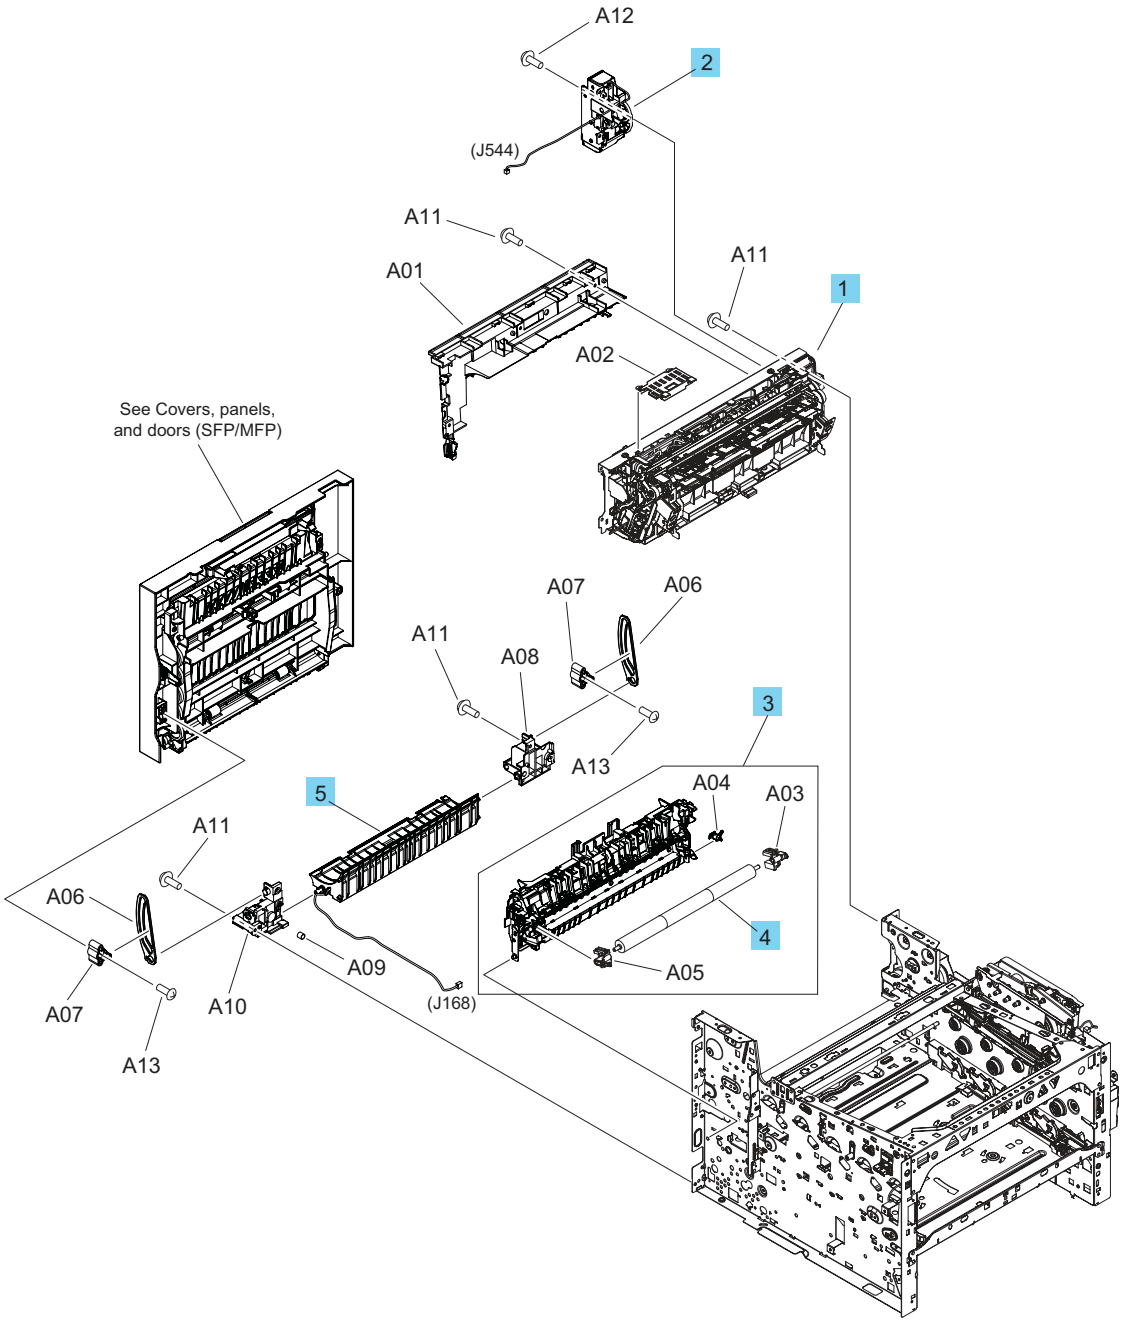


Table 5-11 Internal parts and assemblies (5 of 5)

Ref No	Part number	Description	Qty
1	RM2-2731-000CN	Fuser assembly (110-127V)	1
1	RM2-2732-000CN	Fuser assembly (220-240V)	1

Table 5-11 Internal parts and assemblies (5 of 5) (continued)

Ref No	Part number	Description	Qty
2	RM2-2841-000CN	Duplex drive assembly (SFP)	1
2	RM2-2842-000CN	Duplex drive assembly (MFP)	1
3	RM2-2755-000CN	Secondary transfer feed assembly	1
4	RM2-6455-000CN	Secondary transfer roller assembly	1
5	RM2-2760-000CN	Duplexing guide assembly	1

Input device - 550-sheet paper feeder

Learn about the 550-sheet paper feeder parts and assemblies.

Covers, panels, and doors

Parts diagrams and part lists for the covers, panels, and doors.

Covers, panels, and doors (550-sheet paper feeder)

Parts diagram and part list for the 550-sheet paper feeder covers, panels, and doors.

Figure 5-12 550-sheet paper feeder covers, panels, and doors

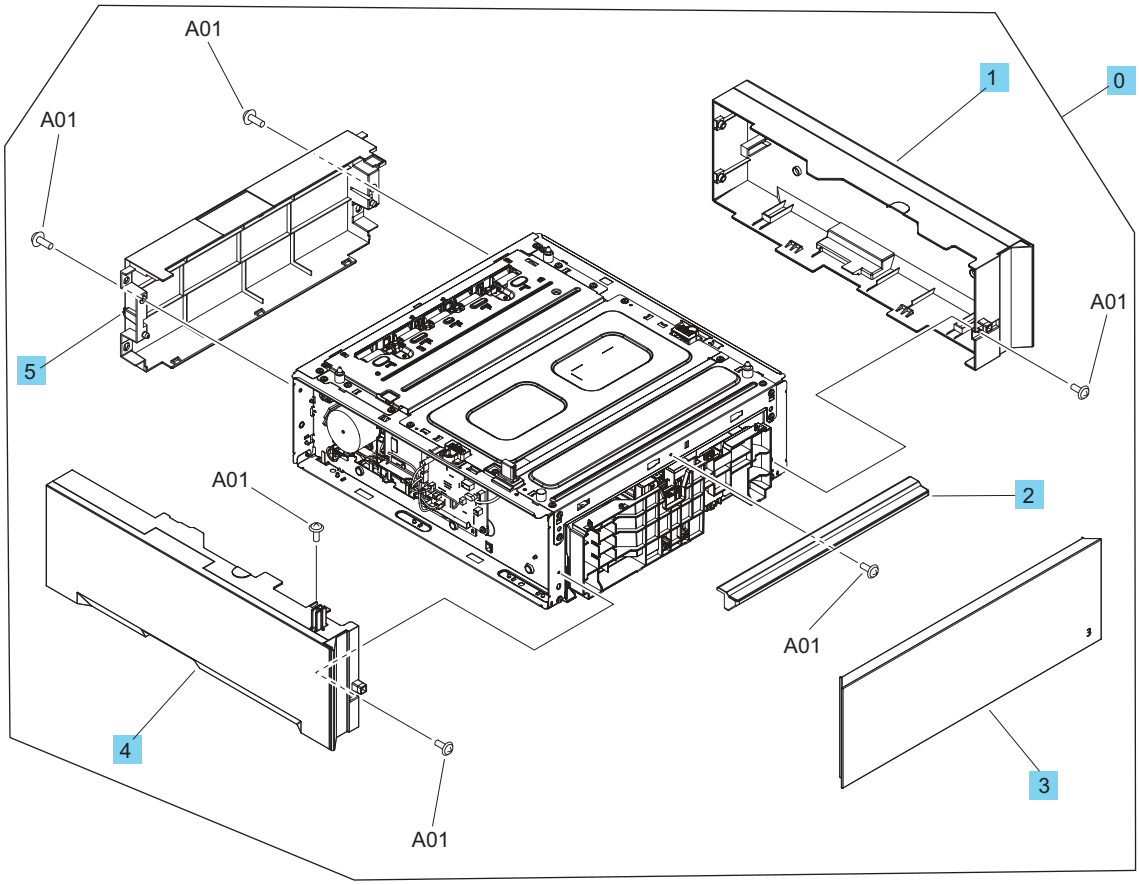


Table 5-12 550-sheet paper feeder covers, panels, and doors

Ref No	Part number	Description	Qty
0	28N93A	550-sheet paper feeder	1
1	RM2-2771-000CN	Right cover assembly	1
2	RC5-6742-000CN	Cover, inner front	1
3	RC5-6738-000CN	Cover, cassette	1
4	RM2-2770-000CN	Left cover assembly	1
5	RC5-6741-000CN	Cover, rear	1

Internal parts and assemblies

Parts diagrams and part lists for the internal parts and assemblies.

Internal parts and assemblies (550-sheet paper feeder)

Parts diagram and part list for the 550-sheet paper feeder main body.

Figure 5-13 550-sheet paper feeder internal parts and assemblies

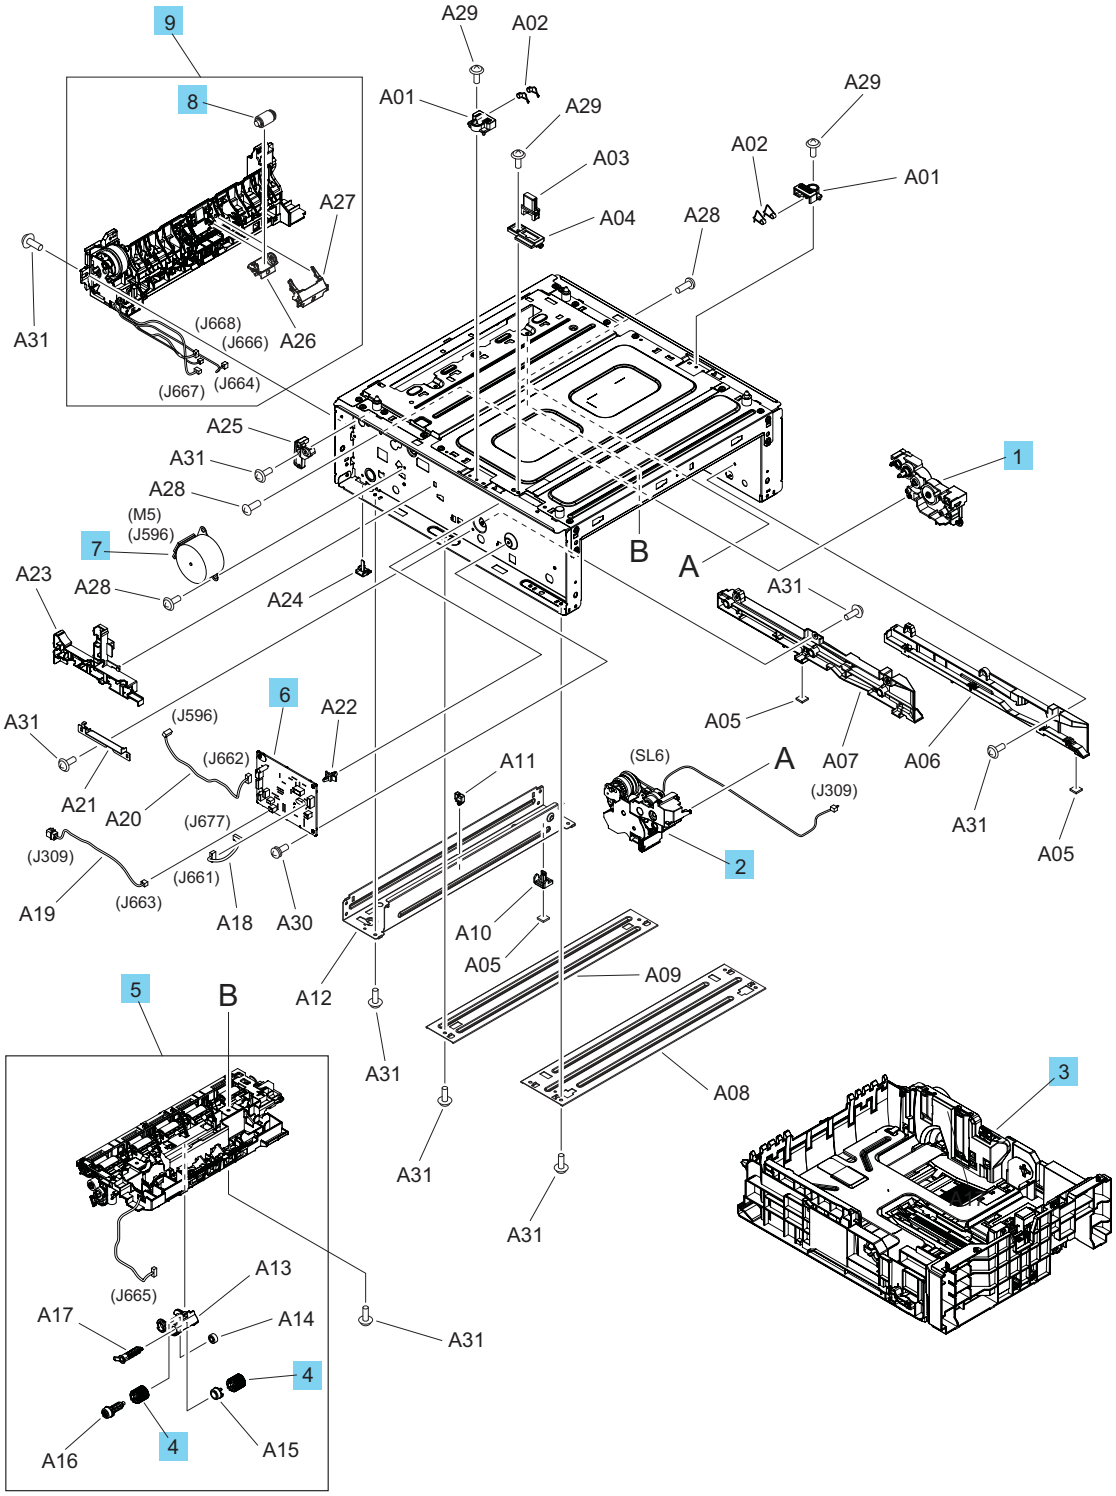


Table 5-13 550-sheet paper feeder internal parts and assemblies

Ref No	Part number	Description	Qty
1	RM2-2776-000CN	Paper pickup drive assembly	1

Table 5-13 550-sheet paper feeder internal parts and assemblies (continued)

Ref No	Part number	Description	Qty
2	RM2-2769-000CN	Lift drive assembly	1
3	RM2-2764-000CN	Cassette assembly	1
4	RM2-2695-000CN	Paper pickup roller assembly	2
5	RM2-2775-000CN	Paper feed guide assembly, upper	1
6	RM3-7537-000CN	Paper feeder driver PCA	1
7	RK3-0335-000CN	Motor, stepping DC	1
8	RM2-2692-000CN	Separation roller assembly (Tray1/2/3)	1
9	RM2-2774-000CN	Paper feed guide assembly, lower	1

Alphabetical parts list

Table 5-14 Alphabetical parts list

Description	Part number	Table and page
210A Black Toner Crtg; standard	W2100A	Whole unit replacement and toner cartridges on page 933
210A Cyan Toner Crtg; standard	W2101A	Whole unit replacement and toner cartridges on page 933
210A Magenta Toner Crtg; standard	W2103A	Whole unit replacement and toner cartridges on page 933
210A Yellow Toner Crtg; standard	W2102A	Whole unit replacement and toner cartridges on page 933
210X Black Toner Crtg; high capacity	W2100X	Whole unit replacement and toner cartridges on page 933
210X Cyan Toner Crtg; high capacity	W2101X	Whole unit replacement and toner cartridges on page 933
210X Magenta Toner Crtg; high capacity	W2103X	Whole unit replacement and toner cartridges on page 933
210X Yellow Toner Crtg; high capacity	W2102X	Whole unit replacement and toner cartridges on page 933
220A Black Toner Crtg EMEA; standard	W2200A	Whole unit replacement and toner cartridges on page 933
220A Cyan Toner Crtg EMEA; standard	W2201A	Whole unit replacement and toner cartridges on page 933
220A Magenta Toner Crtg EMEA; standard	W2203A	Whole unit replacement and toner cartridges on page 933
220A Yellow Toner Crtg EMEA; standard	W2202A	Whole unit replacement and toner cartridges on page 933
220X Black Toner Crtg EMEA; high capacity	W2200X	Whole unit replacement and toner cartridges on page 933
220X Cyan Toner Crtg EMEA; high capacity	W2201X	Whole unit replacement and toner cartridges on page 933
220X Magenta Toner Crtg EMEA; high capacity	W2203X	Whole unit replacement and toner cartridges on page 933
220X Yellow Toner Crtg EMEA; high capacity	W2202X	Whole unit replacement and toner cartridges on page 933
230A Black Toner Crtg; standard	W2300A	Whole unit replacement and toner cartridges on page 933
230A Cyan Toner Crtg; standard	W2301A	Whole unit replacement and toner cartridges on page 933
230A Magenta Toner Crtg; standard	W2303A	Whole unit replacement and toner cartridges on page 933
230A Yellow Toner Crtg; standard	W2302A	Whole unit replacement and toner cartridges on page 933
230X Black Toner Crtg; high capacity	W2300X	Whole unit replacement and toner cartridges on page 933

Table 5-14 Alphabetical parts list (continued)

Description	Part number	Table and page
230X Cyan Toner Crtg; high capacity	W2301X	Whole unit replacement and toner cartridges on page 933
230X Magenta Toner Crtg; high capacity	W2303X	Whole unit replacement and toner cartridges on page 933
230X Yellow Toner Crtg; high capacity	W2302X	Whole unit replacement and toner cartridges on page 933
550-sheet paper feeder	28N93A	550-sheet paper feeder covers, panels, and doors on page 951
ADF top cover assembly (includes rollers)	4RA80-67006	Integrated scanner assembly on page 929
Button, cartridge door	RC5-5411-000CN	Covers, panels, and doors (4201/4202/4203) on page 938
Button, cartridge door	RC5-5411-000CN	Covers, panels, and doors (4301/4302/4303) on page 940
Cable, flexible flat	RK3-0360-000CN	Internal parts and assemblies (1 of 5)1 on page 942
Cable, flexible flat	RK3-0363-000CN	Internal parts and assemblies (1 of 5)1 on page 942
Cable, flexible flat	RK3-0367-000CN	Internal parts and assemblies (1 of 5)1 on page 942
Cable, flexible flat	RK3-0373-000CN	Internal parts and assemblies (1 of 5)1 on page 942
Cable, flexible flat	RK3-0377-000CN	Covers, panels, and doors (4201/4202/4203) on page 938
Cable, flexible flat	RK3-0380-000CN	Internal parts and assemblies (2 of 5) on page 944
Cable, flexible flat	RK3-0383-000CN	Control panel (4201/4202/4203) on page 931
Cable, flexible flat	RK3-0383-000CN	Covers, panels, and doors (4201/4202/4203) on page 938
Cable, flexible flat (SFP) (Wireless model)	RK3-0392-000CN	Covers, panels, and doors (4201/4202/4203) on page 938
Cartridge door assembly (blue) (MFP)	RM2-2844-000CN	Covers, panels, and doors (4301/4302/4303) on page 940
Cartridge door assembly (blue) (SFP)	RM2-2843-000CN	Covers, panels, and doors (4201/4202/4203) on page 938
Cartridge door assembly (gray) (MFP)	RM2-2848-000CN	Covers, panels, and doors (4301/4302/4303) on page 940
Cartridge door assembly (gray) (SFP)	RM2-2847-000CN	Covers, panels, and doors (4201/4202/4203) on page 938
Cartridge tray assembly	RM2-2750-000CN	Internal parts and assemblies (4 of 5) on page 948
Cassette assembly	RM2-2764-000CN	550-sheet paper feeder internal parts and assemblies on page 952

Table 5-14 Alphabetical parts list (continued)

Description	Part number	Table and page
Cassette assembly (Tray 2) (blue)	RM2-2737-000CN	Internal parts and assemblies (3 of 5) on page 946
Cassette assembly (Tray 2) (gray)	RM2-2849-000CN	Internal parts and assemblies (3 of 5) on page 946
Cassette rail assembly. left	RM2-2742-000CN	Internal parts and assemblies (3 of 5) on page 946
Cassette rail assembly. right	RM2-2743-000CN	Internal parts and assemblies (2 of 5) on page 944
Control panel base	4RA83-40005	Control panel (4301/4302/4303) on page 932
Control panel base cover	4RA83-40006	Control panel (4301/4302/4303) on page 932
Control panel touchscreen assembly	4RA83-60101	Control panel (4301/4302/4303) on page 932
Cover, FFC	4RA80-40045	Integrated scanner assembly on page 929
Cover, cassette	RC5-6738-000CN	550-sheet paper feeder covers, panels, and doors on page 951
Cover, duplexing bottom	RC5-6129-000CN	Covers, panels, and doors (4201/4202/4203) on page 938
Cover, duplexing bottom	RC5-6129-000CN	Covers, panels, and doors (4301/4302/4303) on page 940
Cover, front assembly	RM2-2824-000CN	Covers, panels, and doors (4201/4202/4203) on page 938
Cover, front assembly	RM2-2824-000CN	Covers, panels, and doors (4301/4302/4303) on page 940
Cover, inner front	RC5-6742-000CN	550-sheet paper feeder covers, panels, and doors on page 951
Cover, left (MFP)	RC5-5462-000CN	Covers, panels, and doors (4301/4302/4303) on page 940
Cover, left (SFP)	RC5-5450-000CN	Covers, panels, and doors (4201/4202/4203) on page 938
Cover, pillar (MFP)	RC5-5444-000CN	Covers, panels, and doors (4301/4302/4303) on page 940
Cover, rear	RC5-6741-000CN	550-sheet paper feeder covers, panels, and doors on page 951
Cover, right (MFP)	RM2-2827-000CN	Covers, panels, and doors (4301/4302/4303) on page 940
Cover, right (SFP)	RM2-2812-000CN	Covers, panels, and doors (4201/4202/4203) on page 938
Cover, top assembly (MFP)	RM2-2762-000CN	Covers, panels, and doors (4301/4302/4303) on page 940
Cover, top assembly (SFP) (network model)	RM2-2814-000CN	Covers, panels, and doors (4201/4202/4203) on page 938

Table 5-14 Alphabetical parts list (continued)

Description	Part number	Table and page
Cover, top assembly (SFP) (wireless model)	RM2-2815-000CN	Covers, panels, and doors (4201/4202/4203) on page 938
Density detect sensor assembly	RM2-2710-000CN	Internal parts and assemblies (3 of 5) on page 946
Dial control panel with display	4RA89-60101	Control panel (4201/4202/4203) on page 931
Duplex drive assembly (MFP)	RM2-2842-000CN	Internal parts and assemblies (5 of 5) on page 949
Duplex drive assembly (SFP)	RM2-2841-000CN	Internal parts and assemblies (5 of 5) on page 949
Duplexing clutch assembly	RM2-2714-000CN	Internal parts and assemblies (3 of 5) on page 946
Duplexing guide assembly	RM2-2760-000CN	Internal parts and assemblies (5 of 5) on page 949
Duplexing guide assembly, upper	RM2-2716-000CN	Internal parts and assemblies (4 of 5) on page 948
Engine controller PCA	RM3-7577-010CN	Internal parts and assemblies (1 of 5)1 on page 942
Fan	RK3-0397-000CN	Internal parts and assemblies (2 of 5) on page 944
Fax PCA kit (Brazil)	W1A78-67908	Internal parts and assemblies (1 of 5)1 on page 942
Fax PCA kit (EURO)	W1A78-67907	Internal parts and assemblies (1 of 5)1 on page 942
Fax PCA kit (Philippines)	W1A78-67909	Internal parts and assemblies (1 of 5)1 on page 942
Fax PCA kit (USA)	W1A78-67906	Internal parts and assemblies (1 of 5)1 on page 942
Fixing motor control PCA	RM3-7536-000CN	Internal parts and assemblies (2 of 5) on page 944
Formatter PCA 4201dn and 4201dne	4RA85-67001	Internal parts and assemblies (1 of 5)1 on page 942
Formatter PCA 4201dw and 4201dwe	4RA86-67001	Internal parts and assemblies (1 of 5)1 on page 942
Formatter PCA 4202dn and 4202dne	4RA87-67001	Internal parts and assemblies (1 of 5)1 on page 942
Formatter PCA 4202dw and 4202dwe	4RA88-67001	Internal parts and assemblies (1 of 5)1 on page 942
Formatter PCA 4203cdn	5HH53-67001	Internal parts and assemblies (1 of 5)1 on page 942
Formatter PCA 4203dw	5HH48-67001	Internal parts and assemblies (1 of 5)1 on page 942
Formatter PCA 4301dw and 4301dwe	4RA80-67001	Internal parts and assemblies (1 of 5)1 on page 942

Table 5-14 Alphabetical parts list (continued)

Description	Part number	Table and page
Formatter PCA 4301fdn and 4301fdne	4RA81-67001	Internal parts and assemblies (1 of 5)1 on page 942
Formatter PCA 4301fdw and 4301fdwe	4RA82-67001	Internal parts and assemblies (1 of 5)1 on page 942
Formatter PCA 4302dw and 4302dwe	4RA83-67001	Internal parts and assemblies (1 of 5)1 on page 942
Formatter PCA 4302fdn and 4302fdne	4RA84-67001	Internal parts and assemblies (1 of 5)1 on page 942
Formatter PCA 4302fdw and 4302fdwe	5HH64-67001	Internal parts and assemblies (1 of 5)1 on page 942
Formatter PCA 4303dw	5HH65-67001	Internal parts and assemblies (1 of 5)1 on page 942
Formatter PCA 4303fdn	5HH66-67001	Internal parts and assemblies (1 of 5)1 on page 942
Formatter PCA 4303fdw	5HH67-67001	Internal parts and assemblies (1 of 5)1 on page 942
Fuser assembly (110-127V)	RM2-2731-000CN	Internal parts and assemblies (5 of 5) on page 949
Fuser assembly (220-240V)	RM2-2732-000CN	Internal parts and assemblies (5 of 5) on page 949
HP logo gem	7122-0718	Covers, panels, and doors (4201/4202/4203) on page 938
HP logo gem	7122-0718	Covers, panels, and doors (4301/4302/4303) on page 940
ISA assembly duplex blue and folded FFC	4RA80-67002	Integrated scanner assembly on page 929
ISA assembly duplex gray and folded FFC	4RA80-67004	Integrated scanner assembly on page 929
ISA assembly simplex blue and folded FFC	4RA80-67003	Integrated scanner assembly on page 929
ISA assembly simplex gray and folded FFC	4RA80-67005	Integrated scanner assembly on page 929
ISA lift assembly	B3Q10-60128	Integrated scanner assembly on page 929
ISA lift slider pin	B3Q10-40041	Integrated scanner assembly on page 929
Interlock holder assembly	RM2-2759-000CN	Internal parts and assemblies (3 of 5) on page 946
Intermediate transfer belt	RM2-2811-000CN	Internal parts and assemblies (3 of 5) on page 946
Laser scanner assembly	RM2-2630-000CN	Internal parts and assemblies (1 of 5)1 on page 942
Left cover assembly	RM2-2770-000CN	550-sheet paper feeder covers, panels, and doors on page 951

Table 5-14 Alphabetical parts list (continued)

Description	Part number	Table and page
Lift drive assembly	RM2-2769-000CN	550-sheet paper feeder internal parts and assemblies on page 952
Lifter drive assembly	RM2-2711-000CN	Internal parts and assemblies (4 of 5) on page 948
Low-voltage power supply (110-127V)	RM2-2834-000CN	Internal parts and assemblies (2 of 5) on page 944
Low-voltage power supply (220-240V)	RM2-2835-000CN	Internal parts and assemblies (2 of 5) on page 944
MP paper feed assembly	RM2-2741-000	Internal parts and assemblies (2 of 5) on page 944
Main motor assembly	RM2-2779-000CN	Internal parts and assemblies (3 of 5) on page 946
Microswitch	RK2-0534-000CN	Internal parts and assemblies (1 of 5)1 on page 942
Microswitch	RK2-0534-000CN	Internal parts and assemblies (3 of 5) on page 946
Motor, stepping DC	RK3-0334-000CN	Internal parts and assemblies (3 of 5) on page 946
Motor, stepping DC	RK3-0335-000CN	Internal parts and assemblies (1 of 5)1 on page 942
Motor, stepping DC	RK3-0335-000CN	550-sheet paper feeder internal parts and assemblies on page 952
Multipurpose feed assembly	RM2-2758-000CN	Internal parts and assemblies (3 of 5) on page 946
Multipurpose guide assembly, lower	RM2-2749-000CN	Internal parts and assemblies (3 of 5) on page 946
Multipurpose guide assembly, upper	RM2-2790-000CN	Internal parts and assemblies (3 of 5) on page 946
Name plate 4201dne	RC5-5465-000CN	Covers, panels, and doors (4201/4202/4203) on page 938
Name plate 4201dw	RC5-5496-000CN	Covers, panels, and doors (4201/4202/4203) on page 938
Name plate 4201dwe	RC5-5464-000CN	Covers, panels, and doors (4201/4202/4203) on page 938
Name plate 4202de	RC5-5492-000CN	Covers, panels, and doors (4201/4202/4203) on page 938
Name plate 4202dw	RC5-5491-000CN	Covers, panels, and doors (4201/4202/4203) on page 938
Name plate 4202dwe	RC5-5486-000CN	Covers, panels, and doors (4201/4202/4203) on page 938
Name plate 4203cdn	RC5-5490-000CN	Covers, panels, and doors (4201/4202/4203) on page 938

Table 5-14 Alphabetical parts list (continued)

Description	Part number	Table and page
Name plate 4203dn	RC5-5489-000CN	Covers, panels, and doors (4201/4202/4203) on page 938
Name plate 4203dw	RC5-5488-000CN	Covers, panels, and doors (4201/4202/4203) on page 938
Name plate4201dn	RC5-5497-000CN	Covers, panels, and doors (4201/4202/4203) on page 938
Nameplate-Color LaserJet Pro MFP 4301dw	4RA80-40048	Covers, panels, and doors (4301/4302/4303) on page 940
Nameplate-Color LaserJet Pro MFP 4301dwe	4RA80-00012	Covers, panels, and doors (4301/4302/4303) on page 940
Nameplate-Color LaserJet Pro MFP 4301fdn	4RA81-40002	Covers, panels, and doors (4301/4302/4303) on page 940
Nameplate-Color LaserJet Pro MFP 4301fdne	4RA80-00008	Covers, panels, and doors (4301/4302/4303) on page 940
Nameplate-Color LaserJet Pro MFP 4301fdw	4RA82-40004	Covers, panels, and doors (4301/4302/4303) on page 940
Nameplate-Color LaserJet Pro MFP 4301fdwe	4RA82-00012	Covers, panels, and doors (4301/4302/4303) on page 940
Nameplate-Color LaserJet Pro MFP 4302dw	4RA83-40002	Covers, panels, and doors (4301/4302/4303) on page 940
Nameplate-Color LaserJet Pro MFP 4302dwe	4RA83-00004	Covers, panels, and doors (4301/4302/4303) on page 940
Nameplate-Color LaserJet Pro MFP 4302fdn	4RA84-40012	Covers, panels, and doors (4301/4302/4303) on page 940
Nameplate-Color LaserJet Pro MFP 4302fdn	5HH66-00002	Covers, panels, and doors (4301/4302/4303) on page 940
Nameplate-Color LaserJet Pro MFP 4302fdw	5HH64-40002	Covers, panels, and doors (4301/4302/4303) on page 940
Nameplate-Color LaserJet Pro MFP 4302fdw	5HH67-00002	Covers, panels, and doors (4301/4302/4303) on page 940
Nameplate-Color LaserJet Pro MFP 4302fdwe	5HH64-00004	Covers, panels, and doors (4301/4302/4303) on page 940
Nameplate-Color LaserJet Pro MFP 4303dw	5HH65-00004	Covers, panels, and doors (4301/4302/4303) on page 940
PCA holder assembly	RM2-2819-000CN	Internal parts and assemblies (1 of 5)1 on page 942
Paper feed guide assembly, lower	RM2-2736-000CN	Internal parts and assemblies (4 of 5) on page 948
Paper feed guide assembly, lower	RM2-2774-000CN	550-sheet paper feeder internal parts and assemblies on page 952
Paper feed guide assembly, upper	RM2-2747-000CN	Internal parts and assemblies (4 of 5) on page 948

Table 5-14 Alphabetical parts list (continued)

Description	Part number	Table and page
Paper feed guide assembly, upper	RM2-2775-000CN	550-sheet paper feeder internal parts and assemblies on page 952
Paper feeder driver PCA	RM3-7537-000CN	550-sheet paper feeder internal parts and assemblies on page 952
Paper pickup drive assembly	RM2-2763-000CN	Internal parts and assemblies (4 of 5) on page 948
Paper pickup drive assembly	RM2-2776-000CN	550-sheet paper feeder internal parts and assemblies on page 952
Paper pickup roller assembly	RM2-2695-000CN	Internal parts and assemblies (4 of 5) on page 948
Paper pickup roller assembly	RM2-2695-000CN	550-sheet paper feeder internal parts and assemblies on page 952
Prod-Exchange 110V 4201dn WUR	4RA85-69004	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 110V 4201dne WUR	4RA85-69002	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 110V 4201dw WUR	4RA86-69004	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 110V 4201dwe WUR	4RA86-69002	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 110V 4203dn WUR TW	4RA89-69002	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 110V 4203dw WUR Brazil	5HH48-69005	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 110V 4203dw WUR LAR	5HH48-69004	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 110V 4203dw WUR TW	5HH48-69002	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 110V 4301dw WUR	4RA80-69004	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 110V 4301dwe WUR	4RA80-69002	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 110V 4301fdn WUR	4RA81-69004	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 110V 4301fdne WUR	4RA81-69002	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 110V 4301fdw WUR	4RA82-69004	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 110V 4301fdwe WUR	4RA82-69002	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 110V 4303dw WUR LAR	5HH65-69003	Whole unit replacement and toner cartridges on page 933

Table 5-14 Alphabetical parts list (continued)

Description	Part number	Table and page
Prod-Exchange 110V 4303dw WUR TW	5HH65-69001	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 110V 4303fdn WUR TW	5HH66-69001	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 110V 4303fdw WUR	5HH67-69006	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 110V 4303fdw WUR LAR	5HH67-69005	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 110V 4303fdw WUR TW	5HH67-69001	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 220V 4201dn WUR	4RA85-69003	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 220V 4201dne WUR	4RA85-69001	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 220V 4201dw WUR	4RA86-69003	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 220V 4201dwe WUR	4RA86-69001	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 220V 4202dn WUR	4RA87-69002	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 220V 4202dw WUR	4RA88-69002	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 220V 4202dwe WUR	4RA88-69001	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 220V 4203cdn Gray CN WUR	5HH53-69001	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 220V 4203dn Blue WUR	4RA89-69001	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 220V 4203dn Gray WUR RU	4RA89-69005	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 220V 4203dw Gray WUR RU	5HH48-69007	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 220V 4203dw WUR	5HH48-69001	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 220V 4203dw WUR LAR	5HH48-69006	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 220V 4301dw WUR	4RA80-69003	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 220V 4301dwe WUR	4RA80-69001	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 220V 4301fdn WUR	4RA81-69003	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 220V 4301fdne WUR	4RA81-69001	Whole unit replacement and toner cartridges on page 933

Table 5-14 Alphabetical parts list (continued)

Description	Part number	Table and page
Prod-Exchange 220V 4301fdw WUR	4RA82-69003	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 220V 4301fdwe WUR	4RA82-69001	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 220V 4302dw WUR	4RA83-69002	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 220V 4302dwe WUR	4RA83-69001	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 220V 4302fdn WUR	4RA84-69002	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 220V 4302fdw WUR	5HH64-69001	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 220V 4302fdwe WUR	5HH64-69002	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 220V 4303dw CN WUR	5HH65-69004	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 220V 4303dw Gray WUR RU	5HH65-69007	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 220V 4303dw WUR	5HH65-69002	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 220V 4303fdn Gray WUR	5HH66-69006	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 220V 4303fdn WUR	5HH66-69002	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 220V 4303fdw Gray WUR RU	5HH67-69008	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 220V 4303fdw WUR	5HH67-69002	Whole unit replacement and toner cartridges on page 933
Prod-Exchange 220V 4303fdw WUR LAR	5HH67-69007	Whole unit replacement and toner cartridges on page 933
Prod-Replace New 220V 4203dn China GV WUR	4RA89-69003	Whole unit replacement and toner cartridges on page 933
Prod-Replace New 220V 4203dn IN WUR	4RA89-69004	Whole unit replacement and toner cartridges on page 933
Prod-Replace New 220V 4203dw CN WUR	5HH48-69003	Whole unit replacement and toner cartridges on page 933
Prod-Replace New 220V 4303dw IN GOV WUR	5HH65-69006	Whole unit replacement and toner cartridges on page 933
Prod-Replace New 220V 4303dw IN WUR	5HH65-69005	Whole unit replacement and toner cartridges on page 933
Prod-Replace New 220V 4303fdn CN GOV WUR	5HH66-69005	Whole unit replacement and toner cartridges on page 933
Prod-Replace New 220V 4303fdn CN WUR	5HH66-69003	Whole unit replacement and toner cartridges on page 933

Table 5-14 Alphabetical parts list (continued)

Description	Part number	Table and page
Prod-Replace New 220V 4303fdn IN WUR	5HH66-69004	Whole unit replacement and toner cartridges on page 933
Prod-Replace New 220V 4303fdw CN WUR	5HH67-69003	Whole unit replacement and toner cartridges on page 933
Prod-Replace New 220V 4303fdw IN WUR	5HH67-69004	Whole unit replacement and toner cartridges on page 933
Rear door assembly	RM2-2754-000CN	Covers, panels, and doors (4201/4202/4203) on page 938
Rear door assembly	RM2-2754-000CN	Covers, panels, and doors (4301/4302/4303) on page 940
Right cover assembly	RM2-2771-000CN	550-sheet paper feeder covers, panels, and doors on page 951
Secondary transfer feed assembly	RM2-2755-000CN	Internal parts and assemblies (5 of 5) on page 949
Secondary transfer roller assembly	RM2-6455-000CN	Internal parts and assemblies (5 of 5) on page 949
Sensor unit, waste toner	RM2-2793-000	Internal parts and assemblies (2 of 5) on page 944
Separation roller assembly (Tray1/2/3)	RM2-2692-000CN	Internal parts and assemblies (3 of 5) on page 946
Separation roller assembly (Tray1/2/3)	RM2-2692-000CN	Internal parts and assemblies (4 of 5) on page 948
Separation roller assembly (Tray1/2/3)	RM2-2692-000CN	550-sheet paper feeder internal parts and assemblies on page 952
Solenoid	RK3-0408-000CN	Internal parts and assemblies (3 of 5) on page 946
Switch, power supply PCA	RM3-7568-000CN	Covers, panels, and doors (4201/4202/4203) on page 938
WIFI PCA 802.11N Dual Band Radio	0960-4630	Internal parts and assemblies (1 of 5)1 on page 942
XC Black Contract Toner	W2150XC	Whole unit replacement and toner cartridges on page 933
XC Cyan Contract Toner	W2151XC	Whole unit replacement and toner cartridges on page 933
XC Magenta Contract Toner	W2153XC	Whole unit replacement and toner cartridges on page 933
XC Yellow Contract Toner	W2152XC	Whole unit replacement and toner cartridges on page 933

Numerical parts list

Table 5-15 Numerical parts list

Part number	Description	Table and page
W2201A	220A Cyan Toner Crtg EMEA; standard	Whole unit replacement and toner cartridges on page 933
0960-4630	WIFI PCA 802.11N Dual Band Radio	Internal parts and assemblies (1 of 5)1 on page 942
28N93A	550-sheet paper feeder	550-sheet paper feeder covers, panels, and doors on page 951
4RA80-00008	Nameplate-Color LaserJet Pro MFP 4301fdne	Covers, panels, and doors (4301/4302/4303) on page 940
4RA80-00012	Nameplate-Color LaserJet Pro MFP 4301dwe	Covers, panels, and doors (4301/4302/4303) on page 940
4RA80-40045	Cover, FFC	Integrated scanner assembly on page 929
4RA80-40048	Nameplate-Color LaserJet Pro MFP 4301dw	Covers, panels, and doors (4301/4302/4303) on page 940
4RA80-67001	Formatter PCA 4301dw and 4301dwe	Internal parts and assemblies (1 of 5)1 on page 942
4RA80-67002	ISA assembly duplex blue and folded FFC	Integrated scanner assembly on page 929
4RA80-67003	ISA assembly simplex blue and folded FFC	Integrated scanner assembly on page 929
4RA80-67004	ISA assembly duplex gray and folded FFC	Integrated scanner assembly on page 929
4RA80-67005	ISA assembly simplex gray and folded FFC	Integrated scanner assembly on page 929
4RA80-67006	ADF top cover assembly (includes rollers)	Integrated scanner assembly on page 929
4RA80-69001	Prod-Exchange 220V 4301dwe WUR	Whole unit replacement and toner cartridges on page 933
4RA80-69002	Prod-Exchange 110V 4301dwe WUR	Whole unit replacement and toner cartridges on page 933
4RA80-69003	Prod-Exchange 220V 4301dw WUR	Whole unit replacement and toner cartridges on page 933
4RA80-69004	Prod-Exchange 110V 4301dw WUR	Whole unit replacement and toner cartridges on page 933
4RA81-40002	Nameplate-Color LaserJet Pro MFP 4301fdn	Covers, panels, and doors (4301/4302/4303) on page 940
4RA81-67001	Formatter PCA 4301fdn and 4301fdne	Internal parts and assemblies (1 of 5)1 on page 942
4RA81-69001	Prod-Exchange 220V 4301fdne WUR	Whole unit replacement and toner cartridges on page 933
4RA81-69002	Prod-Exchange 110V 4301fdne WUR	Whole unit replacement and toner cartridges on page 933

Table 5-15 **Numerical parts list (continued)**

Part number	Description	Table and page
4RA81-69003	Prod-Exchange 220V 4301fdn WUR	Whole unit replacement and toner cartridges on page 933
4RA81-69004	Prod-Exchange 110V 4301fdn WUR	Whole unit replacement and toner cartridges on page 933
4RA82-00012	Nameplate-Color LaserJet Pro MFP 4301fdwe	Covers, panels, and doors (4301/4302/4303) on page 940
4RA82-40004	Nameplate-Color LaserJet Pro MFP 4301fdw	Covers, panels, and doors (4301/4302/4303) on page 940
4RA82-67001	Formatter PCA 4301fdw and 4301fdwe	Internal parts and assemblies (1 of 5)1 on page 942
4RA82-69001	Prod-Exchange 220V 4301fdwe WUR	Whole unit replacement and toner cartridges on page 933
4RA82-69002	Prod-Exchange 110V 4301fdwe WUR	Whole unit replacement and toner cartridges on page 933
4RA82-69003	Prod-Exchange 220V 4301fdw WUR	Whole unit replacement and toner cartridges on page 933
4RA82-69004	Prod-Exchange 110V 4301fdw WUR	Whole unit replacement and toner cartridges on page 933
4RA83-00004	Nameplate-Color LaserJet Pro MFP 4302dwe	Covers, panels, and doors (4301/4302/4303) on page 940
4RA83-40002	Nameplate-Color LaserJet Pro MFP 4302dw	Covers, panels, and doors (4301/4302/4303) on page 940
4RA83-40005	Control panel base	Control panel (4301/4302/4303) on page 932
4RA83-40006	Control panel base cover	Control panel (4301/4302/4303) on page 932
4RA83-60101	Control panel touchscreen assembly	Control panel (4301/4302/4303) on page 932
4RA83-67001	Formatter PCA 4302dw and 4302dwe	Internal parts and assemblies (1 of 5)1 on page 942
4RA83-69001	Prod-Exchange 220V 4302dwe WUR	Whole unit replacement and toner cartridges on page 933
4RA83-69002	Prod-Exchange 220V 4302dw WUR	Whole unit replacement and toner cartridges on page 933
4RA84-40012	Nameplate-Color LaserJet Pro MFP 4302fdn	Covers, panels, and doors (4301/4302/4303) on page 940
4RA84-67001	Formatter PCA 4302fdn and 4302fdne	Internal parts and assemblies (1 of 5)1 on page 942
4RA84-69002	Prod-Exchange 220V 4302fdn WUR	Whole unit replacement and toner cartridges on page 933
4RA85-67001	Formatter PCA 4201dn and 4201dne	Internal parts and assemblies (1 of 5)1 on page 942
4RA85-69001	Prod-Exchange 220V 4201dne WUR	Whole unit replacement and toner cartridges on page 933

Table 5-15 Numerical parts list (continued)

Part number	Description	Table and page
4RA85-69002	Prod-Exchange 110V 4201dne WUR	Whole unit replacement and toner cartridges on page 933
4RA85-69003	Prod-Exchange 220V 4201dn WUR	Whole unit replacement and toner cartridges on page 933
4RA85-69004	Prod-Exchange 110V 4201dn WUR	Whole unit replacement and toner cartridges on page 933
4RA86-67001	Formatter PCA 4201dw and 4201dwe	Internal parts and assemblies (1 of 5)1 on page 942
4RA86-69001	Prod-Exchange 220V 4201dwe WUR	Whole unit replacement and toner cartridges on page 933
4RA86-69002	Prod-Exchange 110V 4201dwe WUR	Whole unit replacement and toner cartridges on page 933
4RA86-69003	Prod-Exchange 220V 4201dw WUR	Whole unit replacement and toner cartridges on page 933
4RA86-69004	Prod-Exchange 110V 4201dw WUR	Whole unit replacement and toner cartridges on page 933
4RA87-67001	Formatter PCA 4202dn and 4202dne	Internal parts and assemblies (1 of 5)1 on page 942
4RA87-69002	Prod-Exchange 220V 4202dn WUR	Whole unit replacement and toner cartridges on page 933
4RA88-67001	Formatter PCA 4202dw and 4202dwe	Internal parts and assemblies (1 of 5)1 on page 942
4RA88-69001	Prod-Exchange 220V 4202dwe WUR	Whole unit replacement and toner cartridges on page 933
4RA88-69002	Prod-Exchange 220V 4202dw WUR	Whole unit replacement and toner cartridges on page 933
4RA89-60101	Dial control panel with display	Control panel (4201/4202/4203) on page 931
4RA89-69001	Prod-Exchange 220V 4203dn Blue WUR	Whole unit replacement and toner cartridges on page 933
4RA89-69002	Prod-Exchange 110V 4203dn WUR TW	Whole unit replacement and toner cartridges on page 933
4RA89-69003	Prod-Replace New 220V 4203dn China GV WUR	Whole unit replacement and toner cartridges on page 933
4RA89-69004	Prod-Replace New 220V 4203dn IN WUR	Whole unit replacement and toner cartridges on page 933
4RA89-69005	Prod-Exchange 220V 4203dn Gray WUR RU	Whole unit replacement and toner cartridges on page 933
5HH48-67001	Formatter PCA 4203dw	Internal parts and assemblies (1 of 5)1 on page 942
5HH48-69001	Prod-Exchange 220V 4203dw WUR	Whole unit replacement and toner cartridges on page 933
5HH48-69002	Prod-Exchange 110V 4203dw WUR TW	Whole unit replacement and toner cartridges on page 933

Table 5-15 Numerical parts list (continued)

Part number	Description	Table and page
5HH48-69003	Prod-Replace New 220V 4203dw CN WUR	Whole unit replacement and toner cartridges on page 933
5HH48-69004	Prod-Exchange 110V 4203dw WUR LAR	Whole unit replacement and toner cartridges on page 933
5HH48-69005	Prod-Exchange 110V 4203dw WUR Brazil	Whole unit replacement and toner cartridges on page 933
5HH48-69006	Prod-Exchange 220V 4203dw WUR LAR	Whole unit replacement and toner cartridges on page 933
5HH48-69007	Prod-Exchange 220V 4203dw Gray WUR RU	Whole unit replacement and toner cartridges on page 933
5HH53-67001	Formatter PCA 4203cdn	Internal parts and assemblies (1 of 5)1 on page 942
5HH53-69001	Prod-Exchange 220V 4203cdn Gray CN WUR	Whole unit replacement and toner cartridges on page 933
5HH64-00004	Nameplate-Color LaserJet Pro MFP 4302fdwe	Covers, panels, and doors (4301/4302/4303) on page 940
5HH64-40002	Nameplate-Color LaserJet Pro MFP 4302fdw	Covers, panels, and doors (4301/4302/4303) on page 940
5HH64-67001	Formatter PCA 4302fdw and 4302fdwe	Internal parts and assemblies (1 of 5)1 on page 942
5HH64-69001	Prod-Exchange 220V 4302fdw WUR	Whole unit replacement and toner cartridges on page 933
5HH64-69002	Prod-Exchange 220V 4302fdwe WUR	Whole unit replacement and toner cartridges on page 933
5HH65-00004	Nameplate-Color LaserJet Pro MFP 4303dw	Covers, panels, and doors (4301/4302/4303) on page 940
5HH65-67001	Formatter PCA 4303dw	Internal parts and assemblies (1 of 5)1 on page 942
5HH65-69001	Prod-Exchange 110V 4303dw WUR TW	Whole unit replacement and toner cartridges on page 933
5HH65-69002	Prod-Exchange 220V 4303dw WUR	Whole unit replacement and toner cartridges on page 933
5HH65-69003	Prod-Exchange 110V 4303dw WUR LAR	Whole unit replacement and toner cartridges on page 933
5HH65-69004	Prod-Exchange 220V 4303dw CN WUR	Whole unit replacement and toner cartridges on page 933
5HH65-69005	Prod-Replace New 220V 4303dw IN WUR	Whole unit replacement and toner cartridges on page 933
5HH65-69006	Prod-Replace New 220V 4303dw IN GOV WUR	Whole unit replacement and toner cartridges on page 933
5HH65-69007	Prod-Exchange 220V 4303dw Gray WUR RU	Whole unit replacement and toner cartridges on page 933
5HH66-00002	Nameplate-Color LaserJet Pro MFP 4302fdn	Covers, panels, and doors (4301/4302/4303) on page 940

Table 5-15 Numerical parts list (continued)

Part number	Description	Table and page
5HH66-67001	Formatter PCA 4303fdn	Internal parts and assemblies (1 of 5)1 on page 942
5HH66-69001	Prod-Exchange 110V 4303fdn WUR TW	Whole unit replacement and toner cartridges on page 933
5HH66-69002	Prod-Exchange 220V 4303fdn WUR	Whole unit replacement and toner cartridges on page 933
5HH66-69003	Prod-Replace New 220V 4303fdn CN WUR	Whole unit replacement and toner cartridges on page 933
5HH66-69004	Prod-Replace New 220V 4303fdn IN WUR	Whole unit replacement and toner cartridges on page 933
5HH66-69005	Prod-Replace New 220V 4303fdn CN GOV WUR	Whole unit replacement and toner cartridges on page 933
5HH66-69006	Prod-Exchange 220V 4303fdn Gray WUR	Whole unit replacement and toner cartridges on page 933
5HH67-00002	Nameplate-Color LaserJet Pro MFP 4302fdw	Covers, panels, and doors (4301/4302/4303) on page 940
5HH67-67001	Formatter PCA 4303fdw	Internal parts and assemblies (1 of 5)1 on page 942
5HH67-69001	Prod-Exchange 110V 4303fdw WUR TW	Whole unit replacement and toner cartridges on page 933
5HH67-69002	Prod-Exchange 220V 4303fdw WUR	Whole unit replacement and toner cartridges on page 933
5HH67-69003	Prod-Replace New 220V 4303fdw CN WUR	Whole unit replacement and toner cartridges on page 933
5HH67-69004	Prod-Replace New 220V 4303fdw IN WUR	Whole unit replacement and toner cartridges on page 933
5HH67-69005	Prod-Exchange 110V 4303fdw WUR LAR	Whole unit replacement and toner cartridges on page 933
5HH67-69006	Prod-Exchange 110V 4303fdw WUR	Whole unit replacement and toner cartridges on page 933
5HH67-69007	Prod-Exchange 220V 4303fdw WUR LAR	Whole unit replacement and toner cartridges on page 933
5HH67-69008	Prod-Exchange 220V 4303fdw Gray WUR RU	Whole unit replacement and toner cartridges on page 933
7122-0718	HP logo gem	Covers, panels, and doors (4201/4202/4203) on page 938
7122-0718	HP logo gem	Covers, panels, and doors (4301/4302/4303) on page 940
B3Q10-40041	ISA lift slider pin	Integrated scanner assembly on page 929
B3Q10-60128	ISA lift assembly	Integrated scanner assembly on page 929
RC5-5411-000CN	Button, cartridge door	Covers, panels, and doors (4201/4202/4203) on page 938

Table 5-15 **Numerical parts list (continued)**

Part number	Description	Table and page
RC5-5411-000CN	Button, cartridge door	Covers, panels, and doors (4301/4302/4303) on page 940
RC5-5444-000CN	Cover, pillar (MFP)	Covers, panels, and doors (4301/4302/4303) on page 940
RC5-5450-000CN	Cover, left (SFP)	Covers, panels, and doors (4201/4202/4203) on page 938
RC5-5462-000CN	Cover, left (MFP)	Covers, panels, and doors (4301/4302/4303) on page 940
RC5-5464-000CN	Name plate 4201dwe	Covers, panels, and doors (4201/4202/4203) on page 938
RC5-5465-000CN	Name plate 4201dne	Covers, panels, and doors (4201/4202/4203) on page 938
RC5-5486-000CN	Name plate 4202dwe	Covers, panels, and doors (4201/4202/4203) on page 938
RC5-5488-000CN	Name plate 4203dw	Covers, panels, and doors (4201/4202/4203) on page 938
RC5-5489-000CN	Name plate 4203dn	Covers, panels, and doors (4201/4202/4203) on page 938
RC5-5490-000CN	Name plate 4203cdn	Covers, panels, and doors (4201/4202/4203) on page 938
RC5-5491-000CN	Name plate 4202dw	Covers, panels, and doors (4201/4202/4203) on page 938
RC5-5492-000CN	Name plate 4202de	Covers, panels, and doors (4201/4202/4203) on page 938
RC5-5496-000CN	Name plate 4201dw	Covers, panels, and doors (4201/4202/4203) on page 938
RC5-5497-000CN	Name plate4201dn	Covers, panels, and doors (4201/4202/4203) on page 938
RC5-6129-000CN	Cover, duplexing bottom	Covers, panels, and doors (4201/4202/4203) on page 938
RC5-6129-000CN	Cover, duplexing bottom	Covers, panels, and doors (4301/4302/4303) on page 940
RC5-6738-000CN	Cover, cassette	550-sheet paper feeder covers, panels, and doors on page 951
RC5-6741-000CN	Cover, rear	550-sheet paper feeder covers, panels, and doors on page 951
RC5-6742-000CN	Cover, inner front	550-sheet paper feeder covers, panels, and doors on page 951
RK2-0534-000CN	Microswitch	Internal parts and assemblies (1 of 5)1 on page 942
RK2-0534-000CN	Microswitch	Internal parts and assemblies (3 of 5) on page 946
RK3-0334-000CN	Motor, stepping DC	Internal parts and assemblies (3 of 5) on page 946

Table 5-15 Numerical parts list (continued)

Part number	Description	Table and page
RK3-0335-000CN	Motor, stepping DC	Internal parts and assemblies (1 of 5)1 on page 942
RK3-0335-000CN	Motor, stepping DC	550-sheet paper feeder internal parts and assemblies on page 952
RK3-0360-000CN	Cable, flexible flat	Internal parts and assemblies (1 of 5)1 on page 942
RK3-0363-000CN	Cable, flexible flat	Internal parts and assemblies (1 of 5)1 on page 942
RK3-0367-000CN	Cable, flexible flat	Internal parts and assemblies (1 of 5)1 on page 942
RK3-0373-000CN	Cable, flexible flat	Internal parts and assemblies (1 of 5)1 on page 942
RK3-0377-000CN	Cable, flexible flat	Covers, panels, and doors (4201/4202/4203) on page 938
RK3-0380-000CN	Cable, flexible flat	Internal parts and assemblies (2 of 5) on page 944
RK3-0383-000CN	Cable, flexible flat	Control panel (4201/4202/4203) on page 931
RK3-0383-000CN	Cable, flexible flat	Covers, panels, and doors (4201/4202/4203) on page 938
RK3-0392-000CN	Cable, flexible flat (SFP) (Wireless model)	Covers, panels, and doors (4201/4202/4203) on page 938
RK3-0397-000CN	Fan	Internal parts and assemblies (2 of 5) on page 944
RK3-0408-000CN	Solenoid	Internal parts and assemblies (3 of 5) on page 946
RM2-2630-000CN	Laser scanner assembly	Internal parts and assemblies (1 of 5)1 on page 942
RM2-2692-000CN	Separation roller assembly (Tray1/2/3)	Internal parts and assemblies (3 of 5) on page 946
RM2-2692-000CN	Separation roller assembly (Tray1/2/3)	Internal parts and assemblies (4 of 5) on page 948
RM2-2692-000CN	Separation roller assembly (Tray1/2/3)	550-sheet paper feeder internal parts and assemblies on page 952
RM2-2695-000CN	Paper pickup roller assembly	Internal parts and assemblies (4 of 5) on page 948
RM2-2695-000CN	Paper pickup roller assembly	550-sheet paper feeder internal parts and assemblies on page 952
RM2-2710-000CN	Density detect sensor assembly	Internal parts and assemblies (3 of 5) on page 946
RM2-2711-000CN	Lifter drive assembly	Internal parts and assemblies (4 of 5) on page 948

Table 5-15 **Numerical parts list (continued)**

Part number	Description	Table and page
RM2-2714-000CN	Duplexing clutch assembly	Internal parts and assemblies (3 of 5) on page 946
RM2-2716-000CN	Duplexing guide assembly, upper	Internal parts and assemblies (4 of 5) on page 948
RM2-2731-000CN	Fuser assembly (110-127V)	Internal parts and assemblies (5 of 5) on page 949
RM2-2732-000CN	Fuser assembly (220-240V)	Internal parts and assemblies (5 of 5) on page 949
RM2-2736-000CN	Paper feed guide assembly, lower	Internal parts and assemblies (4 of 5) on page 948
RM2-2737-000CN	Cassette assembly (Tray 2) (blue)	Internal parts and assemblies (3 of 5) on page 946
RM2-2741-000	MP paper feed assembly	Internal parts and assemblies (2 of 5) on page 944
RM2-2742-000CN	Cassette rail assembly. left	Internal parts and assemblies (3 of 5) on page 946
RM2-2743-000CN	Cassette rail assembly. right	Internal parts and assemblies (2 of 5) on page 944
RM2-2747-000CN	Paper feed guide assembly, upper	Internal parts and assemblies (4 of 5) on page 948
RM2-2749-000CN	Multipurpose guide assembly, lower	Internal parts and assemblies (3 of 5) on page 946
RM2-2750-000CN	Cartridge tray assembly	Internal parts and assemblies (4 of 5) on page 948
RM2-2754-000CN	Rear door assembly	Covers, panels, and doors (4201/4202/4203) on page 938
RM2-2754-000CN	Rear door assembly	Covers, panels, and doors (4301/4302/4303) on page 940
RM2-2755-000CN	Secondary transfer feed assembly	Internal parts and assemblies (5 of 5) on page 949
RM2-2758-000CN	Multipurpose feed assembly	Internal parts and assemblies (3 of 5) on page 946
RM2-2759-000CN	Interlock holder assembly	Internal parts and assemblies (3 of 5) on page 946
RM2-2760-000CN	Duplexing guide assembly	Internal parts and assemblies (5 of 5) on page 949
RM2-2762-000CN	Cover, top assembly (MFP)	Covers, panels, and doors (4301/4302/4303) on page 940
RM2-2763-000CN	Paper pickup drive assembly	Internal parts and assemblies (4 of 5) on page 948
RM2-2764-000CN	Cassette assembly	550-sheet paper feeder internal parts and assemblies on page 952

Table 5-15 Numerical parts list (continued)

Part number	Description	Table and page
RM2-2769-000CN	Lift drive assembly	550-sheet paper feeder internal parts and assemblies on page 952
RM2-2770-000CN	Left cover assembly	550-sheet paper feeder covers, panels, and doors on page 951
RM2-2771-000CN	Right cover assembly	550-sheet paper feeder covers, panels, and doors on page 951
RM2-2774-000CN	Paper feed guide assembly, lower	550-sheet paper feeder internal parts and assemblies on page 952
RM2-2775-000CN	Paper feed guide assembly, upper	550-sheet paper feeder internal parts and assemblies on page 952
RM2-2776-000CN	Paper pickup drive assembly	550-sheet paper feeder internal parts and assemblies on page 952
RM2-2779-000CN	Main motor assembly	Internal parts and assemblies (3 of 5) on page 946
RM2-2790-000CN	Multipurpose guide assembly, upper	Internal parts and assemblies (3 of 5) on page 946
RM2-2793-000	Sensor unit, waste toner	Internal parts and assemblies (2 of 5) on page 944
RM2-2811-000CN	Intermediate transfer belt	Internal parts and assemblies (3 of 5) on page 946
RM2-2812-000CN	Cover, right (SFP)	Covers, panels, and doors (4201/4202/4203) on page 938
RM2-2814-000CN	Cover, top assembly (SFP) (network model)	Covers, panels, and doors (4201/4202/4203) on page 938
RM2-2815-000CN	Cover, top assembly (SFP) (wireless model)	Covers, panels, and doors (4201/4202/4203) on page 938
RM2-2819-000CN	PCA holder assembly	Internal parts and assemblies (1 of 5)1 on page 942
RM2-2824-000CN	Cover, front assembly	Covers, panels, and doors (4201/4202/4203) on page 938
RM2-2824-000CN	Cover, front assembly	Covers, panels, and doors (4301/4302/4303) on page 940
RM2-2827-000CN	Cover, right (MFP)	Covers, panels, and doors (4301/4302/4303) on page 940
RM2-2834-000CN	Low-voltage power supply (110-127V)	Internal parts and assemblies (2 of 5) on page 944
RM2-2835-000CN	Low-voltage power supply (220-240V)	Internal parts and assemblies (2 of 5) on page 944
RM2-2841-000CN	Duplex drive assembly (SFP)	Internal parts and assemblies (5 of 5) on page 949
RM2-2842-000CN	Duplex drive assembly (MFP)	Internal parts and assemblies (5 of 5) on page 949

Table 5-15 **Numerical parts list (continued)**

Part number	Description	Table and page
RM2-2843-000CN	Cartridge door assembly (blue) (SFP)	Covers, panels, and doors (4201/4202/4203) on page 938
RM2-2844-000CN	Cartridge door assembly (blue) (MFP)	Covers, panels, and doors (4301/4302/4303) on page 940
RM2-2847-000CN	Cartridge door assembly (gray) (SFP)	Covers, panels, and doors (4201/4202/4203) on page 938
RM2-2848-000CN	Cartridge door assembly (gray) (MFP)	Covers, panels, and doors (4301/4302/4303) on page 940
RM2-2849-000CN	Cassette assembly (Tray 2) (gray)	Internal parts and assemblies (3 of 5) on page 946
RM2-6455-000CN	Secondary transfer roller assembly	Internal parts and assemblies (5 of 5) on page 949
RM3-7536-000CN	Fixing motor control PCA	Internal parts and assemblies (2 of 5) on page 944
RM3-7537-000CN	Paper feeder driver PCA	550-sheet paper feeder internal parts and assemblies on page 952
RM3-7568-000CN	Switch, power supply PCA	Covers, panels, and doors (4201/4202/4203) on page 938
RM3-7577-010CN	Engine controller PCA	Internal parts and assemblies (1 of 5)1 on page 942
W1A78-67906	Fax PCA kit (USA)	Internal parts and assemblies (1 of 5)1 on page 942
W1A78-67907	Fax PCA kit (EURO)	Internal parts and assemblies (1 of 5)1 on page 942
W1A78-67908	Fax PCA kit (Brazil)	Internal parts and assemblies (1 of 5)1 on page 942
W1A78-67909	Fax PCA kit (Philippines)	Internal parts and assemblies (1 of 5)1 on page 942
W2100A	210A Black Toner Crtg; standard	Whole unit replacement and toner cartridges on page 933
W2100X	210X Black Toner Crtg; high capacity	Whole unit replacement and toner cartridges on page 933
W2101A	210A Cyan Toner Crtg; standard	Whole unit replacement and toner cartridges on page 933
W2101X	210X Cyan Toner Crtg; high capacity	Whole unit replacement and toner cartridges on page 933
W2102A	210A Yellow Toner Crtg; standard	Whole unit replacement and toner cartridges on page 933
W2102X	210X Yellow Toner Crtg; high capacity	Whole unit replacement and toner cartridges on page 933
W2103A	210A Magenta Toner Crtg; standard	Whole unit replacement and toner cartridges on page 933
W2103X	210X Magenta Toner Crtg; high capacity	Whole unit replacement and toner cartridges on page 933

Table 5-15 **Numerical parts list (continued)**

Part number	Description	Table and page
W2150XC	XC Black Contract Toner	Whole unit replacement and toner cartridges on page 933
W2151XC	XC Cyan Contract Toner	Whole unit replacement and toner cartridges on page 933
W2152XC	XC Yellow Contract Toner	Whole unit replacement and toner cartridges on page 933
W2153XC	XC Magenta Contract Toner	Whole unit replacement and toner cartridges on page 933
W2200A	220A Black Toner Crtg EMEA; standard	Whole unit replacement and toner cartridges on page 933
W2200X	220X Black Toner Crtg EMEA; high capacity	Whole unit replacement and toner cartridges on page 933
W2201X	220X Cyan Toner Crtg EMEA; high capacity	Whole unit replacement and toner cartridges on page 933
W2202A	220A Yellow Toner Crtg EMEA; standard	Whole unit replacement and toner cartridges on page 933
W2202X	220X Yellow Toner Crtg EMEA; high capacity	Whole unit replacement and toner cartridges on page 933
W2203A	220A Magenta Toner Crtg EMEA; standard	Whole unit replacement and toner cartridges on page 933
W2203X	220X Magenta Toner Crtg EMEA; high capacity	Whole unit replacement and toner cartridges on page 933
W2300A	230A Black Toner Crtg; standard	Whole unit replacement and toner cartridges on page 933
W2300X	230X Black Toner Crtg; high capacity	Whole unit replacement and toner cartridges on page 933
W2301A	230A Cyan Toner Crtg; standard	Whole unit replacement and toner cartridges on page 933
W2301X	230X Cyan Toner Crtg; high capacity	Whole unit replacement and toner cartridges on page 933
W2302A	230A Yellow Toner Crtg; standard	Whole unit replacement and toner cartridges on page 933
W2302X	230X Yellow Toner Crtg; high capacity	Whole unit replacement and toner cartridges on page 933
W2303A	230A Magenta Toner Crtg; standard	Whole unit replacement and toner cartridges on page 933
W2303X	230X Magenta Toner Crtg; high capacity	Whole unit replacement and toner cartridges on page 933

Glossary of terms

802.11

802.11 is a set of standards for wireless local area network (WLAN) communication, developed by the IEEE LAN/MAN Standards Committee (IEEE 802).

802.11b/g/n

802.11b/g/n can share the same hardware and use the 2.4 GHz band. 802.11b supports bandwidth up to 11 Mbps, 802.11n supports bandwidth up to 150 Mbps. 802.11b/g/n devices might occasionally suffer interferences from microwave ovens, cordless telephones, and Bluetooth devices.

AC

An electric current that reverses its direction many times a second at regular intervals. For example, the 110V line current found in a typical US electrical wall receptacle.

AC Control Module (PageWide)

The AC Control Module controls the heating elements in the airflow assembly. Functions include voltage monitoring (ensuring correct operation in a low-quality-power environment), isolation (low voltage heater control signals are isolated from the high voltage AC power for safety), AC switching (power is switched on/off to the heater), and heating element configuration (heating element configuration is changed between series and parallel for temperature predictability).

ADF

An Automatic Document Feeder (ADF) is a device that automatically feeds an original sheet (or multiple sheets) of paper into the image scanner. The document feeder is a component of the integrated scanner assembly (ADF and image scanner).

Airflow System (PageWide)

The airflow system conditions the printed pages to avoid page curling due to the ink on the page. The airflow system functionally consists of a fan and heating elements. The pressurized air is blown on the page through the nozzles that are placed on the paper path of the airflow system between print and eject zone.

BOOTP

Bootstrap Protocol. A network protocol used by a network client to obtain its IP address automatically. This is usually done in the bootstrap process of computers or operating systems running on them. The BOOTP servers assigns an IP address from a pool of addresses to each client. BOOTP enables “diskless workstation” computers to obtain an IP address prior to loading any advanced operating system.

CCD

A Charged Coupled Device (CCD) is the scanner module which enables a scan job. A CCD locking mechanism is used to hold the CCD module to prevent any damage when the printer is moved.

CIS

A Contact Image Sensor (CIS) scanner captures an image using the printer's optical path. Red, green, and blue LEDs sequentially illuminate a small strip of the document (often called a raster line), and the optical system captures each color in a single row of Charged Coupled Device (CCD) sensors that cover the entire page width.

Collation

Collation is a process of printing a multiple-copy job in sets. When collation is selected, the device prints an entire set before printing additional copies.

Control Panel

The control panel is a flat, typically vertical panel or screen where the user can control and/or monitor the printer. The control panel is found on the front of the printer.

Coverage

Coverage is the printing term used for a toner usage measurement on printing. For example, 5% coverage means that an A4 sided paper has about 5% image or text on it. If the paper or original has complicated images or a large amount of text, the coverage will be higher and at the same time, a toner usage will be as much as the coverage.

DC

An electric current flowing in one direction only. Typically, a low voltage load current supplied to an electrical assembly.

DCC

The DC controller (DCC) controls the operation of the printer sub-systems and electrical components. the DCC sends out various signals to operate motors, solenoids, and other printer components based on the print command and image data that the host computer sends the formatter.

Default

The value or setting that is in effect when a printer is unboxed, reset, or initialized.

DHCP

Dynamic Host Configuration Protocol (DHCP) is a client-server networking protocol. A DHCP server provides configuration parameters specific to the DHCP client host requesting, generally, information required by the client host to participate on an IP network. The DHCP also provides a mechanism for allocation of IP addresses to client hosts.

Digital Send Software

Digital send software allows a mufti-function printer (MFP) to scan and send information quickly and securely to email, network folders, other printers, and fax services.

DIMM

A Dual Inline Memory Module (DIMM) is a small circuit board that holds memory. The DIMM stores all data within the printer, such as printing data and received fax data.

DPI

Dots Per Inch (DPI) is a measurement of resolution that is used for scanning and printing. Generally, higher DPI results in a higher resolution (more visible detail in the image and a larger file size).

Duplex

A mechanism that automatically turns over a sheet of paper so that the printer can print (or scan) on both sides of the paper. A printer equipped with a duplex unit can print on both sides of the paper during one print cycle.

Duty Cycle

Duty cycle is the page quantity which does not affect printer performance for a month. Generally, the printer has the lifespan limitation such as pages per year. The lifespan means the average capacity of print-outs, usually within the warranty period. For example, if the duty cycle is 48,000 pages per month the printer limit is 2,400 pages a day (assuming 20 working days/month).

Dynamic Security

Dynamic Security is a toner cartridge design and process for authenticating genuine HP supplies. HP printers use toner cartridges that have security chips or electronic circuitry. Cartridges using a non-HP chip, or modified chip, or non-HP circuitry might not work (now or in the future).

e-Duplex

Single-pass electronic duplex (e-Duplex) printer use two separate scan modules to scan the front-side and back-side of an e-duplex copy job page in a single pass through the document feeder.

EMC

EMC is a measure of a device's ability to operate as intended in its shared operating environment while, at the same time, not affecting the ability of other equipment within the same environment to operate as intended.

EMI

EMI is the electromagnetic energy which affects the functioning of an electronic device. Electronic devices (like printers) are a source of EMI. Because it is rare for electronics to operate in isolation, products are generally engineered to function in the presence of some amount of EMI.

eMMC

An embedded Multi-Media Card is a compact memory device consisting of NAND flash memory and a simple storage controller.

Emulation

Emulation is a technique of one machine obtaining the same results as another. An emulator duplicates the functions of one system with a different system, so that the second system behaves like the first system. Emulation focuses on exact reproduction of external behavior. This is different from simulation, which concerns an abstract model of the system being simulated, often considering its internal state.

EPS

Encapsulated PostScript (EPS) is a PostScript (PS) code file which is used for storing font and vector graphic image information.

ESD

An electrostatic discharge (ESD) is a sudden flow of electricity between two electrically charged objects caused by contact, an electrical short, or dielectric breakdown. Discharge of built up static electricity.

Ethernet

Ethernet is a frame-based computer networking technology for local area networks (LANs). It defines wiring and signaling for the physical layer, and frame formats and protocols for the media access control (MAC)/data link layer of the OSI model. Ethernet is mostly standardized as IEEE 802.3. Ethernet has become the most widespread LAN technology in use during the 1990s to present.

Ferrite

A ferrite is used to reduce the amount of radio frequency noise (or interference) in a wire or cable. A ferrite enables proper EMC/EMI performance for regulatory purposes.

FFC

Flat Flexible Cables (FFCs) are designed for Printed Circuit Assembly (PCA) to PCA connections (for example, connecting a fax PCA to the formatter).

FIH

A Foreign Interface Harness (FIH) is a port that enables HP multifunction printers (MFPs) to use third-party devices to extend the capabilities of the MFP.

Firmware

The formatter stores the printer firmware. A remote firmware upgrade process is used to overwrite and upgrade the firmware.

Flash memory

Flash memory is non-volatile, meaning it retains stored data even when the power is turned off.

Flow integrated scanner assembly

A printer scanner assembly that includes a slide-out external physical keyboard.

Formatter (LaserJet)

The formatter controls printer functions like receiving and processes print data, developing and coordinating data placement and timing with the DC controller PCA, storing font and customer configuration information, communicating with the host computer, and monitoring control panel functions and relaying printer status information through the control panel.

FTP

FTP stands for File Transfer Protocol. FTP is a protocol designed for transferring files over the Internet. Files stored on an FTP server can be accessed using an FTP client, such as a web browser, FTP software program, or a command line interface.

Fuser Unit

The fuser unit is part of a laser printer that adheres the toner onto the printed page. It consists of a heat roller and a pressure roller. After toner is transferred onto the paper, the fuser unit applies heat and pressure to make sure that the toner stays on the paper permanently (which is why paper is warm when it comes out of a laser printer).

Gateway

A connection between computer networks, or between a computer network and a telephone line. A gateway is used to connect two different computer networks, especially a connection to the Internet.

Grayscale

Shades of gray that represent light and dark portions of a color image printed in monochrome. Colors are represented by a range of gray shades from white to black.

Halftone

Halftone is a way of reproducing a photograph or other image in which the various tones of gray or color are produced by variously sized dots of ink or toner. Halftone simulates grayscale by varying the number of dots. Highly colored areas consist of a large number of dots, while lighter areas consist of a smaller number of dots.

HDD

A Hard-Disk Drive (HDD) (commonly referred to as a hard drive or hard disk) is a non-volatile storage device which stores digitally-encoded data on rapidly rotating platters with magnetic surfaces.

IEEE

The Institute of Electrical and Electronics Engineers (IEEE) is an international non-profit, professional organization for the advancement of technology related to electricity.

Image scanner

The image scanner (or Sub Scanner Assembly) contains the components to digitally scan an original source document. The image scanner is a component of the integrated scanner assembly (ADF and image scanner).

IP address

An Internet Protocol (IP) address is a unique number that a device uses in order to identify and communicate with other devices on a network utilizing the Internet Protocol standard.

IPM

The Images Per Minute (IPM) is a method of measuring the speed of a printer. An IPM rate indicates the number of single-sided sheets a printer can complete in one minute.

IPP

The Internet Printing Protocol (IPP) defines a standard protocol for printing and managing print jobs, media size, resolution, etc. IPP can be used locally, or over the internet to reach hundreds of printers. IPP also supports access control, authentication, and encryption, making it a capable and secure printing solution.

ISA

The Integrated Scanner Assembly (ISA) includes the document feeder and image scanner.

ISO

The International Organization for Standardization (ISO) is an international standard-setting body composed of representatives from national standards bodies. In produces world-wide industrial and commercial standards.

JBIG

Joint Bi-level Image Experts Group (JBIG) is an image compression standard with no loss of accuracy or quality. It was designed for compression of binary images, particularly for faxes, but can also be used for other images.

JPEG

Joint Photographic Experts Group (JPEG) is a commonly used standard method of loss compression for photographic images. It is the format used for storing and transmitting photographs on the World Wide Web.

LDAP

The Lightweight Directory Access Protocol (LDAP) is a networking protocol for querying and modifying directory services running over TCP/IP.

LED

A Light-Emitting Diode (LED) is a semiconductor device that can indicate the status of a printer (formatter LEDs) or a component in a contact image sensor (CIS) scanner that helps capture an image.

LEDM

Low end data model (LEDM) provides one consistent data representation method and defines the dynamic and capabilities tickets shared between clients and devices, as well as the access protocol, event, security, and discovery methods.

LPDC

Late point differentiation configuration (LPDC) allows the channel partner to configure the speed to the printer depending on the customer's order. LPDC configuration is stored on the Trusted Platform Module (TPM).

LVPS - SMPS

Low Voltage Power Supplies (LVPS) and Switching Mode Power Supplies (SMPS) supply direct current (DC) voltages to various printer components and assemblies.

MAC address

Media Access Control (MAC) address is a unique identifier associated with a network adapter. MAC address is a unique 48-bit identifier usually written as 12 hexadecimal characters grouped in pairs (for example, 00-00-0c-34-11-4e). This address is usually hard-coded into a Network Interface Card (NIC) by the manufacturer and used as an aid for routers trying to locate machines on a large network.

MEt

HP Memory Enhancement technology (MEt) effectively doubles the standard memory through a variety of font- and data-compression methods. MEt is available only in Printer Command Language (PCL) mode; it is not functional when printing in PostScript (PS) mode.

MFP

A Multi Function Printer (MFP) is a printer that incorporates multiple functionalities in a single physical body. For example, an MFP printer can scan, digitally send, fax, copy, and print.

MHV

Miniature High Voltage (MHV) is designed for high voltage applications of BNC connectors (DC voltage between 500 V and 5 kV).

Modem

A device that modulates a carrier signal to encode digital information, and also demodulates such a carrier signal to decode transmitted information.

MPCA (PageWide)

The MPCA integrates both formatter (LaserJet) and engine control electronics (DC controller) into a single assembly. The Main PCA (MPCA) controls printer functions like receiving and processes print data, developing and coordinating data placement, storing font and customer configuration information, communicating with the host computer, and monitoring control panel functions and relaying printer status information through the control panel.

NAND

NAND is not an acronym (the term is short for **NOT AND** a Boolean operator and logic gate). NAND (flash) memory is non-volatile, meaning it retains stored data even when the power is turned off.

NVRAM

Nonvolatile random access memory (NVRAM) is used to store I/O and information about the print environment configuration (stored data even when the power is turned off).

OPC

Organic Photo Conductor (OPC) is a mechanism that makes a virtual image for print using a laser beam emitted from a laser printer. It is usually green or rust colored and has a cylinder shape. An imaging unit containing a drum slowly wears the drum surface during its usage in the printer, and it should be replaced appropriately due to wear from contact with the cartridge development brush, cleaning mechanism, and paper.

Originals

The first example of something, such as a document, photograph, or text which is copied, reproduced, or translated to produce additional copies. The original itself is not copied or derived from something else.

PCA

Printed Circuit Assembly (PCA). Once the printed circuit board (PCB) is complete, electronic components must be assembled to form a functional printed circuit assembly or PCA.

PCL

Printer Command Language (PCL) is a Page Description Language (PDL) developed by HP as a printer protocol. PCL has become an industry standard. Originally developed for early Inkjet printers, PCL has been released in varying levels for thermal, dot matrix printers and laser printers.

PDF

Portable Document Format (PDF) is a proprietary file format developed by Adobe Systems. A PDF represents two dimension documents in a device independent and resolution independent format.

PJL

Printer job language (PJL) is an integral part of printer configuration, in addition to the standard PCL and PostScript (PS). With standard cabling, the printer can use PJL to perform a variety of functions like dynamic I/O switching, context-sensitive switching, and isolation of print environment settings from one print job to the next.

PML

Printer management language (PML) allows remote configuration of the printer and status read-back from the printer through the I/O ports.

PostScript (PS)

PostScript (PS) is a Page Description Language (PDL) and programming language used primarily in electronic and desktop publishing. PostScript is run in an interpreter to generate an image.

PPM

Pages Per Minute (PPM) is a method of measurement for determining how fast a printer works, meaning the number of pages a printer can produce in one minute.

Print Media

Media like paper, envelopes, labels, and transparencies which can be used in a printer, scanner, fax, or copier.

Printer Driver

A program used to send commands and transfer data from the computer to the printer.

Printhead (PageWide)

The printhead converts the digital firing instructions from the printer electronics into properly formed and timed microscopic drops of the four ink colors.

Printhead Wiper (PageWide)

The printhead wiper system keeps the printhead nozzles firing correctly throughout the life of the printer as it performs the wiping and capping functions. The wiping function cleans the nozzles of ink residue and particulates. The capping function keeps the nozzles moist during storage and when the printer is idle.

Protocol

A convention or standard that controls or enables the connection, communication, and data transfer between two computing endpoints.

RAM

Random Access Memory (RAM) is the printer memory device where the data in current use is kept so it can be quickly retrieved by the device's processor. This memory is an important factor in avoiding errors and printing documents properly. Printer memory is used to store, and process print jobs as they are sent to the printer from a computer. After printing, the job is cleared from the memory to make room for more print jobs. Printer memory is directly linked to two print characteristics: speed and print quality. More memory allows you to print faster and print larger, high-quality graphics.

REDI sensor

An optical reflective edge detection interrupter (REDI) sensor. Usually used in conjunction with mirrors to sense the presence or absence of paper in the paper path. These sensors are carefully aligned and calibrated at the factory, so care must be taken when servicing these sensors.

Resolution

The sharpness of an image is measured in Dots Per Inch (DPI). The higher the DPI, the greater the resolution.

SCB

The Scanner Control Board (SCB) controls the functions of the image scanner components in the Sub Scanner Assembly (SSA).

Service fluid and aerosol management systems (PageWide)

There are two types of service fluid, shipping fluid and ink. The service fluid management system is contained entirely within the duplex module. Service fluid is discharged as droplets from the printhead, and then collected in a container inside the duplex module. Some of the droplets are called aerosol because they are lighter than air. Aerosol can float inside the printer and collect on the lens of optical sensors, producing false failures. The aerosol management system transports the aerosol and collects it in a safe place. Aerosol management consists of an aerosol fan, mounted on the rear wall of the air flow assembly, which creates air flow that pulls the aerosol through the holes in the platen and into the aerosol filter inside the duplex module.

SFP

A single-function printer only processes print jobs sent from a host computer or from an USB port on the printer.

SMB

Server Message Block (SMB) is a network protocol mainly applied to share files, printers, serial ports, and miscellaneous communications between nodes on a network. SMB also provides an authenticated inter-process communication mechanism.

SMTP

Simple Mail Transfer Protocol (SMTP) is the standard for email transmissions across the internet. SMTP is a relatively simple, text-based protocol, where one or more recipient of a message is specified, and the message text is transferred. It is a client server protocol where the client transmits an email message to the server.

SODIMM

Small outline dual in-line memory module (SODIMM) is a thin profile memory storage device (a smaller alternative to a standard DIMM device).

SSA

The Sub-Scanner Assembly is the image scanner component of the Integrated Scanner Assembly (ISA, which includes the document feeder and the image scanner).

Subnet Mask

The subnet mask is used in conjunction with the network address to determine which part of the address is the network address and which part is the host address.

TCP/IP

The Transmission Control Protocol (TCP) and the Internet Protocol (IP) are the set of communications protocols that implement the protocol stack on which the internet and most commercial networks run.

TIFF

Tagged Image File Format (TIFF) is a variable-resolution bit mapped image format. TIFF describes image data that typically come from scanners. TIFF images use tags, keywords defining the characteristics of the image that is included in the file. This flexible and platform-independent format can be used for pictures that have been made by various image processing applications.

Toner Cartridge

A bottle or container that holds toner, which is used in a machine like a printer. Toner is a powder used in laser printers and photocopiers. The toner forms the text and images on printed paper. Toner can be fused by a combination of heat/pressure from the fuser, causing it to bind the fibers in the paper.

TPM

The HP Trusted Platform Module (TPM) is a security accessory for printers. The TPM strengthens protection of encrypted credentials and data stored on your printer. Certificate private keys are both generated by and protected by the TPM. Once installed, the printer and the TPM are sealed, and the printer owns the TPM. The TPM may not be moved to another device without losing its ownership from the original printer. Installing a TPM accessory might necessitate a firmware upgrade. The TPM prevents the printer from starting if the TPM is missing. If the TPM is removed from the printer, a control-panel error message appears indicating that the TPM is missing.

NOTE: The TPM is not a service part for some printer models. Check the printer service manual to determine if the TPM is a replaceable service part.

TWAIN

An industry standard for scanners and software. By using a TWAIN compliant scanner with TWAIN-compliant software, a scan can be initiated from the program. TWAIN is an image capture API for Microsoft Windows and Apple Macintosh operating systems.

URL

Uniform Resource Locator (URL) is the global address of documents and resources on the internet. The first part of the address indicates what protocol to use. The second part specifies the IP address or the domain name where the resource is located.

USB

Universal Serial Bus (USB) is a standard that was developed by the USB Implementers Forum, Inc., to connect computers and peripherals. Unlike the parallel port, USB is designed to concurrently connect a single computer USB port to multiple peripherals.

Walk-up USB

Some printers support direct printing from a USB flash drive (the walk-up USB port is usually near the control panel).

Watermark

A watermark is a recognizable image or pattern in paper that appears lighter when viewed by transmitted light. Watermarks were first introduced in Bologna, Italy in 1282. Watermarks have been used by paper makers to identify their product, and also on postage stamps, currency, and other government documents to discourage counterfeiting.

XPS

XML Paper Specification (XPS) is a specification for a Page Description Language (PDL) and a new document format developed by Microsoft. This has benefits for portable document and electronic documents. It is an XML-based specification based on a new print path and vector-based, device-independent document format.

ZIF Connector

Zero insertion force (ZIF) connectors use a mechanical locking method to secure Flat Flexible Cables (FFCs) to a Printed Circuit Assembly (PCA).

Index

Symbols/Numerics

550-sheet paper feeder
  parts and diagrams 950
  parts, main body 951
550-sheet paper feeder covers, panels, and doors
  whole unit replacement 950
550-sheet paper feeder)
  controller PCA, removal and replacement 921
  feed lower guide, removal and replacement 876
  feed motor, removal and replacement 925
  feed upper guide, removal and replacement 896
  left cover, removal and replacement 862
  lifter drive assembly, removal and replacement 886
  pickup drive assembly, removal and replacement 908
  rear cover, removal and replacement 865
  right cover, removal and replacement 859
  rollers, Tray 3 pickup and feed, removal and replacement 870
  rollers, Tray 3 separation, removal and replacement 873
550-sheet trays
  jams MFP 131
  jams SFP 118

A

applications
  access, control panel 3
assemblies 550-sheet paper feeder
  remove and replace 858

B

base printer
  information 2
  information, configurations, and specifications 2
  parts and diagrams 930
  remove and replace parts 223
  specifications 8
  views 2
bin, output
  locating 2, 5
blank pages
  troubleshooting 173

C

cables
  USB, troubleshooting 173
cartridge
  replacing 21
cartridge door
  removal and replacement 300
cartridge door button (MFP)
  removal and replacement 236
cartridge door button (SFP)
  removal and replacement 231
cartridge fan
  removal and replacement 422
cartridge tray
  removal and replacement 450
cartridges
  order numbers 21
caution iii
checklist, solve problems 112
checklists
  pre-troubleshooting 44
cleaning
  tray 1 pickup and separation rollers 30
  tray 2 pickup, feed, and separation rollers 33
  tray 3 pickup, feed, and separation rollers 39
cleaning page
  print 29, 155
cleaning, base printer
  installation and maintenance 29
cleaning, input devices
  installation and maintenance 38
component tests
  dial test, SFP 58
  display test, MFP 58
  display test, SFP 58
  solve problems 58
  walk-up USB port 58
configuration
  printer 1
configuration page
  determine installed firmware 48
configuration report
  find information 78
  solve problems 78
connectivity and performance
  troubleshooting 173
connectivity status report
  solve problems 78
connector error
  65.WX.YZ error 116
connector locations
  external plug and port diagrams 68
  printed circuit assembly diagrams 64
control panel
  accessing applications 3
  diagnostics 52
  locating 2, 5
  locating features 3
  locating features on the touchscreen control panel 7
  solve problems 113
  whole-unit replacement 196

control panel base cover MFP
removal and replacement 209
control panel base MFP
removal and replacement 209
control panel messages 115
control panel MFP
parts 932
removal and replacement 209
control panel SFP
parts 931
removal and replacement 196
control panels
parts and diagrams 931
control-panel diagnostics
dial test, SFP 114
display test, MFP 114
display test, SFP 114
controller PCA (550-sheet paper feeder)
removal and replacement 921
conventions used iii
copy-quality problems
light or faint copies 172
modify printer settings to improve scan or copy quality 172
vertical lines, bands, or streaks 168
copy-quality troubleshooting 165
covers
document feeder top, removal and replacement 188
integrated scanner assembly FFC cover MFP, removal and replacement 229
remove and replace parts 188, 223, 859
Tray 3 cassette front cover, removal and replacement 223
covers, panels, and doors
parts and diagrams 933, 950
covers, panels, and doors MFP
parts 939
covers, panels, and doors SFP
parts 937
CPMD 115
cross section diagrams
550-sheet paper feeder 61
base printer 61

D

DC controller
formatter pairing 575, 591
DC controller communication error
55.WX.YZ error 116
defeating
interlocks 109
defeating interlocks
solve problems 54, 110
definitions and terms
glossary 976
determine problem source 44
devices, input
information 17
diagnostics
component, solve problems 58
control panel 52, 114
engine 109
scanner tests 56
diagnostics report
solve problems 78
diagrams, block
solve problems 59
diagrams, cross section 61
diagrams, external plug and port locations 68
diagrams, major component locations 70
diagrams, printed circuit assembly
connector locations 64
diagrams, sensors and switches 59
dial, control panel
locating 3
document feeder
paper-feeding problems (MFP) 147
remove and replace parts 187
whole unit replacement 929
document feeder / scanner
information, configurations, and specifications 1
parts and diagrams 929
document feeder and scanner
information 1
document feeder error
31.WX.YZ error 115
document feeder top cover, includes rollers
removal and replacement 188
doors
parts and diagrams 933, 950
remove and replace parts 188, 223, 859
doors MFP
parts 939
doors SFP
parts 937
drum motor
removal and replacement 398
duplex drive assembly
removal and replacement 467
duplex guide assembly
removal and replacement 719
duplex re-pick clutch
removal and replacement 710
duplex upper guide
removal and replacement 707
duplexer
jams MFP 131
jams SFP 118
duplexer error
69.WX.YZ error 116
duplexing bottom cover
removal and replacement 308

E

electrostatic discharge 185
engine
diagnostics 109
remove and replace parts 223
test page 109
engine controller PCA
removal and replacement 566
engine controller unit
formatter pairing 575, 591
engine error (LaserJet)
46.WX.YZ error 115
engine FRUs, internal
parts and diagrams 941, 951
engine test
solve problems 52, 109
engine, printer
parts and diagrams 930
engine, printer base
information, configurations, and specifications 2
external plug and port diagrams
locations 68

F

faint copies
copy-quality problems 172
fan
cartridge, removal and replacement 422
fan error
58.WX.YZ error 116
fasteners used in this printer 186

fax PCA
removal and replacement 349
feed lower guide (550-sheet paper feeder)
removal and replacement 876
feed lower guide assembly
removal and replacement 732
feed motor
removal and replacement 391
feed motor (550-sheet paper feeder)
removal and replacement 925
feed upper guide (550-sheet paper feeder)
removal and replacement 896
feed upper guide assembly
removal and replacement 789
field-replaceable units
covers, panels, and doors 188, 223, 859
remove and replace parts 187, 223, 858
firmware
determine the installed version 48
firmware error
F0.WX.YZ.ZZ error 116
firmware upgrade
firmware version determine 48
firmware upgrade)
embedded web server 47
USB flash drive, control panel 47
firmware, upgrade
downloading 47
firmware, version determine
find information 48
firmware, version determining 47
flat-flexible cable
control panel SFP, removal and replacement 196
flowcharts
troubleshooting 44, 46
Formatter
DCC/ECU pairing 575, 591
formatter PCA
removal and replacement 583
front cover
removal and replacement 248
front USB
removal and replacement 311
FRUs
remove and replace parts 187, 223, 858
FRUS, internal
parts and diagrams 941, 951
fuser
jams 129, 142
removal and replacement 467
fuser error
41.WX.YZ error 115
laser scanner error 115
paper path error 115
fuser error (LaserJet)
50.WX.YZ error 115
fuser motor
removal and replacement 405
fuser motor PCA
removal and replacement 414

G

glossary
terms and definitions 976

H

HP Support viii, 183
HP, pairing
formatter/DCC/ECU 575, 591
HP, pairing, step 1
type identification 579, 595
HP, pairing, step 2
formatter preparation 580, 596
HP, pairing, step 3
operation 581, 597

I

image defects, repetitive
ruler 149
image quality
check toner-cartridge status 154
tray 1 pickup and separation rollers, clean 30
tray 2 pickup, feed, and separation rollers, clean 33
tray 3 pickup, feed, and separation rollers, clean 39
image-quality
troubleshooting 148
Info menu, MFP
control-panel menu 93
Info menu, SFP
control-panel menu 84
information
document feeder and scanner 1
input devices 17
printer 1
printer base 2
information pages
configuration report 78
connectivity status report 78
diagnostics report 78
information, configurations, and specifications
ADF / scanner 1
base printer 2
document feeder / scanner 1
engine, printer base 2
input devices 17
scanner / document feeder 1
input accessory error
67.WX.YZ error 116
input devices
information 17
information, configurations, and specifications 17
remove and replace, 550-sheet paper feeder 858
input, 550-sheet paper feeder
parts and diagrams 950
input/output error
40.WX.YZ error 115
installation
printer 18
installation, base printer 21
installation, cleaning, base printer 29
installation, cleaning, input devices 38
installation, document feeder / scanner 18
installation, input devices 38
installation, security setup 27
installation, supplies and long-life consumables 21
integrated scanner assembly
removal and replacement 216
integrated scanner assembly (ISA)
ISA
whole-unit replacement, integrated scanner assembly 216
whole-unit replacement 216
integrated scanner assembly FFC cover MFP
removal and replacement 229
interface ports
locating 3, 6
interlock holder assembly
removal and replacement 599

interlocks
defeating 109
intermediate transfer belt (ITB)
removal and replacement 386
internal assemblies 550-sheet paper feeder 858
internal parts 550-sheet paper feeder
remove and replace 858
internal parts and assemblies
parts and diagrams 941, 951
internal parts and assemblies,
remove and replace 191, 311, 870
internal test and information pages
solve problems 78
ISA
removal and replacement 216
ISA lift assembly
parts 929
ISA lift slider pin
parts 929
ITB)
removal and replacement 386

J

jam error (LaserJet)
13.WX.YZ error 115
jams
550-sheet trays MFP 131
550-sheet trays SFP 118
auto-navigation MFP 131
auto-navigation SFP 118
causes of MFP 131
causes of SFP 118
duplexer MFP 131
duplexer SFP 118
fuser 129, 142
help animations 119, 131
locations 118, 131, 133
locations MFP 131
locations SFP 118
output bin 127, 139
output bin MFP 131
output bin SFP 118
rear door 127, 140
Tray 1 120, 133
Tray 1 MFP 131
Tray 1 SFP 118
Tray 2 124, 137
Tray 2 MFP 131
Tray 2 SFP 118
Job menu, MFP
control-panel menu 94

L

laser scanner error (LaserJet)
51.WX.YZ error 115
52.WX.YZ error 115
laser/scanner
removal and replacement 485
left cover (550-sheet paper feeder)
removal and replacement 862
left cover (MFP)
removal and replacement 236
left cover (SFP)
removal and replacement 231
lift assembly, integrated scanner assembly
removal and replacement 191
lifter drive assembly
removal and replacement 758
lifter drive assembly (550-sheet paper feeder)
removal and replacement 886
light copies
copy-quality problems 172
lines, bands, streaks
copy-quality problems 168
LLCs
installation and maintenance 21
local area network (LAN)
locating 3, 6
long-life consumables
installation and maintenance 21
low-voltage power supply
removal and replacement 518
LVPS
removal and replacement 518

M

maintenance
printer 18
maintenance, base printer 21
maintenance, cleaning, base printer 29
maintenance, cleaning, input devices 38
maintenance, document feeder / scanner 18
maintenance, input devices 38
maintenance, security setup 27
maintenance, supplies and long-life consumables 21
major component diagrams
locations 70
major component locations
diagrams 70
memory
included 8-12, 14, 16
memory chip (toner)
locating 21
menu, control panel
Info menu, MFP 93
Info menu, SFP 84
Jobs menu, MFP 94
menu, sub menus, MFP 93
menu, sub menus, SFP 84
Paper menu, MFP 94
Print menu, SFP 85
Reports menu 82
Settings menu, MFP 95
Settings menu, SFP 87
Status menu, SFP 85
Supplies menu, MFP 94
Supplies menu, SFP 85
Tools menu, MFP 101
Tools menu, SFP 90
Trays menu, SFP 86
menu, sub menus, MFP
control-panel menu 93
menu, sub menus, SFP
control-panel menu 84
motor
drum, removal and replacement 398
feed, removal and replacement 391
fuser, removal and replacement 405
motor error (LaserJet)
59.WX.YZ error 116
MP lower guide
removal and replacement 527
MP paper feed assembly
removal and replacement 354

N

networks
supported 8-12, 14, 16
note iii

O

on/off button
locating 2, 5
output accessory error
66.WX.YZ error 116

output bin
clear jams 127, 139
clear jams MFP 131
clear jams SFP 118
locating 2, 5

P

page error
21.WX.YZ error 115
pages
blank 173
not printing 173
printing slowly 173
pages per minute 8-12, 14, 16
pairing
formatter/DCC/ECU 575, 591
pairing, step 1
type identification 579, 595
pairing, step 2
formatter preparation 580, 596
pairing, step 3
operation 581, 597
panels
parts and diagrams 933, 950
remove and replace parts 188, 223, 859
panels MFP
parts 939
panels SFP
parts 937
paper
jams MFP 131
jams SFP 118
selecting 156
paper feeder, 550-sheet
parts and diagrams 950
parts, main body 951
whole unit replacement part 950
paper handling
solve problems 118
paper handling error (LaserJet)
56.WX.YZ error 116
paper jams
550-sheet trays MFP 131
550-sheet trays SFP 118
duplexer MFP 131
duplexer SFP 118
fuser 129, 142
locations 118, 131, 133
locations MFP 131
locations SFP 118
output bin 127, 139
output bin MFP 131
output bin SFP 118
rear door 127, 140
Tray 1 120, 133
Tray 1 MFP 131
Tray 1 SFP 118
Tray 2 124, 137
Tray 2 MFP 131
Tray 2 SFP 118
Paper menu, MFP
control-panel menu 94
parts
550-sheet paper feeder covers, panels, and doors 950
550-sheet paper feeder main body 951
control panel MFP 932
control panel SFP 931
covers, panels, and doors MFP 939
covers, panels, and doors SFP 937
document feeder and scanner whole units 929
doors MFP 939
doors SFP 937
internal parts and assemblies (1 of 5) 941
internal parts and assemblies (2 of 5) 943
internal parts and assemblies (3 of 5) 945
internal parts and assemblies (4 of 5) 947
internal parts and assemblies (5 of 5) 949
ISA lift assembly 929
ISA lift slider pin 929
panels MFP 939
panels SFP 937
toner cartridges 933
whole unit replacement 933
WUR 933
parts and assemblies (1 of 5)
parts, internal 941
parts and assemblies (2 of 5)
parts, internal 943
parts and assemblies (3 of 5)
parts, internal 945
parts and assemblies (4 of 5)
parts, internal 947
parts and assemblies (5 of 5)
parts, internal 949
parts and diagrams
550-sheet paper feeder 950
ADF / scanner 929
base printer 930
control panels 931
covers, panels, and doors 933, 950
document feeder / scanner 929
doors 933, 950
engine, printer 930
internal parts and assemblies 941, 951
panels 933, 950
scanner / document feeder 929
parts internal 550-sheet paper feeder
remove and replace 858
PCA
engine controller, removal and replacement 566
formatter, removal and replacement 583
fuser motor, removal and replacement 414
LVPS, removal and replacement 518
PCA holder assembly
removal and replacement 631
performance and connectivity troubleshooting 173
pickup drive assembly
removal and replacement 823
pickup drive assembly (550-sheet paper feeder)
removal and replacement 908
ports
locating 3, 6
post service tests
print quality test 187
power connection
locating 3, 6
power on troubleshooting 105
power on troubleshooting
overview 105
power switch
locating 2, 5
power-on checks
troubleshooting process 105
pre-troubleshooting checklist 44
precautions
disassemble or reassemble iv, 179
electrical iv, 179
ingestion hazard iv, 179
laser radiation hazard iv, 179

mechanical hazard iv, 179
thermal hazard iv, 179
print a cleaning page 29, 155
Print menu, SFP
control-panel menu 85
print-quality troubleshooting 149
printed circuit assembly diagrams
connector locations 64
printer
information, configuration, and specifications 1
installation and maintenance 18
printer engine
information, configurations, and specifications 2
parts and diagrams 930
views 2
printer information, configuration, and specifications
document feeder and scanner views 1
printer installation and maintenance
base printer 21
cleaning, base printer 29
cleaning, input devices 38
document feeder / scanner 18
input devices 38
security setup 27
supplies and long-life consumables (LLCs) 21
printer memory error
20.WX.YZ error 115
printer settings
copy-quality problems 172
printer views
MFP 5
SFP 2
printer, base
information 2
specifications 8
printing
troubleshooting 173
product number
location 3, 6

R

real-time clock error
11.WX.YZ error 115
rear cover (550-sheet paper feeder)
removal and replacement 865
rear door
clear jams 127, 140
locating 3, 6
removal and replacement 297
registration density sensor
removal and replacement 664
removal and replacement 179
cartridge door 300
cartridge door button (MFP) 236
cartridge door button (SFP) 231
cartridge fan 422
cartridge tray 450
considerations 184
control panel base cover MFP 209
control panel base MFP 209
control panel FFC SFP 196
control panel MFP 209
control panel SFP 196
controller PCA (550-sheet paper feeder) 921
document feeder top cover, includes rollers 188
drum motor 398
duplex drive assembly 467
duplex guide assembly 719
duplex re-pick clutch 710
duplex upper guide 707
duplexing bottom cover 308
engine controller PCA 566
fax PCA 349
feed lower guide (550-sheet paper feeder) 876
feed lower guide assembly 732
feed motor 391
feed motor (550-sheet paper feeder) 925
feed upper guide (550-sheet paper feeder) 896
feed upper guide assembly 789
formatter PCA 583
front cover 248
front USB 311
fuser 467
fuser motor 405
fuser motor PCA 414
integrated scanner assembly 216
integrated scanner assembly FFC cover MFP 229
interlock holder assembly 599
intermediate transfer belt (ITB) 386
ISA 216
ITB 386
laser/scanner 485
left cover (550-sheet paper feeder) 862
left cover (MFP) 236
left cover (SFP) 231
lift assembly, integrated scanner assembly 191
lifter drive assembly 758
lifter drive assembly (550-sheet paper feeder) 886
low-voltage power supply 518
LVPS 518
MP lower guide 527
MP paper feed assembly 354
PCA holder assembly 631
pickup drive assembly 823
pickup drive assembly (550-sheet paper feeder) 908
rear cover (550-sheet paper feeder) 865
rear door 297
registration density sensor 664
right cover (550-sheet paper feeder) 859
right cover (MFP) 244
right cover (SFP) 240
secondary transfer roller (T2) 381
secondary transfer roller (T2) assembly 383
slider pin, lift assembly, integrated scanner assembly 191
T2 assembly 383
T2 roller 381
top cover (MFP) 276
top cover (SFP network models) 263
Tray 1 pickup roller assembly 367
Tray 1 separation roller assembly 370
Tray 2 pickup and feed rollers 374
Tray 2 separation roller 378
Tray 3 cassette front cover 223
Tray 3 pickup and feed rollers (550-sheet paper feeder) 870

Tray 3 separation roller (550-sheet paper feeder) 873
WiFi PCA 339, 344
wireless PCA 339, 344
removal and replacement
strategy 184
introduction 184
remove and replace
550-sheet paper feeder, internal parts and assemblies 858
remove and replace parts
base printer 223
control panel, whole-unit replacement 196
covers, panels, and doors 188, 223, 859
document feeder / scanner 187
field-replaceable units 187, 223, 858
integrated scanner assembly (ISA), whole-unit replacement 216
whole-unit replacement 196
remove and replace, internal parts and assemblies 191, 311, 870
repetitive image defect ruler 149
replacing
toner cartridges 21
Reports menu
control-panel menu 82
required tools 185
right cover (550-sheet paper feeder)
removal and replacement 859
right cover (MFP)
removal and replacement 244
right cover (SFP)
removal and replacement 240
rollers
document feeder top, removal and replacement 188
rollers, Tray 2 pickup and feed)
removal and replacement 374
rollers, Tray 2 separation
removal and replacement 378
rollers, Tray 3 pickup and feed 550-sheet paper feeder))
removal and replacement 870
rollers, Tray 3 separation (550-sheet paper feeder)
removal and replacement 873
rollers, Tray1 pickup)
removal and replacement 367
rollers, Tray1 separation)
removal and replacement 370

S

safety precautions iv, 179
scan or copy quality improvement
copy-quality problems 172
scanner
remove and replace parts 187
scanner and document feeder
information 1
scanner error
30.WX.YZ error 115
scanner tests
diagnostics 56
scanner, image
whole unit replacement part 929
scanner/document feeder
information, configurations, and specifications 1
parts and diagrams 929
secondary transfer roller (T2)
removal and replacement 381
secondary transfer roller (T2) assembly
removal and replacement 383
security error
33.WX.YZ error 115
security setup
installation and maintenance 27
sensor
registration density, removal and replacement 664
sensor error
54.WX.YZ error 116
58.WX.YZ error 116
sensors diagrams
550-sheet paper feeder 59
base printer 59
serial number
locating 3
service approach 186
after performing service 187
before performing service 186
Settings menu, MFP
control-panel menu 95
Settings menu, SFP
control-panel menu 87
slider pin, lift assembly, integrated scanner assembly
removal and replacement 191
solve performance problems 173
factors affecting print performance 173
print speeds 174
printer does not print 175
printer prints slowly 176
solve problems
configuration report 78
control panel 113
control panel messages 115
control-panel diagnostics 114
copy-quality troubleshooting 165
CPMD 115
cross section diagrams 61
defeating interlocks 54, 110
diagrams, block 59
engine test 52, 109
external plug and port location diagrams 68
firmware upgrade 47
firmware, determine version 48
image-quality troubleshooting 148
individual component tests 58
internal test and information pages 78
LED diagnostics 55, 111
major component locations diagrams 70
output is curled or wrinkled 118, 145
paper does not feed automatically 118, 148
paper does not feed from Tray 2-X 118, 145
paper handling 118
performance and connectivity troubleshooting 173
power-on checks 105
print-quality troubleshooting 149
printed circuit assembly
connector location diagrams 64
printer does not pick up paper 118
printer does not pick up paper or misfeeds 118
printer feeds incorrect page size 118, 144
printer picks up multiple sheets of paper 118
printer pulls from incorrect tray 118, 144

printer will not duplex or duplexes incorrectly 118, 144
sensors and switches diagrams 59
troubleshooting tools 51
solve problems checklists
pre-troubleshooting 112
specifications
base printer 8
MFP 12
printer 1
SFP 8
Status menu, SFP
control-panel menu 85
supplies
installation and maintenance 21
replacing toner cartridges 21
supplies error (LaserJet)
10.WX.YZ error 115
Supplies menu, MFP
control-panel menu 94
Supplies menu, SFP
control-panel menu 85
switches diagrams
550-sheet paper feeder 59
base printer 59

T

T2 assembly)
removal and replacement 383
T2 roller)
removal and replacement 381
terms and definitions
glossary 976
tests
component, solve problems 58
disable cartridge check 109
engine 109
tip iii
toner cartridge
diagnostic test 109
toner cartridges
components 21
order numbers 21
parts 933
replacing 21
Tools menu, MFP
control-panel menu 101
Tools menu, SFP
control-panel menu 90
top cover (MFP)
removal and replacement 276
top cover (SFP network models)
removal and replacement 263
touchscreen
locating features 7
tray
location assemblies, 550-sheet paper feeder 17
Tray 1
jams 120, 133
jams MFP 131
jams SFP 118
tray 1 pickup and separation rollers
cleaning 30
Tray 1 pickup roller assembly)
removal and replacement 367
Tray 1 separation roller assembly)
removal and replacement 370
Tray 2
jams 124, 137
jams MFP 131
jams SFP 118
Tray 2 pickup and feed rollers)
removal and replacement 374
tray 2 pickup, feed, and separation rollers
cleaning 33
Tray 2 separation roller)
removal and replacement 378
Tray 3 cassette front cover
removal and replacement 223
Tray 3 pickup and feed rollers (550-sheet paper feeder))
removal and replacement 870
tray 3 pickup, feed, and separation rollers
cleaning 39
Tray 3 separation roller) (550-sheet paper feeder)
removal and replacement 873
tray motor error (LaserJet)
60.WX.YZ error 116
trays
capacity 8-12, 14, 16
included 8-12, 14, 16
locating 2, 5
Trays menu, SFP
control-panel menu 86
troubleshooting
blank pages 173
check toner-cartridge status 154
checklist 44
control panel 52, 113
defeating interlocks 54, 110
engine test 52, 109
flowchart 44, 46
jams MFP 131
jams SFP 118
LED diagnostics 55, 111
network problems 176
pages not printing 173
pages printing slowly 173
scanner tests 56
solve problems checklist 112
USB cables 173
wired network 176
troubleshooting process
power on 105
power subsystem 105
power-on checks 105
troubleshooting process overview
power on 105
troubleshooting tools
control panel messages 115
copy-quality troubleshooting 165
CPMD 115
determine the problem source 44
diagrams, block 59
firmware upgrade 47
image-quality troubleshooting 148
individual component tests 58
performance and connectivity troubleshooting 173
print-quality troubleshooting 149
solve problems 51

U

upgrade, product firmware 47
USB port
troubleshooting 173

V

vertical lines, bands, or streaks
copy-quality problems 168
views
printer base 2
views, document feeder and scanner
printer information, configuration, and specifications 1

W

warning iii
whole unit replacement
  parts 933
whole-unit replacement
  control panel 196
  integrated scanner assembly (ISA) 216
  remove and replace parts 196
WiFi PCA
  removal and replacement 339, 344
wireless PCA
  removal and replacement 339, 344
WUR
  control panel 196
  integrated scanner assembly (ISA) 216
  parts 933
  remove and replace parts 196