

# Product Environmental Profile

## Ortronics® Unshielded Jacks



### LEGRAND COMPANY OVERVIEW

#### • Designed to Be Better – Our Commitment to Sustainability

At Legrand®, our sustainability commitment translates into greater benefits and tangible value for our customers, business partners, employees, and the broader community.

#### • Better Performance

We provide building solutions to meet many building performance goals from sustainability and energy efficiency to productivity and occupant well being. The right choice in network and electrical infrastructure can play a key role in many facets of building performance. Our products help ensure electrical safety. They offer choice and flexibility in space design. They are designed to reduce installation time and material waste on site. Because we know buildings consume a great deal of energy, we offer a range of products and solutions that reduce energy consumption from lighting to plug load to data centers.

#### • Better Solutions

We offer a wide range of innovative solutions for the building, while constantly evolving our design and development processes to improve the environmental profile of our products. Through active monitoring and research, we serve as an expert resource for market trends and building and product performance standards to keep our customers at the top of their game.

#### • Better Operations

We focus on operational excellence because we believe optimizing the way we manage energy, water and waste is not only good for the environment, it's good for business. As part of the Department of Energy's Better Building, Better Plants Challenge (BBBP) Legrand has reduced its energy intensity by over 30% across 14 sites in the United States in just three years. Integrating sustainability into the way we run our operations makes us more competitive – and a better business partner.



For information on Legrand PEP's and other sustainability initiatives, scan the QR code to be brought to our Product Sustainability page.



### LEGRAND'S ENVIRONMENTAL COMMITMENTS

#### • Incorporate environmental management into our industrial sites

Of all Legrand sites worldwide, over 85% are ISO 14001 certified (sites belonging to Legrand for more than five years).

#### • Offer our customers environmentally friendly solutions

Develop innovative solutions to help our customers design more energy efficient, better managed and more environmentally friendly installations.

#### • Involve the environment in product design

Reduce the environmental impact of products over their whole life cycle.

Provide our customers with all relevant information (composition, consumption, end of life, etc.).



### REFERENCE PRODUCT

|                   |                                                                                                                                                                                                                                         |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Function          | Provides the connection for a copper cable to other equipment in a data communications system during a typical lifetime of 20 years. This system complies with the Category 6A component specifications, per TIA-568-C.2-2009 Standard. |
| Reference Product |  <p>Part Number: OR-HDJ6A</p> <p>Clarity High Density Jack, Category 6A, fog white</p>                                                               |

The company reserves the right to change specifications and designs without notice. All illustrations, descriptions, dimensions and weights in the document are for guidance and cannot be held binding on the company.

# Product Environmental Profile

## Ortronics® Unshielded Jacks



### PRODUCTS CONCERNED

The environmental data are representative of the following products:

#### Clarity® High Density Jacks

OR-HDJ6A-xx  
OR-HDJ6-xx  
OR-HDJ5E-xx  
xx = color

#### Clarity® TracJack® Modules

OR-TJ6A-xx  
OR-TJ610-xx  
OR-TJ600-xx  
OR-TJ5E00-xx  
xx = color

#### Clarity® Panel Jacks

OR-PJ6A-xx  
OR-PJ6A00-xx  
OR-PJ600-xx  
OR-PJ5E00-xx  
xx = color

#### TechChoice® Keystone Jacks

OR-KS6A-xx  
OR-KS5EA-xx  
OR-KS6-xx (25 pack)  
OR-KS5E-xx (25 pack)  
xx = color

#### Keystone Jacks

OR-KT2J6A-xx  
OR-KT2J6-xx  
OR-KT2J5E-xx  
xx = color



### CONSTITUENT MATERIALS

This Reference Product contains no substances prohibited by the regulations applicable at the time of its introduction to the market. It respects the restrictions on use of hazardous substances as defined in the RoHS directive 2011/65/CE.

| <b>Total weight of Reference Product (with unit packaging)</b> |              | <b>0.5 oz (15 g)</b>  |             |                                  |              |
|----------------------------------------------------------------|--------------|-----------------------|-------------|----------------------------------|--------------|
| Plastics as % of weight                                        |              | Metals as % of weight |             | Other as % of weight             |              |
| PC                                                             | 28.9%        | Stainless Steel       | 4.3%        | Printed Circuit Board            | 3.9%         |
| PC/ABS (70/30)                                                 | 4.0%         | Copper Alloys         | 3.2%        | Paper                            | 0.1%         |
| PBT + 30% glass filled                                         | 6.2%         | Aluminum              | 1.4%        |                                  |              |
| Other plastics                                                 | 0.5%         | Other metals          | <0.1%       | <b>Packaging as % of weight</b>  |              |
|                                                                |              |                       |             | Paper, Cardboard                 | 30.6%        |
|                                                                |              |                       |             | PE (low density)                 | 8.0%         |
|                                                                |              |                       |             | PC/ABS (70/30)                   | 9.0%         |
| <b>Total plastics</b>                                          | <b>39.6%</b> | <b>Total metals</b>   | <b>8.8%</b> | <b>Total other and packaging</b> | <b>51.6%</b> |

Estimated recycled material content: 23% of weight.

Note: The proportions of PC, ABS, PC/ABS, Stainless Steel, Aluminum, paper/cardboard, PC/ABS or PC + gf (= 79%) mass vary due to the presence or absence of a PC/ABS and stainless steel slide lock, Aluminum foil shield, PC or ABS housing, paper/cardboard packaging, and PC/ABS or PC + glass filled installation tool. Percentages for all product families are shown in the table below. All other material proportions are the same as shown for the Reference Product above.

| Product Family                                              | % PC | % ABS | % PC/ABS and Stainless Steel | % Aluminum | % Paper / Cardboard | % Plastic Packaging |                        |
|-------------------------------------------------------------|------|-------|------------------------------|------------|---------------------|---------------------|------------------------|
|                                                             |      |       |                              |            |                     | % PC/ABS            | % PC +10% glass filled |
| TracJack Modules<br><small>*includes PC+S.S. fibers</small> | 19*  | 22    | 0                            | 0          | 32                  | 0                   | 6                      |
| Panel Jacks                                                 | 28   | 0     | 0                            | 3          | 44                  | 0                   | 4                      |
| TechChoice Keystone Jacks                                   | 20   | 13    | 0                            | 0          | 46                  | 0                   | N/A                    |
| Keystone Jacks                                              | 32   | 0     | 0                            | 3          | 34                  | 10                  | N/A                    |

# Product Environmental Profile

## Ortronics® Unshielded Jacks



### MANUFACTURING

The Reference Product comes from sites that have received ISO 14001 certification.



### DISTRIBUTION

Products are distributed from logistics centers located to optimize transport efficiency. Information on the distance of distribution is not available so the PCR hypothesis for "Intercontinental transport", 2175 miles (3500 km) by heavy truck, was used. This represents transportation of the Reference Product from our warehouse to the local point of distribution in the North American market.



### INSTALLATION

No electricity is required for installing the Reference Product. A termination tool is provided with the Reference Product for installation.



### USE

**Servicing and maintenance:**

Under normal conditions of use, this type of product requires no servicing or maintenance.

**Consumable:**

No consumables are necessary to use this type of product.



### END OF LIFE

Development teams integrate product end-of-life factors in the design phase.

• **Hazardous waste\* contained in the product:** no hazardous waste

(\* Hazardous waste as defined by European Commission decision 2000/532/EC.

• **Recycling rate:**

Calculated using the method described in the IEC/TR 62635 technical report, the recyclability rate of the product is estimated as 73%. This value is based on data collected from a technological channel using industrial procedures. It does not pre-validate the effective use of this channel for end-of-life electrical and electronic products.

| Separated into:                            | (% mass of Reference Product) |
|--------------------------------------------|-------------------------------|
| - plastic materials (excluding packaging): | 31%                           |
| - metal materials (excluding packaging):   | 9%                            |
| - other materials (excluding packaging):   | 2%                            |
| - packaging (all types of materials):      | 31%                           |

All products other than the Reference Product have different proportions of plastic, metal, and packaging materials. However, the recycling rate for all products is at least 73%.

# Product Environmental Profile

## Ortronics® Unshielded Jacks



### ENVIRONMENTAL IMPACTS

The evaluation of environmental impacts examines the stages of the Reference Product life cycle: manufacturing, distribution, installation, use, and end of life. It is representative of products marketed and used in North America.

The following modelling elements were taken into account:

|                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Manufacturing</b> | Packaging taken into account up to third level packaging. As required by the PEP ecopassport program, all transport for the manufacturing of the Reference Product, including materials and components, has been taken into account. The waste generated during manufacturing phase has been taken into account.                                                                                                                                                                                                                                       |
| <b>Distribution</b>  | Transport between the last distribution center and an average delivery to the sales area.                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Installation</b>  | The end-of-life of the packaging is taken into account at this phase.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Use</b>           | <ul style="list-style-type: none"> <li>Under normal conditions of use, this type of product requires no servicing or maintenance.</li> <li>No consumables are necessary to use this type of product.</li> <li>Product category: passive product</li> <li>Use scenario: continuous operation (100% of the time) for 20 years at 30% of rated load when connected to a copper cable for data center applications. This modelling duration does not constitute a minimum durability requirement.</li> <li>Energy model: Electricity(US) - 2009</li> </ul> |
| <b>End of life</b>   | The default end of life scenario modelled maximizes the environmental impact.                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Software used</b> | EIME V5 and its database "CODDE-2015-04" and the indicators defined in the PCR ed 3 in alignment with the EN15804 standard                                                                                                                                                                                                                                                                                                                                                                                                                             |

|                                                             | Total for Life cycle |                                      | Raw material and manufacturing |      | Distribution |      | Installation |      | Use      |      | End of life |      |
|-------------------------------------------------------------|----------------------|--------------------------------------|--------------------------------|------|--------------|------|--------------|------|----------|------|-------------|------|
| <b>Global warming (GW)</b>                                  | 1.25E-01             | kg CO <sub>2</sub> eq.               | 1.17E-01                       | 94%  | 2.65E-03     | 2%   | 5.19E-04     | < 1% | 4.08E-03 | 3%   | 8.83E-04    | < 1% |
| <b>Ozone depletion (OD)</b>                                 | 1.10E-08             | kg CFC-11 eq.                        | 1.09E-08                       | 99%  | 5.36E-12     | < 1% | 6.26E-12     | < 1% | 7.39E-11 | < 1% | 2.09E-11    | < 1% |
| <b>Acidification of soil and water (A)</b>                  | 1.67E-04             | kg SO <sub>2</sub> eq.               | 1.45E-04                       | 87%  | 1.19E-05     | 7%   | 2.38E-06     | 1%   | 3.90E-06 | 2%   | 3.40E-06    | 2%   |
| <b>Water eutrophication (WE)</b>                            | 5.26E-05             | kg PO <sub>4</sub> <sup>3-</sup> eq. | 4.21E-05                       | 80%  | 2.73E-06     | 5%   | 2.60E-06     | 5%   | 1.04E-06 | 2%   | 4.07E-06    | 8%   |
| <b>Photochemical ozone creation (POCP)</b>                  | 2.43E-05             | kg C <sub>2</sub> H <sub>4</sub> eq. | 2.23E-05                       | 92%  | 8.45E-07     | 3%   | 1.72E-07     | < 1% | 6.25E-07 | 3%   | 2.64E-07    | 1%   |
| <b>Depletion of abiotic resources - elements (ADPe)</b>     | 7.11E-05             | kg Sb eq.                            | 7.11E-05                       | 100% | 1.06E-10     | < 1% | 2.56E-11     | < 1% | 4.01E-11 | < 1% | 5.49E-11    | < 1% |
| <b>Total use of primary energy (PE)</b>                     | 2.54E+00             | MJ                                   | 2.41E+00                       | 95%  | 3.74E-02     | 1%   | 7.59E-03     | < 1% | 6.98E-02 | 3%   | 1.35E-02    | < 1% |
| <b>Net use of fresh water (FW)</b>                          | 1.04E-03             | m <sup>3</sup>                       | 1.03E-03                       | 99%  | 2.37E-07     | < 1% | 2.45E-07     | < 1% | 7.20E-06 | < 1% | 7.24E-07    | < 1% |
| <b>Depletion of abiotic resources - fossil fuels (ADPf)</b> | 1.76E+00             | MJ                                   | 1.64E+00                       | 93%  | 3.72E-02     | 2%   | 7.27E-03     | < 1% | 6.45E-02 | 4%   | 1.25E-02    | < 1% |
| <b>Water pollution (WP)</b>                                 | 4.38E+01             | m <sup>3</sup>                       | 4.30E+01                       | 98%  | 4.35E-01     | < 1% | 7.42E-02     | < 1% | 2.01E-01 | < 1% | 1.02E-01    | < 1% |
| <b>Air pollution (AP)</b>                                   | 1.48E+01             | m <sup>3</sup>                       | 1.42E+01                       | 96%  | 1.09E-01     | < 1% | 6.44E-02     | < 1% | 3.47E-01 | 2%   | 9.94E-02    | < 1% |


The values of the 27 impacts defined in the PCR-ed3-EN-2015 04 02 are available in the digital database of pep-ecopassport.org website. The environmental impacts of the Reference Product are representative of the products covered by the PEP, which therefore constitute a homogeneous environmental family.

# Product Environmental Profile

## Ortronics® Unshielded Jacks



### ENVIRONMENTAL IMPACTS (continued)

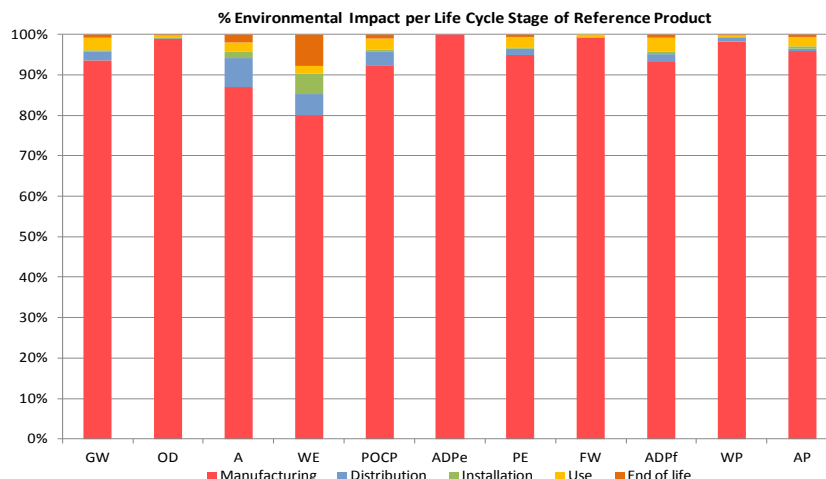

For products other than the Reference Product, the environmental impacts can be estimated by weighting the environmental impacts of the Reference Product by the values shown in the table below. Impacts for Distribution, Installation, Use, and End of Life for all products are the same as the Reference Product. The impacts for OR-KS6-xx and OR-KS5E-xx (pack of 25) can be calculated by multiplying the impacts of OR-KS6A-xx and OR-KS5EA-xx by 25.

| Part Number                                 | Manufacturing |                  |               |               |
|---------------------------------------------|---------------|------------------|---------------|---------------|
| OR-HDJ6-xx<br>OR-HDJ5E-xx                   | WP: 1.0       |                  | all else: 0.9 |               |
| OR-TJ6A-xx<br>OR-TJ600-xx                   | ADPe: 1.5     | WP: 0.6          | FW: 1.1       | all else: 1.0 |
| OR-TJ5E00-xx<br>OR-TJ610-xx                 | ADPe: 0.2     | FW: 0.5          |               | all else: 0.9 |
| OR-PJ6A-xx                                  | ADPe: 1.5     | A / OD / FW: 1.2 |               | all else: 1.1 |
| OR-PJ6A00-xx                                | ADPe: 0.2     | FW: 0.6          |               | all else: 1.0 |
| OR-PJ600-xx<br>OR-PJ5E00-xx                 | ADPe: 0.2     | FW: 0.5          |               | all else: 0.9 |
| OR-KT2J6A-xx<br>OR-KT2J6-xx<br>OR-KT2J5E-xx | 0.9           |                  |               |               |
| OR-KS6A-xx<br>OR-KS5EA-xx                   | ADPe: 0.2     | AP: 0.9          |               | all else: 0.7 |

|                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                           |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|
| Registration number: LGRP-00002-V02.01-EN                                                                                                                                                                                                                                                                                                                                        | Drafting rules: "PCR-ed3-EN-2015 04"<br>Supplemented by "PSR-0005-ed1-EN-2012 12 11"                      |
| Verifier's accreditation number: VH02                                                                                                                                                                                                                                                                                                                                            | Information and reference documents: <a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a> |
| Date of issue: 09-2015                                                                                                                                                                                                                                                                                                                                                           | Validity period: 5 years                                                                                  |
| Independent verification of the declaration and data, in compliance with ISO 14025:2010<br>Internal <input checked="" type="checkbox"/> External <input type="checkbox"/>                                                                                                                                                                                                        |                                                                                                           |
| The PCR Review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN).                                                                                                                                                                                                                                                                                         |                                                                                                           |
| The elements of the present PEP cannot be compared with elements from another program.                                                                                                                                                                                                                                                                                           |                                                                                                           |
| Documents in compliance with ISO 14025:2010: "Environmental labels and declarations - Type III environmental declarations"                                                                                                                                                                                                                                                       |                                                                                                           |
| In compliance with ISO 14040:2006: "Environmental management - LCA - Principles and framework"<br>In compliance with ISO 14044:2006: "Environmental management - LCA - Requirements and guidelines"<br>Environmental data in alignment with EN 15804:2012+A1:2013: "Sustainability of construction works - EPD's - Core rules for the product category of construction products" |                                                                                                           |

