



# Security and Privacy of Telemetry Data



**First Edition (October 2018)**

**© Copyright Lenovo 2018.**

LIMITED AND RESTRICTED RIGHTS NOTICE: If data or software is delivered pursuant to a General Services Administration (GSA) contract, use, reproduction, or disclosure is subject to restrictions set forth in Contract No. GS-35F-05925.

## TABLE OF CONTENTS

<b>1</b>	<b>Introduction</b>	<b>3</b>
1.1	AutoSupport Predictive Technology	3
<b>2</b>	<b>Collection of Telemetry Data</b>	<b>3</b>
2.1	ONTAP	3
2.2	DE Series	5
2.3	OnCommand Insight	5
2.4	OnCommand Unified Manager	5
<b>3</b>	<b>Transfer of Telemetry Data</b>	<b>5</b>
3.1	On Demand Delivery of AutoSupport Messages	6
<b>4</b>	<b>Access and Retention of Telemetry Data</b>	<b>7</b>
4.1	Where the Data Resides	7
4.2	Data Encryption	7
4.3	Who Can Access the Data	7
4.4	Security Testing	8
4.5	Data Retention Period	8
4.6	Certifications	8
	<b>Where to Find Additional Information</b>	<b>8</b>
	<b>Version History</b>	<b>8</b>
	<b>Trademarks</b>	<b>9</b>

# 1 Introduction

Active IQ is a cloud service that provides predictions and recommendations based on peer comparisons and community learning. These insights help you to become a data-driven IT organization. Active IQ enables you to perform the following tasks:

- Monitor and predict capacity usage to stay a step ahead of users' rapidly growing data demands
- Improve security and protect your investments with automated upgrade alerts for software and firmware
- Get recommendations for optimizing configurations based on proven best practices
- Resolve performance issues fast with real-time insights into system bottlenecks
- Apply community wisdom from diagnostic data from across the user base

Active IQ displays information about your systems by aggregating telemetry data from the predictive technology built into ONTAP® software and DE Series storage controller.

**Note:** Data is also collected from OnCommand® Insight, and OnCommand Unified Manager, but that data is not displayed in Active IQ at this time.

The guiding principle of telemetry services is to provide predictive analytics and proactive support by accessing configuration, status, and performance information about your systems. Customer data stored on the systems is never accessed or transferred.

As a Lenovo customer, you should understand what data is collected, how the data is transferred to Lenovo, and how it is kept secure and private.

## 1.1 AutoSupport Predictive Technology

AutoSupport® technology proactively monitors the health of your data, wherever it lives. It continuously watches your flash, traditional, and cloud storage, drawing on over 200 billion real-time and historical diagnostic records to spot potential problems before they affect your business.

AutoSupport regularly sends status messages to Lenovo. If a problem occurs, many of these messages automatically open a case, request additional data, and provide corrective solutions without requiring any action from your IT staff.

The telemetry data will be available to customers (product owners) and support through the Active IQ interface in 2019.

# 2 Collection of Telemetry Data

AutoSupport Active IQ collects configuration, status, and performance information about your systems. If you have privacy-related concerns, you can disable the sending of telemetry data to Lenovo; however, doing so affects your access to predictive analytics and proactive support.

**Note:** AutoSupport is enabled by default on ONTAP software and DE Series storage controllers. It must be manually enabled on all other systems and software.

For ONTAP, you also have the option to mask sensitive information from AutoSupport messages, but doing so can impact support as well. This option is disabled by default.

The following sections list the information collected from each type of system and software.

## 2.1 ONTAP

The following list is a representative sample of what is included in an AutoSupport message for ONTAP.

**Note:** You can identify the exact content sent in an AutoSupport message by reviewing the manifest for that message. To do so, use the `system node autosupport manifest show` command.

- Date and timestamp of the message
- ONTAP software version
- Serial number of the storage system
- Encrypted software licenses
- Host name of the storage system
- SNMP contact name and location (if specified)
- Console encoding type
- Output of commands that provide system information
- Checksum status
- Error-Correcting Code (ECC) memory scrubber statistics
- The following information, if high-availability (HA) configuration is licensed:
  - System ID of the partner in an HA pair
  - Host name of the partner in an HA pair
  - HA node status, including the HA monitor and HA interconnect statistics
- Contents of nonprivacy-related files under the `/etc` directory
- Expiration date of all SnapLock® volumes on the system
- Registry information
- Usage information
- Service statistics
- Boot time statistics
- NVLOG statistics
- WAFL check log
- Modified configurations
- X-header information
- Information about the boot device (such as the CompactFlash card)

Although none of this is business data, data is collected that might be considered customer-identifying if used in conjunction with other data sources outside of the systems. ONTAP offers a solution that protects the privacy of sensitive customer-identifying data by masking or filtering that information with the `-remove-private-data` parameter of the `node autosupport modify` command. When enabled (set to `true`), this parameter removes, encodes, or masks sensitive data from AutoSupport attachments and headers.

Eliminated data includes the following items:

- IP addresses
- MAC addresses
- URIs
- DNS names
- E-mail addresses
- Port numbers
- Node names
- SVM names
- Cluster names
- Aggregate names
- Volume names

- Junction paths
- Policy names
- User IDs
- Group IDs
- LUNs
- Qtree names

Lenovo always recommends that you enable the `-remove-private-data` parameter.

## 2.2 DE Series

Each AutoSupport message for E-Series contains the following information:

- System log files
- Configuration data (formatted XML and unstructured command output)
- State data (subsystem up/down and capacity used)
- Performance metrics
- System inventory data

## 2.3 OnCommand Insight

AutoSupport messages for OnCommand Insight contain the following information:

- Basic information about the OnCommand Insight instance
- The licensed modules and protocols in the OnCommand Insight instance
- The arrays that the OnCommand Insight instance is monitoring (serial number, manufacturer, model number, capacity, and so on)
- The virtual disks that the OnCommand Insight is monitoring (data source, location, object identifier, capacity, and so on)

## 2.4 OnCommand Unified Manager

Each AutoSupport message for OnCommand Unified Manager contains the following information:

- Basic configuration information about the systems managed by a Unified Manager instance
- Log files
- Diagnostic contents from command outputs

# 3 Transfer of Telemetry Data

By default, most Lenovo products use the HTTPS protocol to send telemetry data to Lenovo technical support. HTTPS connections to Lenovo are encrypted and authenticated using TLS 1.0 or later. Lenovo strongly recommends using HTTPS because it is more secure, it enables Lenovo to provide better support, and it provides better analytics through Active IQ.

Table 1) Supported transport protocols for AutoSupport.


Product	Default protocol	Additional protocols supported
ONTAP	HTTPS	HTTP and SMTP
DE Series	HTTPS	HTTP and SMTP
OnCommand Insight	HTTPS	HTTP, SMTP, and FTP

Product	Default protocol	Additional protocols supported
OnCommand Unified Manager	HTTPS	None

**Note:** AutoSupport messages are generally used by Lenovo Support. Although you can configure AutoSupport to notify you of critical events on ONTAP systems, you should use event notifications from the Event Management System (EMS) so that you are notified of issues that require attention.

Figure 1 illustrates how AutoSupport transfers data from an ONTAP system to Lenovo.

**Figure 1) How AutoSupport data is transferred.**

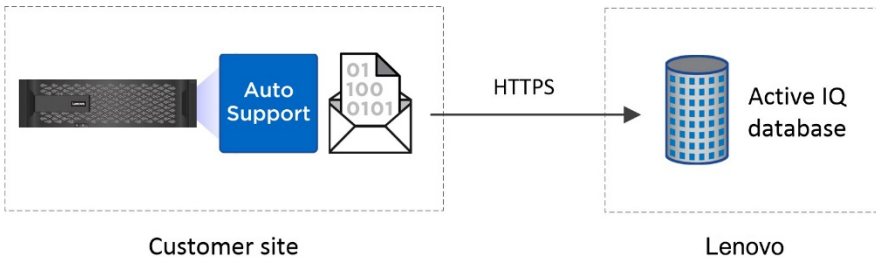

### 3.1 On Demand Delivery of AutoSupport Messages


AutoSupport On Demand enables Lenovo to request AutoSupport messages on demand to troubleshoot cases without the need for customer intervention. This feature is supported with ONTAP and DE Series systems that use HTTPS to deliver messages to Lenovo.

AutoSupport On Demand is a delivery service through which the storage system looks in an inbox for instructions. The service works as follows:

1. As needed, Lenovo Support or support partners create delivery instructions for particular systems. These instructions enable a limited set of predefined AutoSupport delivery instructions:
  - a. Requests for new AutoSupport data to determine the current system state.
  - b. Requests for more in-depth AutoSupport data to resolve complex cases (diagnostic AutoSupport messages, core files, and performance archives).
  - c. Memory buffers containing customer data are excluded from the core files in AutoSupport messages.
2. Systems periodically poll the AutoSupport On Demand service to obtain delivery instructions through encrypted HTTPS. All transmissions are initiated from the system, not from the AutoSupport server.
3. If a system obtains delivery instructions, AutoSupport invokes a new message and sends it to Lenovo using HTTPS.

Figure 2 illustrates the AutoSupport On Demand workflow. The numbers in the image correspond to the steps above.

**Figure 2) AutoSupport On Demand workflow.**

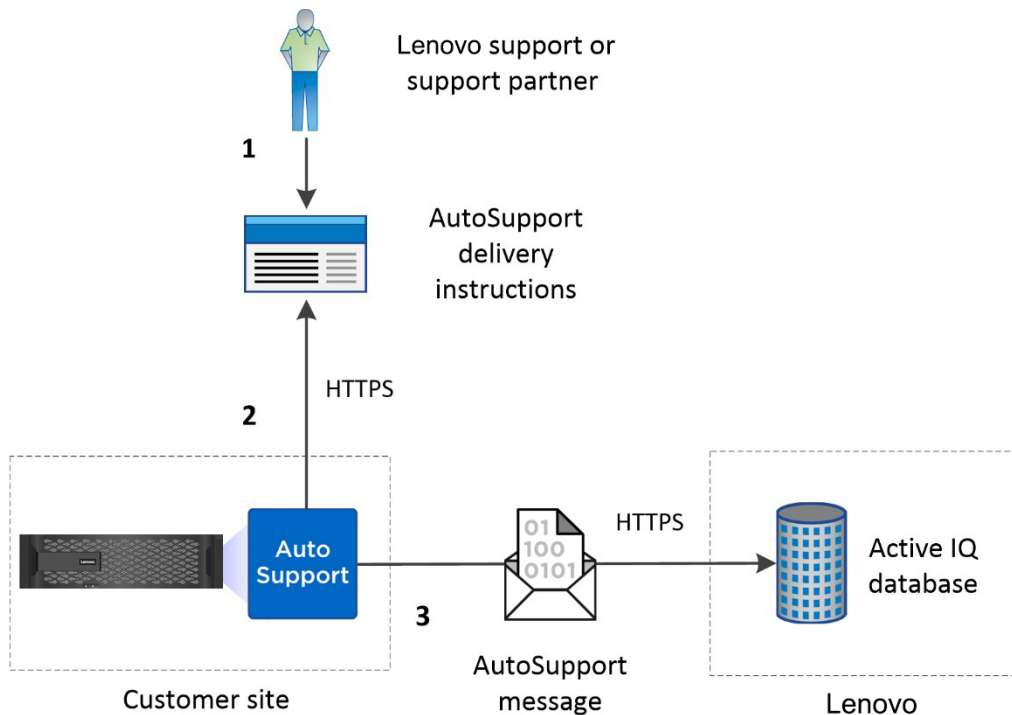

AutoSupport On Demand is restricted to users who have valid Lenovo Support site credentials *and* appropriate business roles (technical support engineers, support account managers, and support partners authorized to work on a given storage system).

AutoSupport On Demand usage is transparent:

- Customers can review and execute all predefined delivery instructions by using the ONTAP CLI.
- Customers and partners receive a copy of the AutoSupport message if you configured the system to send AutoSupport messages to your internal support organization and to partners.
- On Demand usage is tracked and displayed:
  - On Demand requests are logged in daily management log AutoSupport messages.
  - Resulting AutoSupport messages contain On Demand in the title and can be viewed through Active IQ.

## 4 Access and Retention of Telemetry Data

### 4.1 Where the Data Resides

AutoSupport data is sent to one or more Lenovo data centers in the United States. The data is not archived at an offsite location.

### 4.2 Data Encryption

The data is not encrypted at rest or in transit after receipt.

### 4.3 Who Can Access the Data

Access to Lenovo telemetry data is secured by a data access layer that requires positive identification of each user requesting access. All requests for data must include a verifiable reference to the individual who is requesting access. The data access layer is implemented using the following:



- Security Assertion Markup Language (SAML) for authentication, which requires individual registration with Lenovo
- Authenticated user attributes (employing company, geographic location, citizenship, and so on)
- Role-based access controls (job function)

The following people can access the data:

- **Lenovo internal users.** Lenovo employees and approved agents can access data for customer support uses.  
**Note:** For systems that have the SupportEdge for Secure Government support level, Lenovo access to telemetry data is restricted to employees and contractors who are United States citizens working in the United States.
- **Customers.** Any user from a company that has registered with the Lenovo Support site will be able to access data for all their installed systems that have AutoSupport and Active IQ enabled and have active support contracts in 2019.

Users are only able to view systems registered with their company. Active IQ uses the product registration and support registration credentials from the Lenovo Support site to control access.

**Partners.** For AutoSupport, partners who have registered with the Lenovo Support site can access data for all systems that they sold and currently support if those systems have AutoSupport enabled and have active support contracts.

#### 4.4 Security Testing

Lenovo tests access controls as part of monthly release cadence system integration testing. Lenovo also runs monthly vulnerability assessments.

#### 4.5 Data Retention Period

Lenovo deletes AutoSupport data when requested by customers or pursuant to our applicable data retention policy.

#### 4.6 Certifications

Lenovo is ISO 27001:2013 certified. The scope of this certification includes AutoSupport. Lenovo does not provide the audit reports to customers.

### Where to Find Additional Information

To learn more about the information described in this document, refer to the following resources.

<https://datacentersupport.lenovo.com>

[http://thinksystem.lenovofiles.com/help/topic/com.lenovo.thinksystem.storage.doc/overview\\_storage.html](http://thinksystem.lenovofiles.com/help/topic/com.lenovo.thinksystem.storage.doc/overview_storage.html)

The full Lenovo privacy statement is available at the following address:

<https://www.lenovo.com/us/en/privacy/>

To view the privacy statement in other languages, visit:

[www.lenovo.com](http://www.lenovo.com)

### Version History

Refer to the [Compatibility Matrix](#) on the Lenovo Support site to validate that the exact product and feature versions described in this document are supported for your specific environment. The IMT defines the product components and versions that can be used to construct configurations that are supported by

Lenovo. Specific results depend on each customer's installation in accordance with published specifications.

## **Trademarks**

LENOVO, LENOVO logo, and THINKSYSTEM are trademarks of Lenovo. All other trademarks are the property of their respective owners. © 2018 Lenovo.

**Lenovo**