



Best Compact Choice for the Al-Driven Future.













Introducing the ASUS NUC 15 Pro—where intelligent design meets unparalleled performance. Its compact form factor is engineered for versatility, making it ideal for a variety of development scenarios, from AI model training to data visualization. Powered by the latest Gen Intel® Core™ Ultra processors, DDR5 6400 MHz memory, and Intel® Arc GPU, it delivers exceptional speed and efficiency. Experience lightning-fast connectivity and seamless collaboration with cutting-edge Wi-Fi 7. Elevate your workflow and adapt to any environment with the NUC 15 Pro—your compact powerhouse for innovation.

Key Selling Points

Al-Optimized Power: Features the Latest Gen Intel® Core™ Ultra Series 2 CPU, Up to 99 Platform TOPS, optimized for a wide range of workloads delivering up to 18% gen/gen performance

Superior Connectivity: Features Intel® Wi-Fi 7 with up to 2.4X faster transfer rates, Wi-Fi Proximity Sensing, and certified Bluetooth® for enhanced audio quality and seamless connections.

Robust Security: Robust Security: With Intel® vPro™ on Arrow Lake architecture, offering faster threat detection and fTPM 2.0 for stronger data protection.

Integrated & Expandable: Compact 0.48L design with a tool-less 2.0 chassis for quick upgrades, offering 6X faster integration gen/gen.

Exceptional Display Potential: Connect to four 4K displays via HDMI 2.1 and Thunderbolt™ 4, with headless emulation. New sync power-off feature automatically shuts the screen for better energy efficiency

Reliable & Sustainable: Features 24/7 reliability with rigorous torture testing and MIL-STD-810H certification, ensuring durability in extreme conditions. The advanced cooling system enhances reliability by maintaining optimal performance, and eco-friendly packaging reflects a commitment to sustainability.

Audience:

- Small and Medium Business Enterprises
- Retail
- Education
- Collaboration
- · Remote Workers

Target Usages:

- Traditional and Smart Classrooms
- Communication File Sharing/ Virtual Meetings
- Daily Tasks/ Entertainment
- Digital Signage / Kiosk / POS









Mini-PC Specifications	Image A	Image B
------------------------	---------	---------

Mini-PC Specific	cations	Image A	image B
Marketing Name	ASUS NUC 15 PRO Mini-PC (Tall)	ASUS NUC 15 PR	O Mini-PC (slim)
Photo	Image A	Imag	је В
ASUS Logo	Yes	Yes	
ASUS NUC Logo	Yes	Yes	
Color	Black	Black	
OS Support CPU	Microsoft Windows 11 64-bit Intel® Core TM Ultra 7 265H (vPro) Intel® Core TM Ultra 5 235H (vPro) Intel® Core TM Ultra 7 255H Intel® Core TM Ultra 5 225H	Microsoft Wind Intel® Core TM Ult Intel® Core TM Ult Intel® Core TM Intel® Core TM Intel® Core TM	ra 7 265H (vPro) ra 5 235H (vPro) Ultra 7 255H
	Intel® Core [™] 7 240H Intel® Core [™] 5 210H Intel® Core [™] 3 100U	Intel® Core Intel® Core Intel® Core	TM 5 210H
Chipset	Integrated	Integr	ated
Graphics	Intel® Arc™ GPU (Core Ultra)¹ Intel® Graphics (Core3, Core 5, Core 7)	Intel® Arc™ GPI Intel® Graphics (Cor	•
Memory	2 x SO-DIMM, Up to DDR5-5600, 48GB*2 (Core 3, Core 5, Core 7) 2 x CSO-DIMM, Up to DDR5-6400, 48GB*2 (Core Ultra)	2 x SO-DIMM, Up to DDR5-5600, 2 x CSO-DIMM, Up to DDR5	
Storage	1 x M.2 2280 PCle Gen4x4, supports 128GB~2TB NVMe SSD 1 x M.2 2242 PCle Gen4x4, supports 128GB~2TB NVMe SSD PCle Gen 5 ready design	1 x M.2 2280 PCIe Gen4x4, sur 1 x M.2 2242 PCIe Gen4x4, sur PCIe Gen 5 r	ports 128GB~2TB NVMe SSD
Wireless Network	Intel® Wi-Fi 7 BE201 + Bluetooth 5.4 (Core Ultra) Intel® Wi-Fi 7 BE202 + Bluetooth 5.4 (Core 3, Core 5, Core 7)	Intel® Wi-Fi 7 BE20 Intel® Wi-Fi 7 BE202 + Bluetoo	
LAN	Intel® Ethernet Controller I226-V/LM, 2.5G ²	Intel® Ethernet Contro	
Audio	Up to 7.1 multichannel (or 8-channel) digital audio on HDMI and DP Type-C ports	Up to 7.1 multichannel (or a HDMI and DP	
TPM	fTPM	fTP	M
Card Reader	None	No	
HDMI CEC	Yes, 2 ports on back panel	Yes, 2 ports o	n back panel
Front I/O Ports	1 x USB 3.2 Gen2x2 Type-C 2 x USB 3.2 Gen2 Type-A	1 x USB 3.2 G 2 x USB 3.2 G	• •
Back I/O Ports	2 x HDMI 2.1 TMDS Compatible (4K@60Hz) 2 x Thunderbolt™ 4 ports (incl. DP 2.1 and USB4) 1x USB 3.2 Gen2 Type-A 1x USB 2.0 Type-A 1 x RJ45 LAN 1 x DC-in	$2 imes ext{HDMI } 2.1 ext{ TMDS Co} \ 2 imes ext{Thunderbolt}^{TM} 4 ext{ port:} \ 1 imes ext{USB } 3.2 ext{ G} \ 1 imes ext{USB } 2. ext{ G} \ 1 imes ext{USB } 2. ext{ AUSB } 2. ext{ AUSB$	s (incl. DP 2.1 and USB4) en2 Type-A 0 Type A 5 LAN
Side I/O Ports	1 x Kensington Lock	1 x Kensin	gton Lock
Power Supply	Power supply adapter (120W/19VDC for Core Ultra 5, 7, Core 5, 7; 90W/19VDC for Core 3) with geo-specific AC cord (IEC C5)	Power supply adapter (120W/19V 90W/19VDC for Core 3) with	
Operating Temp	0 to 40°C	0 to 4	10°C
Storage Temp	-40 to 60°C	-40 to	60°C
Humidity Produce Dimensions	0%-92% non-condensing ³	0%-92% non-	condensing ³
(W x D x H) Product Weights	117 x 112 x 54mm 364.3g	117 x 112 357	
Color Box Dimensions	·		
(W x D x H)	151 x 183 x 127mm	151 x 183	
Packaged Weight	1385g	138	5g
Accessories	AC Adapter+Power Cord ⁴ VESA Bracket and Screws Cable Clip Safety/Caution/Regulatory Insert Warranty Card	AC Adapter+I VESA Bracket Cable Safety/Caution/R Warran	and Screws Clip egulatory Insert

⁽³⁾ Humidity Info detail please check link: Non-condensing humidity as defined by temperature vs dew point (4) Power cord included is region specific, and some SKUs do not include the power cord









Specification			
Marketing Name	ASUS NUC 15 PRO Kit (Tall)	ASUS NUC 15	PRO Kit (Slim)
Photo	Image C	Ima	
	ū		
ASUS Logo	No	No	
ASUS NUC Logo	No	No	
Color	Black	Black	
	Microsoft Windows 11 Pro	Microsoft Wi	ndows 11 Pro
OS Support	Ubuntu 24.04 LTS 64-bit	Ubuntu 24.0	04 LTS 64-bit
оз зарроге	RedHat Enterprise Linux 64-bit	RedHat Enterp	ise Linux 64-bit
	No OS installed at shipment	No OS installe	d at shipment
	Intel® Core™ Ultra 7 265H (vPro)	Intel® Core TM Uli	7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7
	Intel® Core TM Ultra 5 235H (vPro)	Intel® Core TM Uli	` ,
	Intel® Core™ Ultra 7 255H	Intel® Core TM	` ,
CDII			
CPU	Intel® Core TM Ultra 5 225H	Intel® Core TM	
	Intel® Core™ 7 240H		TM 7 240H
	Intel® Core TM 5 210H		TM 5 210H
	Intel® Core™ 3 100U	Intel® Core	[™] 3 100U
Chipset	Integrated	Integrated	
Graphics	Intel® Arc™ GPU (Core Ultra)¹	Intel® Arc™ GP	,
	Intel® Graphics (Core 3, 5, 7)	Intel® Graphic	
	2 x SO-DIMM, Up to DDR5-5600, 48GB*2 (Core 3, Core 5, Core 7)	2 x SO-DIMM, Up to DDR5-5600,	, , ,
Memory	2 x CSO-DIMM, Up to DDR5-6400, 48GB*2 (Core Ultra)		6-6400, 48GB*2 (Core Ultra)
	No memory installed at shipment	No memory insta	alled at shipment
	1 x M.2 2280 PCIe Gen4x4, supports 128GB~2TB NVMe SSD	1 x M.2 2280 PCle Gen4x4, su	pports 128GB~2TB NVMe SSD
Storage	1 x M.2 2242 PCIe Gen4x4, supports 128GB~2TB NVMe SSD	1 x M.2 2242 PCIe Gen4x4, su	pports 128GB~2TB NVMe SSD
Storage	No storage installed at shipment	No storage insta	lled at shipment
	PCIe Gen 5 ready design	PCle Gen 5 i	eady design
	Intel® Wi-Fi 7 BE201 (Gig+), Bluetooth 5.4 (Core Ultra)	Intel® Wi-Fi 7 BE201 (Gig+)	, Bluetooth 5.4 (Core Ultra)
Wireless Network	Intel® Wi-Fi 7 BE202 (Gig+), Bluetooth 5.4 (Core 3, Core 5, Core 7)	Intel® Wi-Fi 7 BE202 (Gig+), Bluet	
LAN	Intel® Ethernet Controller I226-V/LM, 2.5G ²	Intel® Ethernet Contro	· · · · · · · · · · · · · · · · · · ·
	Up to 7.1 multichannel (or 8-channel) digital audio on		8-channel) digital audio on
Audio	HDMI and DP Type-C ports	HDMI and DP	
TPM	fTPM	fTI	
Card Reader	None	No	ine
HDMI CEC	Yes, 2 ports on back panel	Yes, 2 ports of	on back panel
	1 x USB 3.2 Gen2x2 Type-C		en2x2 Type-C
Front I/O Ports	2 x USB 3.2 Gen2 Type-A		Gen2 Type-A
	2 x HDMI 2.1 TMDS Compatible (4K@60Hz)	2 x HDMI 2.1 TMDS C	
	2 x Thunderbolt™ 4 ports (incl. DP 2.1 and USB4)	2 x Thunderbolt TM 4 port	
Back I/O Ports	1x USB 3.2 Gen2 Type-A	1x USB 3.2 (**
	1x USB 2.0 Type A	1x USB 2	
	1 x RJ45 LAN	1 x RJ	
	1 x DC-in		OC-in
Side I/O Ports	1 x Kensington Lock		gton Lock
Power Supply	Power supply adapter (120W/19VDC for Core Ultra 5, 7, Core 5, 7;	Power supply adapter (120W/19)	
	90W/19VDC for Core 3) with geo-specific AC cord (IEC C5)		geo-specific AC cord (IEC C5)
Operating Temp	0 to 40°C	0 to	-
Storage Temp	-40 to 60°C		60°C
Humidity	0%-92% non-condensing ³	0%-92% non	-condensing ³
oduct Dimensions	117 x 112 x 54mm	117 x 112	2 x 37mm
(W x D x H)			
Product Weights lor Box Dimensions	364.3g	35,	7.4g
(W x D x H)	151 x 183 x 127mm	151 x 183	x 127mm
Packaged Weight	1385g	133	35g
	AC Adapter+Power Cord ⁴	AC Adanter+	Power Cord ⁴
	VESA Bracket and Screws	VESA Bracke	
Accessories	Cable Clip		e Clip
	Safety/Caution/Regulatory Insert		Regulatory Insert
	Jaiety/Caution/Negulatory Insert	Salety/Caution/f	regulatory misert

⁽¹⁾ Intel® Arc™ GPU requires using 2 x SO-DIMM

⁽²⁾ Intel® Ethernet Controller I226-LM included on vPro enabled systems

⁽³⁾ Humidity Info detail please check link: Non-condensing Humidity defined by dew point (4) Power cord included is region specific, and some SKUs do not include the power cord







	name - name - name
Board Specifications	Image E
Marketing Name	ASUS NUC 15 Pro Board
Photo	Image E
ASUS Logo	N/A
ASUS NUC Logo	N/A
Color	N/A
OS Support	Supports Windows 11 64-bit Ubuntu 24.04 LTS 64-bit RedHat Enterprise Linux 64-bit *No OS installed at shipment
CPU	Intel® Core™ Ultra 7 265H, cTDP 40W Intel® Core™ Ultra 7 255H, cTDP 40W Intel® Core™ Ultra 5 235H, cTDP 40W Intel® Core™ Ultra 5 225H, cTDP 40W Intel® Core™ 7 Processor 240H, cTDP 25W Intel® Core™ 5 Processor 210H, cTDP 25W Intel® Core™ 3 Processor 100U, cTDP 25W
Chipset	Integrated
Graphics	Intel® Arc™ GPU (Core Ultra)¹ Intel® Graphics Technology (Core 3, Core 5, Core7)
Memory	2 x SO-DIMM, Up to DDR5-5600, 48GB*2 OR 2 x CSO-DIMM, Up to DDR5-6400, 48GB*2
Storage	1 x M.2 2280 PCIe Gen5x4, supports 128GB~8TB NVMe SSD ² 1 x M.2 2242 PCIe Gen4x4, supports 128GB~2TB NVMe SSD
Wireless Network	None
LAN	Intel® Ethernet Controller I226-V/LM, 2.5G ³
Audio	N/A
TPM	fTPM
Card Reader	None
HDMI CEC	Yes, 2 ports on back panel
Front I/O Ports	1 x USB 3.2 Gen2x2 Type-C 2 x USB 3.2 Gen2 Type-A
Back I/O Ports	2 x Thunderbolt 4 Type-C w/ DisplayPort 2.1 1 x USB 3.2 Gen 2 Type-A 1 x USB 2.0 Type-A 2 x HDMI 2.1 (TMDS Compatible) 1 x RJ45 LAN 1 x DC-in
Side I/O Ports	N/A
Power Supply	Not Included
Dimensions (W x D x H)	101.6mm x 107.5mm x 29.5mm
Weights	226g
Operating Temperature	0°C - 40°C
Storage Temperature	-40°C to 60°C
Humidity	0%-92% non-condensing ⁴
Accessories	Warranty Card

⁽¹⁾ Intel® Arc™ GPU requires using 2 x SO-DIMM

Safety/Caution/Regulatory Insert

⁽²⁾ Intel® Ethernet Controller I226-LM included on vPro enabled systems

⁽³⁾ Humidity Info detail please check link: Non-condensing Humidity defined by dew point

⁽⁴⁾ Power cord included is region specific, and some SKUs do not include the power cord





Tall



Kensington Lock

4 5 6 7 8 9 10 6 7

- 1. 2x USB 3.2 Gen2 Type-A
- 2. USB 3.2 Type-C Gen 2x2
- 3. Power button

- 4. Security mechanism for power cable
- 5. DC-in

- 9. USB 2.0 Type-A 10. USB 3.2 Gen2 Type-A
- 6. 2x HDMI 2.1 (TMDS)
- 7. 2x Thunderbolt™ 4
- 8. 2.5Gb Ethernet Port
- * All USB ports with individual USB power control

Slim



Kensington Lock

4 5 6 7 8 9 10 6 7


- 1. 2x USB 3.2 Gen2 Type-A
- 2. USB 3.2 Gen 2x2 Type-C
- 3. Power button

- 4. Security mechanism for power cable
- 5. DC-in
- 9. USB 2.0 Type-A 10. USB 3.2 Gen2 Type-A
- 6. 2x HDMI 2.1 (TMDS)
- 7. 2x Thunderbolt™ 4
- 8. 2.5Gb Ethernet Port





What's in the box

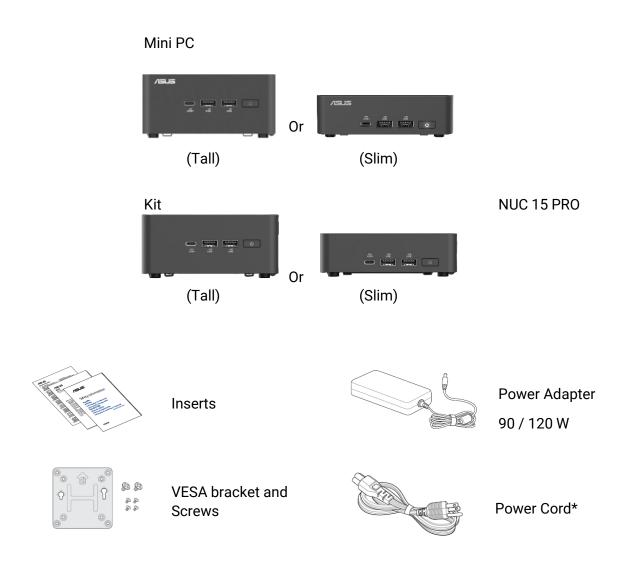

NOTE:

- The most up-to-date and accurate product specifications are available on www.asus.com for download.
- Product and accessory images are for illustrative purposes only. The actual appearance and specifications may vary depending on the model.
- *The bundled power adapter may vary depending on the model and the country (or region) of sale.
- Some bundled accessories may vary depending on the model. For details on these accessories, refer to their respective user manuals.
- If the device or its components fail or malfunction during normal and proper use within the warranty period, bring the warranty card to the ASUS Service Center for replacement of the defective components.