

Product End of Life Instructions

Power Distribution Units: Switched/Metered


Switched/Metered Power Distribution Units (PDUs) prevent electric surges from affecting electronic equipment and provide remote on/off control/metering of individual outlets.



Potential disassembly risks

No specific disassembly risks have been identified for this product.

End of Life Instructions

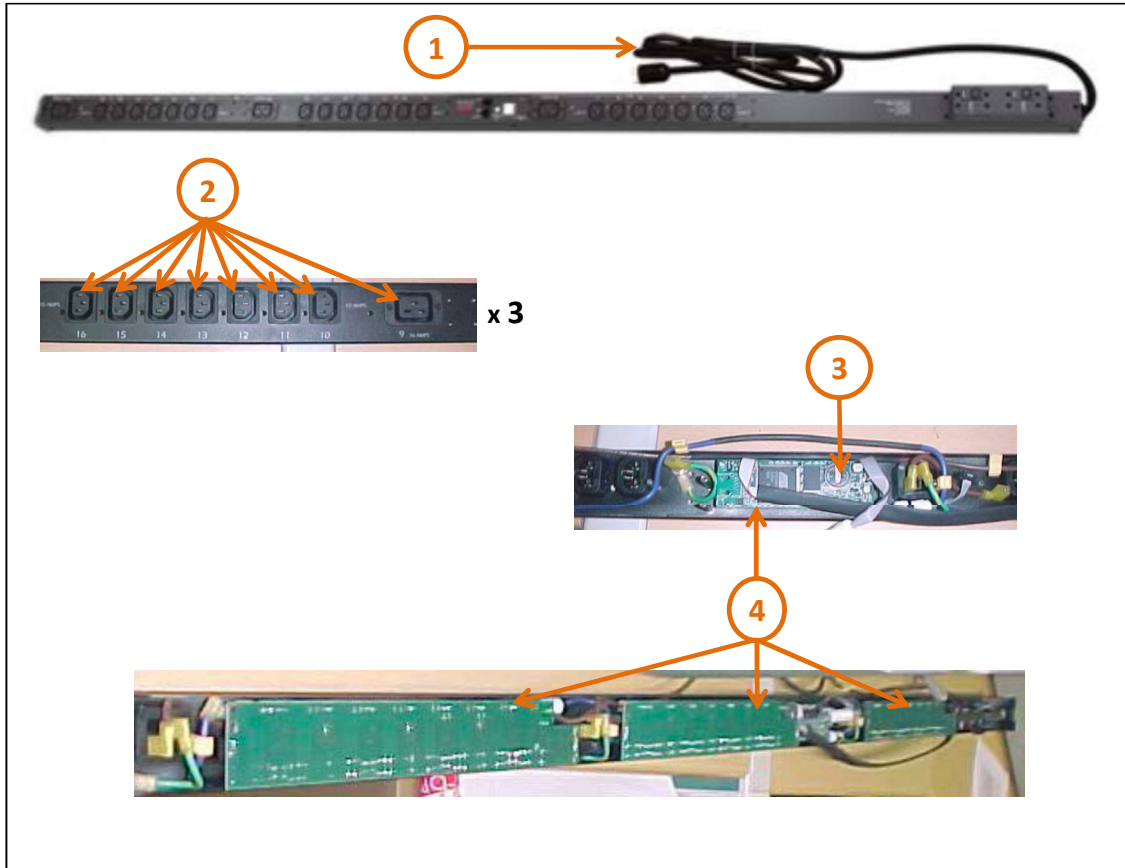

Recommendation	Number on drawing	Component / Material	Weight (g)	Comment
To be depolluted	1	External Power Cord	250 - 1780	Power Cords are composed of various gauge copper wires with RoHS compliant PVC wire wrap and plug connectors.
To be depolluted	2	Outlet assemblies	150 - 450	Mass is for all assemblies. Nylon 6 with brominated flame retardant (FR50).
To be depolluted	3	Lithium (coin) battery	2.5	Lithium battery is part of PCBA and removal is optional. If removed, discard lithium battery with an appropriate battery recycler.

To be dismantled	4	Printed Circuit Board Assemblies (PCBAs)	275 - 500	Mass is for several PCBAs >10cm ² in surface area.
------------------	---	--	-----------	---



Product description

Manufacturer identification	Schneider Electric Industries SAS
Brand name	APC
Product function	The AP7941 PDU provides advanced load monitoring and remote on/off switching control of individual outlets, while distributing power and providing surge protection for multiple power outlets within data centers or related applications.
Product reference	AP7941
Additional similar product references	AP79XX, AP89XX, AP78XX, AP88XX, AP86XX, AP84XX,
Total representative product mass	7375.4
Representative product dimensions	1778 mm x 56mm x 44mm
Accessories	None
Date of information release	12/2016



Additional information

Legal information	This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.	
In case of special transportation: transportation method	N/A	
Recyclability potential	71%	Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

Schneider Electric Industries SAS

Customer Care Center

www.schneider-electric.com/contact

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

Capital social 896 313 776 €

www.schneider-electric.com